




SHARPER IMAGE®




OPERATING INSTRUCTIONS

Operation requires 4 "AA" 1.5V alkaline batteries (not included) for car and one 9V battery (not included) for remote control.

1. Charge the remote control battery (not included).
2. Locate the battery compartment on the back of each item (see diagram on right).
3. Swivel latches on bottom of car to release battery pack and install batteries.
4. Attach both car and remote buttons to "ON" position.
5. For best results use the car on hard surfaces such as wood or tile.

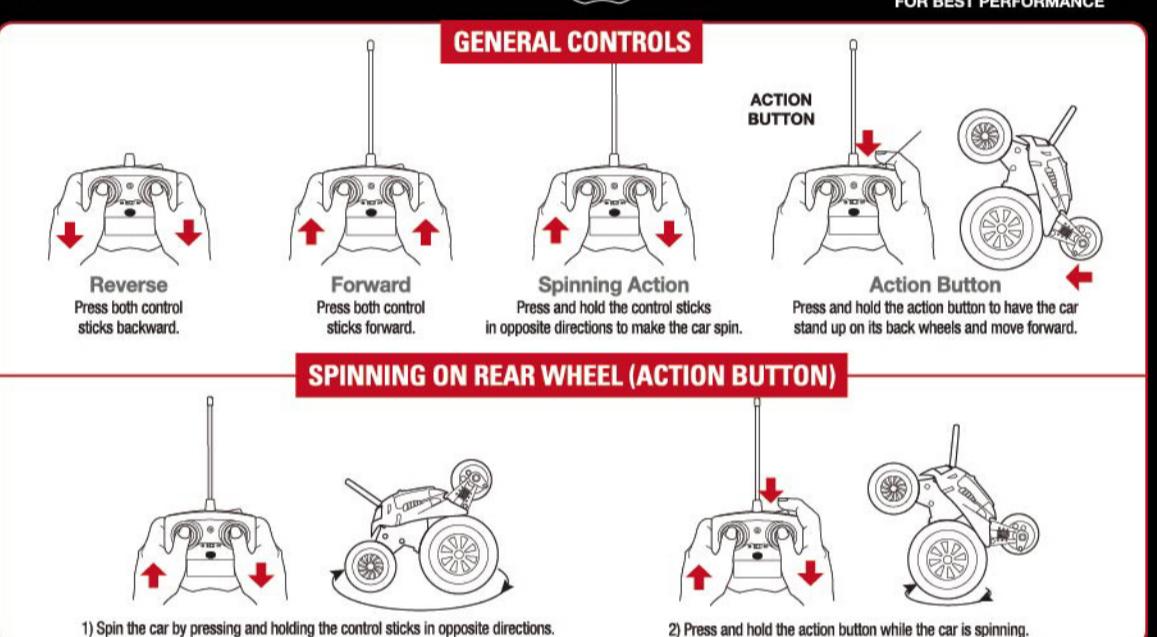

SPINNING ON REAR WHEEL (ACTION BUTTON)

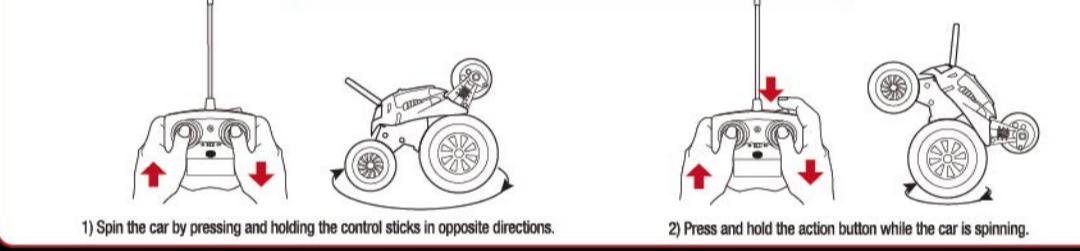

SAFETY PRECAUTIONS

- Do not operate during thunderstorms or rain.
- Avoid water, sand and snow when operating car.
- Never operate car on a roof or balcony.
- Never operate your car on the street or highway.
- Never operate your car in a confined or crowded area, and do not use people or animals as obstacles.
- Do not roll your car into furniture, objects or hard surfaces, as this will cause damage to both the object and the car.
- Keep the car at least 10 feet away from the tire, gear and motor while the car is switched to "ON".
- Do not leave car or transmitter near sources of heat or under direct sunlight for long periods of time.
- Do not leave car or transmitter outside overnight. Damage is harmful to internal components.
- Always turn off car when not in use to avoid accidental operation.
- Adult supervision is recommended when operating this car.

BATTERY WARNING:

- Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries.
- Remove batteries when not in use. Retain or dispose of discarded batteries according to local regulations.
- Recharge batteries using only a charger or source of electrical current specified by the manufacturer.
- Only use rechargers specified by battery, charged very slowly. Reactions, sealed in plastic bags, can cause overheating and explosion.
- Do not use batteries if they are leaking, damaged, or swollen.
- Do not use batteries if they are exposed to extreme temperatures.

Colors and styles may vary.

WARNING:

- Changes or modifications to this unit not expressly approved by the manufacturer could void the user's authority to operate the equipment.
- For technical support, please visit www.merchsource.com or call 1-833-371-7144.
- The design of this product is for entertainment purposes only. Copyright law and/or other applicable laws prohibit unauthorized copying of this material.
- It is not permitted to duplicate or otherwise copy this material without permission of the copyright owner.

KEEP OUT OF REACH OF CHILDREN

NOTICE:

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2ABDQ

IC: 20702-AZB

CSA ID: 20702-AZB

CE: 20702-AZB

RoHS: 20702-AZB

WEEE: 20702-AZB

REACH: 20702-AZB

MSDS: 20702-AZB

SDS: 20702-AZB

EN 60068-2-27: 2002

EN 60068-2-20: 2002

EN 60068-2-6: 2002

EN 60068-2-22: 2002

EN 60068-2-14: 2002

EN 60068-2-11: 2002

EN 60068-2-13: 2002

EN 60068-2-15: 2002

EN 60068-2-16: 2002

EN 60068-2-17: 2002

EN 60068-2-18: 2002

EN 60068-2-19: 2002

EN 60068-2-21: 2002

EN 60068-2-24: 2002

EN 60068-2-26: 2002

EN 60068-2-28: 2002

EN 60068-2-30: 2002

EN 60068-2-32: 2002

EN 60068-2-33: 2002

EN 60068-2-34: 2002

EN 60068-2-35: 2002

EN 60068-2-36: 2002

EN 60068-2-37: 2002

EN 60068-2-38: 2002

EN 60068-2-39: 2002

EN 60068-2-40: 2002

EN 60068-2-41: 2002

EN 60068-2-42: 2002

EN 60068-2-43: 2002

EN 60068-2-44: 2002

EN 60068-2-45: 2002

EN 60068-2-46: 2002

EN 60068-2-47: 2002

EN 60068-2-48: 2002

EN 60068-2-49: 2002

EN 60068-2-50: 2002

EN 60068-2-51: 2002

EN 60068-2-52: 2002

EN 60068-2-53: 2002

EN 60068-2-54: 2002

EN 60068-2-55: 2002

EN 60068-2-56: 2002

EN 60068-2-57: 2002

EN 60068-2-58: 2002

EN 60068-2-59: 2002

EN 60068-2-60: 2002

EN 60068-2-61: 2002

EN 60068-2-62: 2002

EN 60068-2-63: 2002

EN 60068-2-64: 2002

EN 60068-2-65: 2002

EN 60068-2-66: 2002

EN 60068-2-67: 2002

EN 60068-2-68: 2002

EN 60068-2-69: 2002

EN 60068-2-70: 2002

EN 60068-2-71: 2002

EN 60068-2-72: 2002

EN 60068-2-73: 2002

EN 60068-2-74: 2002

EN 60068-2-75: 2002

EN 60068-2-76: 2002

EN 60068-2-77: 2002

EN 60068-2-78: 2002

EN 60068-2-79: 2002

EN 60068-2-80: 2002

EN 60068-2-81: 2002

EN 60068-2-82: 2002

EN 60068-2-83: 2002

EN 60068-2-84: 2002

EN 60068-2-85: 2002

EN 60068-2-86: 2002

EN 60068-2-87: 2002

EN 60068-2-88: 2002

EN 60068-2-89: 2002

EN 60068-2-90: 2002

EN 60068-2-91: 2002

EN 60068-2-92: 2002

EN 60068-2-93: 2002

EN 60068-2-94: 2002

EN 60068-2-95: 2002

EN 60068-2-96: 2002

EN 60068-2-97: 2002

EN 60068-2-98: 2002

EN 60068-2-99: 2002

EN 60068-2-100: 2002

EN 60068-2-101: 2002

EN 60068-2-102: 2002

EN 60068-2-103: 2002

EN 60068-2-104: 2002

EN 60068-2-105: 2002

EN 60068-2-106: 2002

EN 60068-2-107: 2002

EN 60068-2-108: 2002

EN 60068-2-109: 2002

EN 60068-2-110: 2002

EN 60068-2-111: 2002

EN 60068-2-112: 2002

EN 60068-2-113: 2002

EN 60068-2-1