

FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

WUXI IDATA TECHNOLOGY COMPANY LTD.

Floor 11, Building B1, Wuxi Binhu National Sensing Information Center, No. 999 Gaolang East Road, Wuxi, China

FCC ID: 2ADE3IDATA60

Report Type: Product Type: NEW MOBILE COMPUTER Original Report Lion Nias Test Engineer: Lion Xiao **Report Number:** RSZ160114005-00E **Report Date:** 2016-02-24 Sola Huar Sula Huang RF Leader **Reviewed By: Test Laboratory:** Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
CONFIGURATION OF TEST SETUP	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §1.1310 & §2.1093- RF EXPOSURE	
APPLICABLE STANDARD	
TEST RESULT	
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	10
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	14
TEST DATA	14
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	19
APPLICABLE STANDARD	
Test Procedure	19
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	20
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
APPLICABLE STANDARD	
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	35
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §22.917(A) & §24.238(A) - BAND EDGES	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	
APPLICABLE STANDARD	
TEST FROCEDURE TEST EQUIPMENT LIST AND DETAILS.	
Test Data	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The WUXI IDATA TECHNOLOGY COMPANY LTD.'s product, model number: iData 60 (FCC ID: 2ADE3IDATA60) (the "EUT") in this report was a NEW MOBILE COMPUTER, which was measured approximately: 18.3cm (L) x 6.9cm (W) x 3.5cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5V charging from adapter.

Report No.: RSZ160114005-00E

Adapter information:

Model: FJ-SW1260502000UU Input: 100-240V~ 50/60Hz 0.4A Max

Output: DC 5V, 2000mA

All measurement and test data in this report was gathered from production sample serial number: 160114005 (Assigned by BACL, Dongguan). The EUT was received on 2016-01-14.

Objective

This report is prepared on behalf of *WUXI IDATA TECHNOLOGY COMPANY LTD*. in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ADE3IDATA60. FCC Part 15C DSS submissions with FCC ID: 2ADE3IDATA60. FCC Part 15C DTS submissions with FCC ID: 2ADE3IDATA60. FCC Part 15C DXX submissions with FCC ID: 2ADE3IDATA60.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA-603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

FCC Part 22H/24E Page 3 of 51

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Report No.: RSZ160114005-00E

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 22H/24E Page 4 of 51

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	1	1


Report No.: RSZ160114005-00E

Configuration of Test Setup

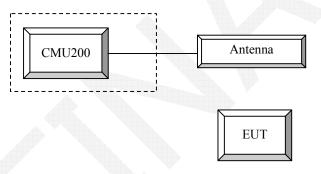

FCC Part 22H/24E Page 5 of 51

Block Diagram of Test Setup

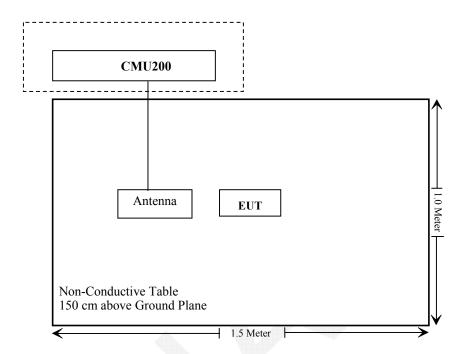

FCC Part 22H/24E Page 6 of 51

FCC Rules	Description of Test	Result	
§1.1310, §2.1093	RF Exposure	Compliance	
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance	
§ 2.1047	Modulation Characteristics	Not Applicable	
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance	
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance	
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance	
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance	
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance	

Report No.: RSZ160114005-00E

FCC Part 22H/24E Page 7 of 51

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RSZ160114005-20.



FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d), Part 22H & 24E, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC Part 22H/24E Page 9 of 51

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

Report No.: RSZ160114005-00E

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test

channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

FCC Part 22H/24E Page 10 of 51

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

Report No.: RSZ160114005-00E

	Loopback Mode	Test Mode 1
WCDMA	Rel99 RMC	12.2kbps RMC
WCDMA General Settings	Power Control Algorithm	Algorithm2
	βc / βd	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA			
	Subset	1	2	3	4			
	Loopback Mode			Test Mode				
	Rel99 RMC			12.2kbps RM	IC			
	HSDPA FRC			H-Set1				
WCDMA	Power Control Algorithm			Algorithm2	2			
WCDMA General	βс	2/15	12/15	15/15	15/15			
Settings	βd	15/15	15/15	8/15	4/15			
Settings	βd (SF)		64					
	βc/ βd	2/15	12/15	15/8	15/4			
	βhs	4/15	24/15	30/15	30/15			
	MPR(dB)	0	0	0.5	0.5			
	DACK	8						
	DNAK			8				
HSDPA	DCQI			8				
Specific Settings	Ack-Nack repetition factor							
Settings	CQI Feedback			4ms				
	CQI Repetition Factor			2				
	Ahs=βhs/ βc	_		30/15				

FCC Part 22H/24E Page 11 of 51

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

Report No.: RSZ160114005-00E

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA				
	Subset	1	2	3	4	5				
	Loopback Mode	Test Mode 1								
WCDM	Rel99 RMC	12.2kbps RMC								
	HSDPA FRC			H-Set1						
	HSUPA Test HSUPA Loopback									
	Power Control			Algorithm2						
	Algorithm			C						
A General	βc	11/15	6/15	15/15	2/15	15/15				
Settings	βd	15/15	15/15	9/15	15/15	0				
Settings	βес	209/225	12/15	30/15	2/15	5/15				
	βc/ βd	11/15	6/15	15/9	2/15	-				
	βhs	22/15	12/15	30/15	4/15	5/15				
	CM(dB)	1.0	3.0	2.0	3.0	1.0				
	MPR(dB)	0	2	1	2	0				
	DACK			8						
	DNAK			8						
	DCQI			8						
HSDPA	Ack-Nack repetition									
Specific	factor	3								
Settings	CQI Feedback									
	CQI Repetition									
	Factor									
	Ahs=βhs/ βc	30/15								
	DE-DPCCH	6	8	8	5	7				
	DHARQ	0	0	0	0	0				
	AG Index	20	12	15	17	21				
	ETFCI	75	67	92	71	81				
	Associated Max UL	242.1	174.9	482.8	205.8	308.9				
	Data Rate kbps		17	102.0	200.0	200.5				
		E TEC	T 11 F	E TEGI	E-TFCI 11 E					
		E-TFC E-TFC		E-TFCI	E-IFC	TIPO 4				
HSUPA		E-TFC E-TFC		11 E-TFCI		CI 67				
Specific		E-1F0 E-TFCI		PO4		C1 67 I PO 18				
Settings		E-TFC		E-TFCI	E-TF					
8	Reference E FCls	E-TFC		92		I PO23				
	Reference E_1 els	E-TF		E-TFCI		CI 75				
		E-TFC		PO 18		I PO26				
		E-TF		1010	E-TF					
		E-TFCI				I PO 27				
			•			-				
				<u> </u>						

FCC Part 22H/24E Page 12 of 51

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub- test	β _c (Note3)	β _d	β _{HS} (Note1)	β _{ec}	β _{ed} (2xSF2) (Note 4)	β _{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	(Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β _{ed} 1: 30/15 β _{ed} 2: 30/15	β _{ed} 3: 24/15 β _{ed} 4: 24/15	3.5	2.5	14	105	105
Note 1	: Δ _{ACK} ,	Δ_{NACI}	$_{\scriptscriptstyle{\zeta}}$ and $_{\scriptscriptstyle{\Delta_{\scriptscriptstyle{ extsf{QQI}}}}}$	= 30/15	with β_{hs} = 30/15	* β_c .					
Note 2					ed on the relative				,0).		
Note 3					refore the β_c is s		0 by defau	lt.			
Note 4	: β _{ed} c	an no	t be set dii	rectly; it is	set by Absolute	Grant Value.					
Note 5	Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-										
	DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH										
	confi	gurati	ons DPD0	CH is not	allocated. The UI	E is signalled to	use the ex	trapolatio	on algoritl	nm.	

Report No.: RSZ160114005-00E

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

	Parameter	Unit	Value
Nominal	Avg. Inf. Bit Rate	kbps	60
Inter-TTI	Distance	TTľs	1
Number	of HARQ Processes	Proces	6
		ses	0
Informati	on Bit Payload (N_{INF})	Bits	120
Number	Code Blocks	Blocks	1
Binary C	hannel Bits Per TTI	Bits	960
Total Ava	ailable SML's in UE	SML's	19200
Number	of SML's per HARQ Proc.	SML's	3200
Coding F	Rate		0.15
Number	of Physical Channel Codes	Codes	1
Modulation	on		QPSK
Note 1:	The RMC is intended to be used for	or DC-HSD	PA
	mode and both cells shall transmit	with identi	cal
	parameters as listed in the table.		
Note 2:			
	retransmission is not allowed. The	e redundan	cy and

constellation version 0 shall be used.

Radiated method:

TIA-603-D section 2.2.17

FCC Part 22H/24E Page 13 of 51

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS LINDGREN	Horn Antenna	3115	000 527 35	2013-09-06	2016-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2013-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06
E-Microwave	Attenuator(10dB)	EMCA10-5RN	OE01203239	2015-05-08	2016-05-08
Pasternack	RF Coaxial Cable	RF-01	N/A	2015-05-06	2016-05-06
Pasternack	RF Coaxial Cable	RF-02	N/A	2015-05-06	2016-05-06
N/A	Two-way Spliter	ODP-1-6-2S	OE0120142	2015-05-06	2016-05-06

Report No.: RSZ160114005-00E

Test Data

Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	46 %
ATM Pressure:	101.3 kPa

The testing was performed by Lion Xiao on 2016-01-21.

FCC Part 22H/24E Page 14 of 51

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Conducted Output Power

Cellular Band (Part 22H) & PCS Band (Part 24E)

Report No.: RSZ160114005-00E

Band	Channel	Peak Output Power (dBm)									
	No.	GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
	128	32.95	32.66	31.45	30.14	28.97	26.88	25.25	23.69	22.31	
Cellular	190	32.98	32.74	31.47	30.18	29.05	26.73	25.06	23.47	22.15	
	251	32.55	32.39	31.03	29.89	28.71	27.09	25.41	24.03	22.48	
	512	29.46	29.04	27.69	26.18	24.55	25.56	24.06	22.75	21.16	
PCS	661	29.51	29.16	27.65	26.14	24.61	25.47	24.01	22.53	22.09	
	810	29.90	29.44	27.86	26.40	25.04	25.04	23.60	22.13	20.65	

WCDMA Band V (PART 22H)

							_			
		Average Output Power (dBm)								
Mode	3GPP Sub Test	Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)			
Rel 99	1	22.59	2.84	22.42	3.24	22.70	3.16			
	1	21.31	2.81	21.22	3.17	21.49	3.19			
HCDDA	2	21.38	2.80	21.30	3.22	21.47	3.13			
HSDPA	3	21.46	2.86	21.35	3.31	21.43	3.21			
	4	21.48	2.92	21.39	3.33	21.48	3.19			
	1	21.46	2.93	21.33	3.23	21.51	3.09			
	2	21.42	2.81	21.24	3.17	21.45	3.21			
HSUPA	3	21.42	2.88	21.31	3.15	21.52	3.18			
	4	21.36	2.83	21.27	3.25	21.37	3.15			
	5	21.43	2.75	21.24	3.27	21.39	3.11			
	1	21.34	2.80	21.22	3.22	21.46	3.08			
DC HCDD 4	2	21.37	2.79	21.18	3.17	21.32	3.17			
DC-HSDPA	3	21.25	2.87	21.26	3.20	21.38	3.15			
	4	21.22	2.82	21.19	3.29	21.33	3.25			
HSPA+ (16QAM)	1	21.29	2.94	21.07	3.14	21.21	3.13			


Note: peak-to-average ratio (PAR) <13 dB.

FCC Part 22H/24E Page 15 of 51

Peak-to-average ratio (PAR)

WCDMA Band V (PART 22H)

Low Channel

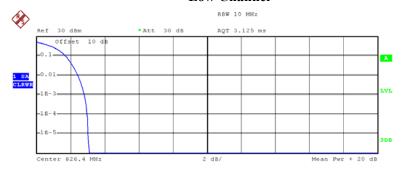

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 22.26 dBm
Peak 25.35 dBm
Crest 3.10 dB

10 % 1.72 dB
1 % 2.44 dB
.1 % 2.84 dB

3.00 dB


Date: 21.JAN.2016 19:58:09

.01 %

FCC Part 22H/24E Page 16 of 51

Report No.: RSZ160114005-00E

Middle Channel

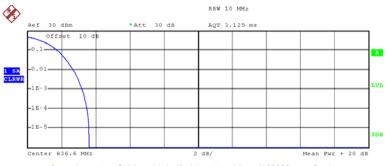


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 22.64 dBm
Peak 26.27 dBm
Crest 3.63 dB

10 % 1.76 dB 1 % 2.68 dB .1 % 3.24 dB .01 % 3.52 dB

Date: 21.JAN.2016 19:57:53

High Channel

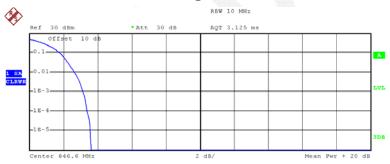

Complementary Cumulative Distribution Function (100000 samples) ${\tt Trace} \quad 1$

Trace 1
Mean 22.46 dBm
Peak 26.06 dBm
Crest 3.60 dB

10 % 1.80 dB 1 % 2.64 dB .1 % 3.16 dB .01 % 3.40 dB

Date: 21.JAN.2016 19:58:51

FCC Part 22H/24E Page 17 of 51

ERP & EIRP

Part 22H

Report No.: RSZ160114005-00E

		Dansiyan	Sı	ubstituted Me	thod	Absolute		
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
GSM 850_Middle Channel								
836.600	Н	99.07	24.1	0.0	1.0	23.1	38.50	15.4
836.600	V	103.91	32.1	0.0	1.0	31.1	38.50	7.4
			EGPRS	850 Middle	Channel			
836.600	Н	92.57	17.6	0.0	1.0	16.6	38.50	21.9
836.600	V	98.41	26.6	0.0	1.0	25.6	38.50	12.9
WCDMA Band V_Middle Channel								
836.600	Н	90.84	15.9	0.0	1.0	14.9	38.50	23.6
836.600	V	94.23	22.4	0.0	1.0	21.4	38.50	17.1

Part 24E

	Doggin		St	ubstituted Me	thod	Abaalaa			
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	S.G. Antenna Cable Loss Level	Level	Limit (dBm)	Margin (dB)			
	PCS 1900_Middle Channel								
1880.000	Н	91.03	19.4	11.1	1.4	29.1	33.0	3.9	
1880.000	V	89.56	18.1	11.1	1.4	27.8	33.0	5.2	
	EGPRS 1900 Middle Channel								
1880.000	Н	86.26	14.7	11.1	1.4	24.4	33.0	8.6	
1880.000	V	82.10	10.6	11.1	1.4	20.3	33.0	12.7	

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level Cable loss + Antenna Gain 3) Margin = Limit-Absolute Level

FCC Part 22H/24E Page 18 of 51

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH

Report No.: RSZ160114005-00E


Applicable Standard

FCC §2.1049, §22.917 and §22.905, §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

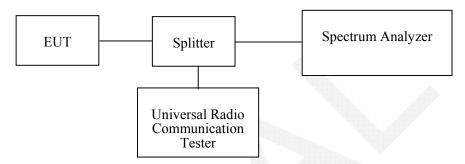

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2015-05-06	2016-05-06
E-Microwave	Attenuator(10dB)	EMCA10- 5RN	OE01203239	2015-05-08	2016-05-08
Pasternack	RF Coaxial Cable	RF-01	N/A	2015-05-06	2016-05-06
Pasternack	RF Coaxial Cable	RF-02	N/A	2015-05-06	2016-05-06
N/A	Two-way Spliter	ODP-1-6- 2S	OE0120142	2015-05-06	2016-05-06

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 19 of 51

Test Data

Environmental Conditions

Temperature:	21.1~26.3 °C
Relative Humidity:	22.9~48 %
ATM Pressure:	101.3∼ 102.2 kPa

The testing was performed by Lion Xiao from 2016-02-02 to 2016-02-24.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Band	Channel No.	Mode	99% Occupied Bandwidth kHz	26 dB Occupied Bandwidth kHz	
Cellular	190	GSM	244	317	
Cellulai	190	EDGE	246	321	
DCC	((1	PCS	242	323	
PCS	661	EDGE	246	319	
	4183	Rel 99	4168	4709	
WCDMA Band V	4183	HSDPA	4168	4709	
Daild V	4183	HSUPA	4188	4729	


Report No.: RSZ160114005-00E

FCC Part 22H/24E Page 20 of 51

GMSK 850 Cellular Band

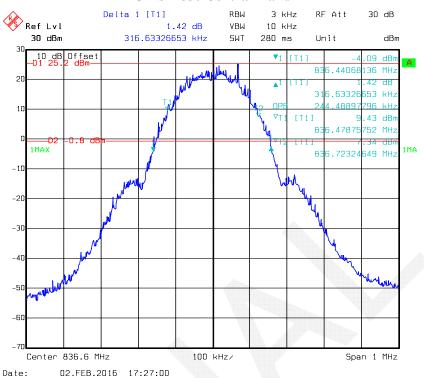


EDGE 850 Cellular Band

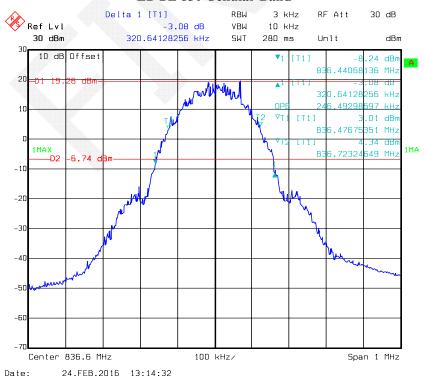


FCC Part 22H/24E Page 21 of 51

Report No.: RSZ160114005-00E

GMSK PCS Band

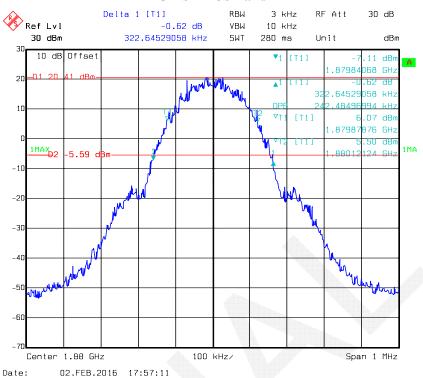


EDGE PCS Band

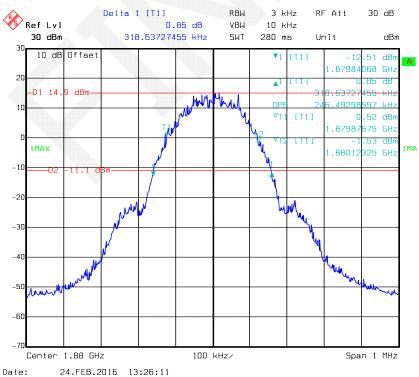


FCC Part 22H/24E Page 22 of 51

Report No.: RSZ160114005-00E

REL99 Band V

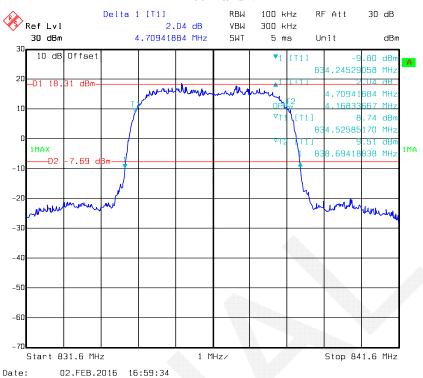


HSDPA Band V

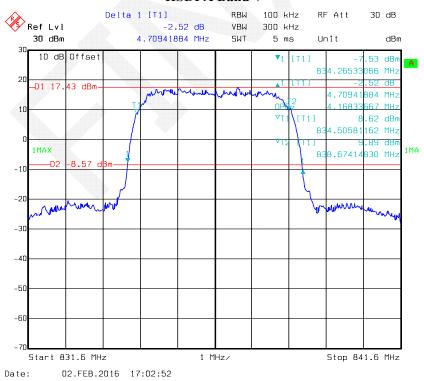

FCC Part 22H/24E Page 23 of 51

HSUPA Band V

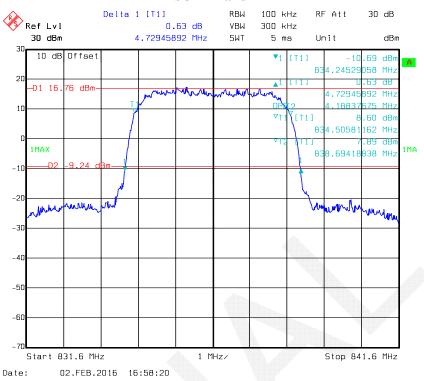

FCC Part 22H/24E Page 24 of 51

Report No.: RSZ160114005-00E


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

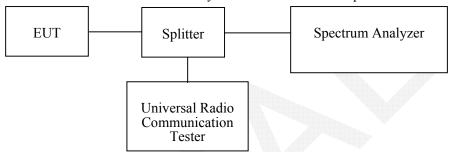

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date					
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09					
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27					
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06					
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2015-05-06	2016-05-06					
E-Microwave	Attenuator(10dB)	EMCA10- 5RN	OE01203239	2015-05-08	2016-05-08					
Pasternack	RF Coaxial Cable	RF-01	N/A	2015-05-06	2016-05-06					
Pasternack	RF Coaxial Cable	RF-02	N/A	2015-05-06	2016-05-06					
N/A	Two-way Spliter	ODP-1-6- 2S	OE0120142	2015-05-06	2016-05-06					

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 25 of 51

Test Data

Environmental Conditions

Temperature:	21.1°C
Relative Humidity:	42 %
ATM Pressure:	102.1kPa


Report No.: RSZ160114005-00E


The testing was performed by Lion Xiao on 2016-02-02.

Please refer to the following plots.

FCC Part 22H/24E Page 26 of 51


GSM850_Middle Channel

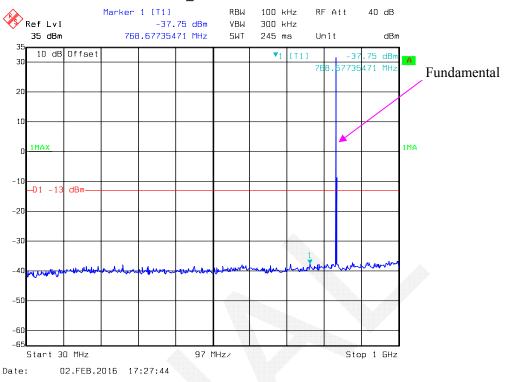


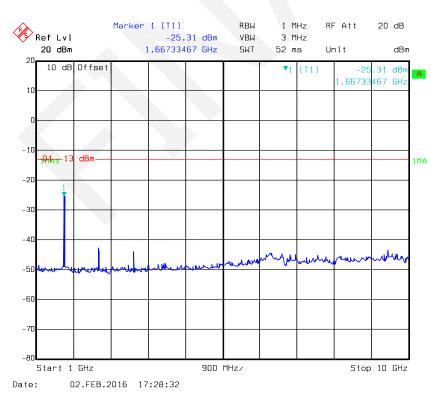


FCC Part 22H/24E Page 27 of 51

PCS 1900_ Middle Channel

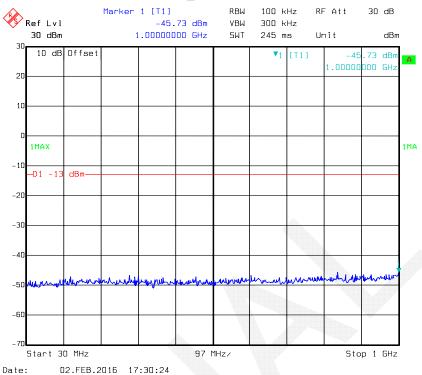


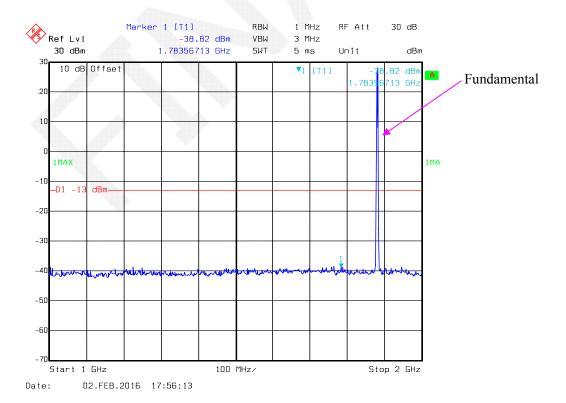


FCC Part 22H/24E Page 28 of 51

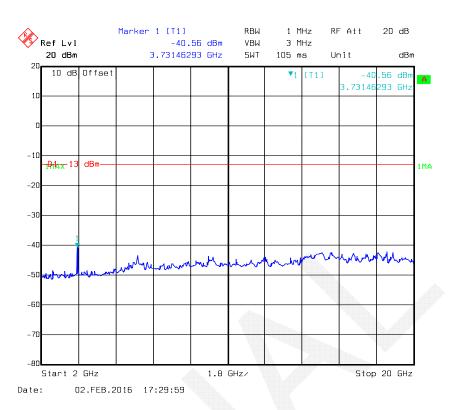


EDGE850_ Middle Channel

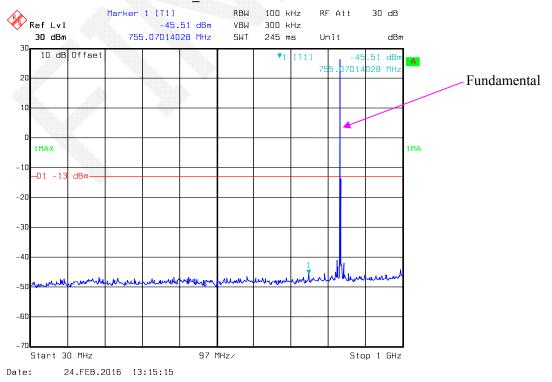

FCC Part 22H/24E Page 29 of 51

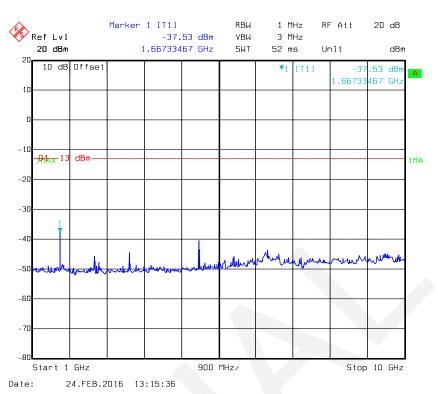

EDGE1900_ Middle Channel

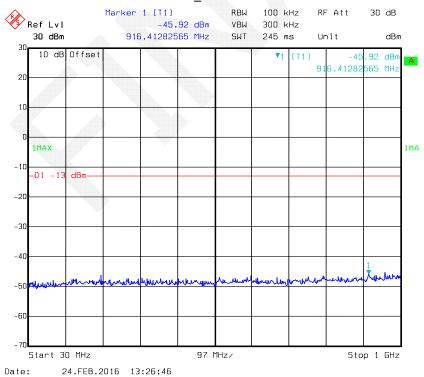

FCC Part 22H/24E Page 30 of 51

-30

-40


-50

-60

Date:

Start 2 GHz

24.FEB.2016 13:27:40

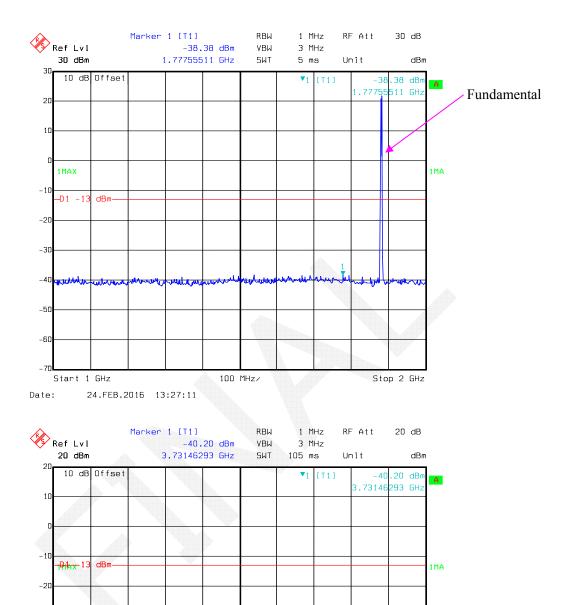



FCC Part 22H/24E Page 31 of 51

1.8 GHz/

Stop 20 GHz


REL99 Band $V_{\rm Middle}$ Channel

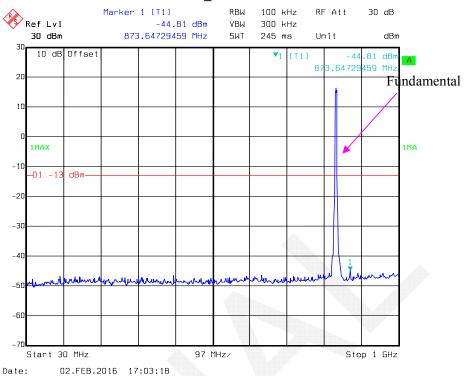


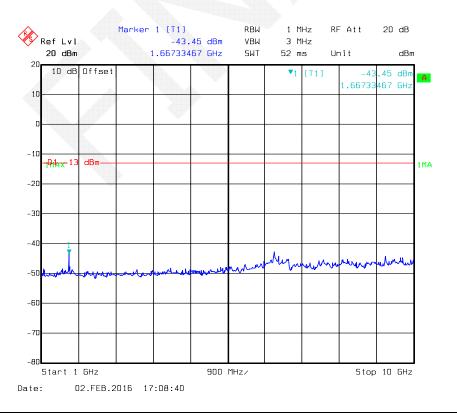

FCC Part 22H/24E Page 32 of 51


HSDPA Band V_Middle Channel

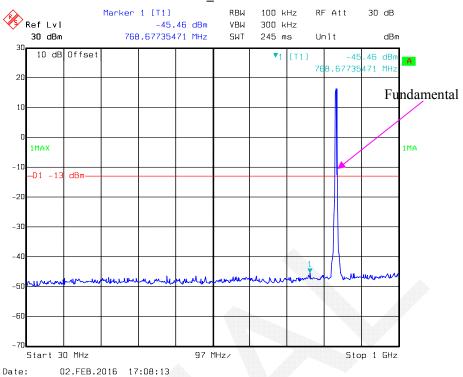


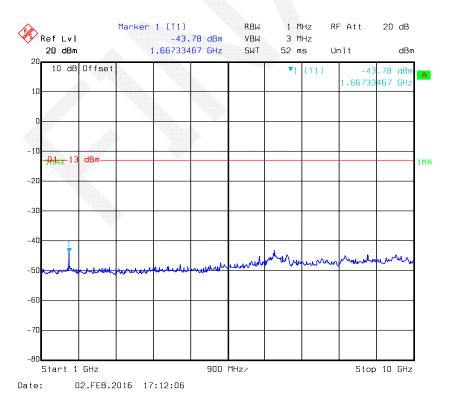

FCC Part 22H/24E Page 33 of 51

$HSUPA \ Band \ V_ \ Middle \ Channel$

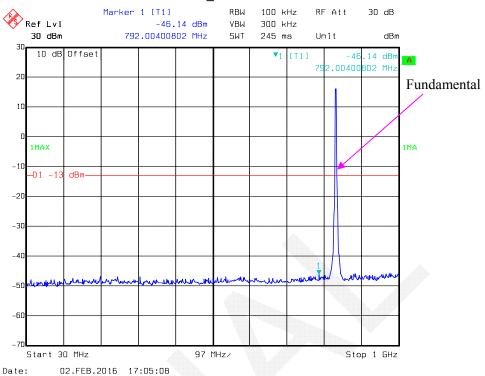

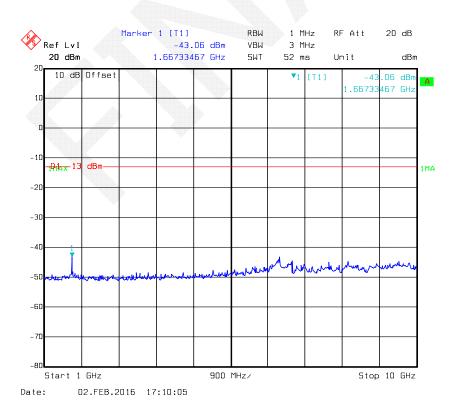

FCC Part 22H/24E Page 34 of 51

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Report No.: RSZ160114005-00E

Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TXpwr in Watts/0.001) - the absolute level$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	ЈВ3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2015-09-06	2018-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	2m	N/A	2015-05-06	2016-05-06
Mini Circuit	High Pass Filter	VHF-3100+	31251	2015-05-06	2016-05-06

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 35 of 51

Test Data

Environmental Conditions

Temperature:	21.1°C
Relative Humidity:	42%
ATM Pressure:	102.1kPa

The testing was performed by Lion Xiao on 2016-02-02.

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)

Report No.: RSZ160114005-00E

30 MHz-10 GHz:

		D	Sı	ubstituted Me	thod	A la a la 4 a		
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency: 836.6 MHz								
1673.200	Н	48.32	-52.8	10.5	1.5	-43.8	-13.0	30.8
1673.200	V	57.55	-43.8	10.5	1.5	-34.8	-13.0	21.8
2509.800	Н	44.52	-53.5	12.2	2.8	-44.1	-13.0	31.1
2509.800	V	46.80	-50.3	12.2	2.8	-40.9	-13.0	27.9
201.300	Н	34.69	-73	0.0	0.5	-73.5	-13.0	60.5
259.700	V	35.41	-70.2	0.0	0.5	-70.7	-13.0	57.7

WCDMA Band V (PART 22H)

		Danima	Sı	ubstituted Me	thod	A la ma landa			
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)	
	Frequency: 836.6 MHz								
1673.200	Н	34.08	-67	10.5	1.5	-58.0	-13.0	45.0	
1673.200	V	38.64	-62.7	10.5	1.5	-53.7	-13.0	40.7	
247.600	Н	34.58	-73.6	0.0	0.5	-74.1	-13.0	61.1	
301.300	V	35.21	-69.6	0.0	0.5	-70.1	-13.0	57.1	

FCC Part 22H/24E Page 36 of 51

PCS Band (PART 24E)

Report No.: RSZ160114005-00E

30 MHz-20 GHz:

		D	Sı	ubstituted Me	thod	A la ma landa		
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	Frequency: 1880 MHz							
3760.000	Н	44.05	-50.2	12.3	2.9	-40.8	-13.0	27.8
3760.000	V	42.37	-50.7	12.3	2.9	-41.3	-13.0	28.3
233.900	Н	34.55	-73.5	0.0	0.5	-74.0	-13.0	61.0
270.500	V	35.09	-70.4	0.0	0.5	-70.9	-13.0	57.9

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.

 2) Absolute Level = SG Level - Cable loss + Antenna Gain

 3) Margin = Limit-Absolute Level

FCC Part 22H/24E Page 37 of 51

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.


Report No.: RSZ160114005-00E

According to $\S24.238(a)$, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

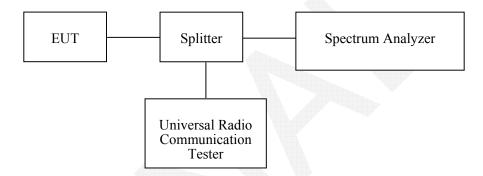

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2015-05-06	2016-05-06
E-Microwave	Attenuator(10dB)	EMCA10- 5RN	OE01203239	2015-05-08	2016-05-08
Pasternack	RF Coaxial Cable	RF-01	N/A	2015-05-06	2016-05-06
Pasternack	RF Coaxial Cable	RF-02	N/A	2015-05-06	2016-05-06
N/A	Two-way Spliter	ODP-1-6-2S	OE0120142	2015-05-06	2016-05-06

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 38 of 51

Test Data

Environmental Conditions

Temperature:	21.1~26.3°C
Relative Humidity:	22.9~48 %
ATM Pressure:	101.3~102.2 kPa

The testing was performed by Lion Xiao from 2016-02-02 to 2016-02-24.


Report No.: RSZ160114005-00E

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following plots.

FCC Part 22H/24E Page 39 of 51

GSM 850, Left Band Edge

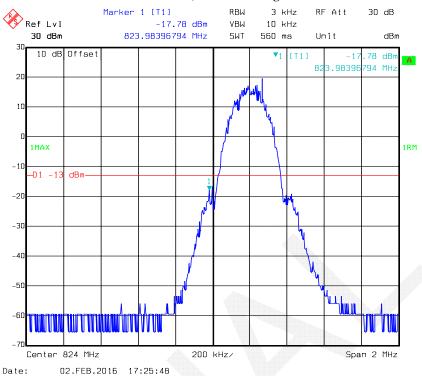


GSM 850, Right Band Edge




FCC Part 22H/24E Page 40 of 51

PCS 1900, Left Band Edge

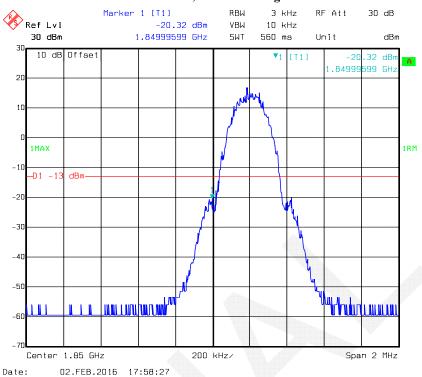


PCS 1900, Right Band Edge

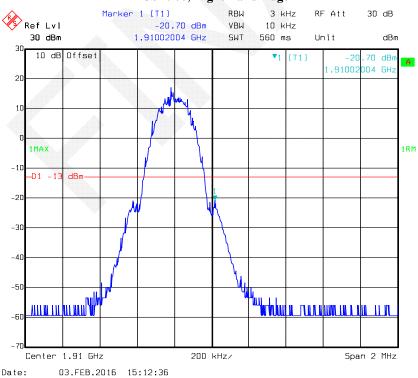


FCC Part 22H/24E Page 41 of 51

EDGE850, Left Band Edge

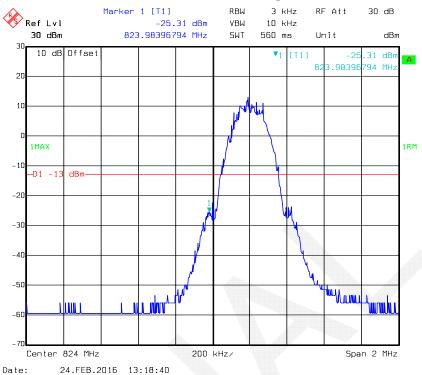


EDGE850, Right Band Edge

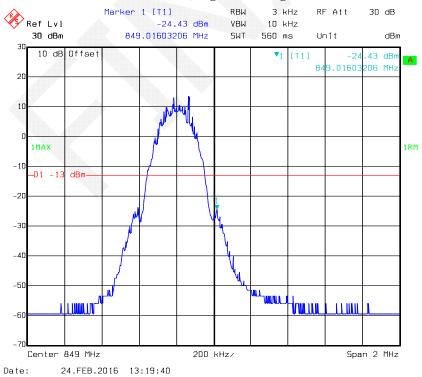


FCC Part 22H/24E Page 42 of 51

EDGE 1900, Left Band Edge

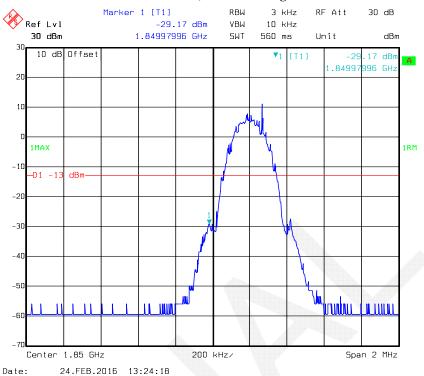


EDGE 1900, Right Band Edge

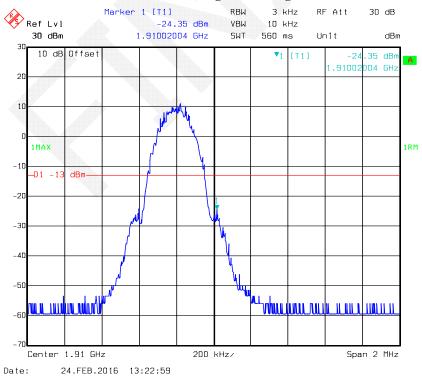


FCC Part 22H/24E Page 43 of 51

REL99 Band V, Left Band Edge

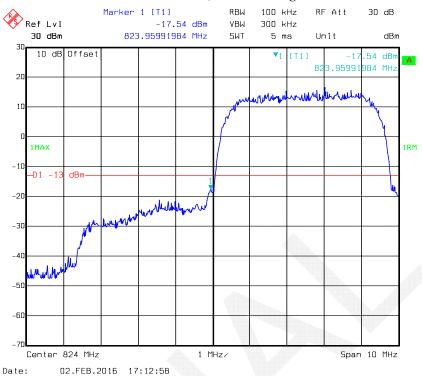


REL99 Band V Right Band Edge

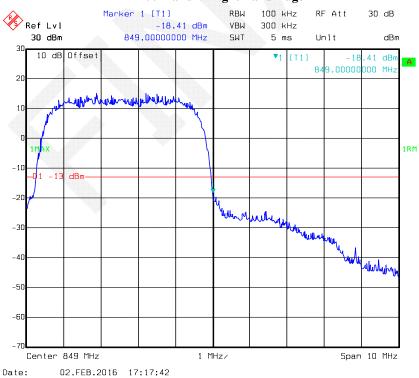


FCC Part 22H/24E Page 44 of 51

HSDPA Band V, Left Band Edge

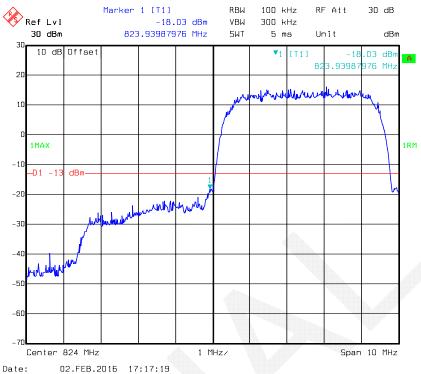


HSDPA Band V, Right Band Edge

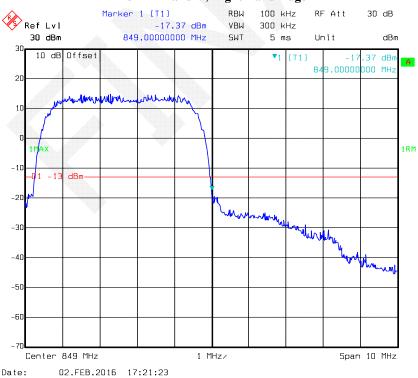


FCC Part 22H/24E Page 45 of 51

HSUPA Band V, Left Band Edge

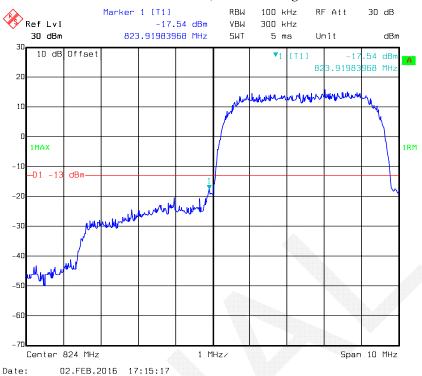

HSUPA Band V, Right Band Edge

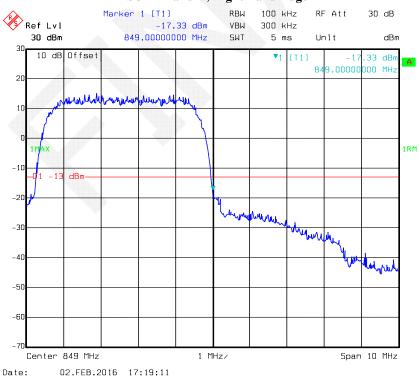

FCC Part 22H/24E Page 46 of 51

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Ser	
	rvices

Report No.: RSZ160114005-00E

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

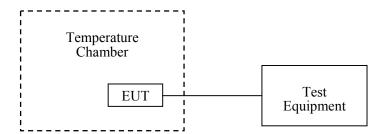

FCC Part 22H/24E Page 47 of 51

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2015-09-10	2016-09-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27
UNI-T	Multimeter	UT39A	M130199938	2015-04-10	2016-04-10
Pasternack	RF Coaxial Cable	RF-01	/	2015-05-06	2016-05-06

Report No.: RSZ160114005-00E

Test Data

Environmental Conditions

Temperature:	21.1°C
Relative Humidity:	42 %
ATM Pressure:	102.1kPa

The testing was performed by Lion Xiao on 2016-02-02.

Cellular Band (Part 22H)

G	MSK, Middle (Channel, $f_c = 8$	36.6 MHz	
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30		16	0.019	
-20		10	0.012	
-10		19	0.023	
0		11	0.013	
10	3.7	17	0.020	
20		15	0.018	2.5
30		18	0.022	
40		13	0.016	
50		16	0.019	
0.5	3.5	12	0.014	
25	4.2	14	0.017	

FCC Part 22H/24E Page 48 of 51

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

11

14

0.013

0.017

3.5

4.2

Report No.: RSZ160114005-00E

WCDMA Band V: Re199

25

	Middle Chan	nel, f _c = 836.6	MHz	
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30		37	0.044	
-20		30	0.036	
-10		39	0.047	
0		34	0.041	
10	3.7	31	0.037	
20		38	0.045	2.5
30		35	0.042	
40		32	0.038	
50		39	0.047	
25	3.5	30	0.036	
23	4.2	36	0.043	

FCC Part 22H/24E Page 49 of 51

	Middle Channel, f _c = 836.6 MHz						
Temperature	Voltage	Frequency Error	Frequency Error	Limit			
${\mathbb C}$	V _{DC}	Hz	ppm	ppm			
-30		-30	-0.036				
-20		-27	-0.032				
-10		-33	-0.039				
0		-36	-0.043				
10	3.7	-31	-0.037				
20		-28	-0.033	2.5			
30		-34	-0.041				
40		-31	-0.037				
50		-37	-0.044				
25	3.5	-35	-0.042	1			
25	4.2	-33	-0.039				

WCDMA Band V: HSUPA

	Middle Channel, f _c = 836.6 MHz						
Temperature	Voltage	Frequency Error	Frequency Error	Limit			
°C	V_{DC}	Hz	ppm	ppm			
-30		41	0.049				
-20		49	0.059				
-10		44	0.053				
0		48	0.057				
10	3.7	42	0.050				
20		45	0.054	2.5			
30		47	0.056				
40		42	0.050				
50		46	0.055				
25	3.5	50	0.060				
23	4.2	43	0.051				

FCC Part 22H/24E Page 50 of 51

(GMSK, Middle Channel, f _c = 1880 MHz						
Temperature	Voltage	Frequency Error	Frequency Error	Result			
°C	V _{DC}	Hz	ppm				
-30		-23	-0.012				
-20		-20	-0.011				
-10		-27	-0.014				
0		-29	-0.015				
10	3.7	-21	-0.011				
20		-25	-0.013	Pass			
30		-22	-0.012				
40		-28	-0.015				
50		-25	-0.013				
25	3.5	-23	-0.012	h 4			
25	4.2	-20	-0.011				

8PSK, Middle Channel, f _c = 1880.0 MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
℃	V _{DC}	Hz	ppm	
-30		30	0.016	
-20		34	0.018	
-10		39	0.021	
0		31	0.016	
10	3.7	35	0.019	
20		38	0.020	Pass
30		33	0.018	
40	>	36	0.019	
50		34	0.018	
25	3.5	38	0.020	
	4.2	30	0.016	

***** END OF REPORT *****

FCC Part 22H/24E Page 51 of 51