

FCC 47 CFR PART 15 SUBPART C

Product Type : AP router
Applicant : Wedge-it.com Ltd
Address : Birkfield House Bridge Road ,High Kelling, United Kingdom NR25 6QT
Trade Name : HomeHalo
Model Number : HHR1
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.4:2009
Receive Date : Oct. 30, 2014
Test Period : Oct. 31 ~ Nov. 07, 2014
Issue Date : Nov. 13, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 13, 2014	Initial Issue	

Verification of Compliance

Issued Date: 11/13/2014

Product Type : AP router
Applicant : Wedge-it.com Ltd
Address : Birkfield House Bridge Road ,High Kelling, United Kingdom
NR25 6QT
Trade Name : HomeHalo
Model Number : HHR1
FCC ID : 2ADED-HHR1
EUT Rated Voltage : DC 9.0V, 0.5A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.4:2009
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.

Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By



(Manager)

(Fly Lu)

Reviewed By



(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Conducted Emission Measurement	11
4.1.	Limit	11
4.2.	Test Instruments	11
4.3.	Test Setup.....	11
4.4.	Test Procedure	12
4.5.	Test Result.....	13
5	Radiated Emission Measurement.....	17
5.1.	Limit	17
5.2.	Test Instruments	17
5.3.	Setup	18
5.4.	Test Procedure	19
5.5.	Test Result.....	21
6	Maximum Conducted Output Power Measurement.....	28
6.1.	Limit	28
6.2.	Test Setup.....	28
6.3.	Test Instruments	28
6.4.	Test Procedure	28
6.5.	Test Result.....	29
7	6dB RF Bandwidth Measurement.....	32
7.1.	Limit	32
7.2.	Test Setup.....	32
7.3.	Test Instruments	32
7.4.	Test Procedure	32
7.5.	Test Result.....	33
7.6.	Test Graphs	35

8	Maximum Power Density Measurement	41
8.1.	Limit	41
8.2.	Test Setup.....	41
8.3.	Test Instruments	41
8.4.	Test Procedure	41
8.5.	Test Result.....	42
8.6.	Test Graphs	44
9	Out of Band Conducted Emissions Measurement	50
9.1.	Limit	50
9.2.	Test Setup.....	50
9.3.	Test Instruments	50
9.4.	Test Procedure	50
9.5.	Test Graphs	51
10	Band Edges Measurement	69
10.1.	Limit	69
10.2.	Test Setup.....	69
10.3.	Test Instruments	69
10.4.	Test Procedure	70
10.5.	Test Result.....	71
11	Antenna Measurement.....	75
11.1.	Limit	75
11.2.	Antenna Connector Construction	75

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	AP router
Trade Name	HomeHalo
Model No.	HHR1
Applicant	Wedge-it.com Ltd Birkfield House Bridge Road ,High Kelling, United Kingdom NR25 6QT
Manufacturer	Wedge-it.com Ltd Birkfield House Bridge Road ,High Kelling, United Kingdom NR25 6QT
FCC ID	2ADED-HHR1
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM
Antenna Type	Dipole Antenna
Antenna Gain	3 dBi
Antenna Delivery	IEEE 802.11b / g: 1TX + 1RX IEEE 802.11n 20MHz / 40MHz: 2TX + 2RX
RF Output Power	IEEE 802.11b: 0.075 W / 18.73 dBm IEEE 802.11g: 0.330 W / 25.18 dBm IEEE 802.11n 2.4GHz 20MHz: 0.350 W / 25.44 dBm IEEE 802.11n 2.4GHz 40MHz: 0.265 W / 24.24 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode (ANT-1 + 2):

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode (ANT-1 + 2):


Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 27Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.


3.3. Configuration of Test System Details

Conducted Emissions

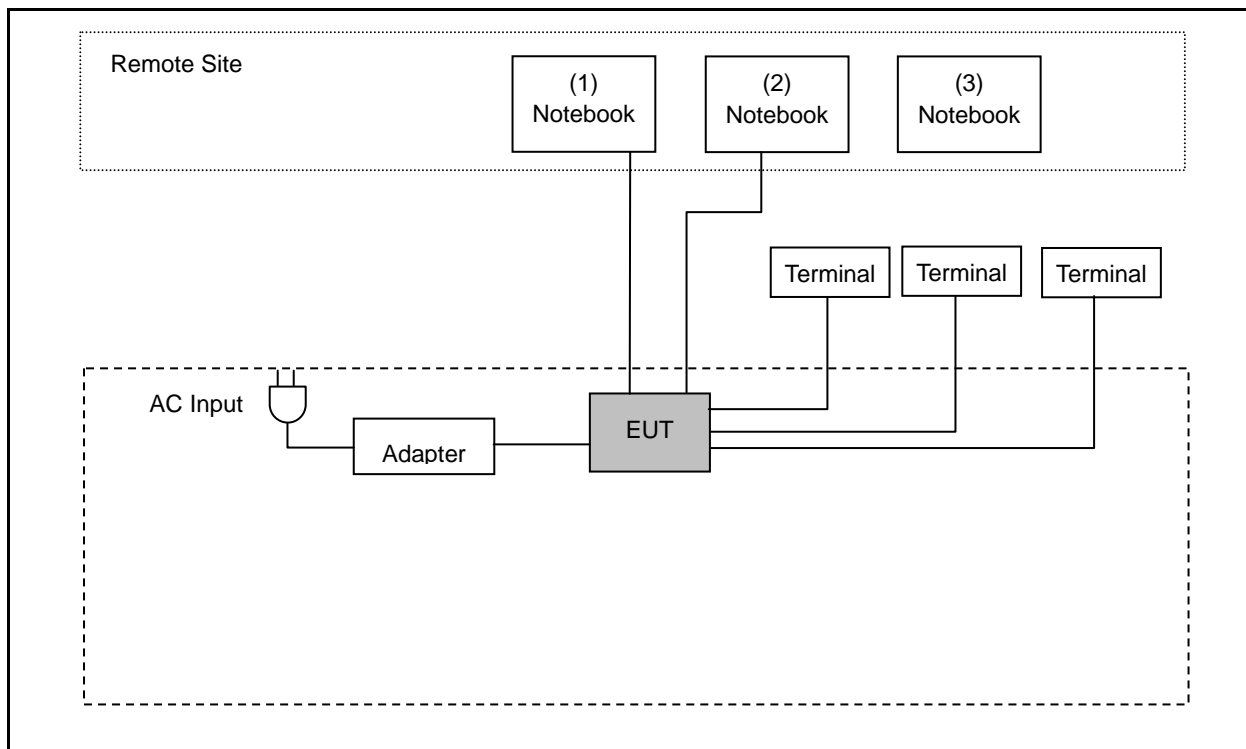

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
1	Notebook	DELL	D531	GCDCD-T6HYQ-3MQ8R-JCPD3-3G8G2	Non-Shielded, 2.0m
2	Notebook	DELL	LAPTITU	25627158361	Non-Shielded, 2.0m
3	Notebook	DELL	LAPTITU	6699565657	Non-Shielded, 2.0m

Radiated Emissions

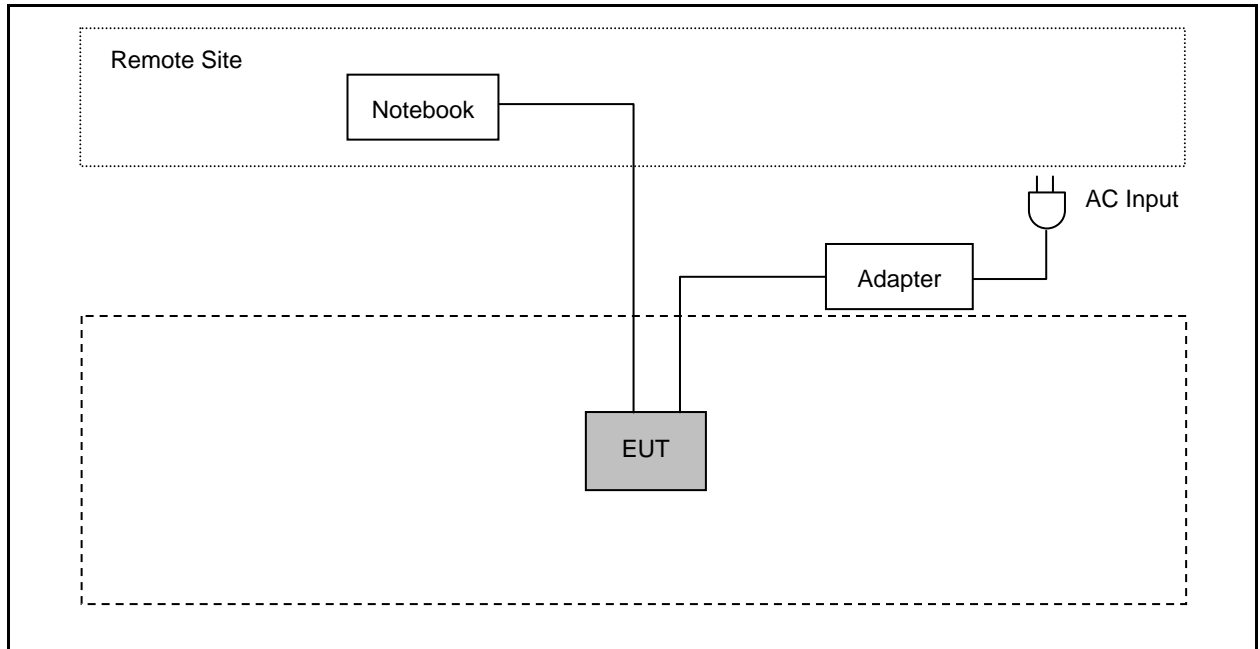

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

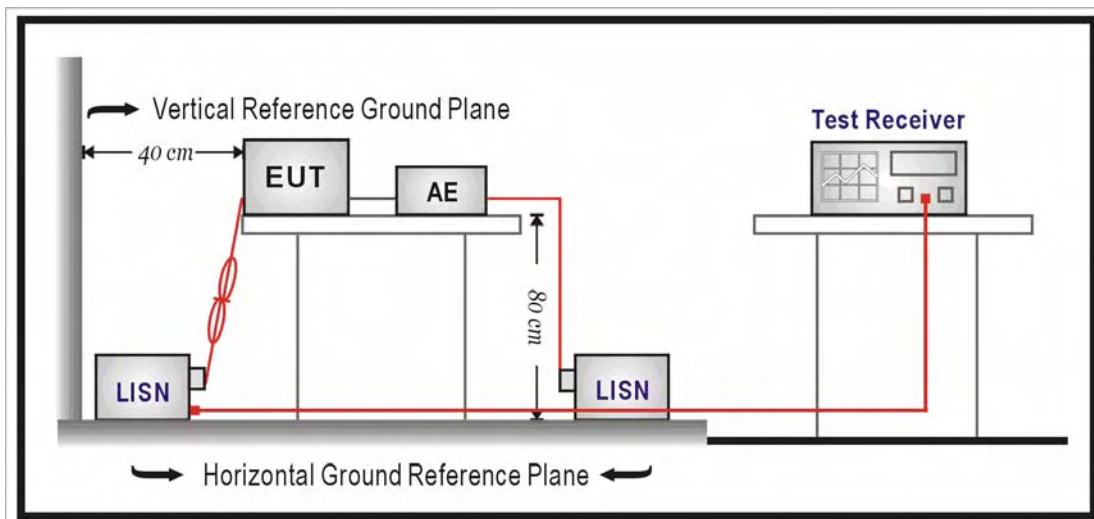

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	HHR1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	10/31/2014
		Test By:	Eric Ou Yang
Description:			

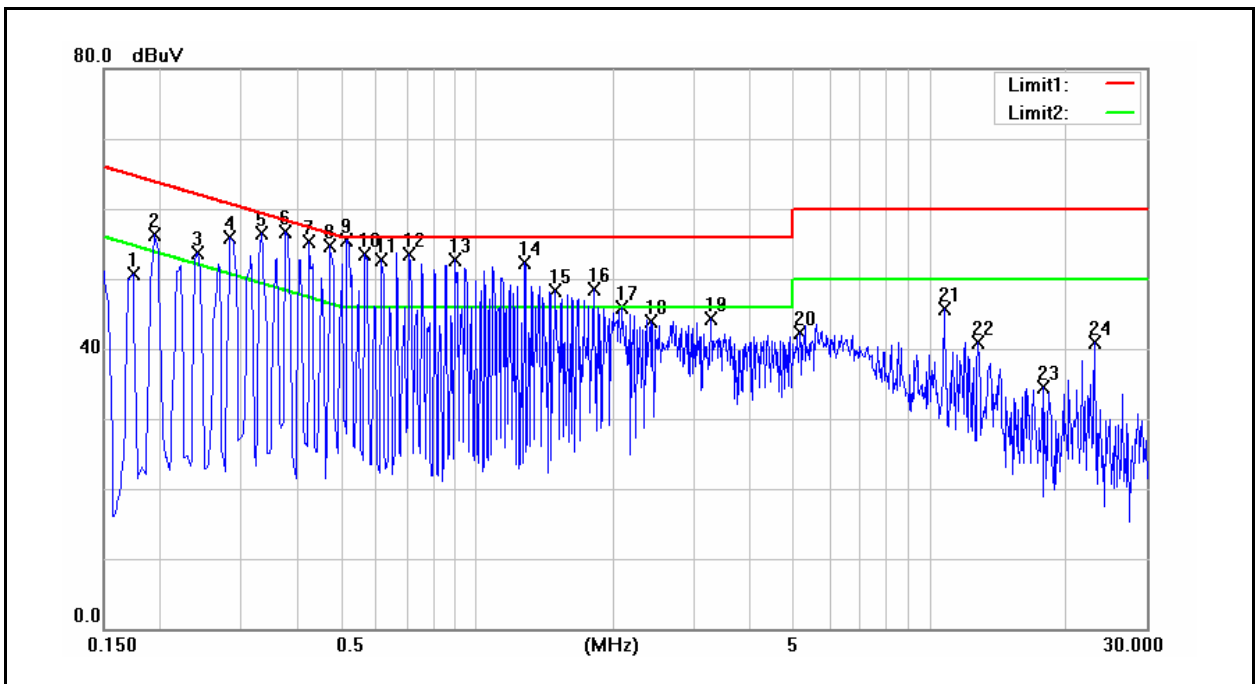

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	37.85	21.77	9.60	47.45	31.37	64.77	54.77	-17.32	-23.40	Pass
2	0.1940	42.05	29.03	9.60	51.65	38.63	63.86	53.86	-12.21	-15.23	Pass
3	0.2420	42.24	30.43	9.60	51.84	40.03	62.03	52.03	-10.19	-12.00	Pass
4	0.2860	43.90	31.85	9.61	53.51	41.46	60.64	50.64	-7.13	-9.18	Pass
5	0.3340	43.24	30.34	9.61	52.85	39.95	59.35	49.35	-6.50	-9.40	Pass
6	0.3780	44.25	32.55	9.61	53.86	42.16	58.32	48.32	-4.46	-6.16	Pass
7	0.4260	42.96	30.07	9.61	52.57	39.68	57.33	47.33	-4.76	-7.65	Pass
8	0.4740	42.61	27.98	9.62	52.23	37.60	56.44	46.44	-4.21	-8.84	Pass
9	0.5180	43.17	29.18	9.62	52.79	38.80	56.00	46.00	-3.21	-7.20	Pass
10	0.5660	41.10	26.44	9.62	50.72	36.06	56.00	46.00	-5.28	-9.94	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	HHR1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	10/31/2014
		Test By:	Eric Ou Yang
Description:			


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
11	0.6140	40.12	25.16	9.62	49.74	34.78	56.00	46.00	-6.26	-11.22	Pass
12	0.7100	40.45	25.75	9.61	50.06	35.36	56.00	46.00	-5.94	-10.64	Pass
13	0.8980	39.87	25.69	9.64	49.51	35.33	56.00	46.00	-6.49	-10.67	Pass
14	1.2740	38.10	23.64	9.66	47.76	33.30	56.00	46.00	-8.24	-12.70	Pass
15	1.4900	35.62	20.06	9.67	45.29	29.73	56.00	46.00	-10.71	-16.27	Pass
16	1.8140	32.42	19.46	9.68	42.10	29.14	56.00	46.00	-13.90	-16.86	Pass
17	2.0980	32.83	20.99	9.69	42.52	30.68	56.00	46.00	-13.48	-15.32	Pass
18	2.4100	29.37	15.90	9.71	39.08	25.61	56.00	46.00	-16.92	-20.39	Pass
19	3.2820	27.26	14.34	9.75	37.01	24.09	56.00	46.00	-18.99	-21.91	Pass
20	5.1500	27.44	14.92	9.80	37.24	24.72	60.00	50.00	-22.76	-25.28	Pass
21	10.7340	31.05	22.31	9.97	41.02	32.28	60.00	50.00	-18.98	-17.72	Pass
22	12.7460	28.84	24.21	10.03	38.87	34.24	60.00	50.00	-21.13	-15.76	Pass
23	17.6940	23.88	20.29	10.18	34.06	30.47	60.00	50.00	-25.94	-19.53	Pass
24	23.1300	28.36	18.03	10.27	38.63	28.30	60.00	50.00	-21.37	-21.70	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	HHR1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	10/31/2014
		Test By:	Eric Ou Yang

Description:

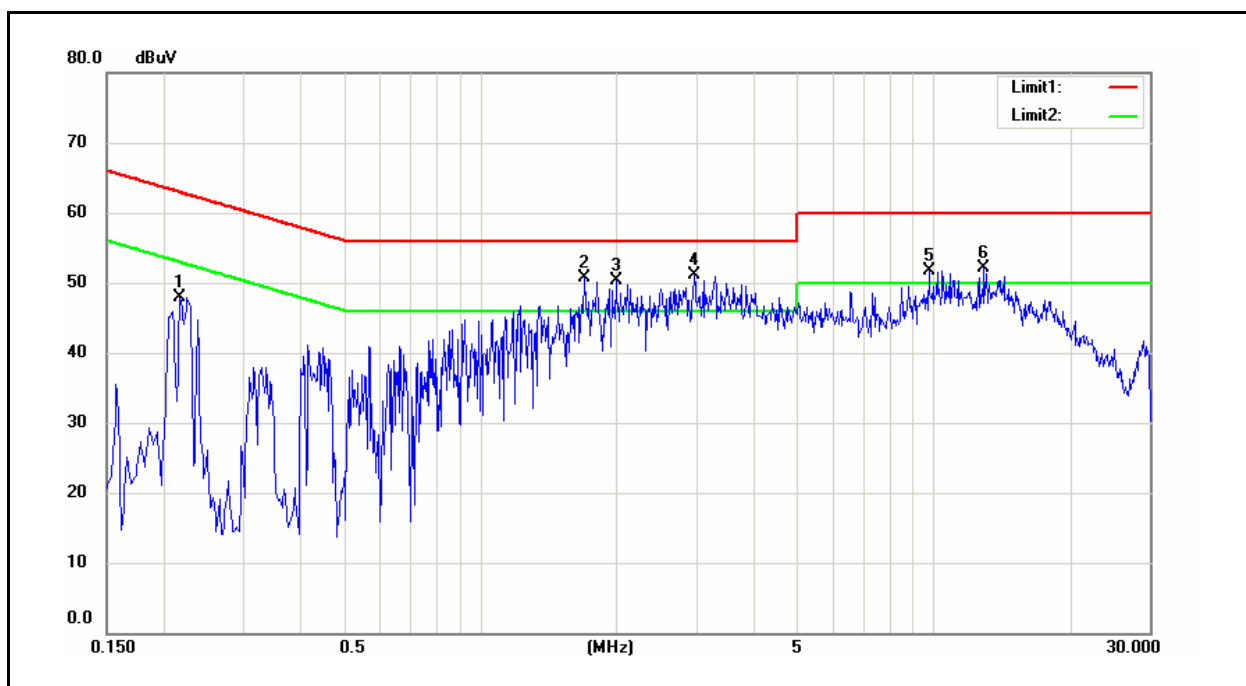

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	42.34	27.13	9.60	51.94	36.73	65.36	55.36	-13.42	-18.63	Pass
2	0.1860	41.44	27.30	9.60	51.04	36.90	64.21	54.21	-13.17	-17.31	Pass
3	0.2300	41.72	28.94	9.60	51.32	38.54	62.45	52.45	-11.13	-13.91	Pass
4	0.2740	43.37	30.59	9.61	52.98	40.20	61.00	51.00	-8.02	-10.80	Pass
5	0.3220	43.47	29.61	9.61	53.08	39.22	59.66	49.66	-6.58	-10.44	Pass
6	0.3700	43.27	29.47	9.61	52.88	39.08	58.50	48.50	-5.62	-9.42	Pass
7	0.4140	42.45	27.80	9.61	52.06	37.41	57.57	47.57	-5.51	-10.16	Pass
8	0.5100	44.40	31.53	9.62	54.02	41.15	56.00	46.00	-1.98	-4.85	Pass
9	0.5580	39.93	25.67	9.62	49.55	35.29	56.00	46.00	-6.45	-10.71	Pass
10	0.6980	40.82	25.59	9.61	50.43	35.20	56.00	46.00	-5.57	-10.80	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	HHR1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	10/31/2014
		Test By:	Eric Ou Yang
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
11	0.8420	39.21	23.48	9.64	48.85	33.12	56.00	46.00	-7.15	-12.88	Pass
12	1.0260	38.24	24.50	9.65	47.89	34.15	56.00	46.00	-8.11	-11.85	Pass
13	1.0780	38.84	25.40	9.65	48.49	35.05	56.00	46.00	-7.51	-10.95	Pass
14	1.2660	37.97	23.62	9.66	47.63	33.28	56.00	46.00	-8.37	-12.72	Pass
15	1.6140	33.40	19.76	9.68	43.08	29.44	56.00	46.00	-12.92	-16.56	Pass
16	2.0900	33.03	21.09	9.70	42.73	30.79	56.00	46.00	-13.27	-15.21	Pass
17	2.6300	28.89	17.98	9.74	38.63	27.72	56.00	46.00	-17.37	-18.28	Pass
18	4.7940	26.31	14.46	9.82	36.13	24.28	56.00	46.00	-19.87	-21.72	Pass
19	5.7900	28.30	16.54	9.85	38.15	26.39	60.00	50.00	-21.85	-23.61	Pass
20	10.2220	29.55	19.74	9.97	39.52	29.71	60.00	50.00	-20.48	-20.29	Pass
21	22.4580	23.98	15.22	10.27	34.25	25.49	60.00	50.00	-25.75	-24.51	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

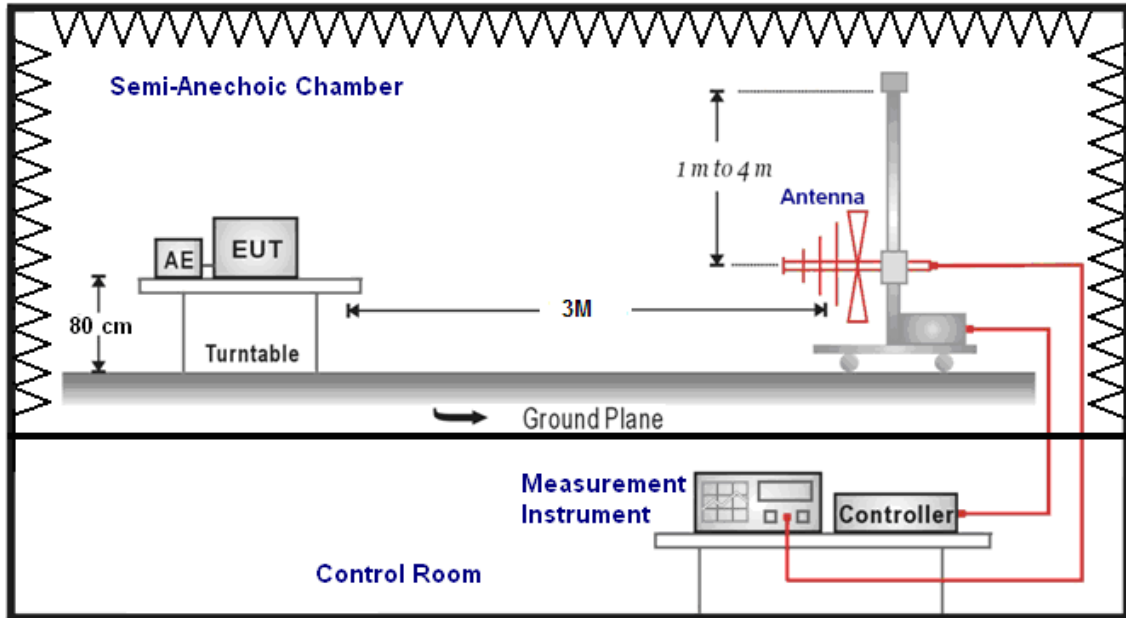

Above 1GHz

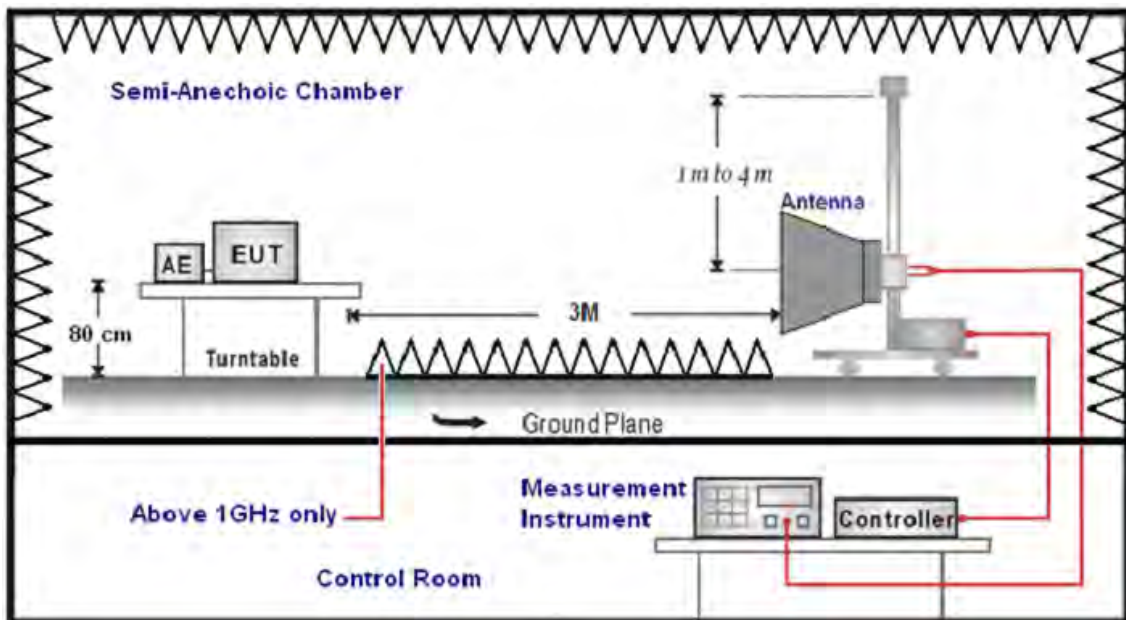

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		11/05/2014	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
146.5000	35.09	-11.57	23.52	43.50	-19.98	QP	H
250.0000	51.08	-12.19	38.89	46.00	-7.11	QP	H
443.5000	35.03	-7.19	27.84	46.00	-18.16	QP	H
500.0000	44.33	-6.25	38.08	46.00	-7.92	QP	H
750.0000	37.35	-1.18	36.17	46.00	-9.83	QP	H
875.0000	30.34	1.01	31.35	46.00	-14.65	QP	H
120.5000	41.00	-13.92	27.08	43.50	-16.42	QP	V
250.0000	52.72	-12.19	40.53	46.00	-5.47	QP	V
375.0000	33.12	-8.78	24.34	46.00	-21.66	QP	V
500.0000	46.21	-6.25	39.96	46.00	-6.04	QP	V
630.5000	28.19	-3.54	24.65	46.00	-21.35	QP	V
750.0000	37.84	-1.18	36.66	46.00	-9.34	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	11/04/2014		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.07	-0.48	36.59	74.00	-37.41	peak	H
4598.000	34.76	4.04	38.80	74.00	-35.20	peak	H
6698.000	34.05	9.53	43.58	74.00	-30.42	peak	H
3023.000	37.62	-0.48	37.14	74.00	-36.86	peak	V
4824.000	43.54	4.61	48.15	74.00	-25.85	peak	V
7236.000	45.29	10.91	56.20	74.00	-17.80	peak	V
7236.000	39.73	10.91	50.64	54.00	-3.36	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	11/04/2014		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.00	-0.48	36.52	74.00	-37.48	peak	H
4598.000	34.00	4.04	38.04	74.00	-35.96	peak	H
6663.000	33.98	9.43	43.41	74.00	-30.59	peak	H
2995.000	38.69	-0.55	38.14	74.00	-35.86	peak	V
4874.000	40.02	4.74	44.76	74.00	-29.24	peak	V
7311.000	40.09	11.09	51.18	74.00	-22.82	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	11/04/2014		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3016.000	37.51	-0.49	37.02	74.00	-36.98	peak	H
4570.000	35.40	3.97	39.37	74.00	-34.63	peak	H
6747.000	33.19	9.65	42.84	74.00	-31.16	peak	H
3030.000	38.81	-0.45	38.36	74.00	-35.64	peak	V
4924.000	40.02	4.86	44.88	74.00	-29.12	peak	V
7386.000	40.20	11.25	51.45	74.00	-22.55	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/05/2014		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.38	-0.48	36.90	74.00	-37.10	peak	H
4591.000	35.22	4.01	39.23	74.00	-34.77	peak	H
6621.000	34.25	9.31	43.56	74.00	-30.44	peak	H
3009.000	36.39	-0.51	35.88	74.00	-38.12	peak	V
4598.000	34.07	4.04	38.11	74.00	-35.89	peak	V
7236.000	43.79	10.91	54.70	74.00	-19.30	peak	V
7236.000	34.16	10.91	45.07	54.00	-8.93	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/05/2014		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.35	-0.48	36.87	74.00	-37.13	peak	H
4570.000	35.36	3.97	39.33	74.00	-34.67	peak	H
6698.000	33.94	9.53	43.47	74.00	-30.53	peak	H
3086.000	37.17	-0.30	36.87	74.00	-37.13	peak	V
4874.000	38.87	4.74	43.61	74.00	-30.39	peak	V
7311.000	45.32	11.09	56.41	74.00	-17.59	peak	V
7311.000	33.51	11.09	44.60	54.00	-9.40	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/05/2014		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3065.000	37.04	-0.36	36.68	74.00	-37.32	peak	H
4563.000	34.20	3.95	38.15	74.00	-35.85	peak	H
7386.000	38.60	11.25	49.85	74.00	-24.15	peak	H
3058.000	38.49	-0.38	38.11	74.00	-35.89	peak	V
4577.000	33.97	3.98	37.95	74.00	-36.05	peak	V
7386.000	45.01	11.25	56.26	74.00	-17.74	peak	V
7386.000	35.24	11.25	46.49	54.00	-7.51	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/05/2014		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.41	-0.48	36.93	74.00	-37.07	peak	H
4549.000	34.09	3.92	38.01	74.00	-35.99	peak	H
6670.000	33.95	9.45	43.40	74.00	-30.60	peak	H
3009.000	37.14	-0.51	36.63	74.00	-37.37	peak	V
4563.000	34.32	3.95	38.27	74.00	-35.73	peak	V
7236.000	45.88	10.91	56.79	74.00	-17.21	peak	V
7236.000	33.51	10.91	44.42	54.00	-9.58	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/05/2014		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	36.60	-0.44	36.16	74.00	-37.84	peak	H
4874.000	40.39	4.74	45.13	74.00	-28.87	peak	H
6670.000	33.29	9.45	42.74	74.00	-31.26	peak	H
3023.000	37.48	-0.48	37.00	74.00	-37.00	peak	V
4874.000	46.47	4.74	51.21	74.00	-22.79	peak	V
7311.000	38.22	11.09	49.31	74.00	-24.69	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/05/2014		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2995.000	37.07	-0.55	36.52	74.00	-37.48	peak	H
4598.000	34.74	4.04	38.78	74.00	-35.22	peak	H
6642.000	34.17	9.37	43.54	74.00	-30.46	peak	H
3023.000	36.59	-0.48	36.11	74.00	-37.89	peak	V
4924.000	44.00	4.86	48.86	74.00	-25.14	peak	V
7377.000	32.75	11.24	43.99	74.00	-30.01	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/05/2014		
Frequency:	2422MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.22	-0.45	35.77	74.00	-38.23	peak	H
4844.000	38.60	4.66	43.26	74.00	-30.74	peak	H
6705.000	34.59	9.54	44.13	74.00	-29.87	peak	H
3002.000	37.66	-0.54	37.12	74.00	-36.88	peak	V
4844.000	39.60	4.66	44.26	74.00	-29.74	peak	V
6726.000	33.42	9.60	43.02	74.00	-30.98	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/05/2014		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.49	-0.40	37.09	74.00	-36.91	peak	H
4874.000	41.05	4.74	45.79	74.00	-28.21	peak	H
6663.000	35.39	9.43	44.82	74.00	-29.18	peak	H
3058.000	37.23	-0.38	36.85	74.00	-37.15	peak	V
4874.000	42.49	4.74	47.23	74.00	-26.77	peak	V
6677.000	33.74	9.46	43.20	74.00	-30.80	peak	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/05/2014		
Frequency:	2452MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.25	-0.44	36.81	74.00	-37.19	peak	H
4904.000	39.09	4.81	43.90	74.00	-30.10	peak	H
6677.000	33.83	9.46	43.29	74.00	-30.71	peak	H
3044.000	38.59	-0.42	38.17	74.00	-35.83	peak	V
4904.000	41.36	4.81	46.17	74.00	-27.83	peak	V
6649.000	35.08	9.39	44.47	74.00	-29.53	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

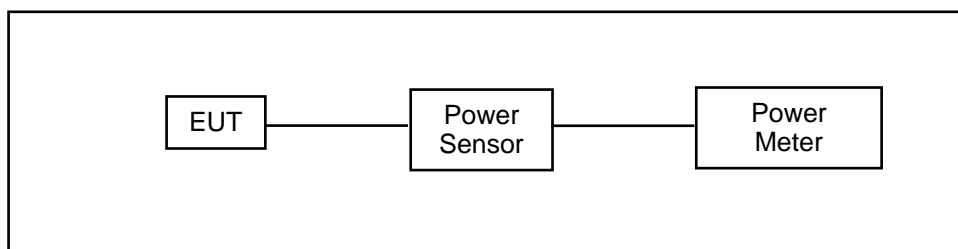

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/21/2014	(1)
Power Meter	Anritsu	ML2495A	1135009	08/21/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	HHR1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: IEEE 802.11b Link Mode					
Date of Test	10/31/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	ANT-1				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	1M	16.04	0.040	18.54	0.071	< 30
2437		16.26	0.042	18.73	0.075	< 30
2462		15.71	0.037	18.21	0.066	< 30
2437	2M	15.93	0.039	18.41	0.069	< 30
2437	5.5M	15.95	0.039	18.45	0.070	< 30
2437	11M	15.91	0.039	18.36	0.069	< 30

Model Number	HHR1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11g Link Mode					
Date of Test	10/31/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	ANT-1				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	6M	15.26	0.034	24.78	0.301	< 30
2437		14.57	0.029	24.04	0.254	< 30
2462		15.40	0.035	25.18	0.330	< 30
2437	9M	14.41	0.028	23.43	0.220	< 30
2437	12M	13.70	0.023	23.42	0.220	< 30
2437	18M	14.34	0.027	23.45	0.221	< 30
2437	24M	14.39	0.027	22.86	0.193	< 30
2437	36M	13.68	0.023	22.66	0.185	< 30
2437	48M	14.52	0.028	22.90	0.195	< 30
2437	54M	14.22	0.026	23.45	0.221	< 30

Model Number	HHR1									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode									
Date of Test	10/31/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	ANT-1				ANT-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	13M	13.57	0.023	22.66	0.185	13.45	0.022	22.11	0.163	< 30
2437		13.11	0.020	22.11	0.163	12.87	0.019	22.10	0.162	< 30
2462		13.55	0.023	22.58	0.181	13.50	0.022	22.27	0.169	< 30
2437	26M	12.96	0.020	21.93	0.156	12.68	0.019	21.89	0.155	< 30
2437	39M	13.01	0.020	22.00	0.158	12.69	0.019	21.92	0.156	< 30
2437	52M	12.98	0.020	21.99	0.158	12.77	0.019	21.98	0.158	< 30
2437	78M	12.94	0.020	21.92	0.156	12.76	0.019	21.97	0.157	< 30
2437	104M	12.97	0.020	21.97	0.157	12.71	0.019	21.92	0.156	< 30
2437	117M	12.92	0.020	21.50	0.141	12.70	0.019	21.91	0.155	< 30
2437	130M	13.06	0.020	22.01	0.159	12.72	0.019	21.93	0.156	< 30

Model Number	HHR1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode					
Date of Test	10/31/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	ANT-1 + 2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2412	13M	16.52	0.045	25.40	0.347	< 30
2437		16.00	0.040	25.12	0.325	< 30
2462		16.54	0.045	25.44	0.350	< 30
2437	26M	15.83	0.038	24.92	0.310	< 30
2437	39M	15.86	0.039	24.97	0.314	< 30
2437	52M	15.89	0.039	25.00	0.316	< 30
2437	78M	15.86	0.039	24.96	0.313	< 30
2437	104M	15.85	0.038	24.96	0.313	< 30
2437	117M	15.82	0.038	24.72	0.296	< 30
2437	130M	15.90	0.039	24.98	0.315	< 30

Model Number	HHR1									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode									
Date of Test	10/31/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	ANT-1				ANT-2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(dBm)	(dBm)	(W)	
2422	27M	11.69	0.015	21.53	0.142	11.31	0.014	20.90	0.123	< 30
2437		11.34	0.014	21.01	0.126	11.32	0.014	21.27	0.134	< 30
2452		11.55	0.014	21.49	0.141	11.03	0.013	20.65	0.116	< 30
2437	54M	11.23	0.013	20.82	0.121	11.20	0.013	21.17	0.131	< 30
2437	81M	11.21	0.013	20.77	0.119	11.14	0.013	21.11	0.129	< 30
2437	108M	11.17	0.013	20.88	0.122	11.15	0.013	21.12	0.129	< 30
2437	162M	11.19	0.013	20.71	0.118	11.19	0.013	21.16	0.131	< 30
2437	216M	11.22	0.013	20.80	0.120	11.22	0.013	21.19	0.132	< 30
2437	243M	11.20	0.013	20.86	0.122	11.13	0.013	21.10	0.129	< 30
2437	270M	11.25	0.013	20.90	0.123	11.24	0.013	21.21	0.132	< 30


Model Number	HHR1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode					
Date of Test	10/31/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	ANT-1 + 2				Limit (dBm)
		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	
2422	27M	14.51	0.028	24.24	0.265	< 30
2437		14.34	0.027	24.15	0.260	< 30
2452		14.31	0.027	24.10	0.257	< 30
2437	54M	14.23	0.026	24.01	0.252	< 30
2437	81M	14.19	0.026	23.95	0.249	< 30
2437	108M	14.17	0.026	24.01	0.252	< 30
2437	162M	14.20	0.026	23.95	0.248	< 30
2437	216M	14.23	0.026	24.01	0.252	< 30
2437	243M	14.18	0.026	23.99	0.251	< 30
2437	270M	14.26	0.027	24.07	0.255	< 30

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

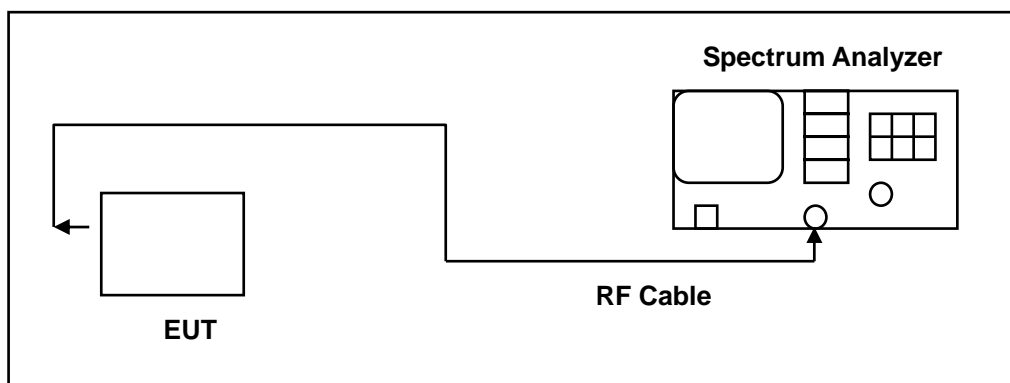

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

7.5. Test Result




Model Number	HHR1		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
	ANT-1		
2412	10.097	> 0.500	
2437	10.082	> 0.500	
2462	10.025	> 0.500	

Model Number	HHR1		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
	ANT-1		
2412	16.603	> 0.500	
2437	16.631	> 0.500	
2462	16.576	> 0.500	




Model Number	HHR1		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)
	ANT-1	ANT-2	
2412	17.810	17.836	> 0.500
2437	17.829	17.824	> 0.500
2462	17.844	17.817	> 0.500

Model Number	HHR1		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)
	ANT-1	ANT-2	
2422	36.494	36.509	> 0.500
2437	36.481	36.490	> 0.500
2452	36.489	36.506	> 0.500

7.6. Test Graphs

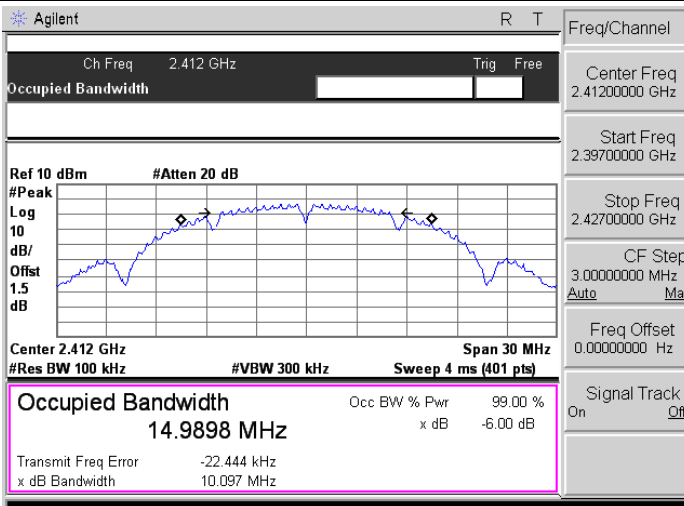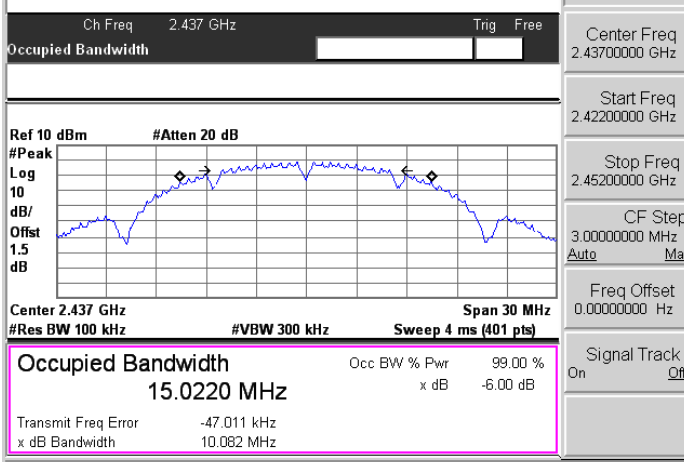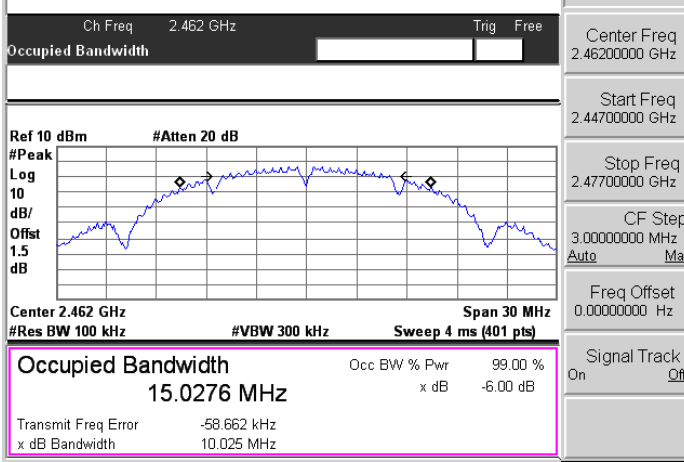
<p>Mode 2: IEEE 802.11b Link Mode_ANT-1</p> <p>2412</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9898 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -22.444 kHz x dB Bandwidth 10.097 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 15.0220 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -47.011 kHz x dB Bandwidth 10.082 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 15.0276 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -58.662 kHz x dB Bandwidth 10.025 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode_ANT-1

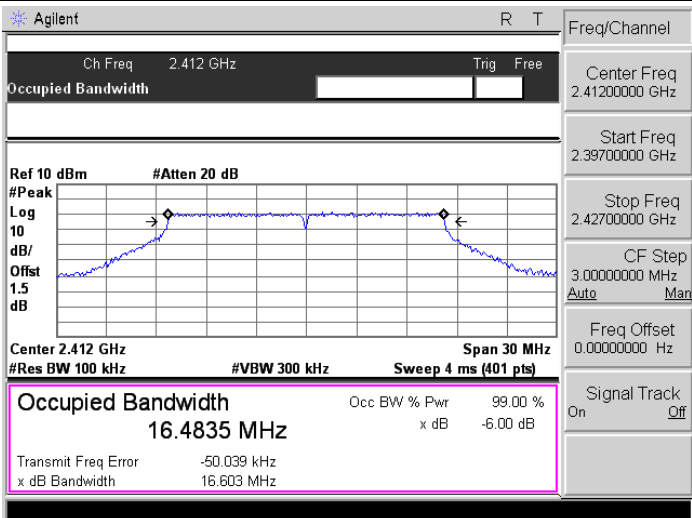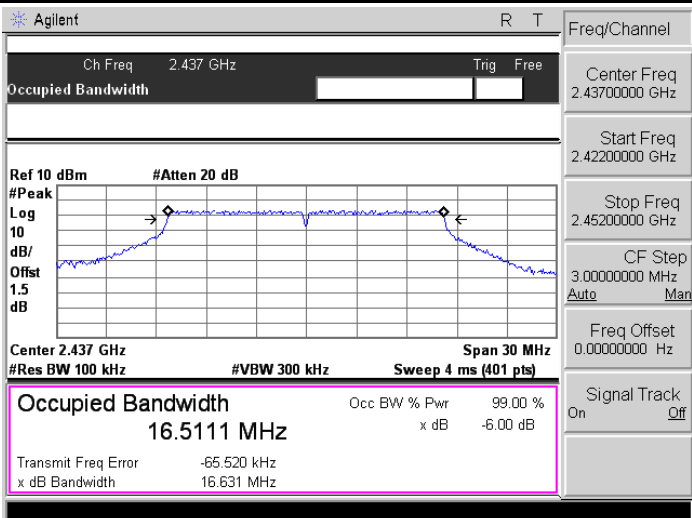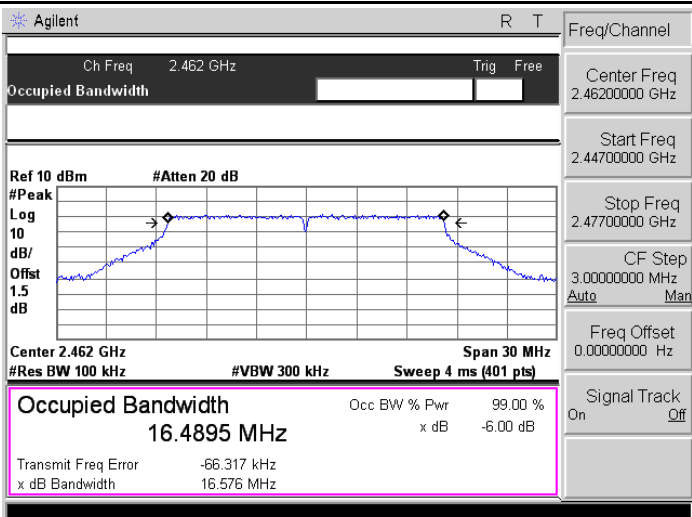
2412	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4835 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -50.039 kHz</p> <p>x dB Bandwidth 16.603 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.5111 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -65.520 kHz</p> <p>x dB Bandwidth 16.631 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4895 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -66.317 kHz</p> <p>x dB Bandwidth 16.576 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-1


2412

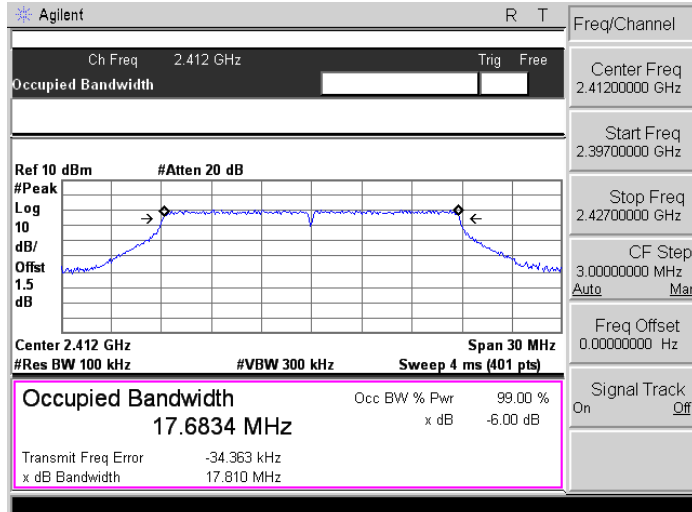




2437

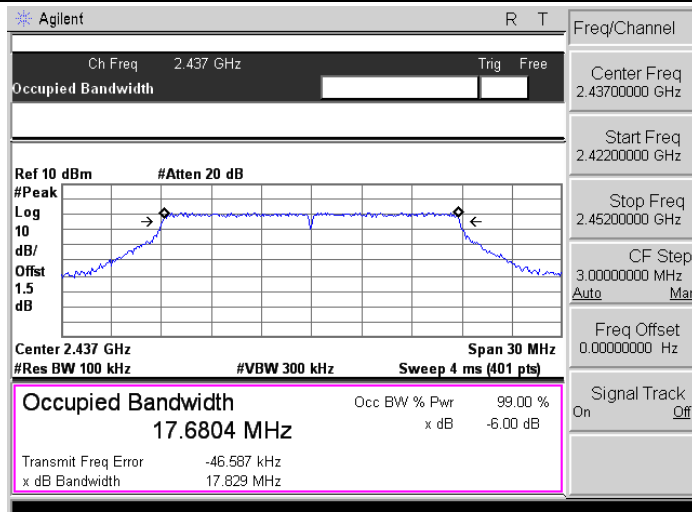

2462

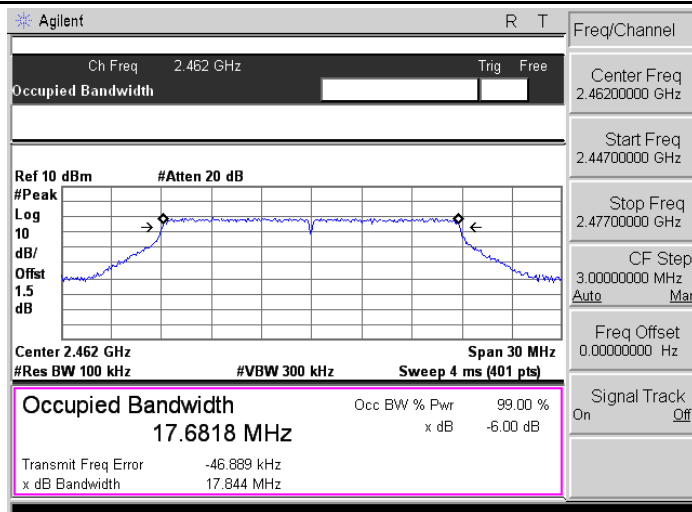


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-2

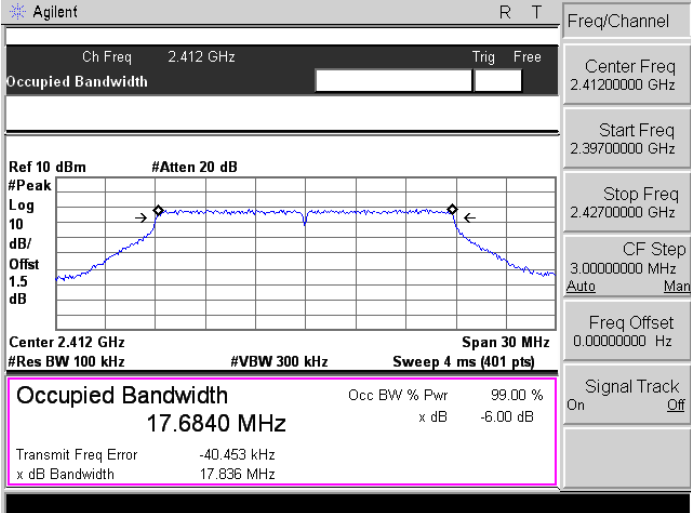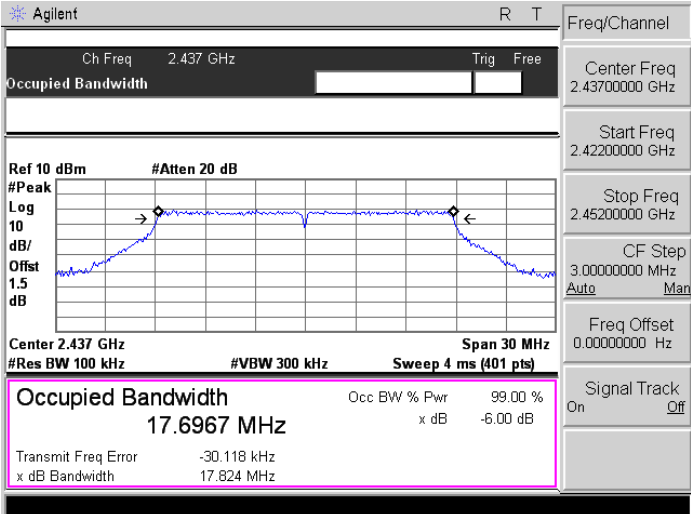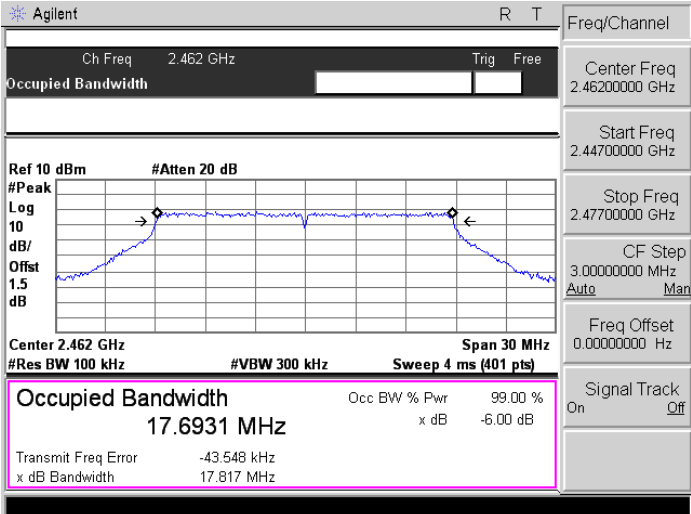
2412	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6840 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -40.453 kHz</p> <p>x dB Bandwidth 17.836 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6967 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -30.118 kHz</p> <p>x dB Bandwidth 17.824 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6931 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -43.548 kHz</p> <p>x dB Bandwidth 17.817 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-1


2422

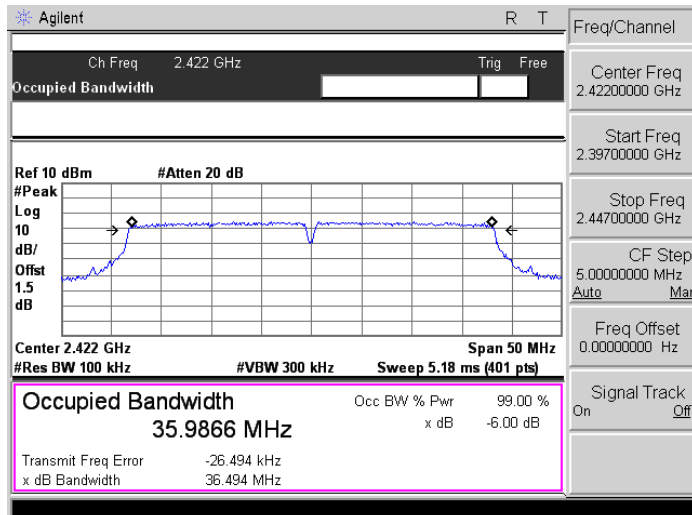




2437

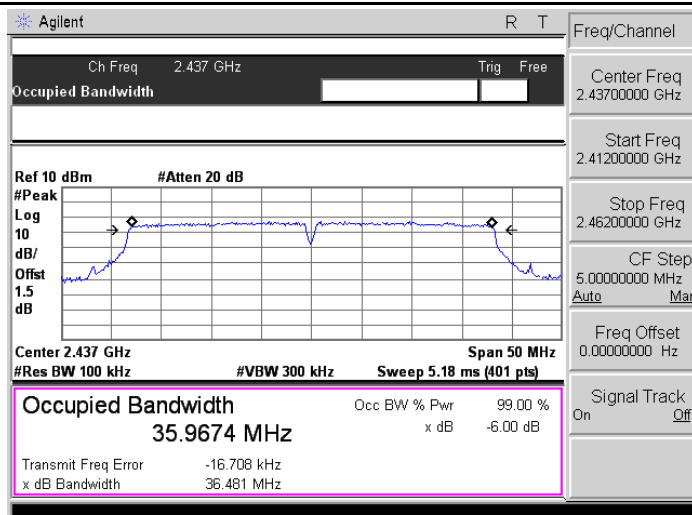

2452

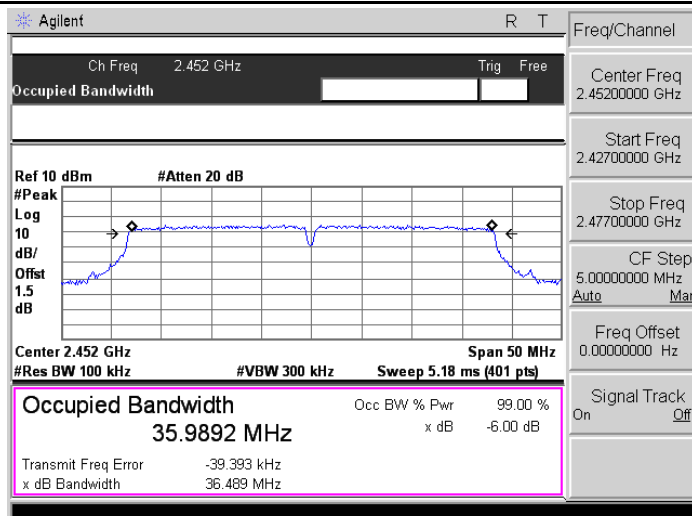

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-2

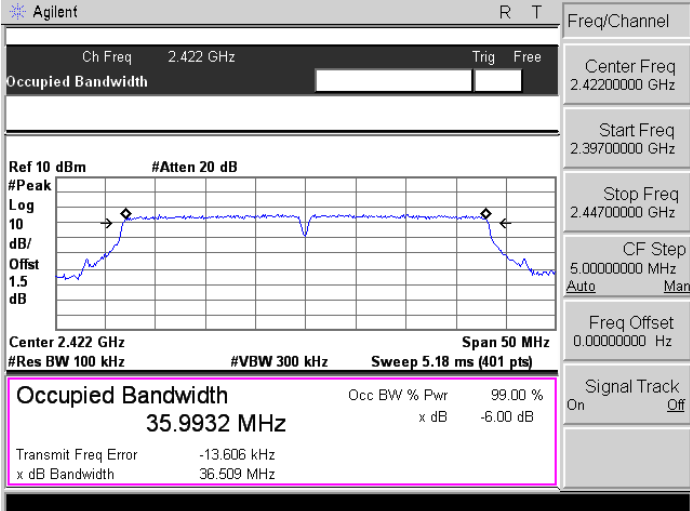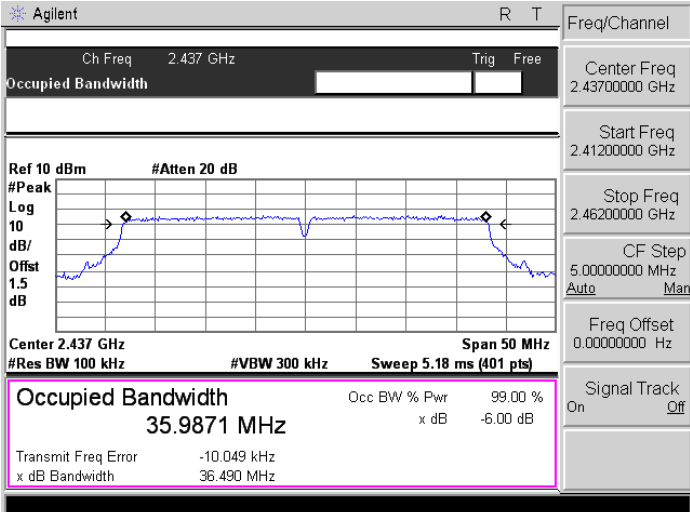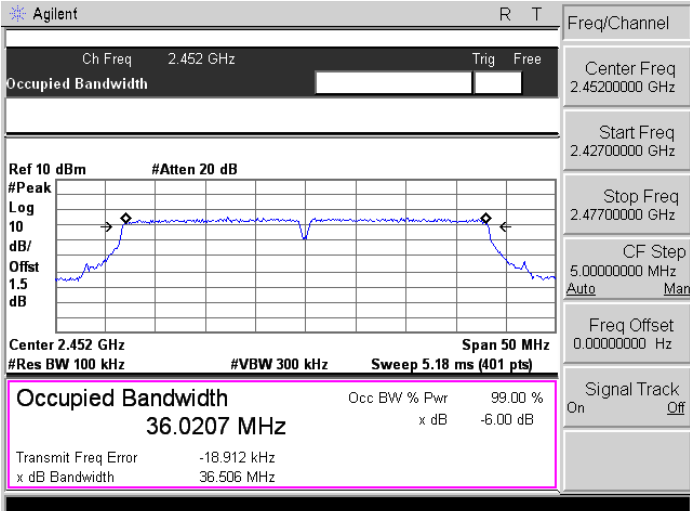
2422	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 35.9932 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -13.606 kHz</p> <p>x dB Bandwidth 36.509 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 35.9871 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -10.049 kHz</p> <p>x dB Bandwidth 36.490 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2452	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.0207 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -18.912 kHz</p> <p>x dB Bandwidth 36.506 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

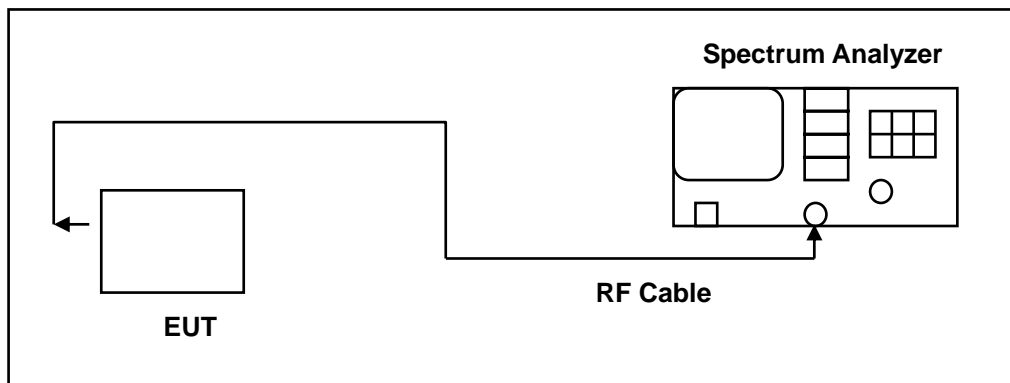

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result




Model Number	HHR1		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
	ANT-1		
2412	-12.49		< 8
2437	-10.34		< 8
2462	-12.57		< 8

Model Number	HHR1		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	11/07/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
	ANT-1		
2412	-12.70		< 8
2437	-10.43		< 8
2462	-12.86		< 8

Model Number	HHR1			
Test Item	Maximum Power Density			
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode			
Date of Test	11/07/2014		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	ANT-1	ANT-2	ANT-1 + 2	
2412	-13.14	-14.06	-10.57	< 8
2437	-11.79	-14.70	-10.00	< 8
2462	-13.83	-14.05	-10.93	< 8


Model Number	HHR1			
Test Item	Maximum Power Density			
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode			
Date of Test	11/07/2014	Test Site	TE05	
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	ANT-1	ANT-2	ANT-1 + 2	
2422	-16.81	-16.43	-13.61	< 8
2437	-15.51	-17.52	-13.39	< 8
2452	-16.15	-16.31	-13.22	< 8

8.6. Test Graphs

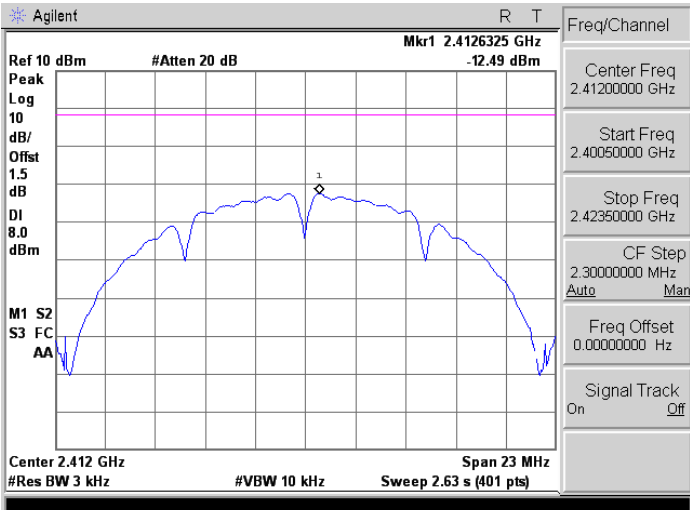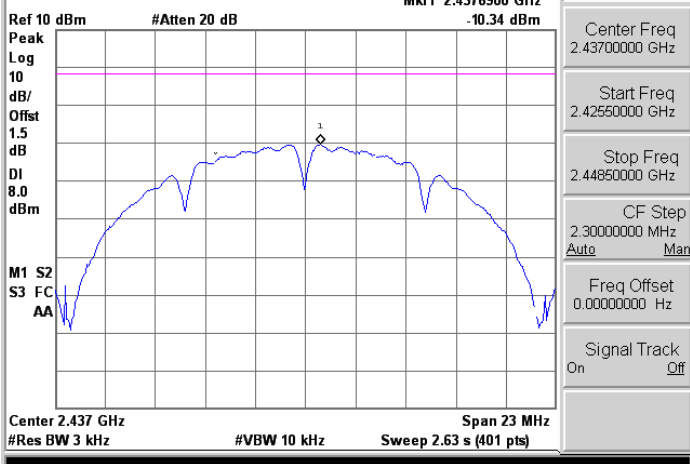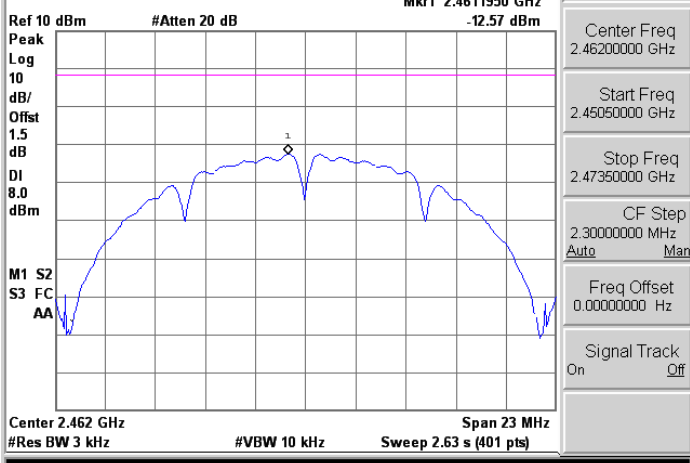
<p>Mode 2: IEEE 802.11b Link Mode_ANT-1</p> <p>2412</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4126325 GHz -12.49 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 23 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.63 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.42350000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4376900 GHz -10.34 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 23 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.63 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42550000 GHz</p> <p>Stop Freq 2.44850000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4611950 GHz -12.57 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 23 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.63 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45050000 GHz</p> <p>Stop Freq 2.47350000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode_ANT-1


2412

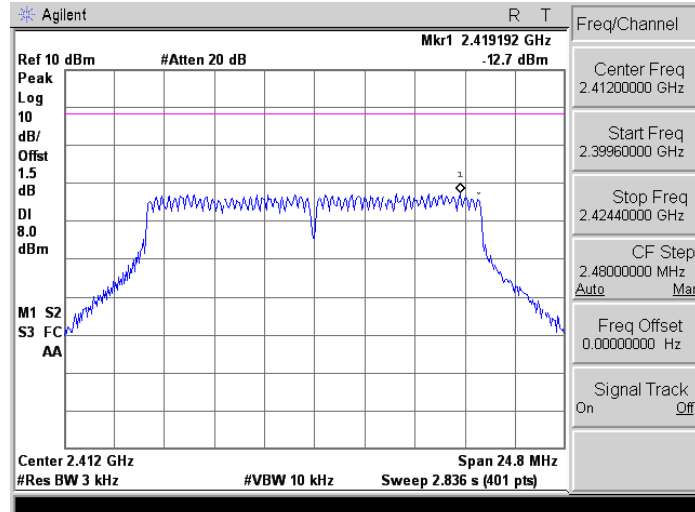




2437

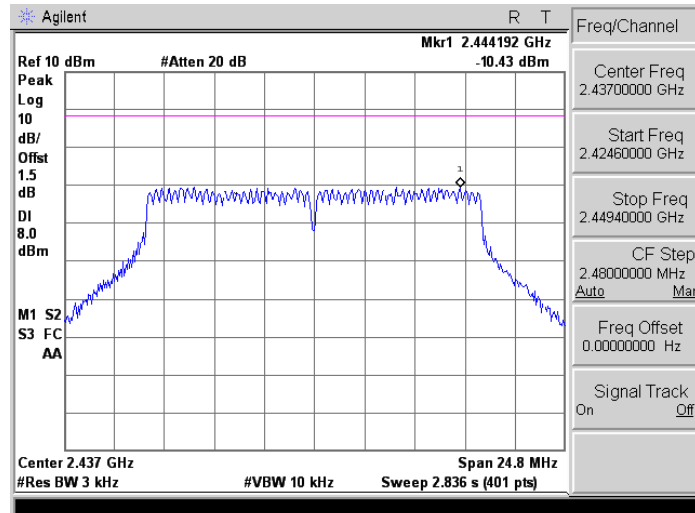

2462

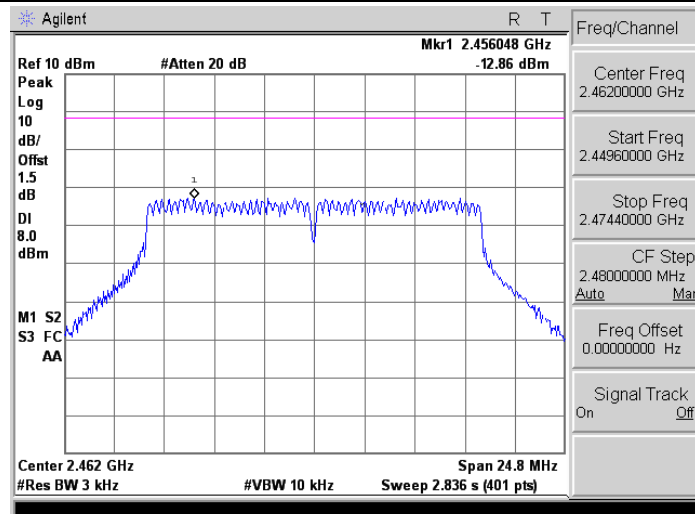


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-1

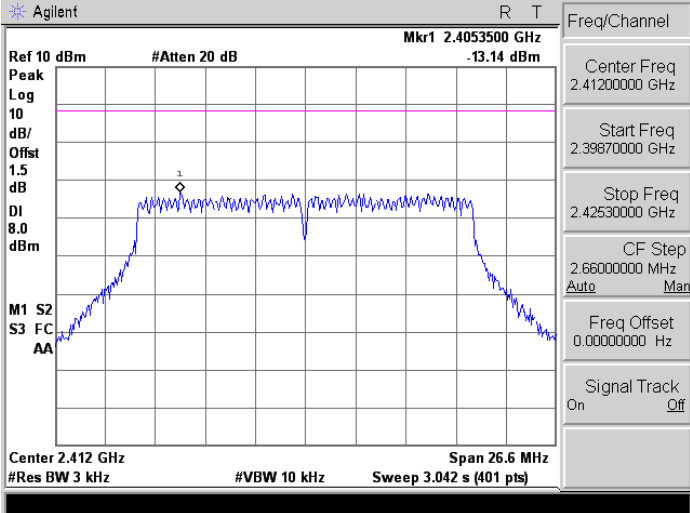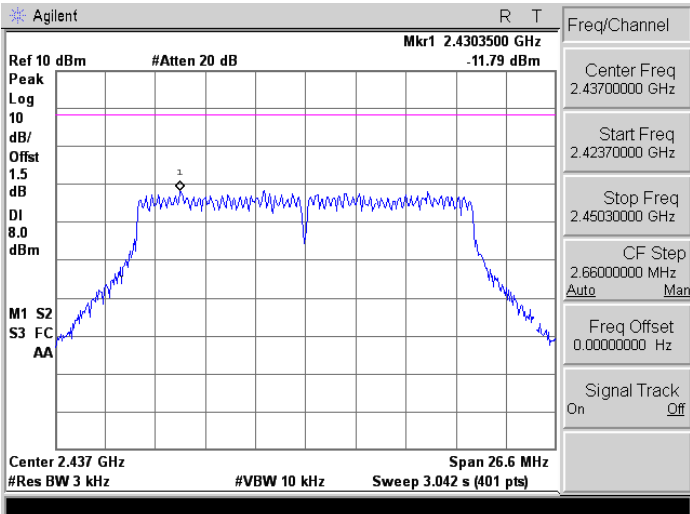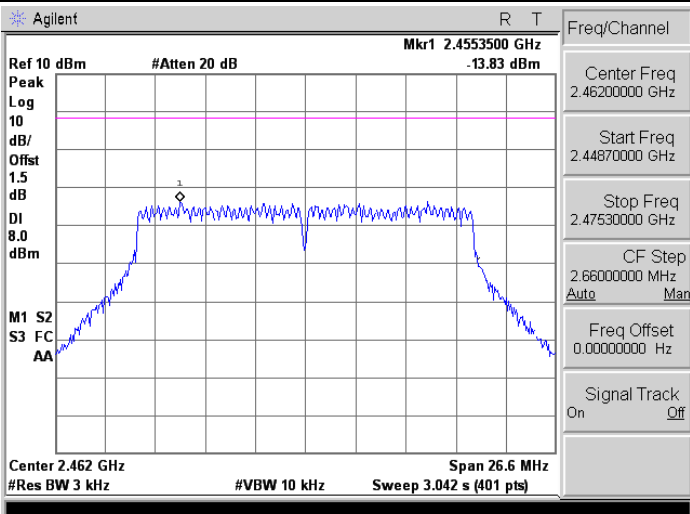
2412	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4053500 GHz -13.14 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 26.6 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.042 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39870000 GHz</p> <p>Stop Freq 2.42530000 GHz</p> <p>CF Step 2.66000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4303500 GHz -11.79 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 26.6 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.042 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42370000 GHz</p> <p>Stop Freq 2.45030000 GHz</p> <p>CF Step 2.66000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4553500 GHz -13.83 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 26.6 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.042 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44870000 GHz</p> <p>Stop Freq 2.47530000 GHz</p> <p>CF Step 2.66000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-2


2412

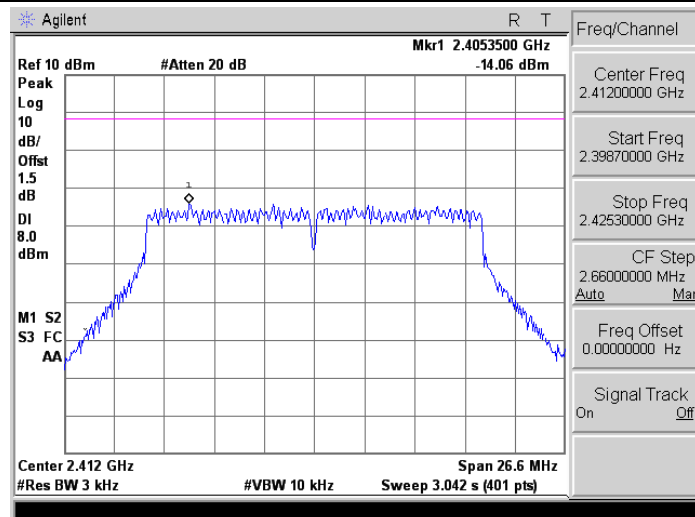

2437

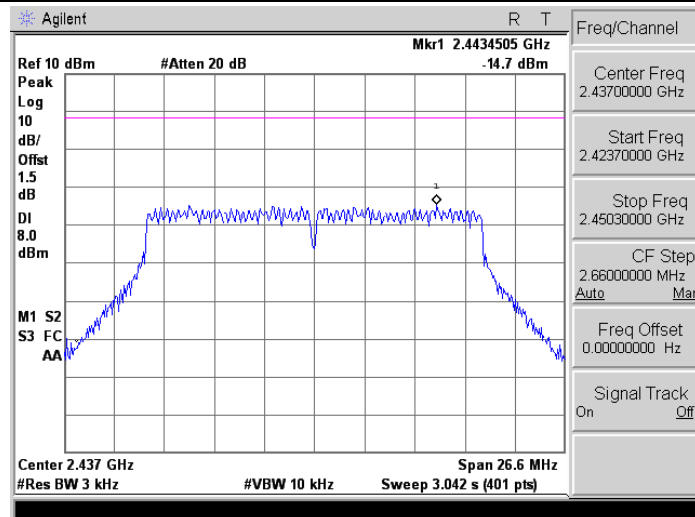


2462

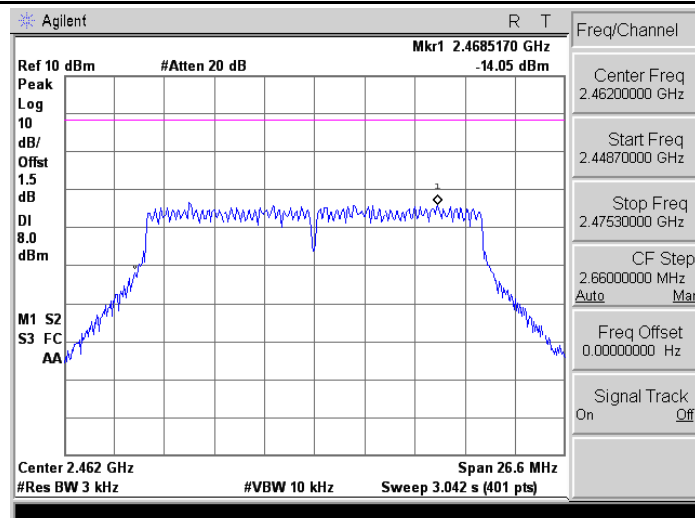


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-1


2422

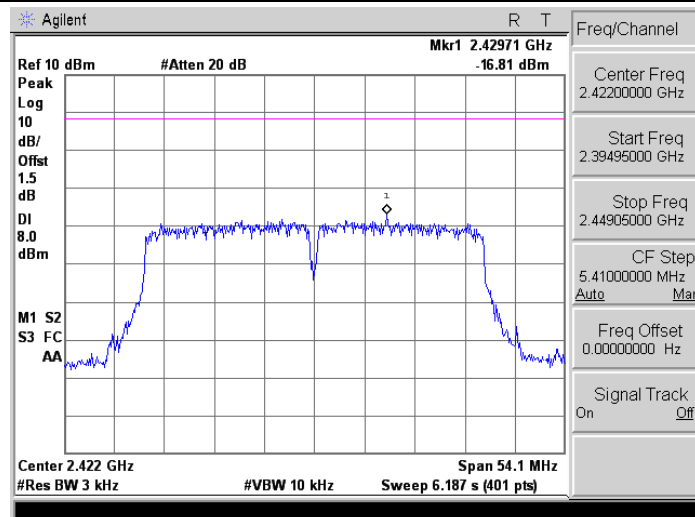

2437

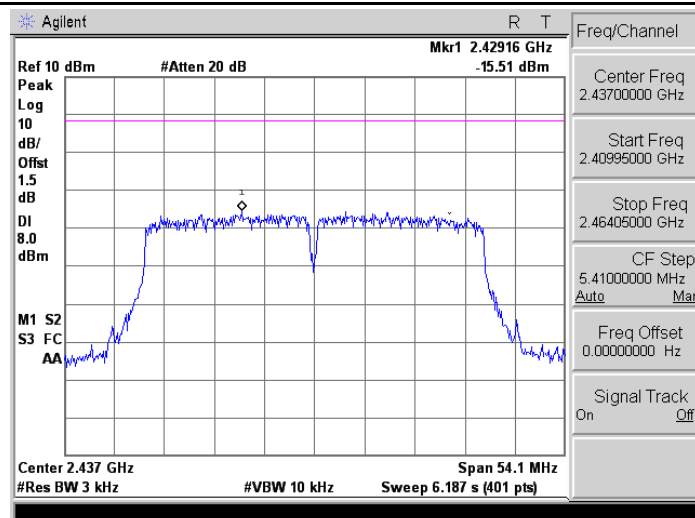


2452

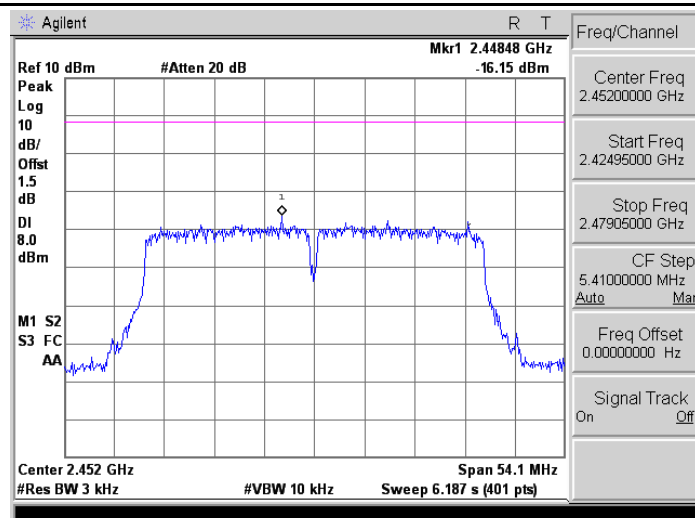


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-2


2422

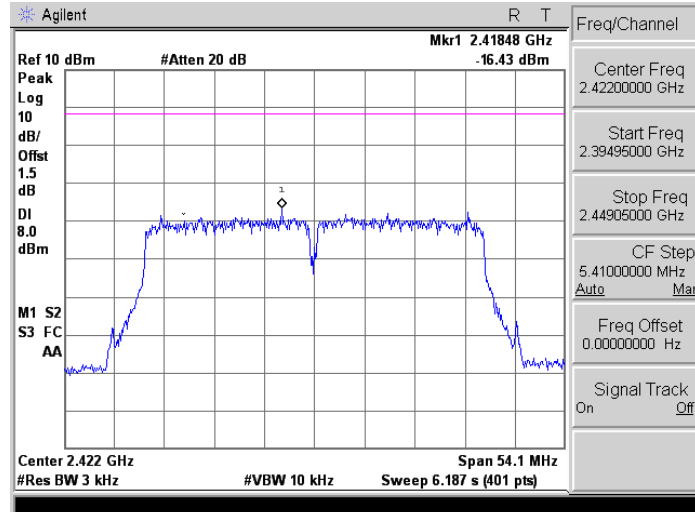

2437

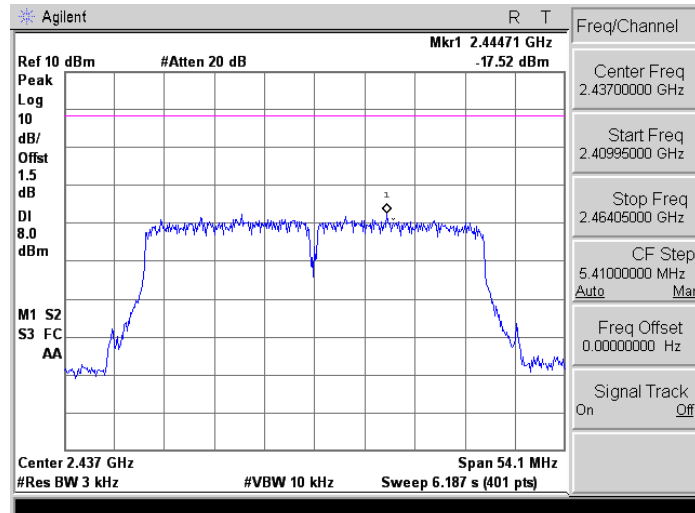

2452

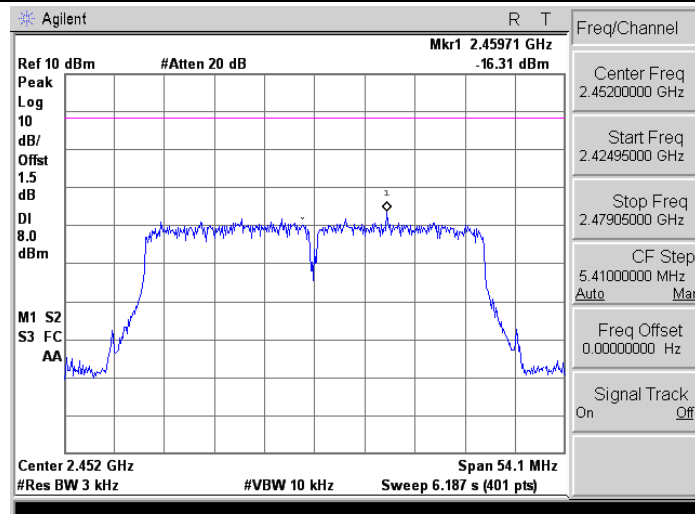


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

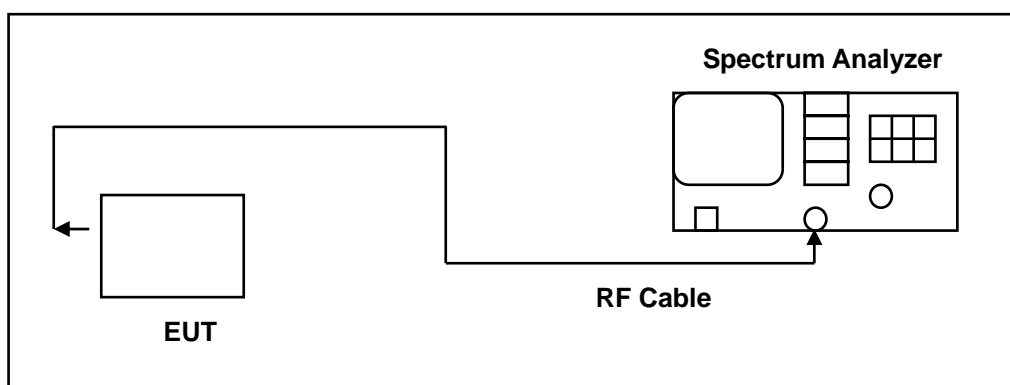

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure




In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.


9.5. Test Graphs

Reference level

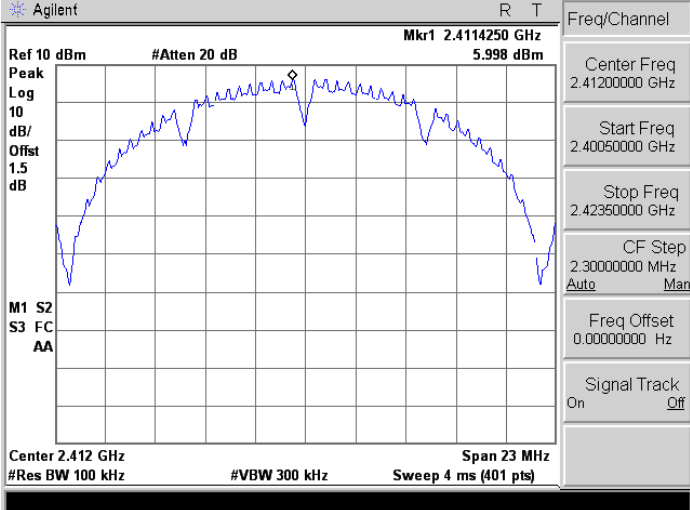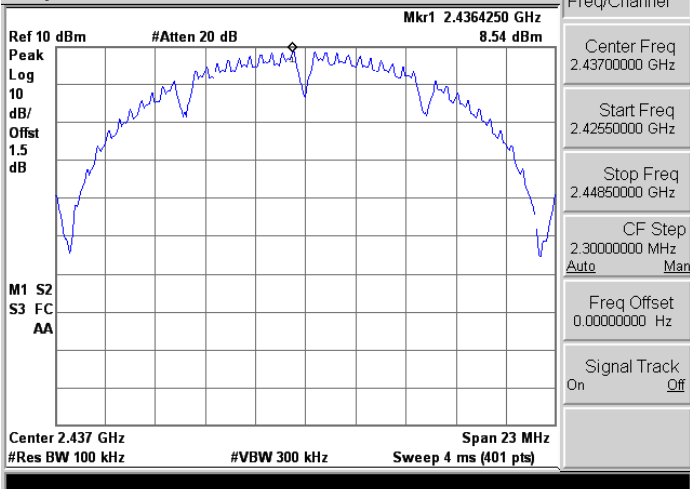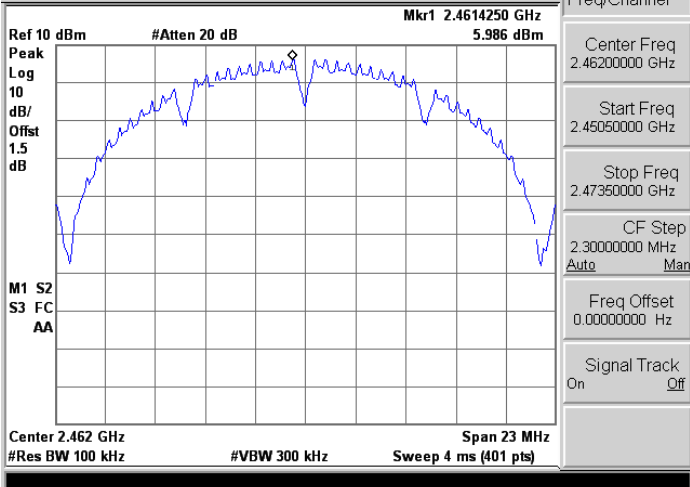
<p>Mode 2: IEEE 802.11b Link Mode_ANT-1</p> <p>2412</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4114250 GHz 5.998 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 23 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.42350000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4364250 GHz 8.54 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 23 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42550000 GHz</p> <p>Stop Freq 2.44850000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	 <p>Agilent R T</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4614250 GHz 5.986 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 23 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45050000 GHz</p> <p>Stop Freq 2.47350000 GHz</p> <p>CF Step 2.30000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode_ANT-1


2412

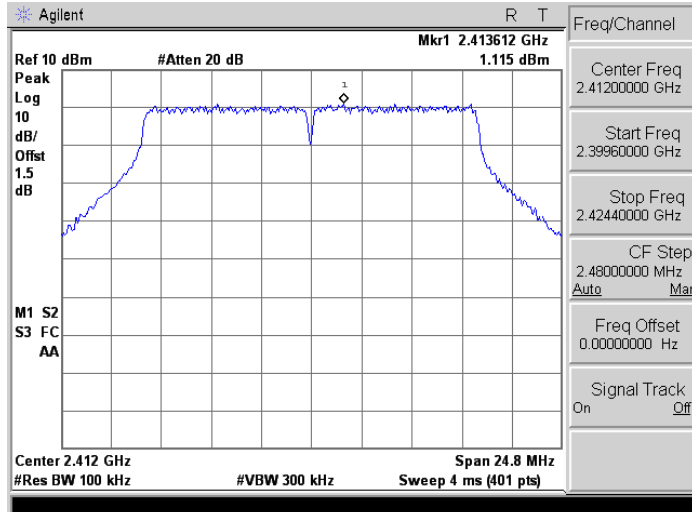

2437

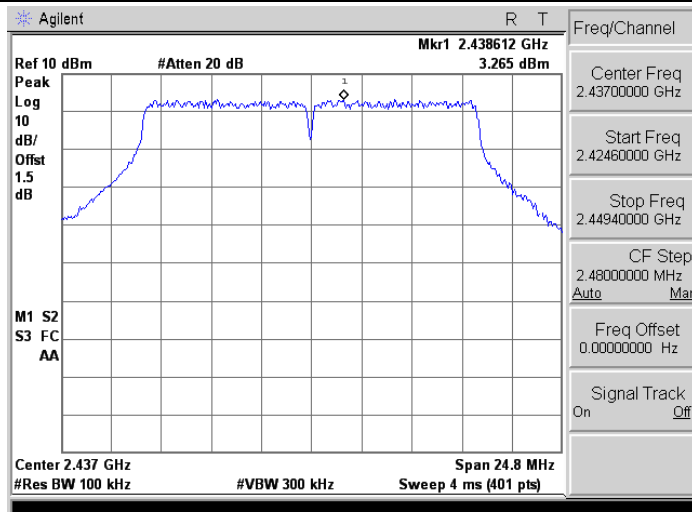


2462

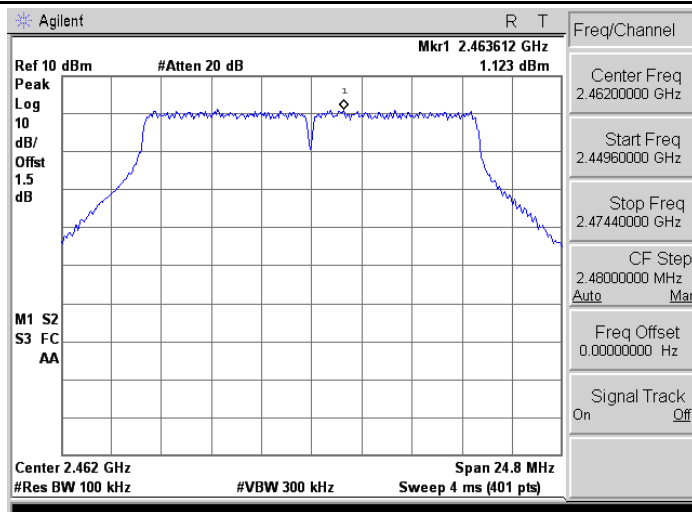


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-1


2412

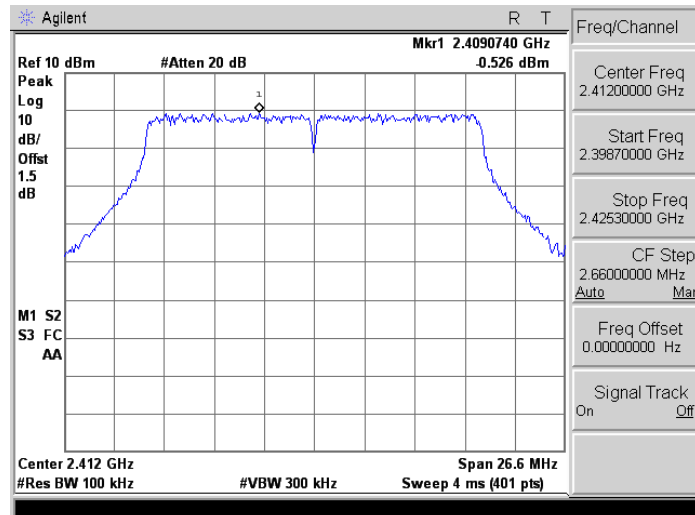

2437

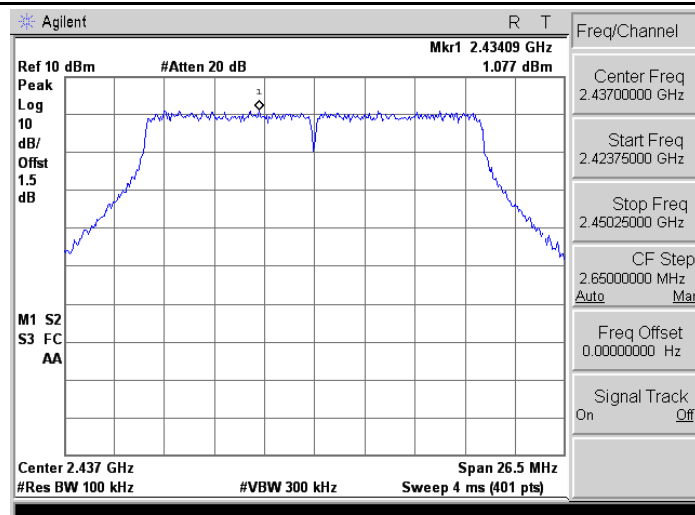


2462

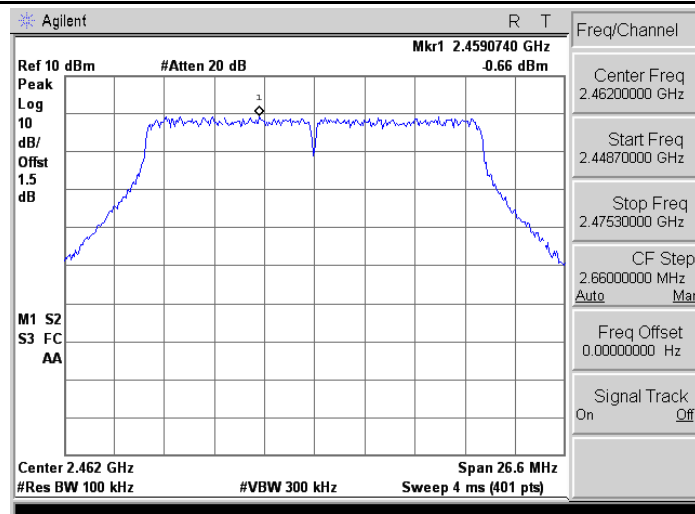


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-2


2412

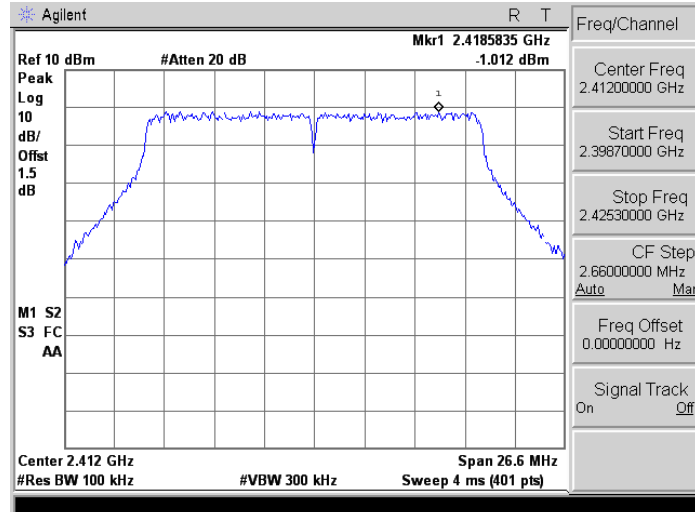

2437

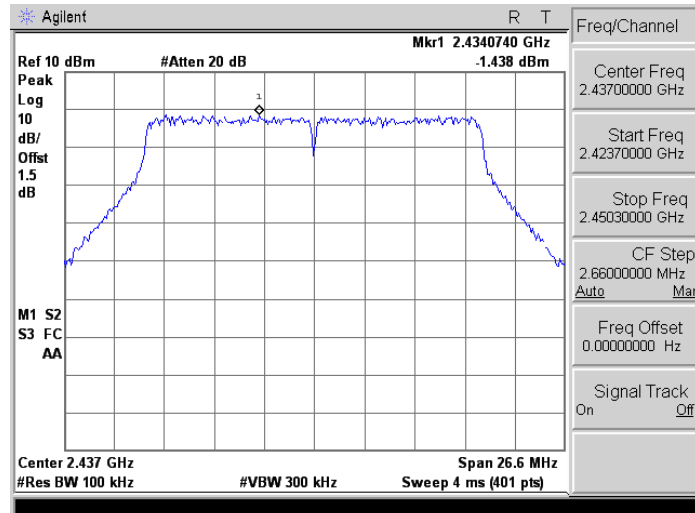


2462

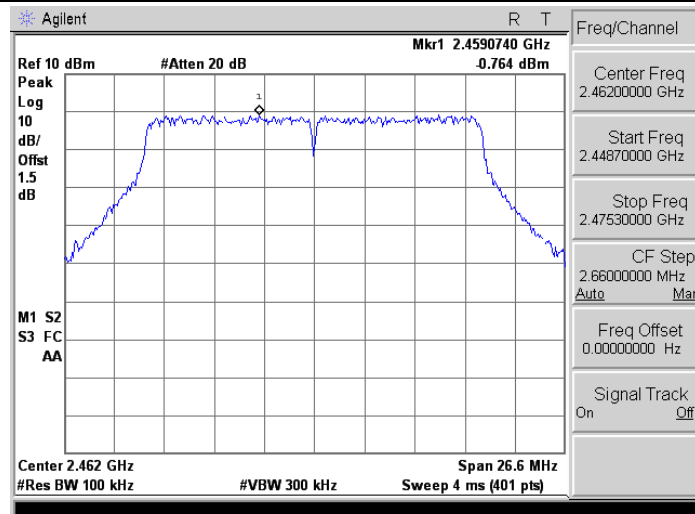


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-1


2422

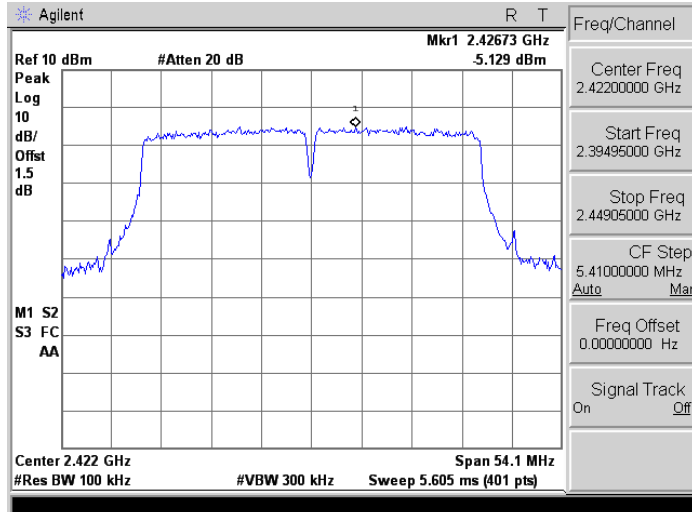

2437

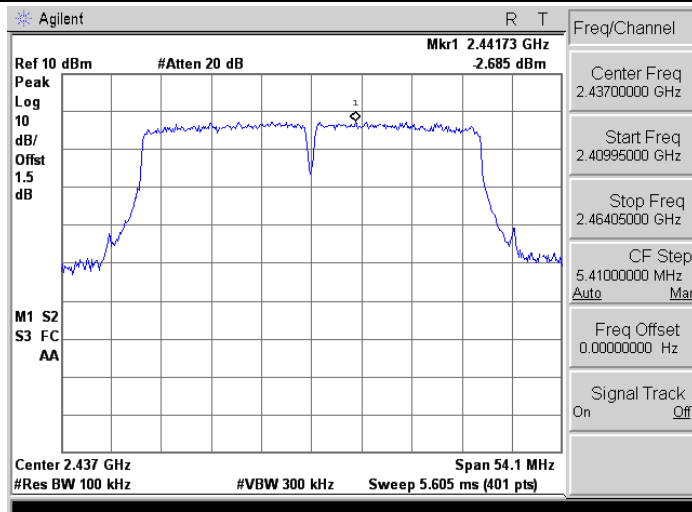


2452

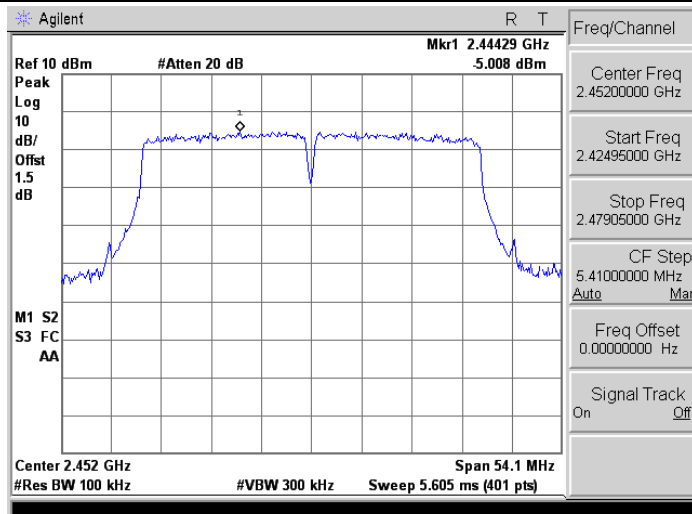


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-2


2422

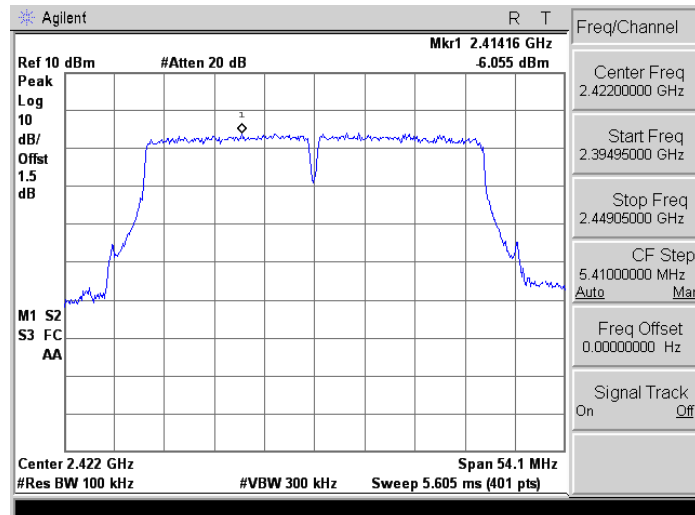

2437

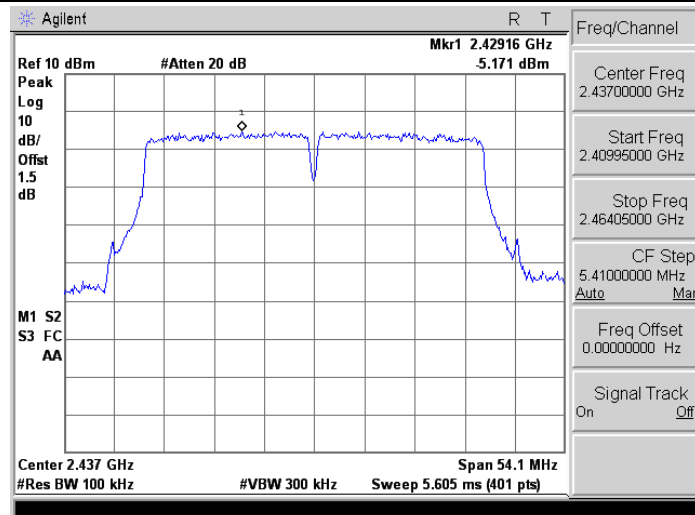

2452

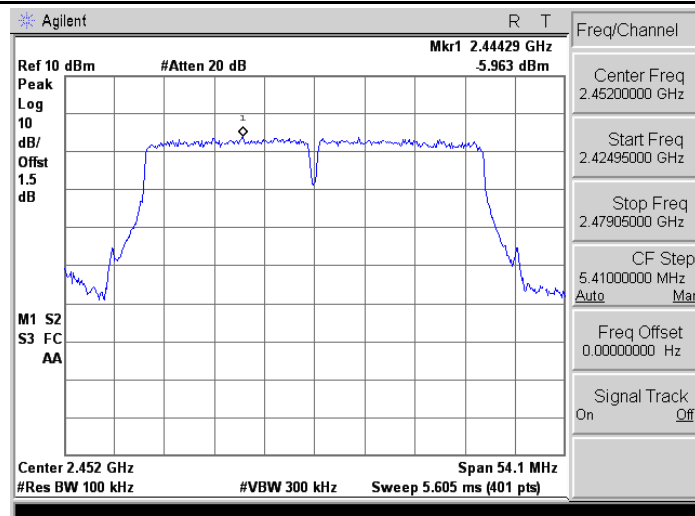


Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode_ANT-1


2412	<div><div><div>Agilent</div><div>R T</div><div>Ref 10 dBm #Atten 20 dB Mkr1 2.41 GHz 5.61 dBm</div><div>Peak Log 10 dB/Offst 1.5 dB DI -14.0 dBm</div><div>Start 30 MHz Stop 26.5 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</div><table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.41 GHz</td><td>5.61 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>4.79 GHz</td><td>-46.94 dBm</td></tr></table></div><div><div>Freq/Channel</div><div>Center Freq 13.2650000 GHz</div><div>Start Freq 30.0000000 MHz</div><div>Stop Freq 26.5000000 GHz</div><div>CF Step 2.64700000 GHz Auto Man</div><div>Freq Offset 0.00000000 Hz</div><div>Signal Track On Off</div></div></div>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.41 GHz	5.61 dBm	2	(1)	Freq	4.79 GHz	-46.94 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.41 GHz	5.61 dBm												
2	(1)	Freq	4.79 GHz	-46.94 dBm												
2437	<div><div><div>Agilent</div><div>R T</div><div>Ref 10 dBm #Atten 20 dB Mkr1 2.44 GHz 8.222 dBm</div><div>Peak Log 10 dB/Offst 1.5 dB DI -11.5 dBm</div><div>Start 30 MHz Stop 26.5 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</div><table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.44 GHz</td><td>8.222 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>4.86 GHz</td><td>-44.06 dBm</td></tr></table></div><div><div>Freq/Channel</div><div>Center Freq 13.2650000 GHz</div><div>Start Freq 30.0000000 MHz</div><div>Stop Freq 26.5000000 GHz</div><div>CF Step 2.64700000 GHz Auto Man</div><div>Freq Offset 0.00000000 Hz</div><div>Signal Track On Off</div></div></div>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	8.222 dBm	2	(1)	Freq	4.86 GHz	-44.06 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.44 GHz	8.222 dBm												
2	(1)	Freq	4.86 GHz	-44.06 dBm												
2462	<div><div><div>Agilent</div><div>R T</div><div>Ref 10 dBm #Atten 20 dB Mkr1 2.46 GHz 5.809 dBm</div><div>Peak Log 10 dB/Offst 1.5 dB DI -14.0 dBm</div><div>Start 30 MHz Stop 26.5 GHz</div><div>#Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</div><table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.46 GHz</td><td>5.809 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>4.93 GHz</td><td>-47.02 dBm</td></tr></table></div><div><div>Freq/Channel</div><div>Center Freq 13.2650000 GHz</div><div>Start Freq 30.0000000 MHz</div><div>Stop Freq 26.5000000 GHz</div><div>CF Step 2.64700000 GHz Auto Man</div><div>Freq Offset 0.00000000 Hz</div><div>Signal Track On Off</div></div></div>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.46 GHz	5.809 dBm	2	(1)	Freq	4.93 GHz	-47.02 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.46 GHz	5.809 dBm												
2	(1)	Freq	4.93 GHz	-47.02 dBm												

Mode 3: IEEE 802.11g Link Mode_ANT-1


2412

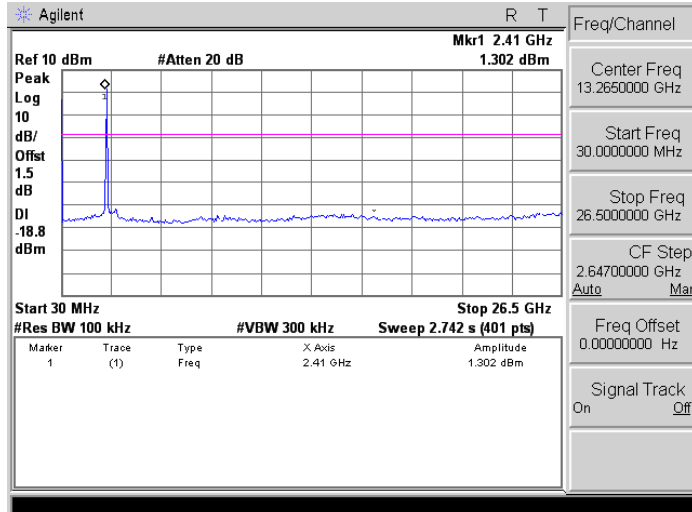

2437

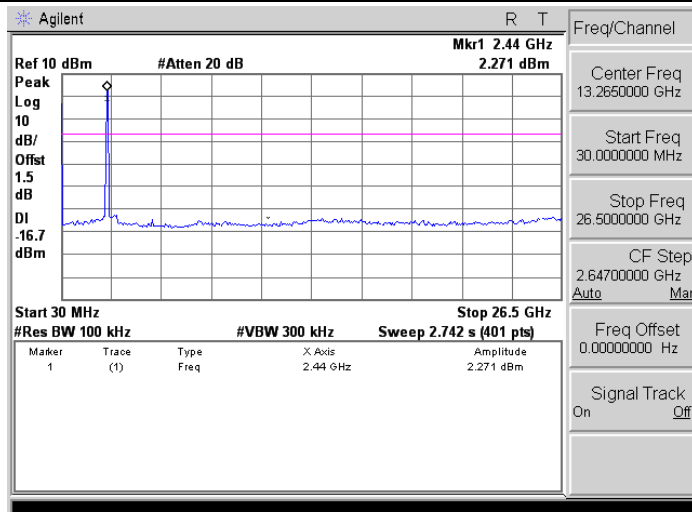


2462

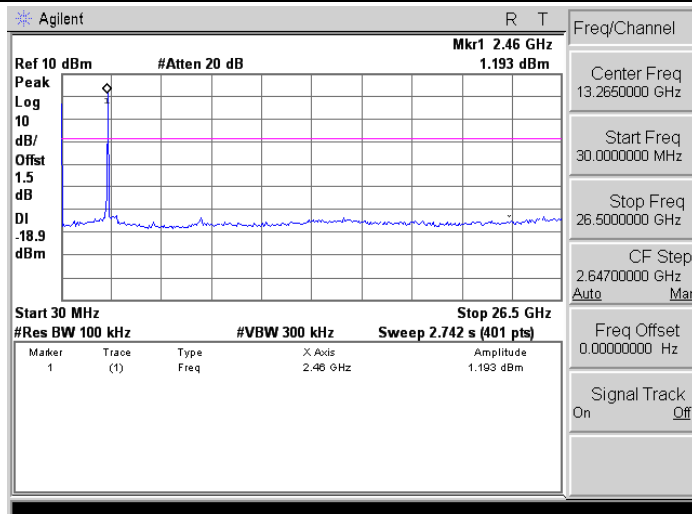


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-1


2412

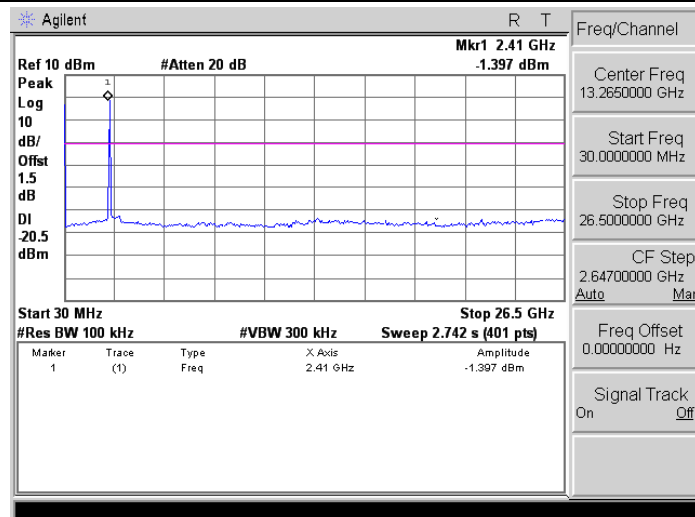

2437

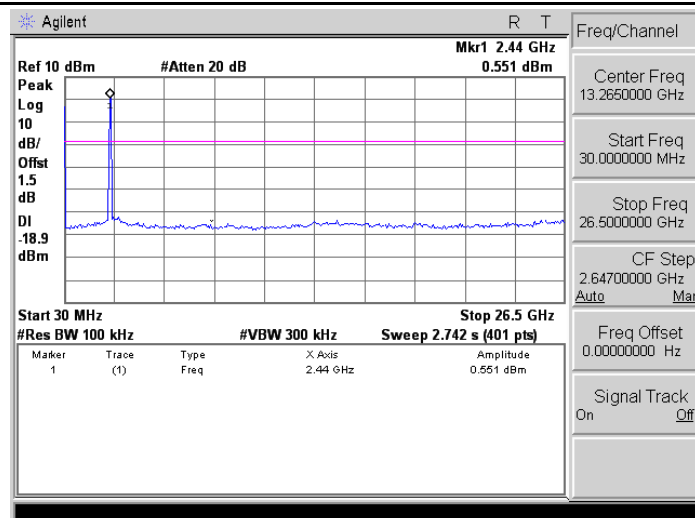


2462

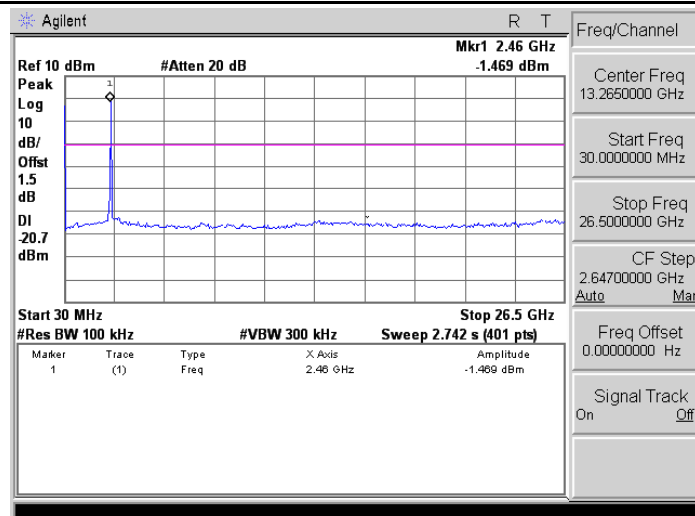


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-2


2412

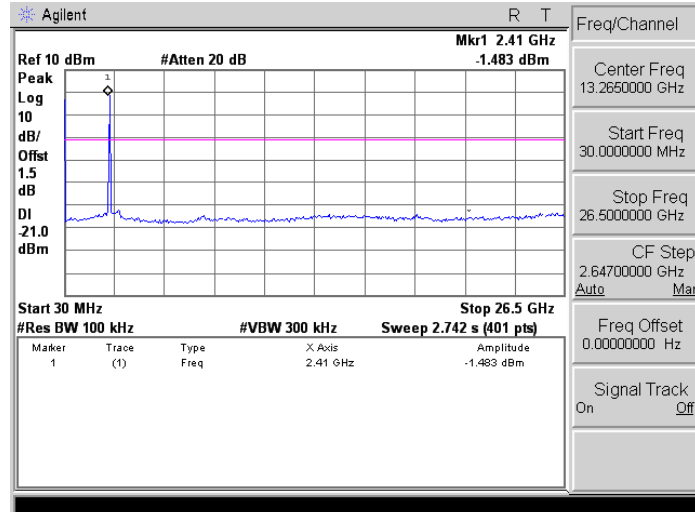

2437

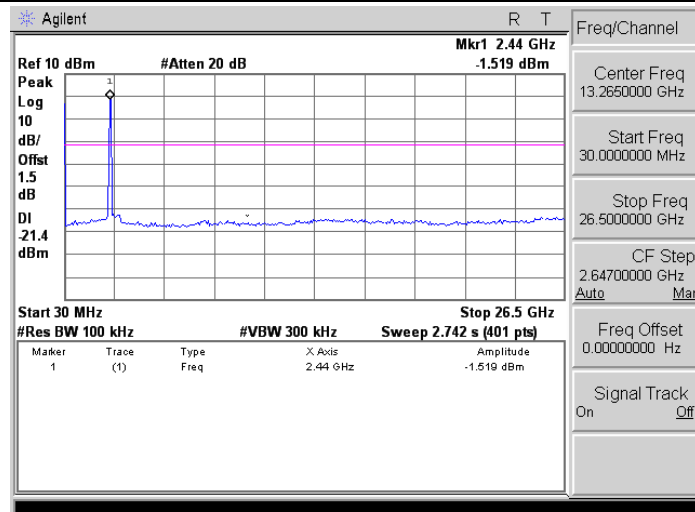


2462

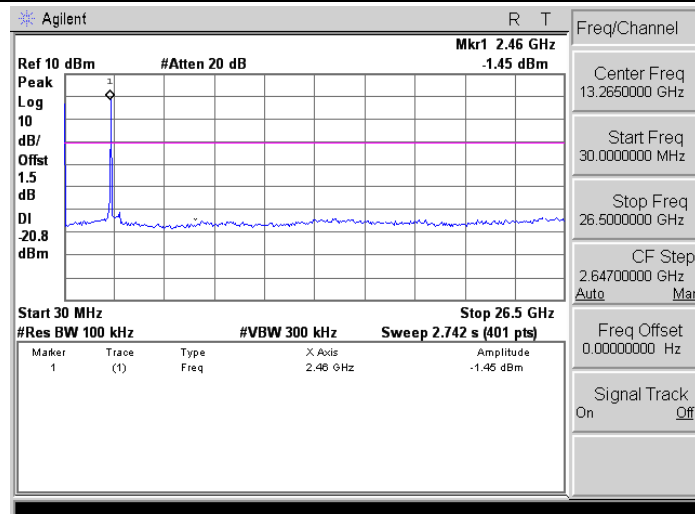


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-1


2422

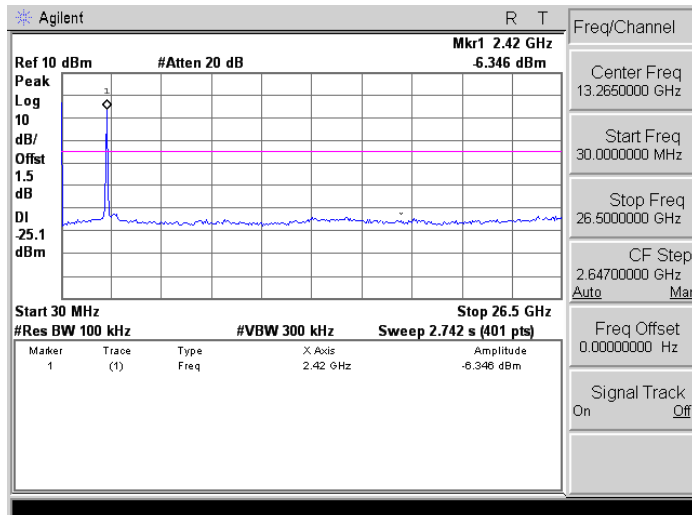

2437

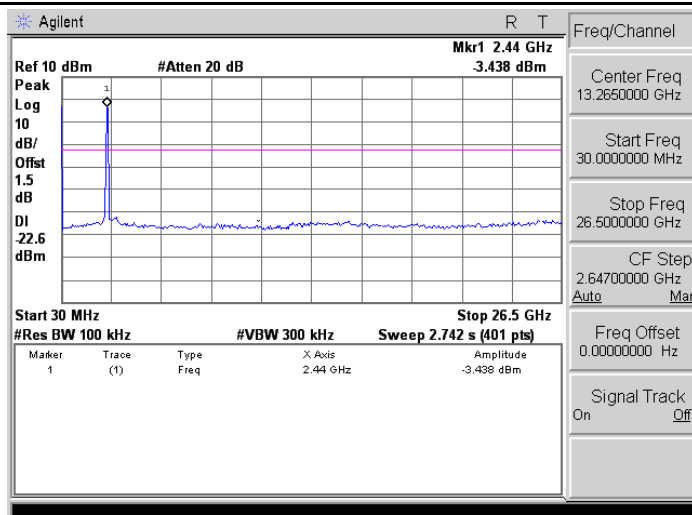


2452

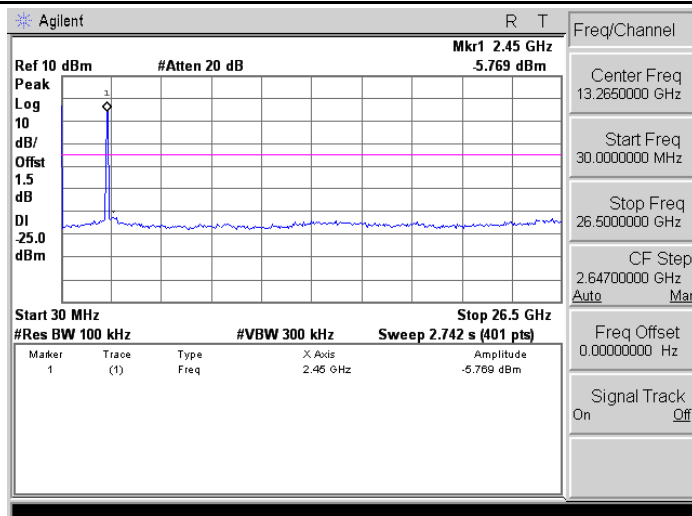


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-2


2422

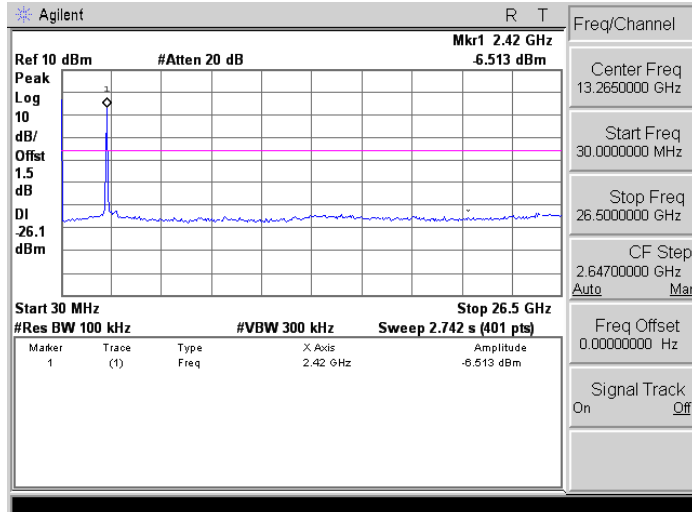

2437

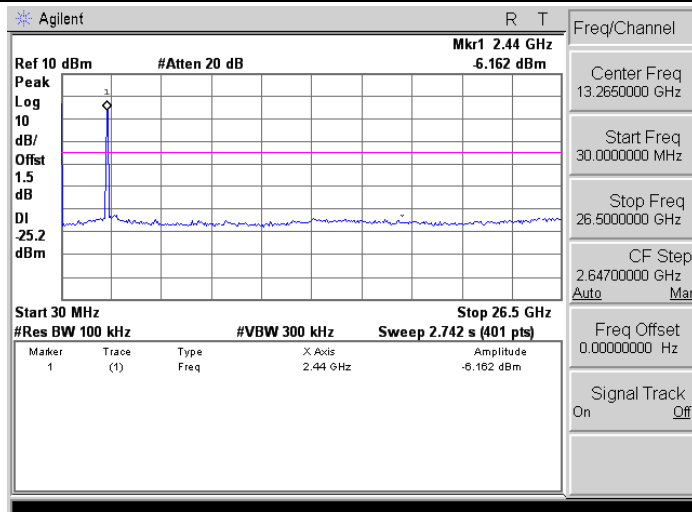


2452

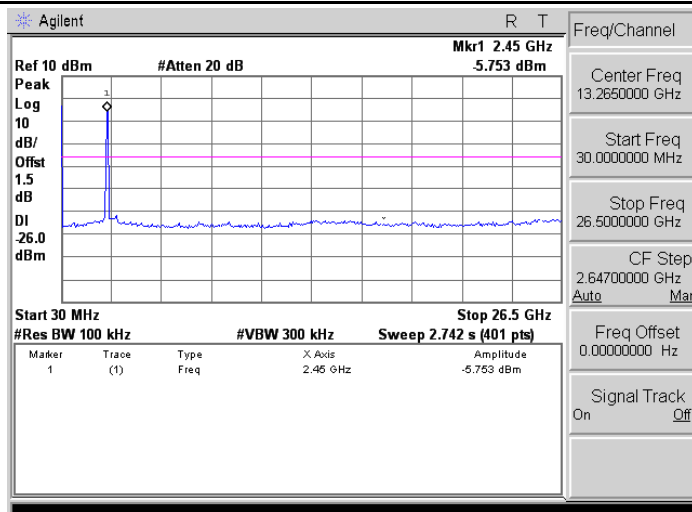


Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode_ANT-1

2412

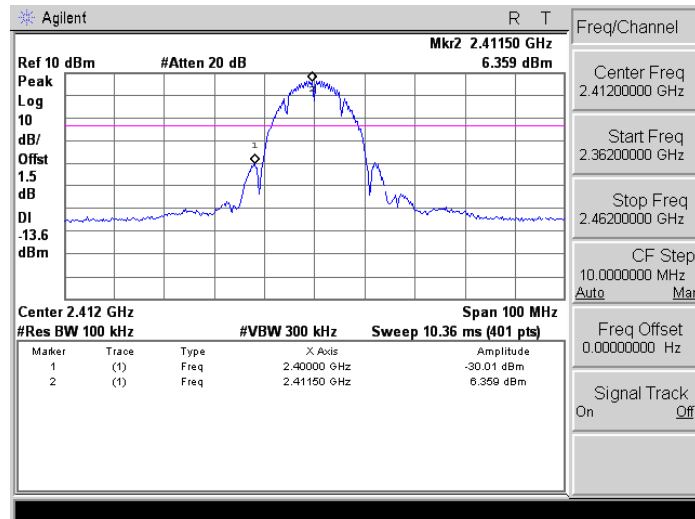


2462

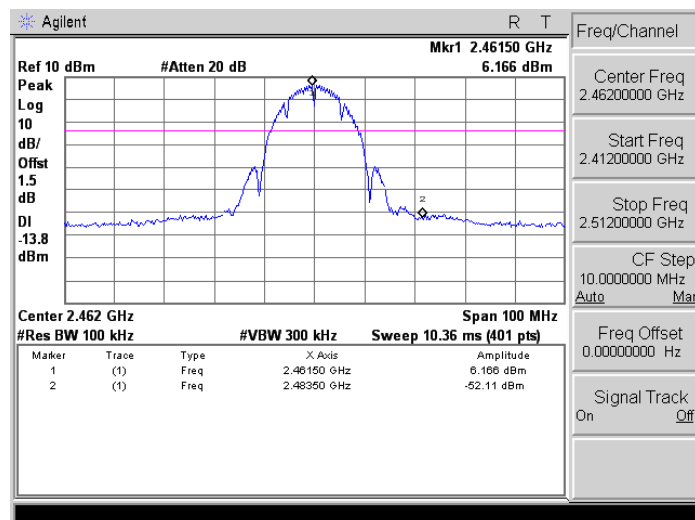


Mode 3: IEEE 802.11g Link Mode_ANT-1

2412

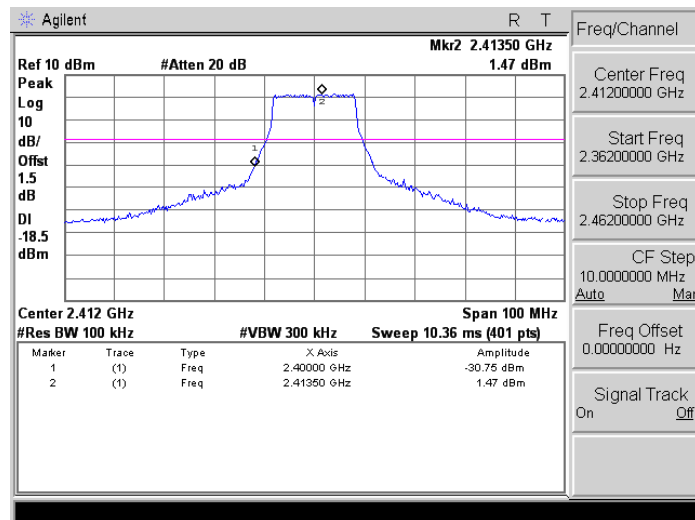


2462

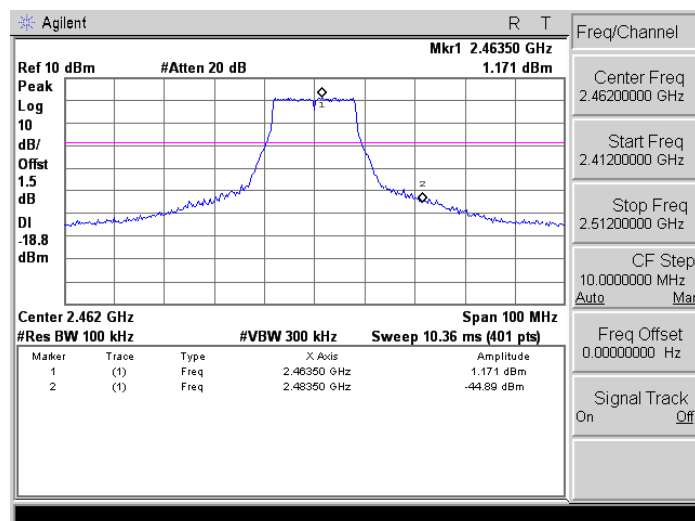


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-1

2412

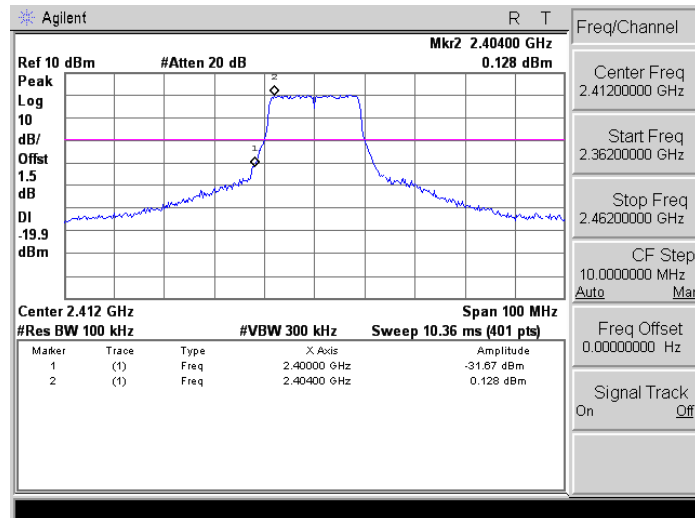


2462

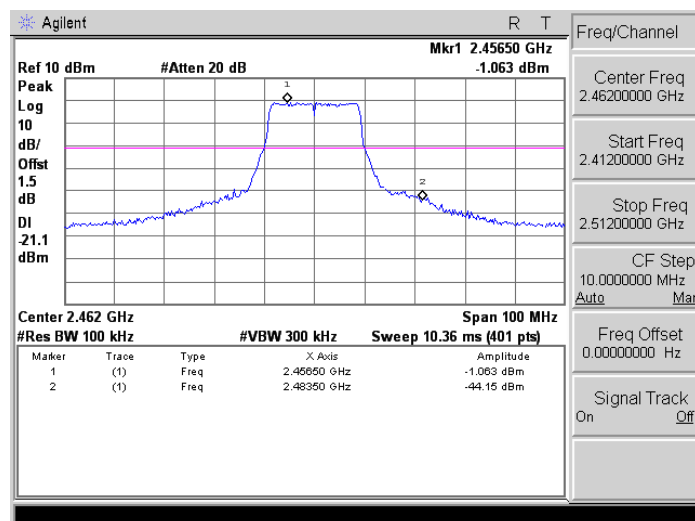


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT-2

2412

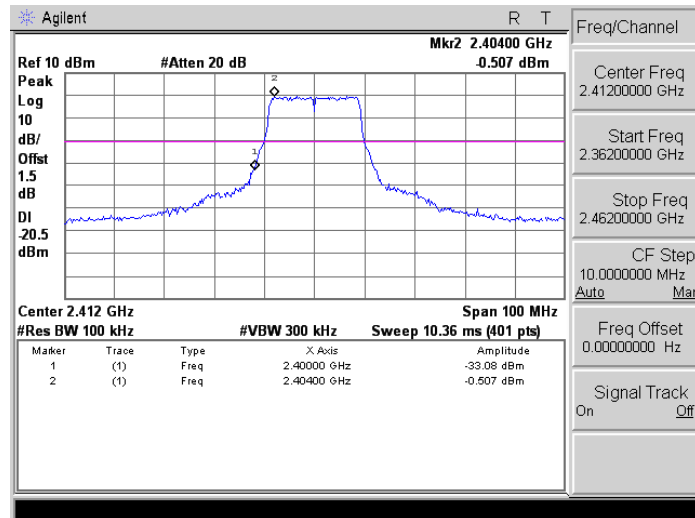


2462

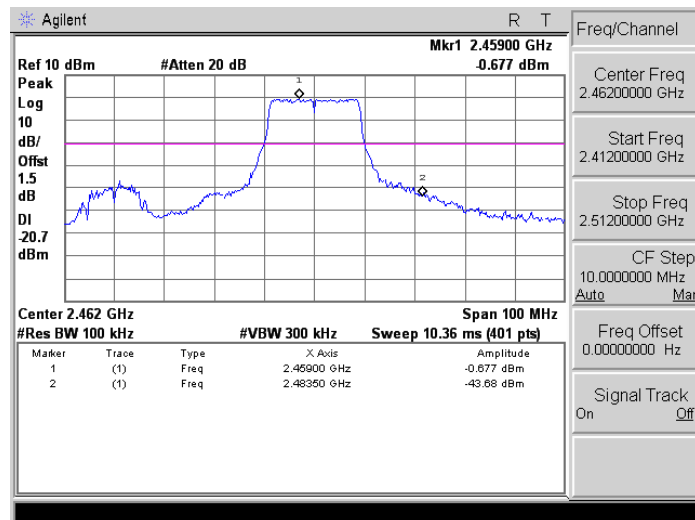


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-1

2422

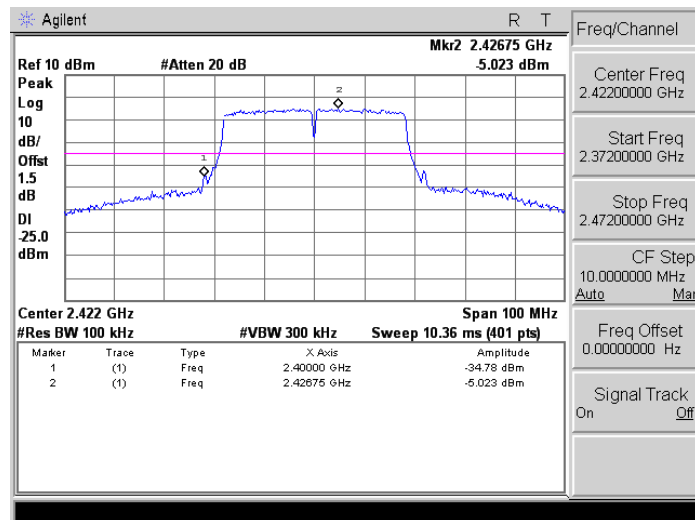


2452

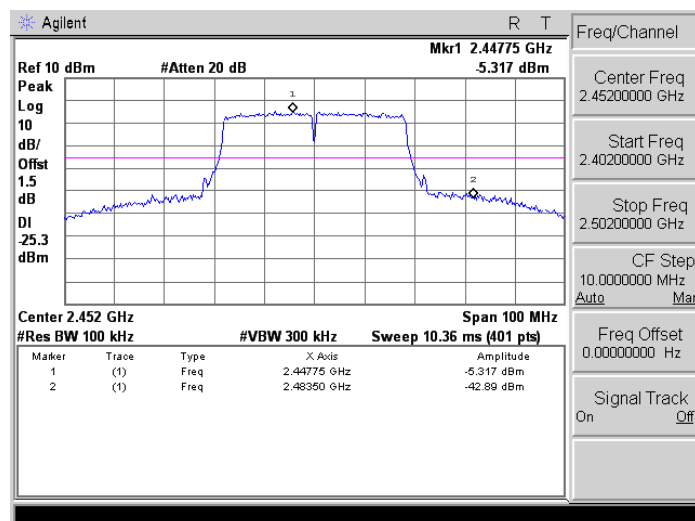


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT-2

2422

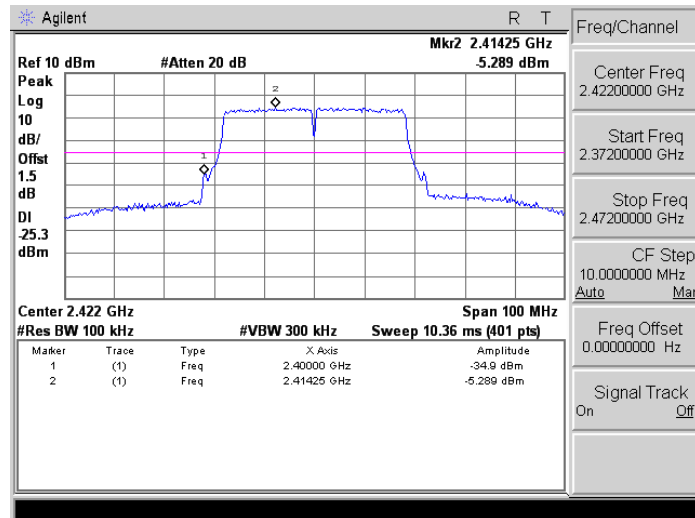

2452

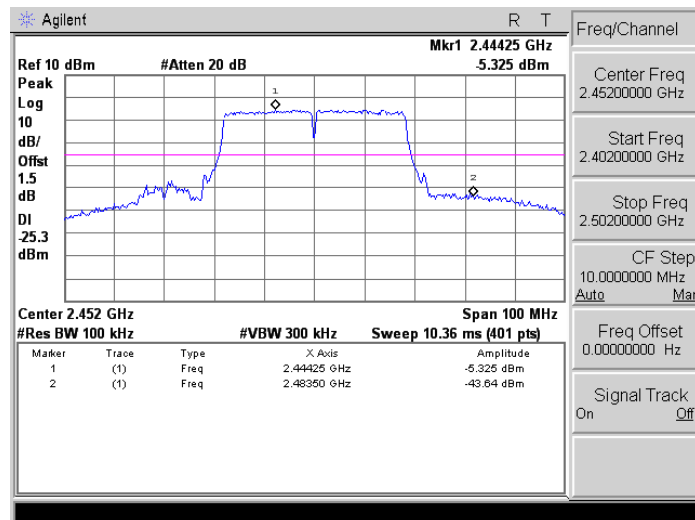


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

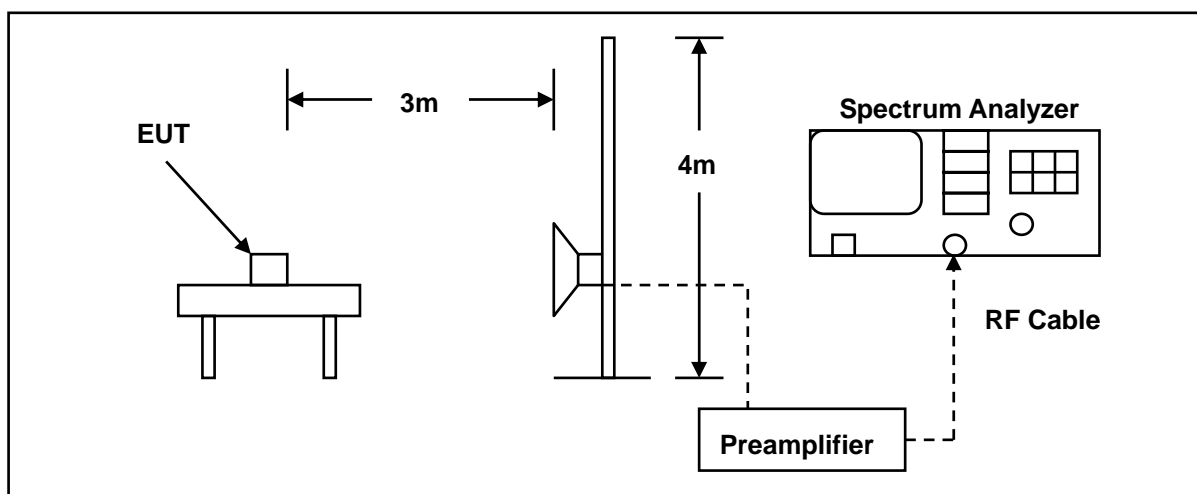

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

10.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		11/04/2014	
Frequency:		2412 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2345.750	52.27	-2.43	49.84	74.00	-24.16	peak	H
2390.000	50.12	-2.24	47.88	74.00	-26.12	peak	H
2387.550	56.12	-2.25	53.87	74.00	-20.13	peak	V
2387.550	47.19	-2.25	44.94	54.00	-9.06	AVG	V
2390.000	54.01	-2.24	51.77	74.00	-22.23	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		11/04/2014	
Frequency:		2462 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	49.35	-1.83	47.52	74.00	-26.48	peak	H
2484.600	51.19	-1.82	49.37	74.00	-24.63	peak	H
2483.500	53.50	-1.83	51.67	74.00	-22.33	peak	V
2486.480	55.71	-1.81	53.90	74.00	-20.10	peak	V
2486.480	46.90	-1.81	45.09	54.00	-8.91	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		3		Date:		11/04/2014	
Frequency:		2412 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.650	55.79	-2.25	53.54	74.00	-20.46	peak	H
2388.650	48.83	-2.25	46.58	54.00	-7.42	AVG	H
2390.000	53.67	-2.24	51.43	74.00	-22.57	peak	H
2388.760	67.88	-2.25	65.63	74.00	-8.37	peak	V
2388.760	51.39	-2.25	49.14	54.00	-4.86	AVG	V
2390.000	66.41	-2.24	64.17	74.00	-9.83	peak	V
2390.000	52.87	-2.24	50.63	54.00	-3.37	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		3		Date:		11/04/2014	
Frequency:		2462 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	52.14	-1.83	50.31	74.00	-23.69	peak	H
2484.760	55.09	-1.82	53.27	74.00	-20.73	peak	H
2484.760	47.16	-1.82	45.34	54.00	-8.66	AVG	H
2483.500	60.69	-1.83	58.86	74.00	-15.14	peak	V
2483.500	51.02	-1.83	49.19	54.00	-4.81	AVG	V
2483.840	62.46	-1.82	60.64	74.00	-13.36	peak	V
2483.840	50.23	-1.82	48.41	54.00	-5.59	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/04/2014		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2383.260	57.02	-2.28	54.74	74.00	-19.26	peak	H
2383.260	46.65	-2.28	44.37	54.00	-9.63	AVG	H
2390.000	55.80	-2.24	53.56	74.00	-20.44	peak	H
2390.000	48.46	-2.24	46.22	54.00	-7.78	AVG	H
2388.650	64.47	-2.25	62.22	74.00	-11.78	peak	V
2388.650	51.39	-2.25	49.14	54.00	-4.86	AVG	V
2390.000	62.94	-2.24	60.70	74.00	-13.30	peak	V
2390.000	53.22	-2.24	50.98	54.00	-3.02	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		HHR1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		4		Date:		11/04/2014	
Frequency:		2462 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	53.36	-1.83	51.53	74.00	-22.47	peak	H
2483.760	54.64	-1.83	52.81	74.00	-21.19	peak	H
2483.760	47.48	-1.83	45.65	54.00	-8.35	AVG	H
2483.500	60.39	-1.83	58.56	74.00	-15.44	peak	V
2483.500	52.09	-1.83	50.26	54.00	-3.74	AVG	V
2483.800	66.34	-1.83	64.51	74.00	-9.49	peak	V
2483.800	52.00	-1.83	50.17	54.00	-3.83	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/04/2014		
Frequency:	2422 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.480	54.44	-2.27	52.17	74.00	-21.83	peak	H
2385.480	48.74	-2.27	46.47	54.00	-7.53	AVG	H
2390.000	53.56	-2.24	51.32	74.00	-22.68	peak	H
2389.560	63.94	-2.25	61.69	74.00	-12.31	peak	V
2389.560	53.34	-2.25	51.09	54.00	-2.91	AVG	V
2390.000	60.86	-2.24	58.62	74.00	-15.38	peak	V
2390.000	53.67	-2.24	51.43	54.00	-2.57	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	HHR1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/04/2014		
Frequency:	2452 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	51.17	-1.83	49.34	74.00	-24.66	peak	H
2487.050	53.69	-1.80	51.89	74.00	-22.11	peak	H
2483.500	62.75	-1.83	60.92	74.00	-13.08	peak	V
2483.500	52.47	-1.83	50.64	54.00	-3.36	AVG	V
2484.350	66.03	-1.82	64.21	74.00	-9.79	peak	V
2484.350	52.26	-1.82	50.44	54.00	-3.56	AVG	V

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is Dipole Antenna. And the maximum Gain of this antenna is only 3 dBi.

Antenna and Coaxial cable is integrated. The one end of Coaxial cable is fixed on the PCB.