

FCC PART 15 SUBPART C SECTION 15.247 & RSS 247 TEST REPORT

for

MODULAR TRANSMITTER Model: ATWINC1500-MR210UB

Prepared for

ATMEL CORPORATION 1 SPECTRUM POINTE DR., SUITE 225 LAKE FOREST, CA 92630

Prepared by:	
	TOREY OLIVER
Approved by:	

JEFF KLINGER

COMPATIBLE ELECTRONICS INC. 20621 PASCAL WAY LAKE FOREST, CALIFORNIA 92630 (949) 587-0400

DATE: SEPTEMBER 23, 2015

	REPORT	APPENDICES				TOTAL	
	BODY	\boldsymbol{A}	В	C	D	E	
PAGES	19	2	2	2	15	74	114

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.





TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample2.6 Abbreviations and Acronyms	7 7
· ·	
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION4.1 Description of Test Configuration	9 9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test8.1.3 DTS Bandwidth	16 17
8.1.4 Maximum Peak Conducted Output Power	17
8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission	17
8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	18
8.1.7 Emissions in the Restricted Bands (Radiated)	18
8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band	18
9. TEST PROCEDURE DEVIATIONS	19
10. CONCLUSIONS	19

LIST OF APPENDICES

APPENDIX	TITLE				
A	Laboratory Accreditations and Recognitions				
В	Modifications to the EUT				
С	Additional Models Covered Under This Report				
D	iagrams, Factors, Charts, and Photos				
	Test Setup Diagrams				
	Antenna and Amplifier Factors				
	Radiated and Conducted Emissions Photos				
Е	Radiated and Conducted Emissions Data Sheets				

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz
3	Conducted Emissions Test Setup





GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Modular Transmitter

Model: ATWINC1500-MR210UB

S/N: None

Product Description: The EUT is an 802.11b, g, and n Wireless Shielded Module with a whip antenna.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Atmel Corporation

1 Spectrum Pointe Dr., Suite 225

Lake Forest, CA 92630

Test Dates: September 11-24, 2015

Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209, & 15.247.

RSS 247 & RSS GEN

Test Procedure: ANSI C63.4 & C63.10, and KDB 558074 D01 v03r03.





SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS	
1	Conducted RF Emissions, 150 kHz - 30 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.207 and RSS GEN	
2	Radiated RF Emissions & Harmonics, 9 kHz – 25,000 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart C Sections 15.205, 15.209, and RSS GEN	
3	DTS Bandwidth	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247	
4	Maximum Peak Conducted Output Power	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247	
5	Maximum Peak Power Spectral Density Level In The Fundamental Emission	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247	
6	Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247	
7	Emissions in the Restricted Bands	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247	





1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Modular Transmitter Model: ATWINC1500-MR210UB. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10 & C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.207, 15.205, 15.209, 15.247, RSS GEN, and RSS 247.







2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Atmel Corporation

Mike Atia Module / SIP Designer

Compatible Electronics Inc.

Torey Oliver Test Technician

Jeff Klinger Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on September 11, 2015.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF Radio Frequency

EMI Electromagnetic Interference EUT Equipment Under Test

P/N Part Number S/N Serial Number HP Hewlett Packard

ITE Information Technology Equipment

CML Corrected Meter Limit

LISN Line Impedance Stabilization Network

NVLAP National Voluntary Laboratory Accreditation Program

CFR Code of Federal Regulations

PCB Printed Circuit Board

TX Transmit RX Receive





3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
RSS 247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 D01 v03r03	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247



4. DESCRIPTION OF TEST CONFIGURATION


4.1 Description of Test Configuration

The Modular Transmitter Model: ATWINC1500-MR210UB (EUT) was setup in a tabletop configuration. The EUT was powered by a DC Supply (for Conducted Emissions the EUT was connected to a USB Power Adapter). The EUT was continuously transmitting a data stream. The EUT was checked in all axes and the X-Axis was found to be the worst case.

The voltage was varied + 15% and the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration

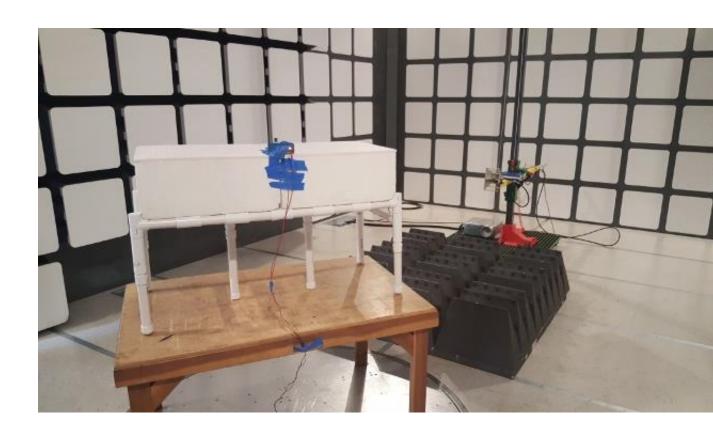



4.1.2 Cable Construction and Termination

Cable 1-2

These are 2 meter, un-shielded, round cables that connect the EUT to the DC Power Supply. The cables were hardwired into the EUT and have banana connectors at the DC Supply end. The cables were not bundled.

Cable 3

This is a 10 centimeter, un-shielded, round cables that connect the EUT to the EUT Control Board. The cable is hardwired into both ends of the cable. The cable was not bundled.

Cable 4

This is a 1 meter, foil shielded, USB cable that connect the EUT to the USB Power Adapter. The cable is hardwired into both ends of the cable. The cable was not bundled. The shield of the cable was terminated at the connectors.

Cable 5

This is a 10 centimeter, braid shielded, round cable that connect the EUT to the whip antenna. The cable has a U.FL connector at the EUT end and a RPSMA connector at the antenna end of the cable. The cable was not bundled.





5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

#	EQUIPMENT TYPE	EQUIPMENT TYPE MANU- FACTURER		SERIAL NUMBER
1	MODULAR TRANSMITTER(EUT)	ATMEL CORPORATION	ATWINC1500- MR210UB	N/A
2	DC SUPPLY	MPJA	0-30V / 0-5A	017687
3	EUT CONTROL BOARD	ATMEL CORPORATION	NONE	NONE
4	USB POWER ADAPTER (CONDUCTED EMISSIONS)	BELKIN	F8J052	NONE







5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/3/2015	9/3/2016
Antenna, Loop	Com Power	AL-130	121049	12/06/2013	12/06/2015
Antenna, CombiLog	Com Power	AC-220	25857	5/21/2014	5/21/2016
Antenna, Horn 1- 18GHz	Com Power	AH-118	071250	7/1/2014	7/1/2016
Antenna, Horn 18- 26 GHz	Com Power	AH-826	081033	NCR	NCR
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551034	2/6/2015	2/6/2016
Pre-Amp, 18- 40GHz	Com Power	PA-840	181289	6/16/2014	6/16/2016
LISN	Com Power	LI-215	191937	4/16/2015	4/16/2016
RF Peak Power Meter/Analyzer	Boonton	4500A	1282	12/2/2014	12/2/2015
Peak Power Sensor	Boonton	57318	3723	12/2/2014	12/2/2015
High Pass Filter	AMTI Microwave Circuits	H3G020G4	481230	6/4/2014	6/4/2016
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A





6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

For testing above 1 GHz the EUT was mounted 1.5 meter above the ground plane.

The EUT was grounded through the USB Cable.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.





7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There are a total of 11 channels. The low channel is at 2412.0 MHz and the high channel is at 2462.0 MHz. There is approximately 5 MHz separation between channels and the EUT uses DSSS modulation. Below are the channels and power settings:

b Mode	g Mode	n Mode
1 == 2412 MHz DigGain= DG= -6	DG= -8	DG= -8
2 == 2417 MHz DigGain= DG= -6	DG = -5	DG= -5
3 == 2422 MHz DigGain= DG= -6	DG = -4	DG= -4
4 == 2427 MHz DigGain= DG= -6	DG = -3	DG = -3
5 == 2432 MHz DigGain= DG= -6	DG = -3	DG= -3
6 == 2437 MHz DigGain= DG= -6	DG = -3	DG= -3
7 == 2442 MHz DigGain= DG= -6	DG = -3	DG= -3
8 == 2447 MHz DigGain= DG= -6	DG = -3	DG = -3
9 == 2452 MHz DigGain= DG= -6	DG = -4	DG= -4
10 == 2457 MHz DigGain= DG= -6	DG= -6	DG= -6
11 == 2462 MHz DigGain= DG= -6	DG= -9	DG= -9

7.2 Antenna

The antenna is an external whip antenna, which is connected by a U.FL connector at the EUT end and a cable that connects a reverse polarity SMA connector that is connected to the whip antenna.





8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C section 15.207 & RSS GEN.





8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The R&S receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There were two Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the radiated Harmonic emissions and Band Edges a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz
1000 to 25000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209, 15.247, and RSS GEN.





8.1.3 DTS Bandwidth

The DTS Bandwidth was measured directly connected to the EMI Receiver using a RBW of 100 kHz and a VBW of 300 kHz. A peak detector and a max hold trace were used with auto sweep time. The trace was allowed to fully maximize. We measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. The automatic bandwidth measurement capability of the EMI Receiver was employed using the n dB bandwidth mode with n set to 6 dB. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.4 Maximum Peak Conducted Output Power

The maximum peak conducted output power was measured using a Peak Power Meter. The Peak Power Meter used a resolution bandwidth that is greater than the DTS bandwidth and a video bandwidth greater than 3 x RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission

The Maximum Peak Power Spectral Density Level in the Fundamental Emission was measured directly connected to the EMI Receiver. Tuned to the center frequency of the DTS channel and set the span to 1.5 times the DTS bandwidth. RBW was set to minimum 3 kHz but not > 100kHz and VBW 3 * RBW. A peak detector was used with the sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level within the RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.





8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)

The Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) measurements were performed using the EMI Receiver directly connected to the EUT. A reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to \geq 1.5 times the DTS bandwidth. The RBW was 100 kHz and VBW 300 kHz. A peak detector was used with a sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20dB below that was the reference level. For Emission Level Measurement the center frequency and span were set to encompass the frequency range to be measured. RBW was set to 100 kHz and VBW to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.7 Emissions in the Restricted Bands (Radiated)

The Emissions in the Restricted Bands measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205 and RSS GEN.

8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The low and high channels were tuned to during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.





9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Modular Transmitter Model: ATWINC1500-MR210UB meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209, 15.247, RSS GEN & RSS 247.







APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS





LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - http://ts.nist.gov/Standards/scopes/2000630.htm
Brea Division - http://ts.nist.gov/Standards/scopes/2005280.htm
Silverado/Lake Forest Division - http://ts.nist.gov/Standards/scopes/2005270.htm



ANSI listing

CETCB

https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:




VCCI Listing, from VCCI site

Enter "Compatible" in search form http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

FCC test lab search https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm



Compatible Electronics IC listing can be found at: http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home



Page B1

APPENDIX B

MODIFICATIONS TO THE EUT





MODIFICATIONS TO THE EUT

There were no modifications made during testing.







APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT





ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Modular Transmitter

Model: ATWINC1500-MR210UB

S/N: None

No additional models were tested.







APPENDIX D

DIAGRAMS, FACTORS, CHARTS, AND PHOTOS





FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

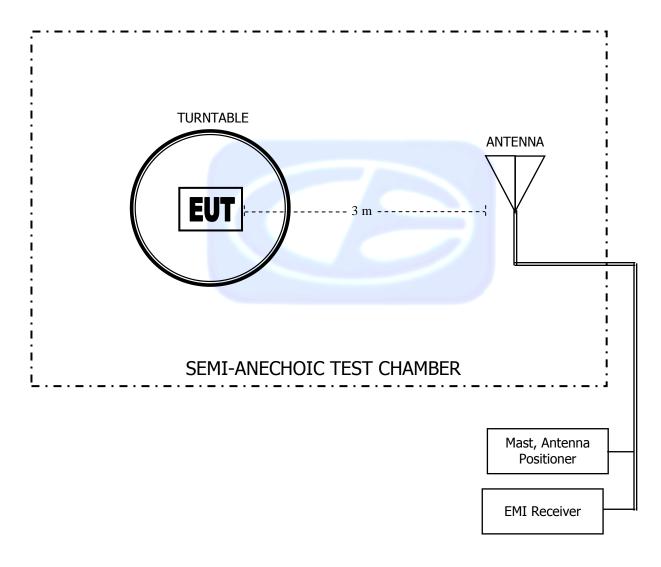






FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


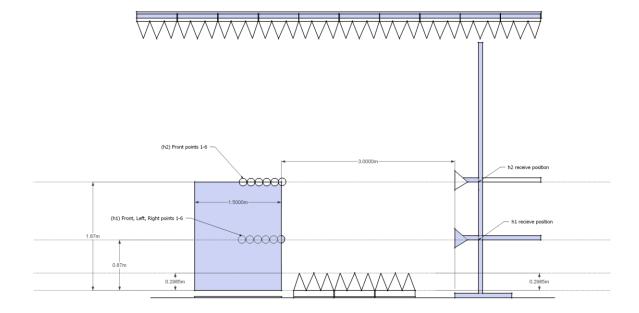






FIGURE 3: CONDUCTED EMISSIONS TEST SETUP



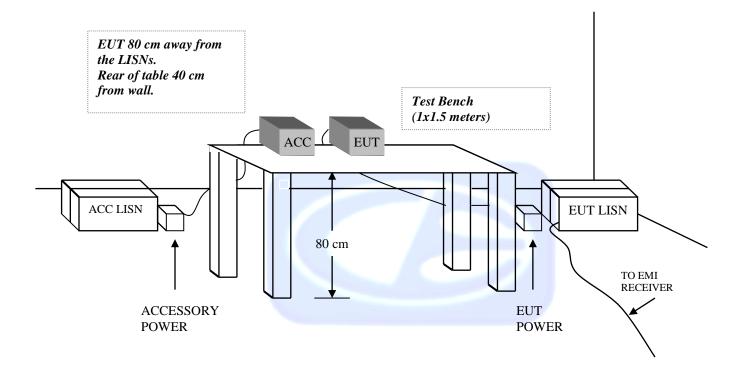



COM-POWER AL-130

LOOP ANTENNA

S/N: 121049

CALIBRATION DUE: DECEMBER 6, 2015

FREQUENCY	MAGNETIC	ELECTRIC	FREQUENCY	MAGNETIC	ELECTRIC
(MHz)	(dB/m)	(dB/m)	(MHz)	(dB/m)	(dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			





COM-POWER AC-220

LAB R - COMBILOG ANTENNA

S/N: 25857

CALIBRATION DUE: MAY 21, 2016

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	160	13.3
35	22.5	180	15.0
40	23.0	200	14.6
45	21.5	250	16.5
50	21.3	300	18.1
60	18.2	400	19.4
70	13.2	500	21.4
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	13.6	1000	28.5





COM-POWER AH-118

HORN ANTENNA

S/N: 071250

CALIBRATION DUE: JULY 1, 2016

FREQUENCY (MHz)	FACTOR	FREQUENCY (MHz)	FACTOR
	(dB)	, ,	(dB)
1000	30.1	9500	44.2
1500	29.2	10000	43.4
2000	31.6	10500	44.6
2500	35.5	11000	45.1
3000	33.7	11500	45.7
3500	36.0	12000	46.2
4000	35.4	12500	45.4
4500	35.5	13000	44.8
5000	40.1	13500	46.7
5500	37.8	14000	47.8
6000	39.0	14500	46.4
6500	39.9	15000	47.2
7000	40.4	15500	45.5
7500	44.4	16000	45.0
8000	44.1	16500	44.5
8500	43.1	17000	47.0
9000	43.0	17500	47.8
		18000	44.2





COM-POWER PAM-118A

1-18GHz - PREAMPLIFIER

S/N: 551034

CALIBRATION DUE: FEBRUARY 6, 2016

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(MHz)	(dB)	(MHz)	(dB)
500	36.77	5500	39.82
1000	38.63	6000	38.74
1100	38.72	6500	39.60
1200	38.97	7000	35.52
1300	38.59	7500	36.61
1400	39.18	8000	36.92
1500	38.71	8500	37.13
1600	39.28	9000	36.50
1700	39.25	9500	38.92
1800	39.06	10000	38.74
1900	40.34	11000	35.23
2000	40.07	12000	35.64
2500	39.69	13000	36.73
3000	40.94	14000	36.48
3500	40.41	15000	37.57
4000	40.44	16000	38.10
4500	41.20	17000	37.34
5000	39.35	18000	36.80





COM-POWER PA-840

18-40 GHz PREAMPLIFIER

S/N: 181289

CALIBRATION DUE: JUNE 16, 2016

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
18000	29.4	31500	28.2
19000	28.8	32000	28.6
20000	30.5	32500	28.8
21000	31.4	33000	28.2
22000	31.2	33500	27.7
23000	30.1	34000	27.2
24000	30.3	34500	28.2
25000	29.8	35000	27.3
26000	30.5	35500	27.2
26500	30.7	36000	27.2
27000	30.8	36500	27.5
27500	30.2	37000	27.0
28000	30.1	37500	26.7
28500	30.2	38000	26.2
29000	30.1	38500	26.5
29500	29.8	39000	26.3
30000	29.2	39500	26.9
30500	28.4	40000	27.6
31000	29.8		







FRONT VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS





REAR VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS






FRONT VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - RADIATED EMISSIONS > 1GHz



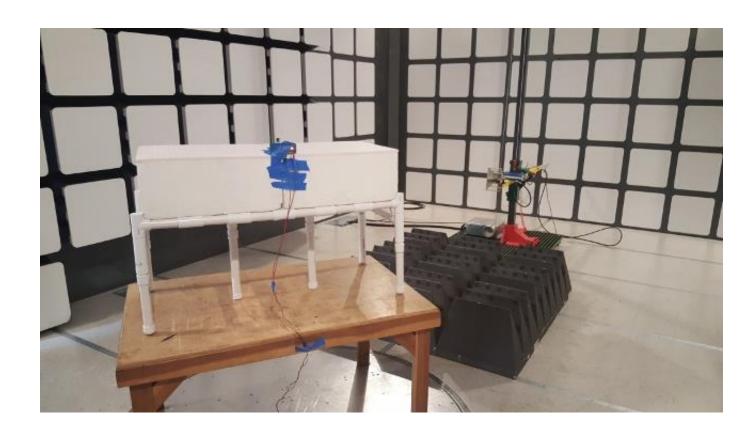

REAR VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - RADIATED EMISSIONS > 1GHz





FRONT VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - CONDUCTED EMISSIONS





REAR VIEW

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWINC1500-MR210UB
FCC SUBPART C - CONDUCTED EMISSIONS



APPENDIX E

RADIATED EMISSIONS DATA SHEETS





FCC Part 15 Subpart C Section 15.247 & RSS 247 Test Report

Title: FCC 15.207 9/15/2015 2:07:07 PM File: Radiated Pre-Scan 30-1000Mhz2.set Sequence: Preliminary Scan

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.


Comments: G mode Mid Channel: 2437 Mhz

Power Gain: -3

Connected to a DC power supply

Temp: 72f Hum: 42% 5VDC

Compatible Electronics, Inc. FAC-3 (Lab R)

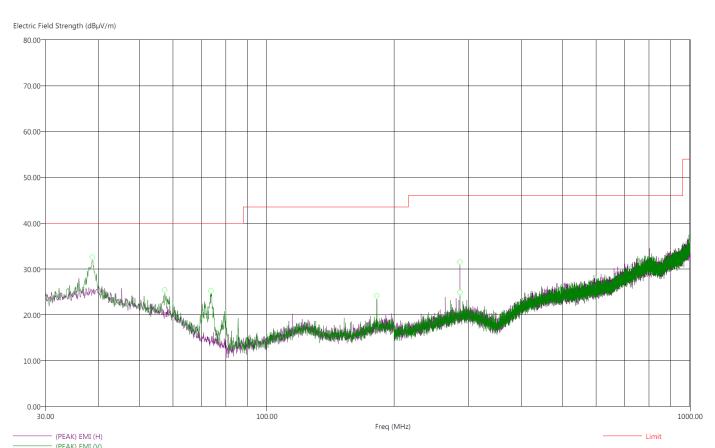

This was worst case for all modes and channels There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.





Title: FCC 15.207 9/15/2015 2:19:08 PM File: Radiated Final 30-1000Mhz2.set Sequence: Final Measurements

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.

Comments: G mode Mid Channel: 2437 Mhz

Power Gain: -3

Connected to a DC power supply

Temp: 72f Hum: 42% 5VDC

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBµV/m)	(PEAK) EMI (dBµV/m)	Limit (dBµV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable(dB)
38.70	-13.01	26.99	31.44	40.00	V	99.00	168.40	22.89	1.24
57.40	-20.36	19.64	25.35	40.00	V	153.25	109.11	18.93	0.79
73.80	-20.92	19.08	26.09	40.00	V	181.00	148.22	12.56	0.58
182.00	-21.71	21.81	25.14	43.52	V	1.50	111.08	14.96	1.29
286.00	-20.87	25.13	28.22	46.00	V	23.00	100.88	17.68	2.05
286.10	-14.85	31.15	32.73	46.00	Н	259.25	115.62	17.68	2.05

This was worst case for all modes and channels

There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.





APPENDIX E

CONDUCTED EMISSIONS DATA SHEETS



Sequence: Preliminary Scan



Title: FCC 15.207 9/11/2015 4:35:55 PM

File: Conducted Pre-Line.set

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.

Comments: G mode Mid Channel: 2437 Mhz


Power Gain: -3

Connected to a Belkin power supply

Temp: 72f Hum: 42%

USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

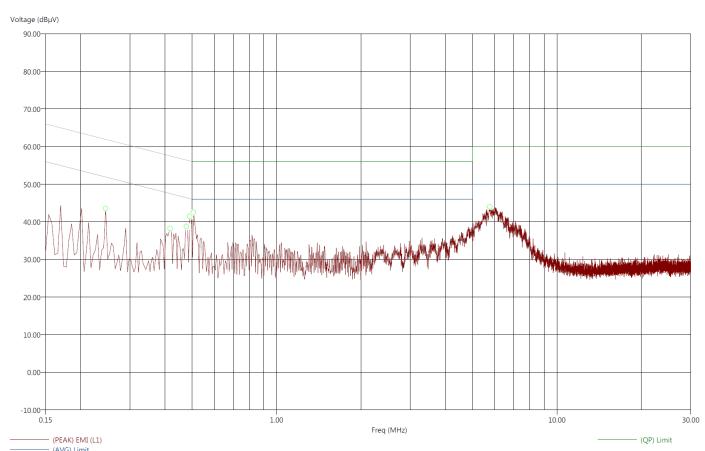



FCC Part 15 Subpart C Section 15.247 & RSS 247 Test Report

Title: FCC 15.207 9/11/2015 4:38:31 PM File: Conducted Final-Line.set Sequence: Final Measurements

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.

Comments: G mode Mid Channel: 2437 Mhz

Power Gain: 3

Connected to a Belkin power supply

Temp: 72f Hum: 42%

USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBµV)	(QP) EMI (dBµV)	(PEAK) EMI (dBµV)	(AVG) Limit (dBµV)	(QP) Limit (dBµV)	Transducer (dB)	Cable (dB)
0.25	-30.06	-30.41	21.83	31.48	39.64	51.89	61.89	0.21	0.23
0.42	-20.04	-22.39	27.44	35.10	37.98	47.49	57.49	0.04	0.06
0.48	-17.94	-20.01	28.43	36.37	39.52	46.37	56.37	0.03	0.01
0.49	-14.39	-16.46	31.78	39.71	42.49	46.17	56.17	0.02	0.01
0.51	-12.93	-14.87	33.07	41.13	43.51	46.00	56.00	0.02	0.00
5.76	-20.08	-19.00	29.92	41.00	44.36	50.00	60.00	0.03	0.30



Title: FCC 15.207 9/11/2015 4:30:34 PM Sequence: Preliminary Scan

File: Conducted Pre-Neutral.set

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.

Comments: G mode Mid Channel: 2437 Mhz


Power Gain: -3

Connected to a Belkin power supply

Temp: 72f Hum: 42%

USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

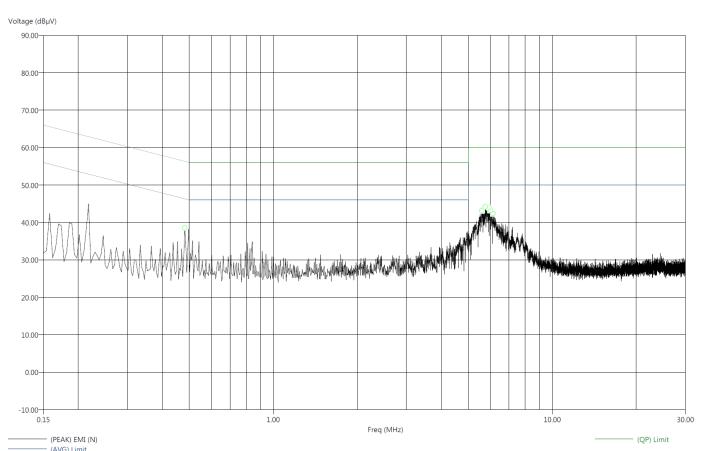





FCC Part 15 Subpart C Section 15.247 & RSS 247 Test Report

Title: FCC 15.207 9/11/2015 4:33:18 PM File: Conducted Final-Neutral.set Sequence: Final Measurements

Operator: Torey Oliver

EUT Type: Wifi Module / ATWINC1500-MR210UB

EUT Condition: The EUT is constantly transmitting.

Comments: G mode Mid Channel: 2437 Mhz

Power Gain: 3

Connected to a Belkin power supply

Temp: 72f Hum: 42%

USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBµV)	(QP) EMI (dBµV)	(PEAK) EMI (dBµV)	(AVG) Limit (dBµV)	(QP) Limit (dBµV)	Transducer (dB)	Cable (dB)
0.48	-26.15	-22.23	20.15	34.08	38.39	46.30	56.30	0.03	0.01
5.59	-28.42	-21.36	21.58	38.64	43.63	50.00	60.00	0.04	0.28
5.76	-28.22	-20.23	21.78	39.77	44.18	50.00	60.00	0.03	0.30
5.92	-28.06	-20.73	21.94	39.27	44.05	50.00	60.00	0.03	0.32
6.00	-28.22	-21.80	21.78	38.20	42.91	50.00	60.00	0.03	0.33
6.13	-27.60	-22.22	22.40	37.78	42.11	50.00	60.00	0.03	0.35





DTS BANDWIDTH

DATA SHEETS





802.11b MODE

DTS BANDWIDTH

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11b


Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit Min (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	12224.45	500.00	11724.45	Peak	
2437	12224.45	500.00	11724.45	Peak	
2462	12224.45	500.00	11724.45	Peak	





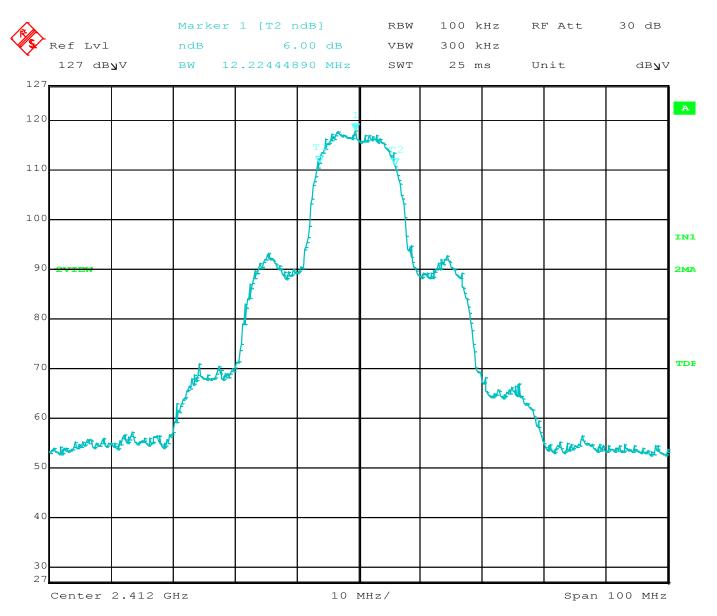


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth B Mode Low Channel

Date: 11.SEP.2015 13:01:05



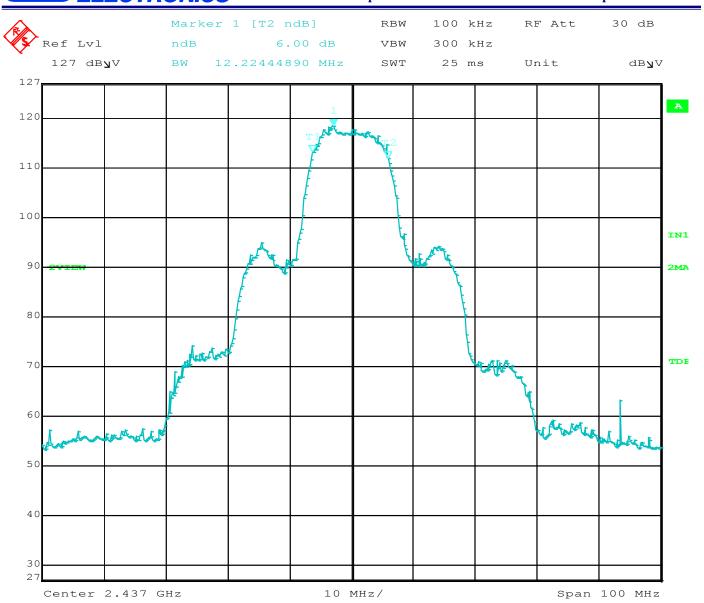


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth B Mode Mid Channel

Date: 11.SEP.2015 13:06:34



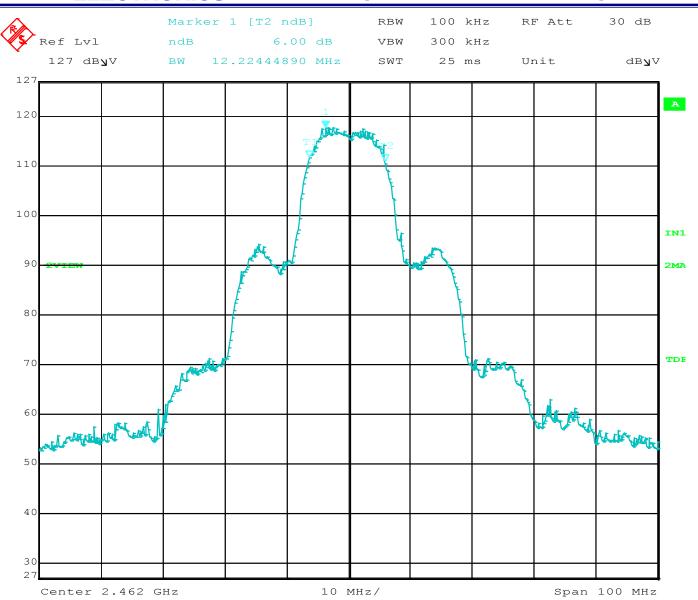

Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth B Mode High Channel

Date: 11.SEP.2015 13:07:27



802.11g MODE

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit Min (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	16833.67	500.00	16333.67	Peak	
2437	16833.67	500.00	16333.67	Peak	
2462	16833.67	500.00	16333.67	Peak	







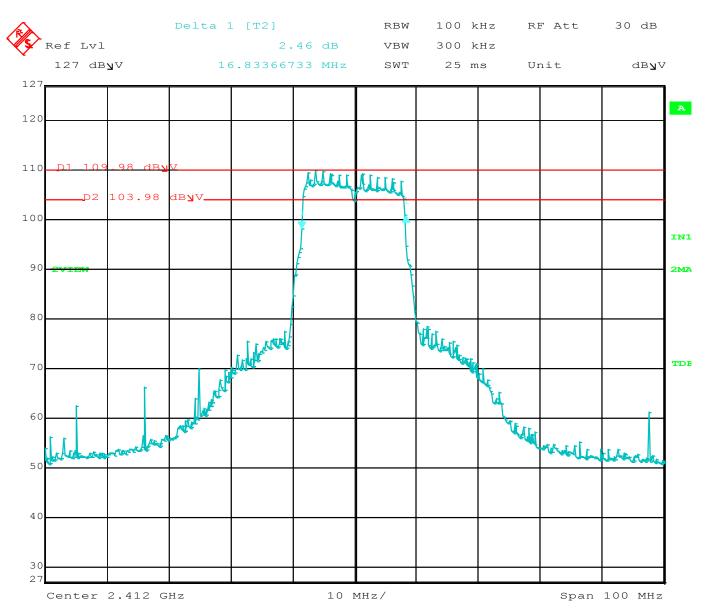


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth G Mode Low Channel

Date: 11.SEP.2015 12:59:32



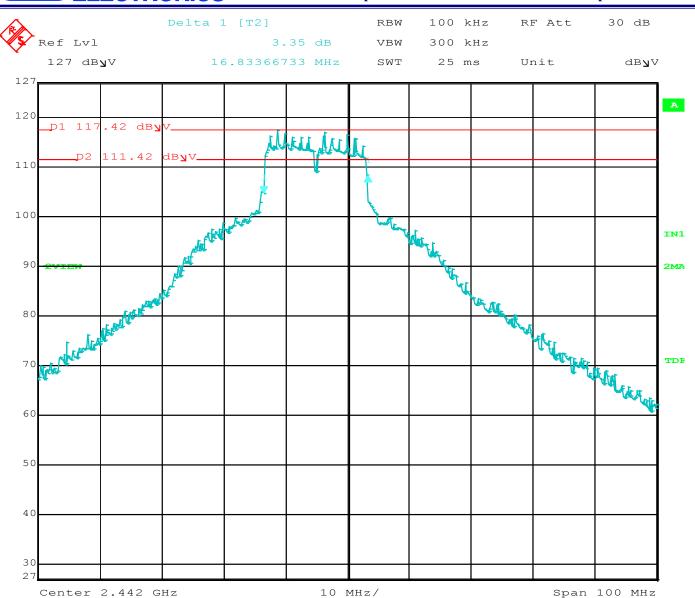


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth G Mode Mid Channel

Date: 11.SEP.2015 12:58:01





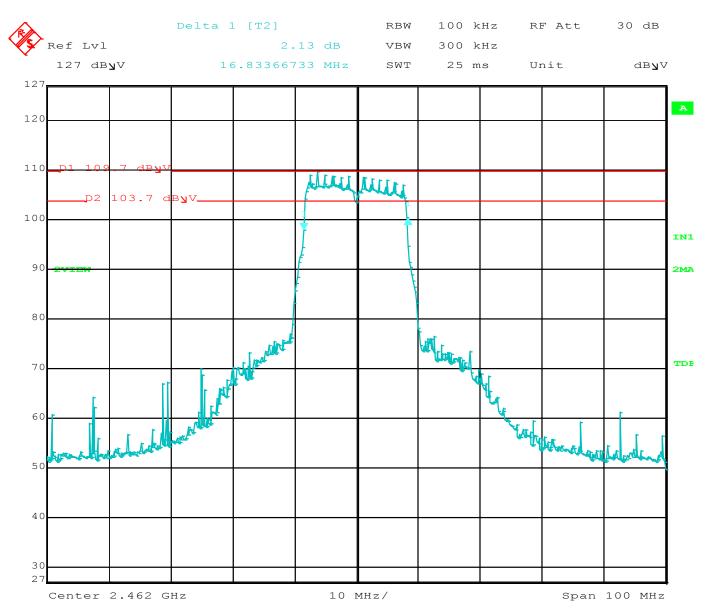

Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth G Mode High Channel

Date: 11.SEP.2015 12:55:56





802.11n MODE

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	17835.67	500.00	17335.67	Peak	
2437	18096.19	500.00	17596.19	Peak	
2462	17835.67	500.00	17335.67	Peak	







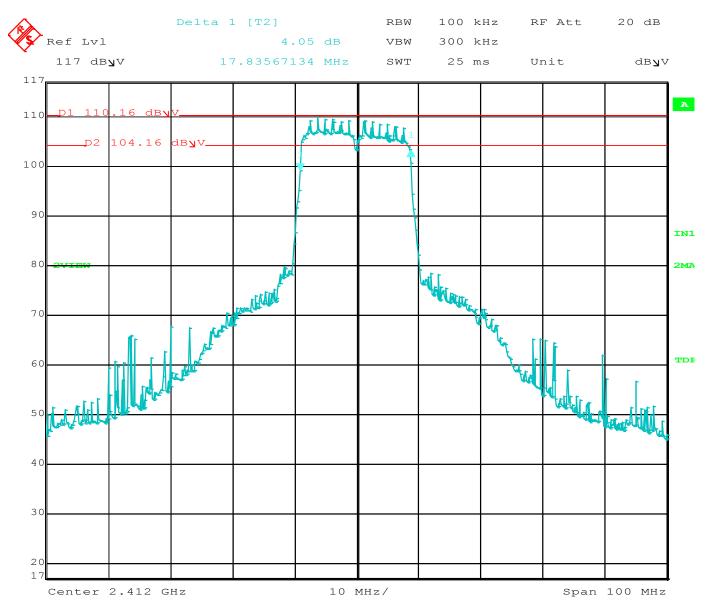


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth N Mode Low Channel

Date: 11.SEP.2015 12:45:47



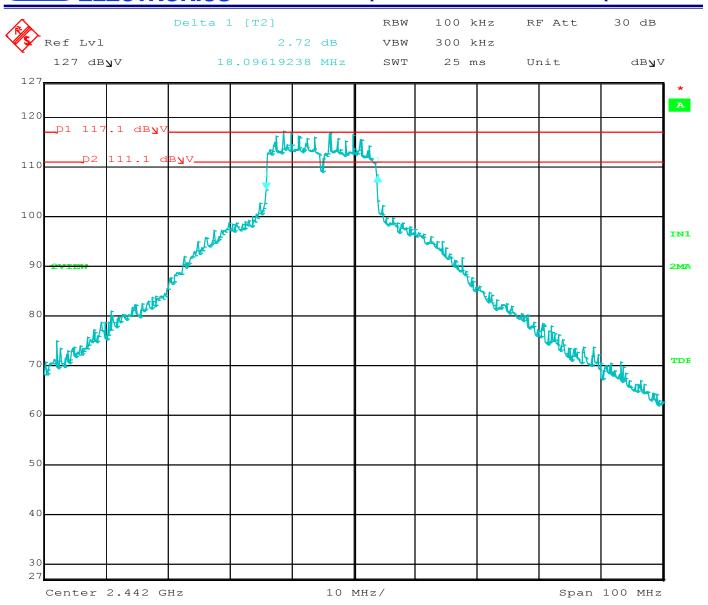


Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth N Mode Mid Channel

Date: 11.SEP.2015 12:51:35





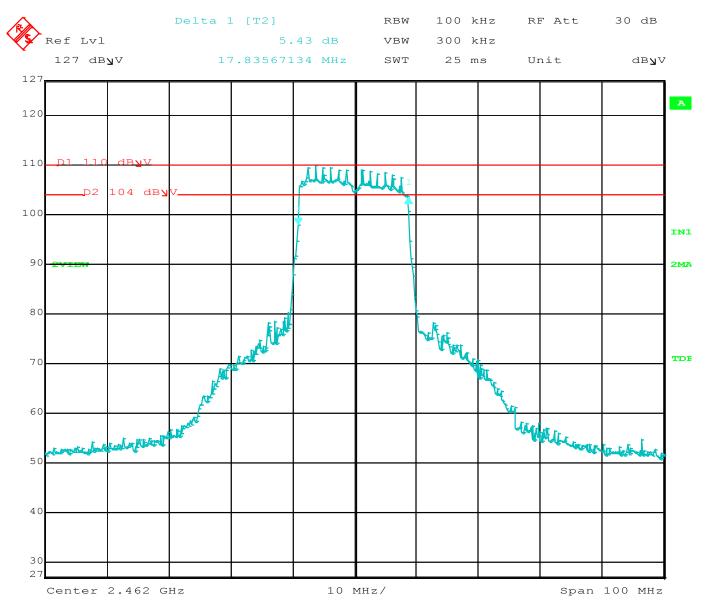

Title: ATWINC1500-MR210UB

Comment A: DTS Bandwidth N Mode High Channel

Date: 11.SEP.2015 12:53:52





DATA SHEETS





802.11b Mode

FCC 15.247

Company: Atmel Corporation Date: 9/22/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	21.36	30.00	-8.64	Peak	DigGain= -6
2437	21.15	30.00	-8.85	Peak	DigGain= -6
2462	21.09	30.00	-8.91	Peak	DigGain= -6







802.11g Mode

FCC 15.247

Company: Atmel Corporation Date: 9/22/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	22.89	30.00	-7.11	Peak	DigGain= -8
2437	23.03	30.00	-6.97	Peak	DigGain= -3
2462	22	30.00	-8.00	Peak	DigGain= -9







802.11n Mode

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	22.57	30.00	-7.43	Peak	DigGain= -8
2437	22.97	30.00	-7.03	Peak	DigGain= -3
2462	22.22	30.00	-7.78	Peak	DigGain= -9







MAXIMUM PEAK POWER SPECTRAL DENSITY LEVEL IN THE FUNDAMENTAL EMISSION

DATA SHEETS





PEAK POWER SPECTRAL DENSITY

802.11b Mode

FCC 15.247

Company: Atmel Corporation Date: 9/23/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver


Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Peak (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
2412	101.47	115.00	-13.53	Peak	DigGain= -6
2437	101.79	115.00	-13.21	Peak	DigGain= -6
2462	102.23	115.00	-12.77	Peak	DigGain= -6



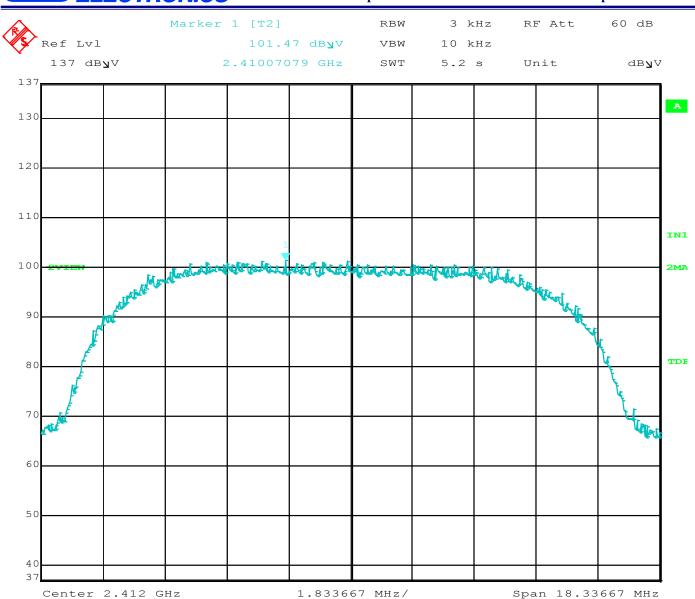


Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density B Mode Low Channel

Date: 23.SEP.2015 10:48:45



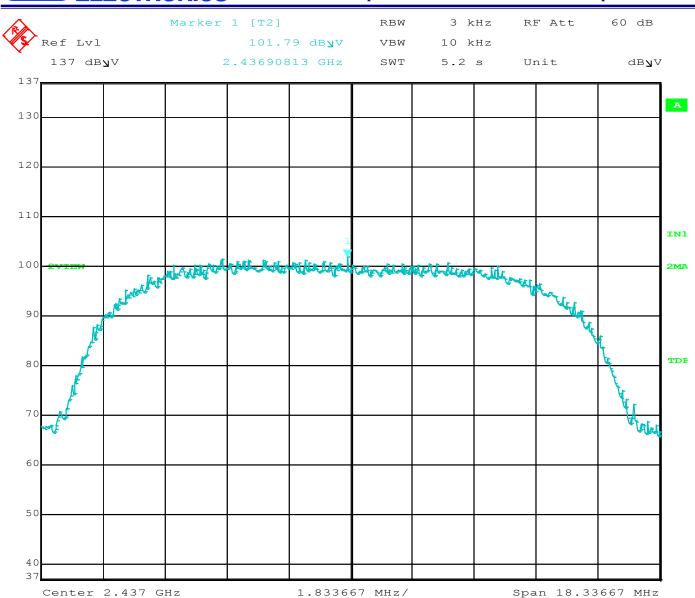


Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density B Mode Mid Channel

Date: 23.SEP.2015 10:45:47



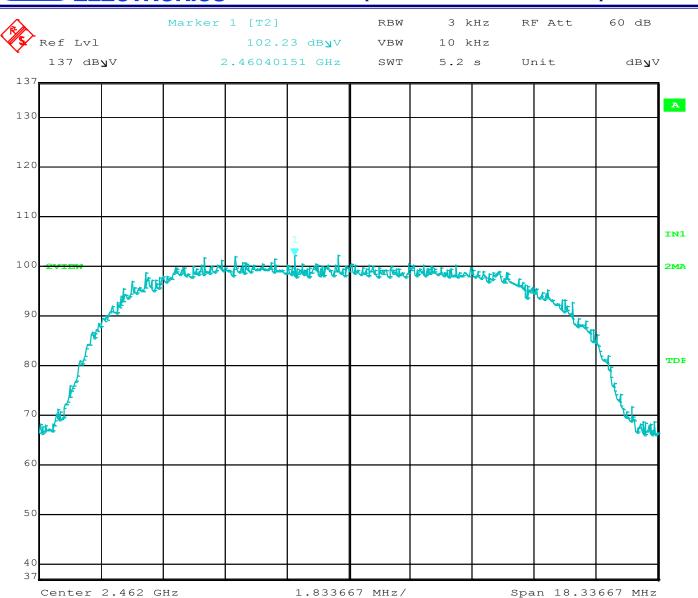

Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density B Mode High Channel

Date: 23.SEP.2015 10:42:39





PEAK POWER SPECTRAL DENSITY

802.11g Mode

FCC 15.247

Company: Atmel Corporation Date: 9/22/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver


Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Peak (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
2412	98.10	115.00	-16.90	Peak	DigGain= -8
2442	100.55	115.00	-14.45	Peak	DigGain= -3
2462	98.00	115.00	-17.00	Peak	DigGain= -9



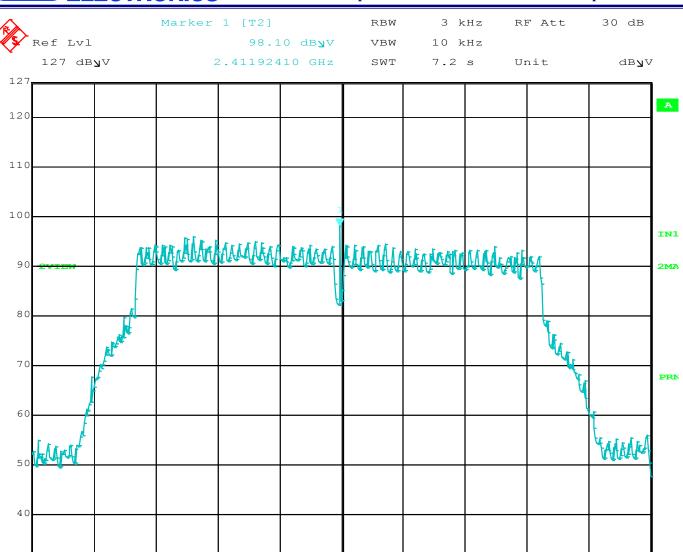

2.52505 MHz/

Title: ATWINC1500-MR210UB

Center 2.412 GHz

3.0


Comment A: Power Spectral Density G Mode Low Channel

Date: 22.SEP.2015 12:53:13



Span 25.2505 MHz



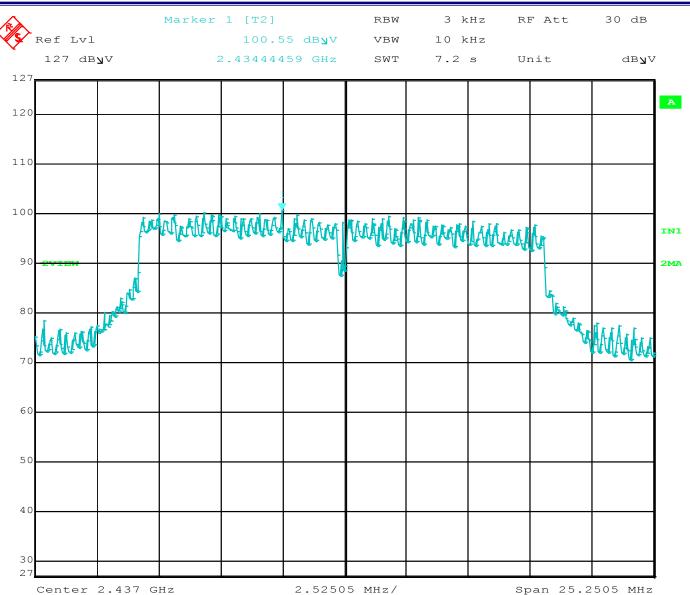


Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density G Mode Mid Channel

Date: 22.SEP.2015 12:51:43



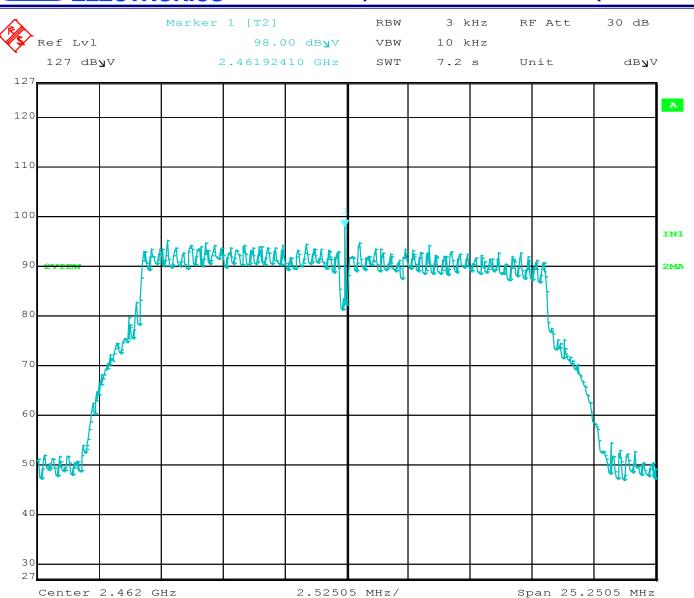

Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density G Mode High Channel

Date: 22.SEP.2015 12:50:04





PEAK POWER SPECTRAL DENSITY

802.11n Mode

FCC 15.247

Company: Atmel Corporation Date: 9/23/2015

EUT: Modular Transmitter Lab: R

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11n


Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Peak (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
2412	97.65	115.00	-17.35	Peak	-8
2437	100.95	115.00	-14.05	Peak	-3
2462	97.71	115.00	-17.29	Peak	-9





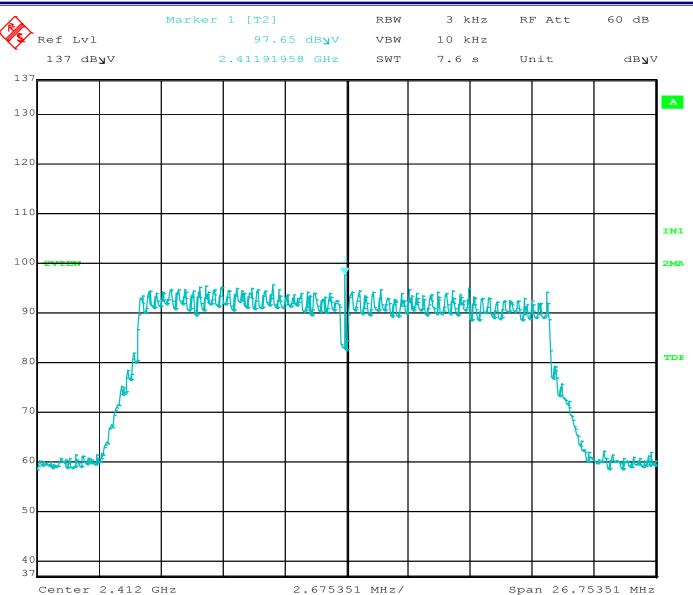


Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density N Mode Low Channel

Date: 23.SEP.2015 10:34:49



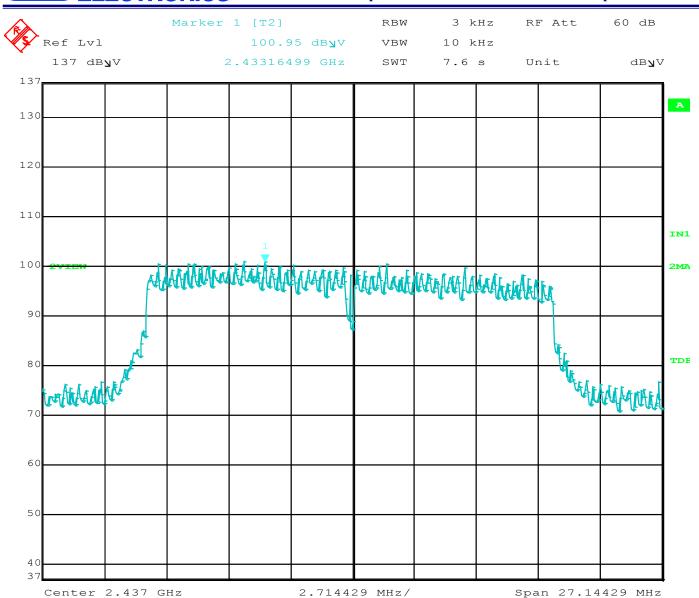

Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density N Mode Mid Channel

Date: 23.SEP.2015 10:36:30





Center 2.462 GHz

50

4.0

2.675351 MHz/

Span 26.75351 MHz

Title: ATWINC1500-MR210UB

Comment A: Power Spectral Density N Mode High Channel

Date: 23.SEP.2015 10:37:58





HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS (IN 100KHZ BANDWIDTH) / CONDUCTED

DATA SHEETS





HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11b Mode

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: F

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2559.118	61.45	96.60	-35.15	Peak	Low Channel
7965.932	59.63	97.18	-37.55	Peak	Mid Channel
8022.044	59.38	97.03	-37.65	Peak	High Channel


Worst case for all B mode measurements






802.11b Mode

Reference Level Measurements



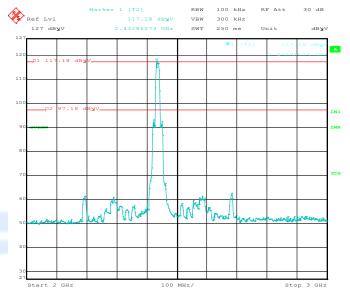


Title: ATWINC1500-MR210UB

Comment A: Conducted Spurious in non Restricted Bands B mode Mid

Date: 11.SEP.2015 14:24:57

Title: ATWINC1500-MR210UB

Comment A: Conducted Spurious in non Restricted Bands B mode Low
Date: 11.SEP.2015 14:31:13



Title: ATWINC1500-MR210UB

Comment A: Conducted Spurious in non Restricted Bands B Mode High

Date: 11.SEP.2015 14:09:19





HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11g Mode

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: F

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

	Freq. (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
	7979.9599	60.03	89.87	-29.84	Peak	Low Channel
	2687.3748	64.45	97.36	-32.91	Peak	Mid Channel
Γ	7993.988	60.04	88.94	-28.90	Peak	High Channel


Worst case for all G mode measurements





802.11g Mode

Reference Level Measurements

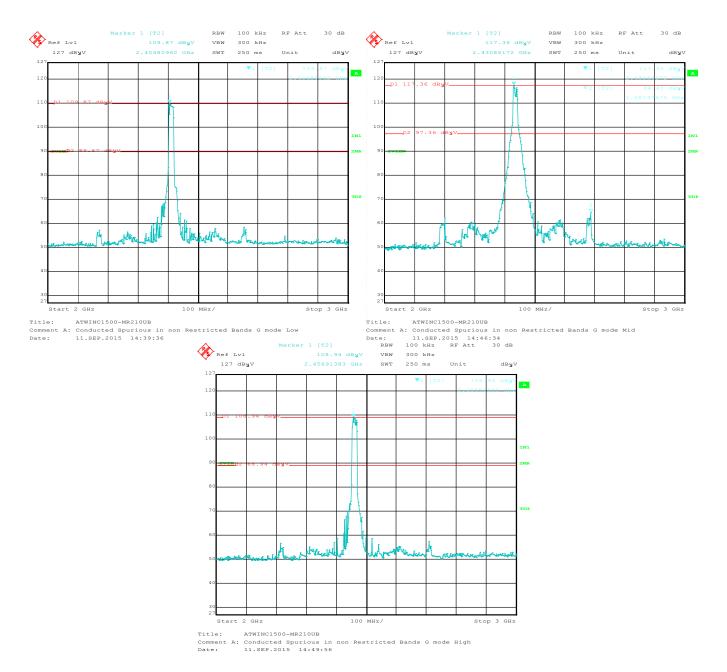





HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11n Mode

FCC 15.247

Company: Atmel Date: 9/11/2015

EUT: WIFI module Lab: F

Model: ATWINC1500-MR210UB Test ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
7965.9319	59.46	89.50	-30.04	Peak	Low Channel
2198.3968	63.32	96.37	-33.05	Peak	Mid Channel
7965.9319	58.79	89.19	-30.40	Peak	High Channel


Worst case for all N mode measurements





802.11n Mode

Reference Level Measurements

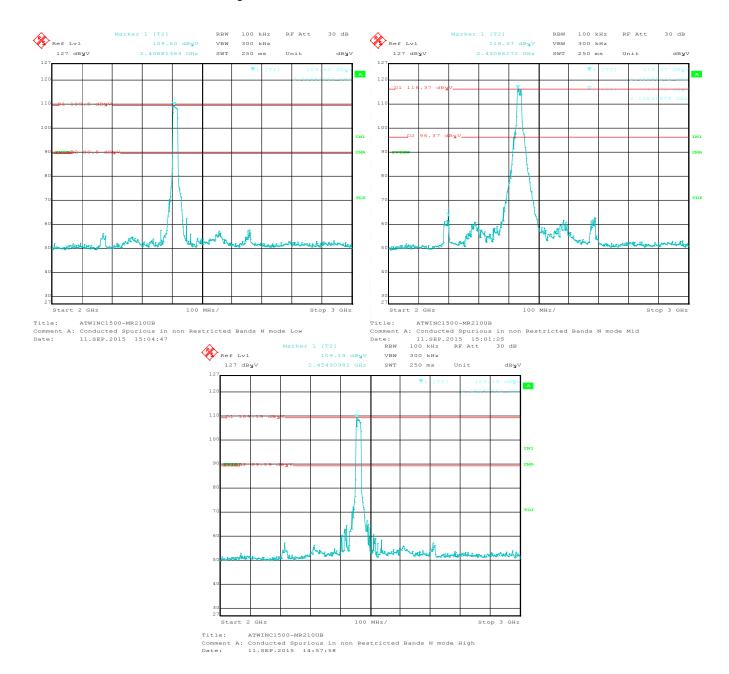





EMISSIONS IN RESTRICTED FREQUENCY BANDS (RADIATED FIELD STRENGTH)

DATA SHEETS



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11b Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/16/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

			Compatible	Licotionic	, IIIO. I AC	-5 (Lab IX		
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00	50.86	Н	73.98	-23.12	Peak	1.52	332	In Restricted Band
4824.00	37.58	Н	53.98	-16.40	Avg	1.52	332	No Emissions Found
		ļ		ļ				
12060.00	62.06	Н	73.98	-11.92	Peak	2.15	0	In Restricted Band
12060.00	50.62	Н	53.98	-3.36	Avg	2.15	0	No Emissions Found
14472.00		Н	73.98		Peak			In Restricted Band
14472.00		Н	53.98		Avg			No Emissions Found
19296.00		H	73.98		Peak			In Restricted Band
19296.00		H	53.98		Avg			No Emissions Found
10200.00			00.00		7.179			THE ETHICOIOTIC T CUTTO
4824.00		V	73.98		Peak			In Restricted Band
4824.00		V	53.98		Avg			No emissions found
12060.00	63.66	V	73.98	-10.32	Peak	1.11	12.00	In Restricted Band
12060.00	53.19	V	53.98	-0.79	Avg	1.11	12.00	
14472.00		V	73.98		Peak			In Restricted Band
14472.00		V	53.98		Avg			No Emissions Found
14472.00		v	00.90		Avy			INO ETTISSIONS FOUND
19296.00		V	73.98		Peak			In Restricted Band
19296.00	_	V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11b Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/16/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

			Companion	e Electronic	55, IIIC. FAC	-3 (Lab K	<u>/</u>	
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00	49.54	Н	73.98	-24.44	Peak	1.25	60	In Restricted Band
4874.00	36.33	Н	53.98	-17.65	Avg	1.25	60	
7311.00		Н	73.98		Peak			In Restricted Band
7311.00		Н	53.98		Avg			No Emissions Found
12185.00	61.76	Н	73.98	-12.22	Peak	1.06	62	In Restricted Band
12185.00	50.15	Н	53.98	-3.83	Avg	1.06	62	
19496.00		Н	73.98		Peak			In Restricted Band
19496.00		Н	53.98		Avg			No Emissions Found
4874.00	50.06	V	73.98	-23.92	Peak	1.35	79	In Restricted Band
4874.00	35.99	V	53.98	-17.99	Avg	1.35	79	
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No Emissions Found
12185.00	62.02	V	73.98	-11.96	Peak	1.05	23	In Restricted Band
12185.00	51.26	V	53.98	-2.72	Avg	1.05	23	
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11b Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/15/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

			Companible	Liectionic	, 1110. 1 AC	-3 (Lab K	,	
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4924.00	50.52	Н	73.98	-23.46	Peak	1.59	64	In Restricted Band
4924.00	37.27	Н	53.98	-16.71	Avg	1.59	64	
7386.00		Н	73.98		Peak			In Restricted Band
7386.00		Н	53.98		Avg			No Emission Found
40040.00	00.00		70.00	44.40	Deal	4.40	40	
12310.00 12310.00	62.86 51.25	H	73.98 53.98	-11.12 -2.73	Peak Avg	1.13 1.13	46 46	In Restricted Band
	01120		00.00	=	7.1.9			
19696.00		Н	73.98		Peak			In Restricted Band
19696.00		Н	53.98		Avg			No Emissions Found
22158.00		Н	73.98		Peak			In Restricted Band
22158.00		H	53.98		Avg			No Emissions Found
4924.00		V	73.98		Peak			In Restricted Band
4924.00		V	53.98		Avg			No emissions found
7386.00		V	73.98		Peak			In Restricted Band
7386.00		V	53.98		Avg			No Emission Found
12310.00	62.24	V	73.98	-11.74	Peak	1.36	313.5	In Restricted Band
12310.00	50.72	V	53.98	-3.26	Avg	1.36	313.5	
19696.00		V	73.98		Peak			In Restricted Band
19696.00		V	53.98		Avg			No Emissions Found
22158.00		V	73.98		Peak			In Restricted Band
22158.00		V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

	1	·	Companisi	Liootioine	1	3-3 (Lab K		
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00		Н	73.98		Peak			In Restricted Band
4824.00		Н	53.98		Avg			No emissions found
12060.00		Н	73.98		Peak			In Restricted Band
12060.00		Н	53.98		Avg			No emissions found
14472.00		Н	73.98		Peak			In Restricted Band
14472.00		Н	53.98		Avg			No emissions found
19296.00		Н	73.98		Peak			In Restricted Band
19296.00		Н	53.98		Avg			No Emissions Found
4824.00		V	73.98		Peak			In Restricted Band
4824.00		V	53.98		Avg			No emissions found
42000 00		V	70.00		Dools			1.0 10. 1
12060.00			73.98		Peak			In Restricted Band
12060.00		V	53.98		Avg			No emissions found
14472.00		V	73.98		Peak			In Restricted Band
14472.00		V	53.98		Avg			No emissions found
19296.00		V	73.98		Peak			In Restricted Band
19296.00		V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

		Ť	- Cimpaniore		5, 11101 1 7 10	-3 (Lab K)		
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00	49.58	Н	73.98	-24.40	Peak	1.08	0	In Restricted Band
4874.00	35.81	Н	53.98	-18.17	Avg	1.08	0	
7311.00		Н	73.98		Peak			In Restricted Band
7311.00		Н	53.98		Avg			No Emissions Found
12185.00	68.87	Н	73.98	-5.11	Peak	1.01	11.25	In Restricted Band
12185.00	53.11	Н	53.98	-0.87	Avg	1.01	11.25	
19496.00		Н	73.98		Peak			In Restricted Band
19496.00		Н	53.98		Avg			No Emissions Found
4874.00	52.33	V	73.98	-21.65	Peak	1.05	288	In Restricted Band
4874.00	38.91	V	53.98	-15.07	Avg	1.05	288	
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No Emissions Found
12185.00	67.25	V	73.98	-6.73	Peak	2.47	359	In Restricted Band
12185.00	51.91	V	53.98	-2.07	Avg	2.47	359	
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation 9/10/2015 Date:

EUT: Modular Transmitter Lab:

Test

ATWINC1500-MR210UB Model: **Torey Oliver** ENG:

Mode: 802.11g

Compatible Electronics Inc. EAC-3 (Lab R)

F			•		Peak /	Ant.	Table	
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	QP / Avg	Height (m)	Angle (deg)	Comments
4924.00		Н	73.98		Peak			In Restricted Band
4924.00		Н	53.98		Avg			No emissions found
7386.00		Н	73.98		Peak			In Restricted Band
7386.00		Н	53.98		Avg			No Emissions Found
12310.00		Н	73.98		Peak			In Restricted Band
12310.00		Н	53.98		Avg			No emissions found
40000 00			70.00		D 1			
19696.00		H	73.98		Peak			In Restricted Band
19696.00		Н	53.98		Avg			No Emissions Found
22158.00		Н	73.98		Peak			In Dootrioted Dand
22158.00		Н	53.98		Avg			In Restricted Band No Emissions Found
22130.00		11	33.90		Avy			NO EMISSIONS FOUND
4924.00	47.29	V	73.98	-26.69	Peak	3.79	108	In Restricted Band
4924.00	34.81	V	53.98	-19.17	Avg	3.79	108	
7386.00		V	73.98		Peak			In Restricted Band
7386.00		V	53.98		Avg			No Emissions Found
12310.00		V	73.98		Peak			In Restricted Band
12310.00		V	53.98		Avg			No emissions found
19696.00		V	73.98		Peak			In Restricted Band
19696.00		V	53.98		Avg			No Emissions Found
22158.00		V	73.98		Peak			In Restricted Band
22158.00		V	53.98		Avg			No Emissions Found

Test distance

3 meter



(818) 597-0600

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

			Compatible	Electronic	S, INC. FAC	:-3 (Lab R)	
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00		Н	73.98		Peak			In Restricted Band
4824.00		Н	53.98		Avg			No Emissions Found
12060.00		Н	73.98		Peak			In Restricted Band
12060.00		Н	53.98		Avg			No Emissions Found
14472.00		Н	73.98		Peak			In Restricted Band
14472.00		Н	53.98		Avg			No Emissions Found
19296.00		Н	73.98		Peak			In Restricted Band
19296.00		Н	53.98		Avg			No Emissions Found
4824.00		V	73.98		Peak			In Restricted Band
4824.00		V	53.98		Avg			No Emissions Found
12060.00		V	73.98		Peak			In Restricted Band
12060.00		V	53.98		Avg			No Emissions Found
14472.00		V	73.98		Peak			In Restricted Band
14472.00		V	53.98		Avg			No Emissions Found
19296.00		V	73.98		Peak			In Restricted Band
19296.00		V	53.98		Avg			No Emissions Found

Test distance



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/16/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

			Companion	LICCHOING	30, 11101 1 71	0 0 (Eas		
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00		Н	73.98		Peak			In Restricted Band
4874.00		Н	53.98		Avg			No emissions found
7311.00		Н	73.98		Peak			In Restricted Band
7311.00		Н	53.98		Avg			No emissions found
12185.00	66.49	Н	73.98	-7.49	Peak	1.08	46.25	In Restricted Band
12185.00	50.16	Н	53.98	-3.82	Avg	1.08	46.25	
19496.00		Н	73.98		Peak			In Restricted Band
19496.00		Н	53.98		Avg			No Emissions Found
					1 Miles 17			
4874.00		V	73.98		Peak			In Restricted Band
4874.00		V	53.98		Avg			No emissions found
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No emissions found
12185.00	68.50	V	73.98	-5.48	Peak	1	11.25	In Restricted Band
12185.00	52.25	V	53.98	-1.73	Avg	1	11.25	
40400.00		\/	72.00		Dools			1.5 15
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No emissions found

Test distance





HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation Date: 9/11/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

Companie Electronics, Inc. FAC-3 (Lab K)										
Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments		
4924.00		Н	73.98		Peak			In Restricted Band		
4924.00		Н	53.98		Avg			No emissions found		
7386.00		Н	73.98		Peak			In Restricted Band		
7386.00		Н	53.98		Avg			No Emissions Found		
12310.00		Н	73.98		Peak			In Restricted Band		
12310.00		Н	53.98		Avg			No emissions found		
19696.00		Н	73.98		Peak			In Restricted Band		
19696.00		Н	53.98		Avg			No Emissions Found		
22158.00		Н	73.98		Peak			In Restricted Band		
22158.00		Н	53.98		Avg			No Emissions Found		
4924.00		V	73.98		Peak			In Restricted Band		
4924.00		V	53.98		Avg			No emissions found		
7386.00		V	73.98		Peak			In Restricted Band		
7386.00		V	53.98		Avg			No Emissions Found		
12310.00		V	73.98		Peak			In Restricted Band		
12310.00		V	53.98		Avg			No emissions found		
19696.00		V	73.98		Peak			In Restricted Band		
19696.00		V	53.98		Avg			No Emissions Found		
					_					
22158.00		V	73.98		Peak			In Restricted Band		
22158.00		V	53.98		Avg			No Emissions Found		

Test distance





EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL FREQUENCY BAND AT BAND EDGES

DATA SHEETS



802.11b Mode

BAND EDGES- VERTICAL

FCC 15.247

Company: Atmel Corporation Date: 9/16/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	109.23	V			Peak	2.82	160	Fundamental of Low Channel
2396.17	78.67	V	89.23	-10.56	Delta	2.82	160	From Peak
2389.16	69.43	V	73.98	-4.55	Peak	2.82	160	
2389.16	40.40	V	53.98	-13.58	Avg	2.82	160	
2462.00	112.71	V			Peak	2.74	355	Fundamental of High Channel
2495.89	69.95	V	73.98	-4.03	Peak	2.74	355	
2495.89	40.11	V	53.98	-13.87	Avg	2.74	355	

Test distance





BAND EDGES- HORIZONTAL

FCC 15.247

Company: Atmel Corporation Date: 9/16/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: torey Oliver

Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)


Companie Licentomos, men Ac o (Lub K)										
Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments		
2412.00	116.49	Ι			Peak	1.2	309	Fundamental of Low Channel		
2396.42	86.93	Ι	96.49	-9.56	Delta	1.2	309	From Peak		
2388.66	69.81	Ι	73.98	-4.17	Peak	1.2	309			
2388.66	46.32	Η	53.98	-7.66	Avg	1.2	309			
2462.00	115.91	Н			Peak	1.17	28	Fundamental of High Channel		
2488.28	66.21	Н	73.98	-7.77	Peak	1.17	28			
2488.28	42.66	Η	53.98	-11.32	Avg	1.17	28			

Test distance





LOWER BAND EDGE

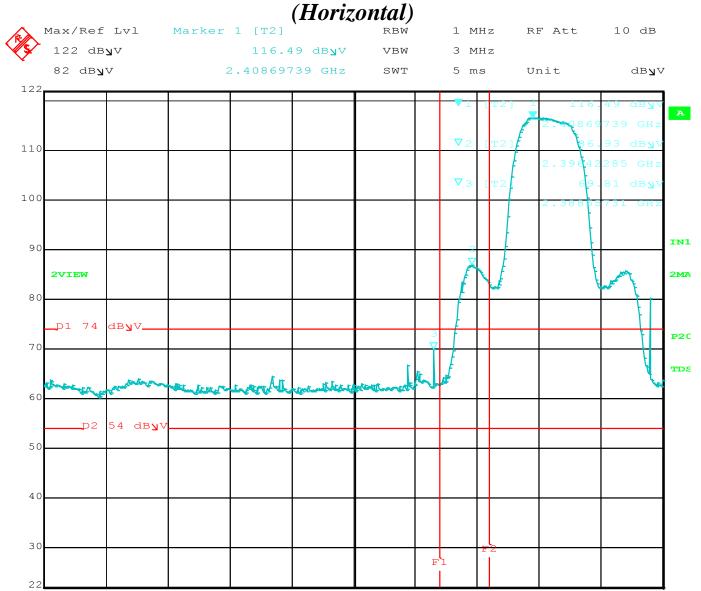

12.5 MHz/

Title: ATWINC1500

Center 2.3725 GHz

Comment A: Lower Band Edge B Mode Horizontal


Date: 16.SEP.2015 16:22:52



Span 125 MHz



LOWER BAND EDGE (Vertical)

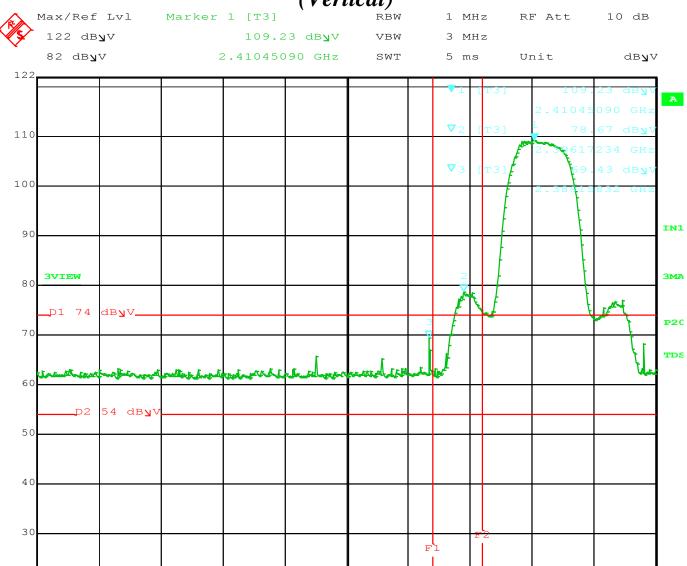

12.5 MHz/

Title: ATWINC1500

Center 2.3725 GHz

Comment A: Lower Band Edge B Mode Vertical


Date: 16.SEP.2015 16:25:42



Span 125 MHz



UPPER BAND EDGE

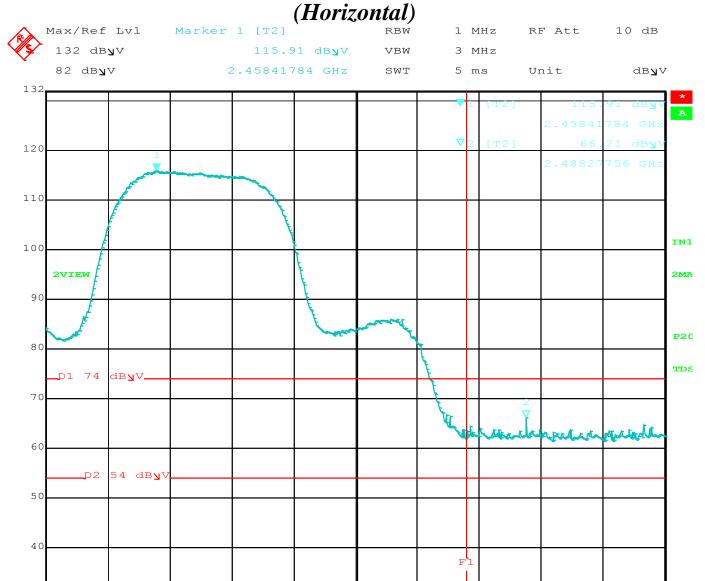

5 MHz/

Title: ATWINC1500

Center 2.4745 GHz

Comment A: Upper Band Edge Horizontal B Mode 2462 Mhz


Date: 16.SEP.2015 16:12:19



Span 50 MHz



UPPER BAND EDGE (Vertical)

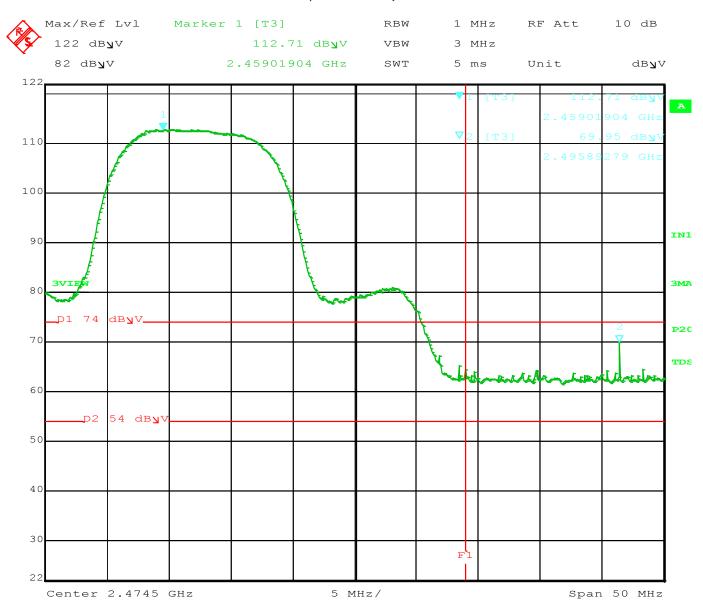

Title: ATWINC1500

Comment A: Upper Band Edge Vertical B Mode 2462 Mhz

Date: 16.SEP.2015 16:06:56





802.11g Mode

BAND EDGES- VERTICAL

FCC 15.247

Company: Atmel Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: F

Test

Model: ATWINC1500-MR210UB ENG: Matt Harrison

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments		
2412.00	102.07	V	-	-	Peak	1.56	175	Fundamental of Low Channel		
2399.45	72.84	V	82.07	-9.23	Delta	1.56	175	From Peak		
						7 / 100				
2389.83	59.88	V	73.98	-14.10	Peak	1.56	175			
2389.83	40.08	V	53.98	-13.90	Avg	1.56	175			
							100			
2462.00	103.25	V		\\\	Peak	1.5	165	Fundamental of High Channel		
						100				
2484.36	65.29	V	73.98	-8.69	Peak	1.5	165			
2484.36	41.36	V	53.98	-12.62	Avg	1.5	165			

Test distance





BAND EDGES- HORIZONTAL

FCC 15.247

Company: Atmel Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Matt Harrison

Mode: 802.11g

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	111.75	Η			Peak	1	290	Fundamental of Low Channel
2399.45	82.54	Н	91.75	-9.21	Delta	1	290	From Peak
2389.69	70.77	Н	73.98	-3.21	Peak	1	290	
2389.69	48.17	Н	53.98	-5.81	Avg	1	290	
2462.00	110.48	Н			Peak	1	310	Fundamental of High Channel
2483.50	72.09	Н	73.98	-1.89	Peak	1	310	
2483.50	48.33	Н	53.98	-5.65	Avg	1	310	

Test distance





LOWER BAND EDGE

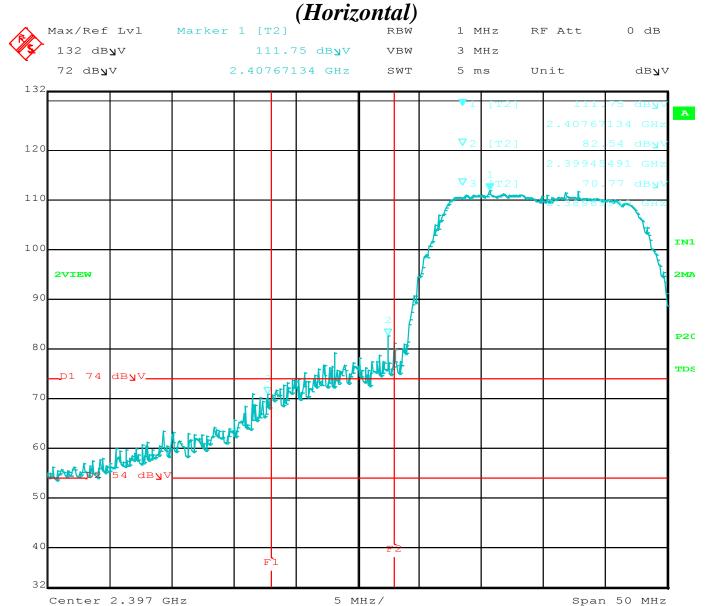

Title: ATWINC1500-MR210UB.


Comment A: LBE, 802.11g, Horizontal.

Date: 10.SEP.2015 09:43:03





LOWER BAND EDGE

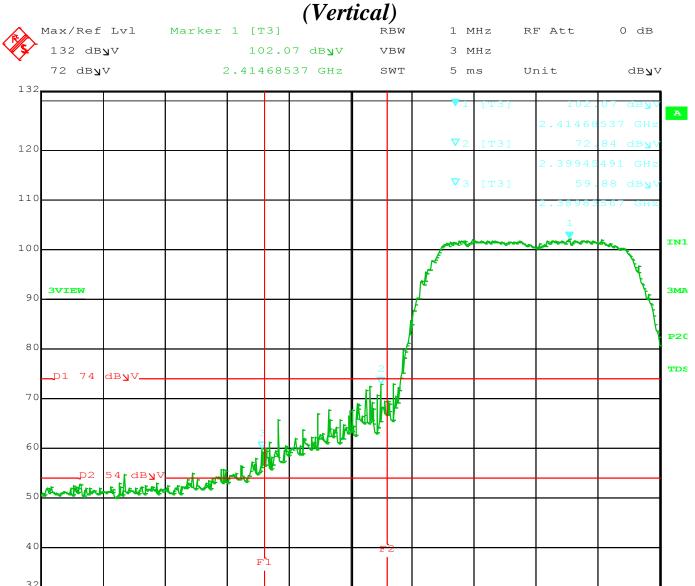

5 MHz/

Title: ATWINC1500-MR210UB.

Comment A: LBE, 802.11g, Vertical.

Date: 10.SEP.2015 09:51:11


Center 2.397 GHz



Span 50 MHz



UPPER BAND EDGE (Horizontal)

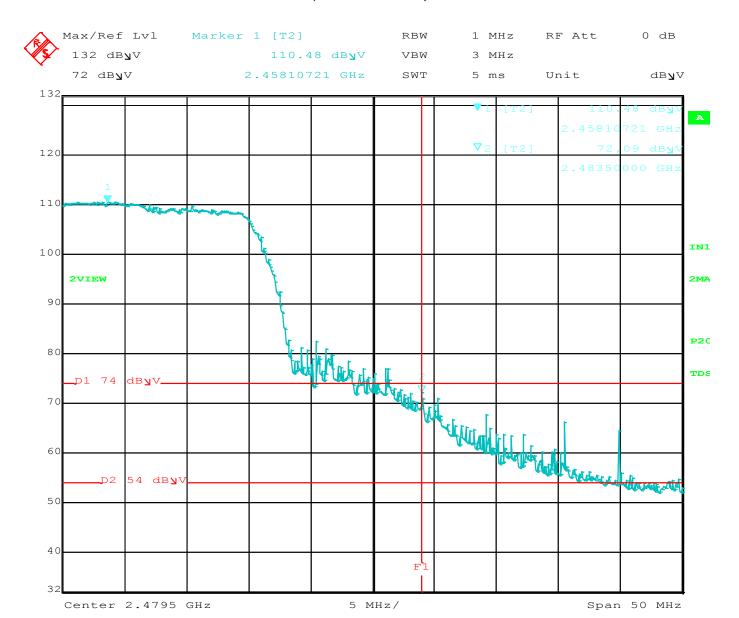

Title: ATWINC1500-MR210UB.


Comment A: UBE, 802.11g, Horizontal.

Date: 10.SEP.2015 10:40:06





UPPER BAND EDGE (Vertical)

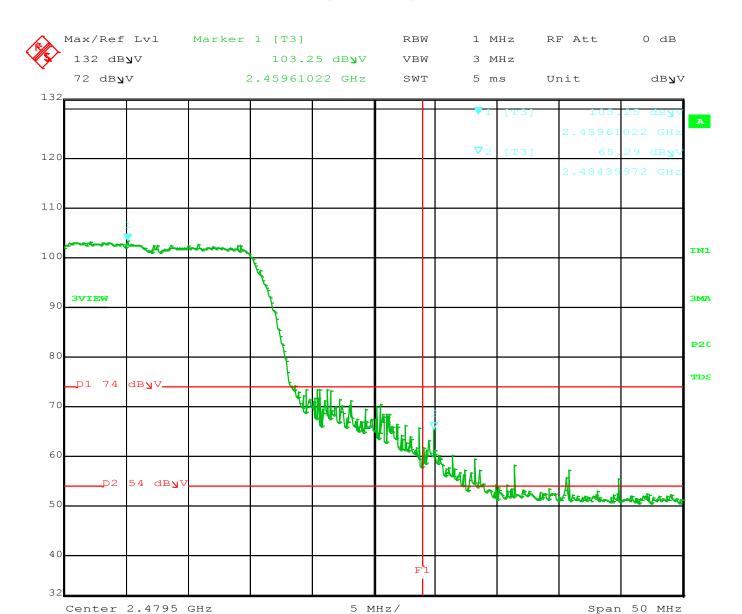

Title: ATWINC1500-MR210UB.

Comment A: UBE, 802.11g, Vertical.

Date: 10.SEP.2015 10:42:19



802.11n Mode

BAND EDGES- VERTICAL

FCC 15.247

Model:

Atmel

ATWINC1500-MR210UB

Company: Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: F

Test

ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)

							7 (_0	,
Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	102.51	V		1	Peak	1.54	175	Fundamental of Low Channel
2397.59	71.97	V	82.51	-10.54	Delta	1.54	175	From Peak
2388.39	59.14	V	73.98	-14.84	Peak	1.54	175	
2388.39	39.70	V	53.98	-14.28	Avg	1.54	175	
2462.00	103.28	V			Peak	1.5	165	Fundamental of High Channel
2483.50	63.09	V	73.98	-10.89	Peak	1.5	165	
2483.50	42.91	V	53.98	-11.07	Avg	1.5	165	

Test distance





BAND EDGES- HORIZONTAL

FCC 15.247

Atmel

Company: Corporation Date: 9/10/2015

EUT: Modular Transmitter Lab: R

Test

Model: ATWINC1500-MR210UB ENG: Torey Oliver

Mode: 802.11n

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBµV)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	111.01	Н			Peak	1	290	Fundamental of High Channel
2398.19	81.96	Н	91.01	-9.05	Delta	1	290	From Peak
2389.73	73.35	Н	73.98	-0.63	Peak	1	290	
2389.73	48.93	Н	53.98	-5.05	Avg	1	290	
2462.00	113.01	Н			Peak	1	310	Fundamental of High Channel
2483.85	72.84	Η	73.98	-1.14	Peak	1	310	
2483.85	49.57	Η	53.98	-4.41	Avg	1	310	

Test distance





LOWER BAND EDGE

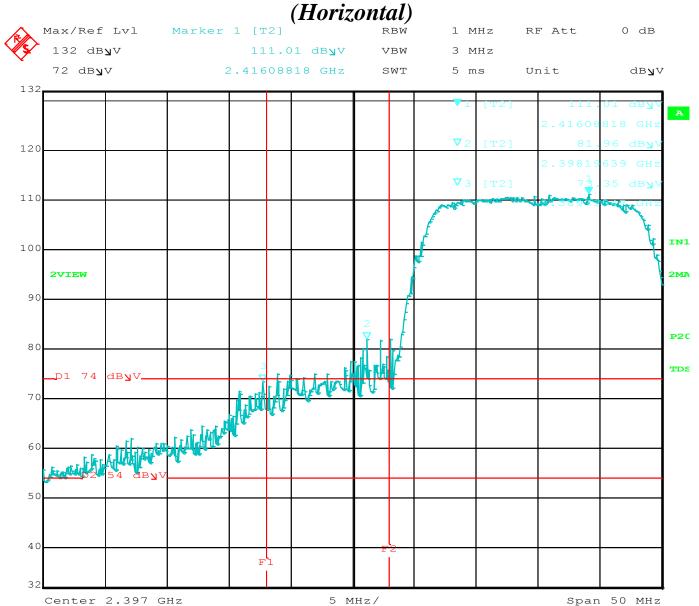

Title: ATWINC1500-MR210UB.


Comment A: LBE, 802.11n, Horizontal.

Date: 10.SEP.2015 10:06:56





LOWER BAND EDGE

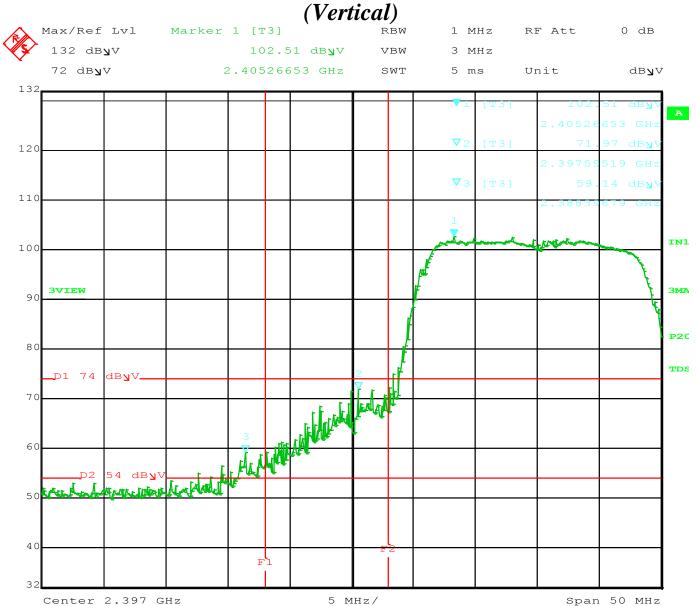

Title: ATWINC1500-MR210UB.


Comment A: LBE, 802.11n, Vertical.

Date: 10.SEP.2015 10:09:28





UPPER BAND EDGE

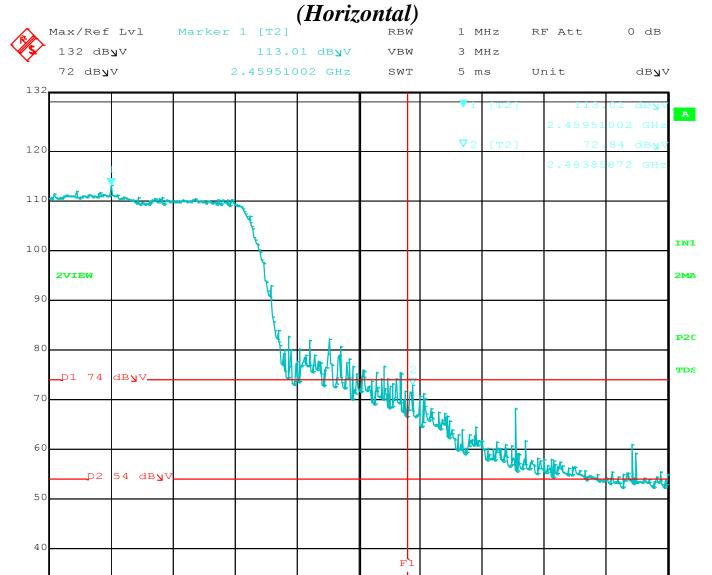

5 MHz/

Title: ATWINC1500-MR210UB.

Comment A: UBE, 802.11n, Horizontal.

Date: 10.SEP.2015 10:49:51


Center 2.4795 GHz



Span 50 MHz



UPPER BAND EDGE (Vertical)

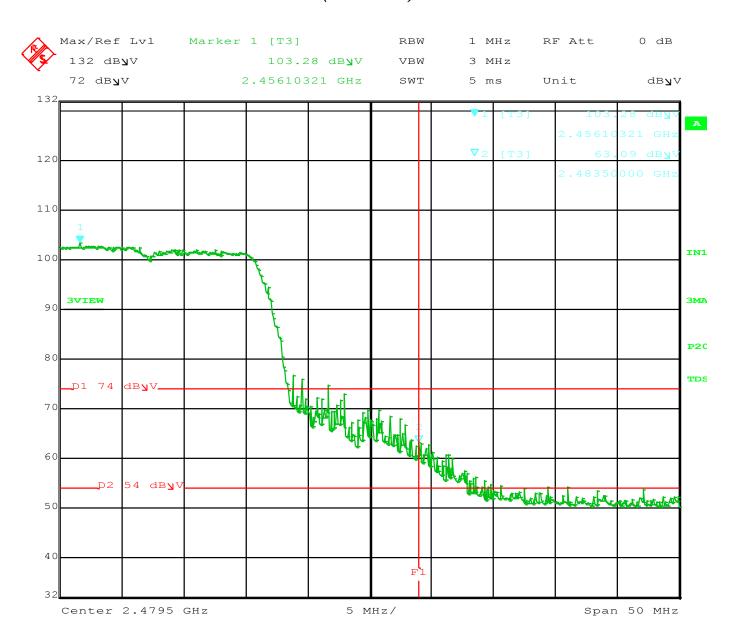

Title: ATWINC1500-MR210UB.

Comment A: UBE, 802.11n, Vertical.

Date: 10.SEP.2015 10:52:36

