5580 MHz

Ratio (dB)	9.754

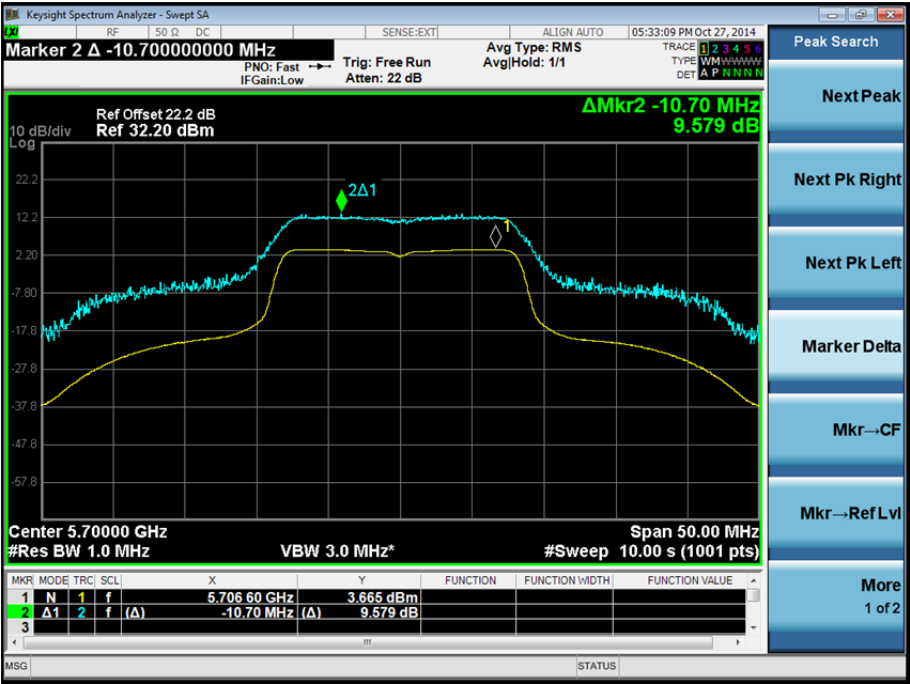## 5700 MHz

Ratio (dB)	9.579

Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.
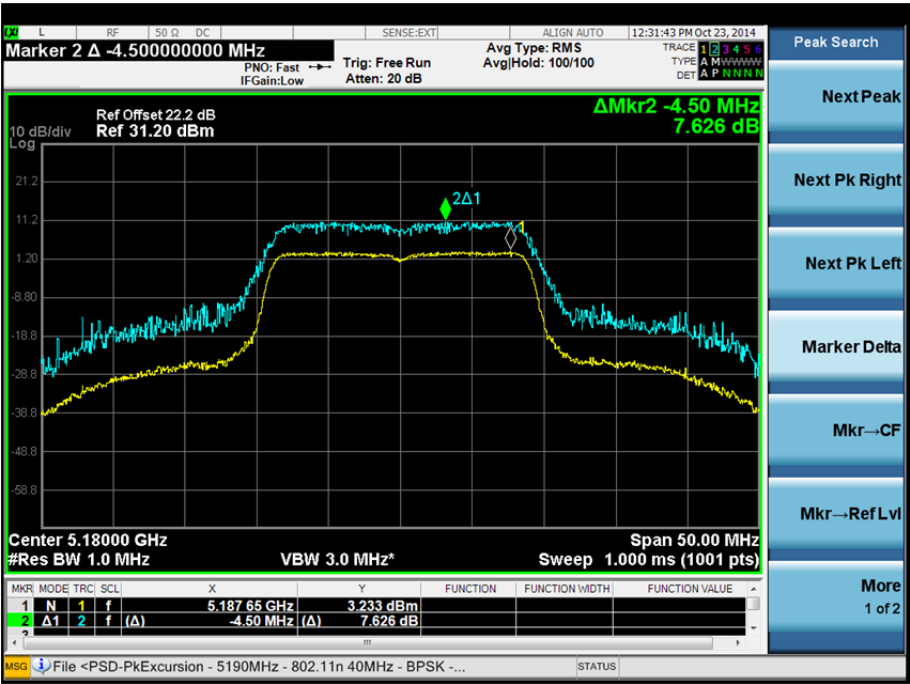
802.11(ac) 20 MHz BW

Frequency Band 1

5180 MHz

Modulation: BPSK

Ratio (dB)	7.626

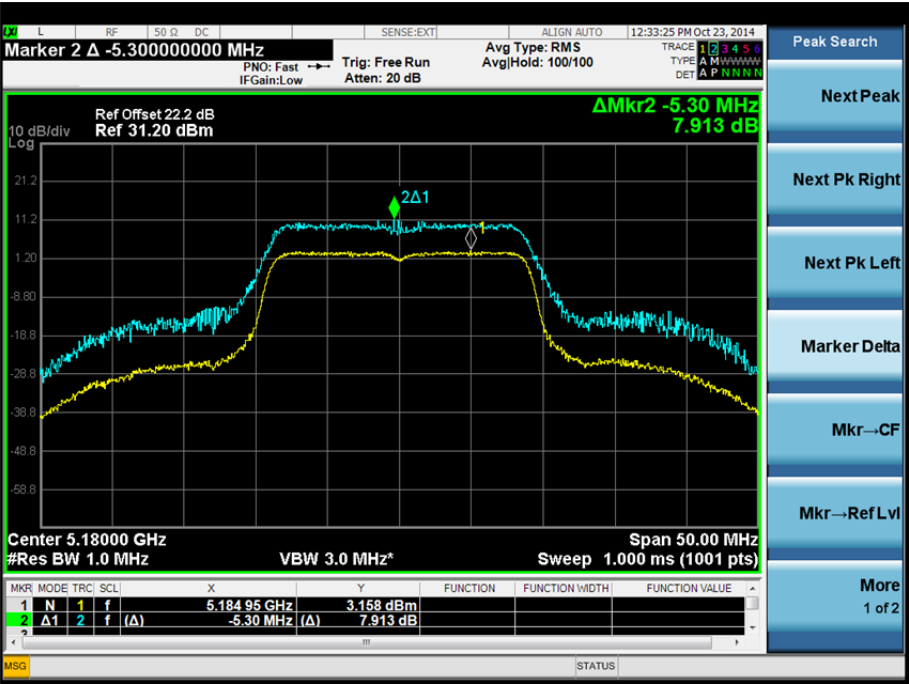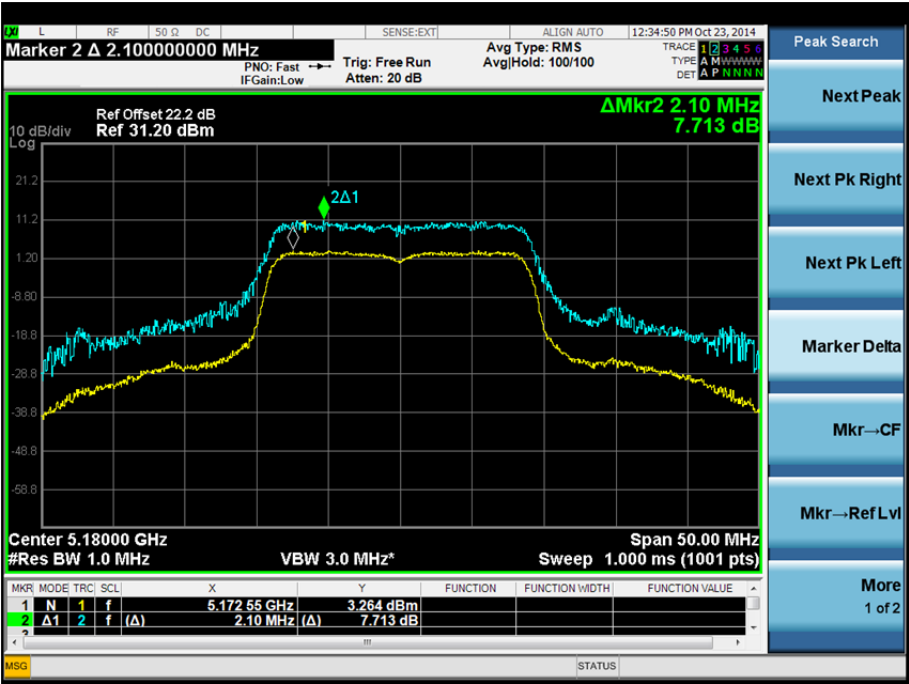Modulation: QPSK

Ratio (dB)	7.913

Modulation: 16-QAM

Ratio (dB)	7.713

Modulation: 64-QAM
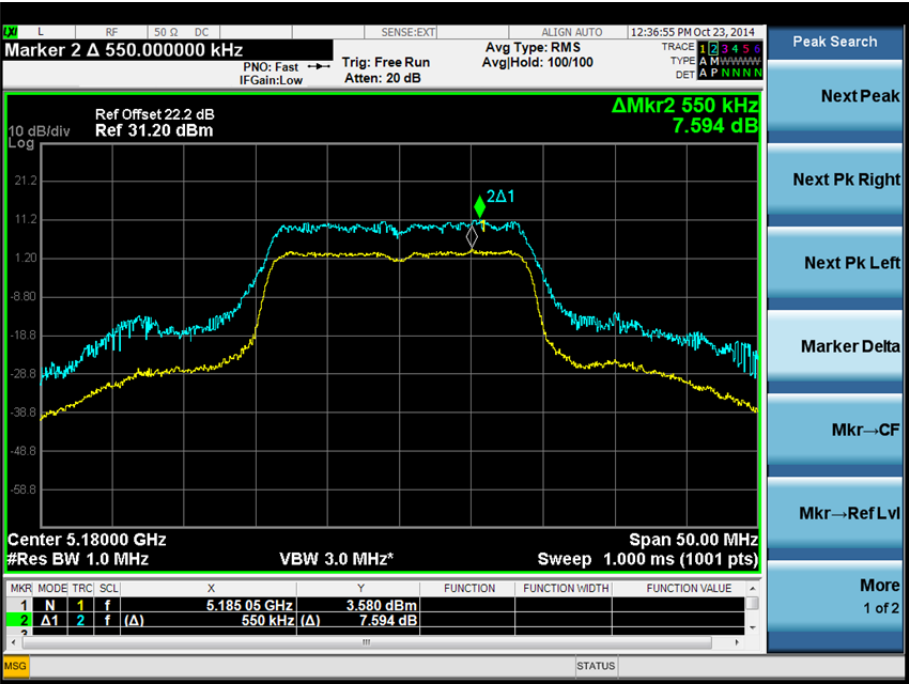
Ratio (dB)	7.594
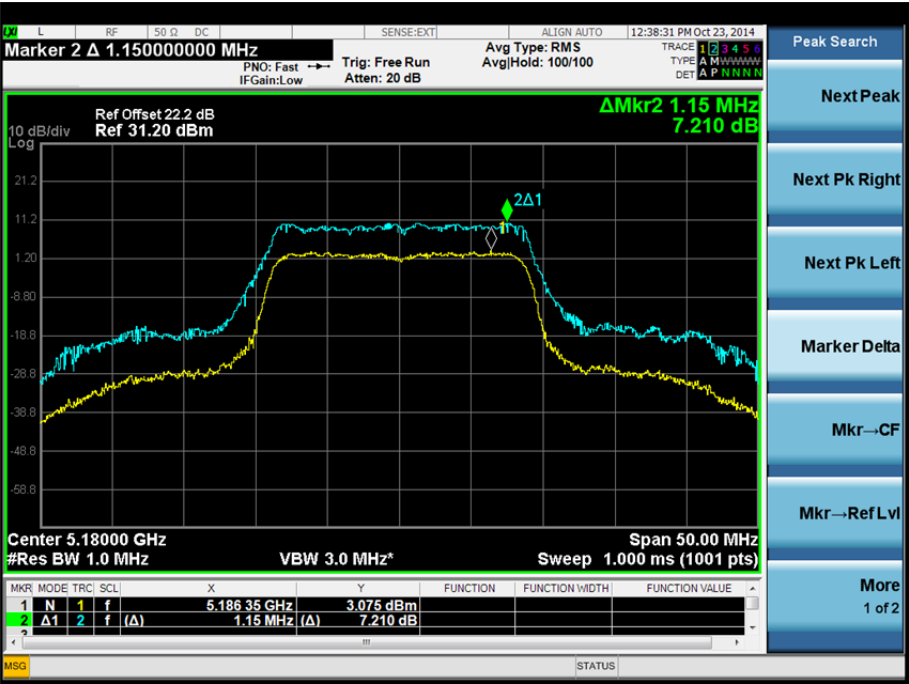
Modulation: 256-QAM

Ratio (dB)	7.210

5220 MHz

Ratio (dB)	8.030
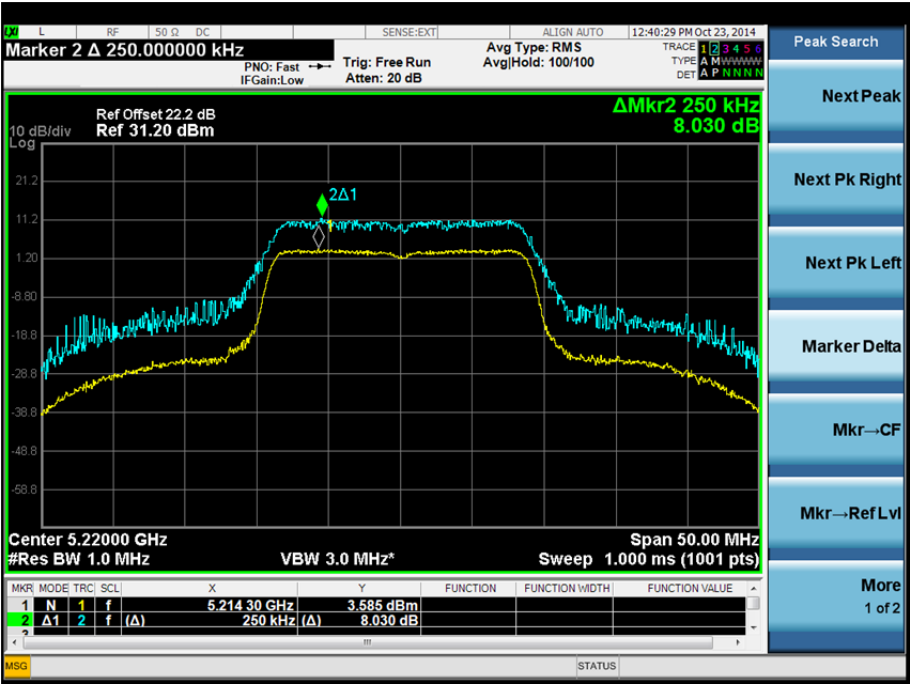
5240 MHz

Ratio (dB)	7.601
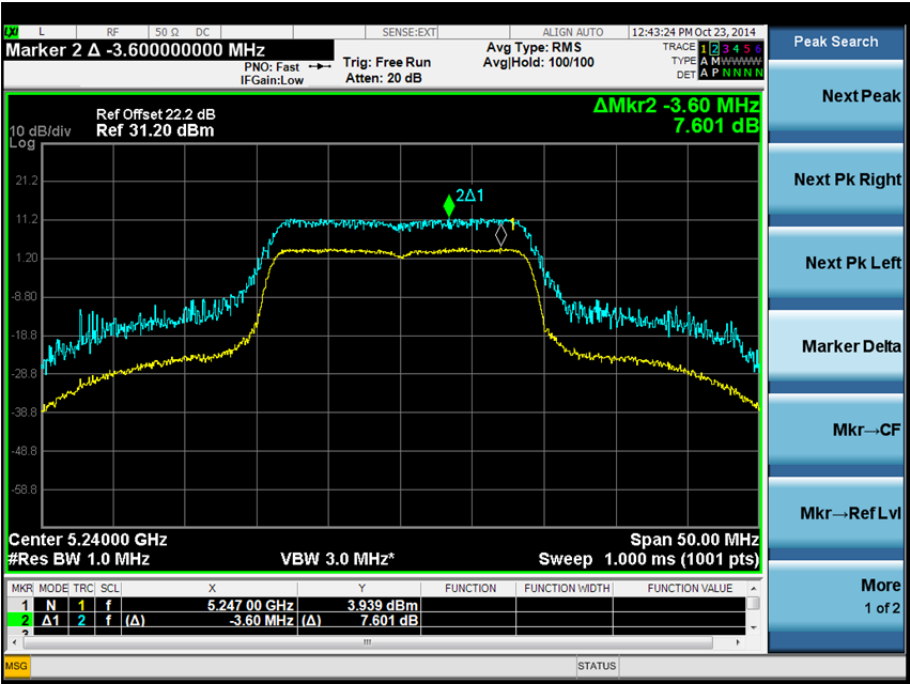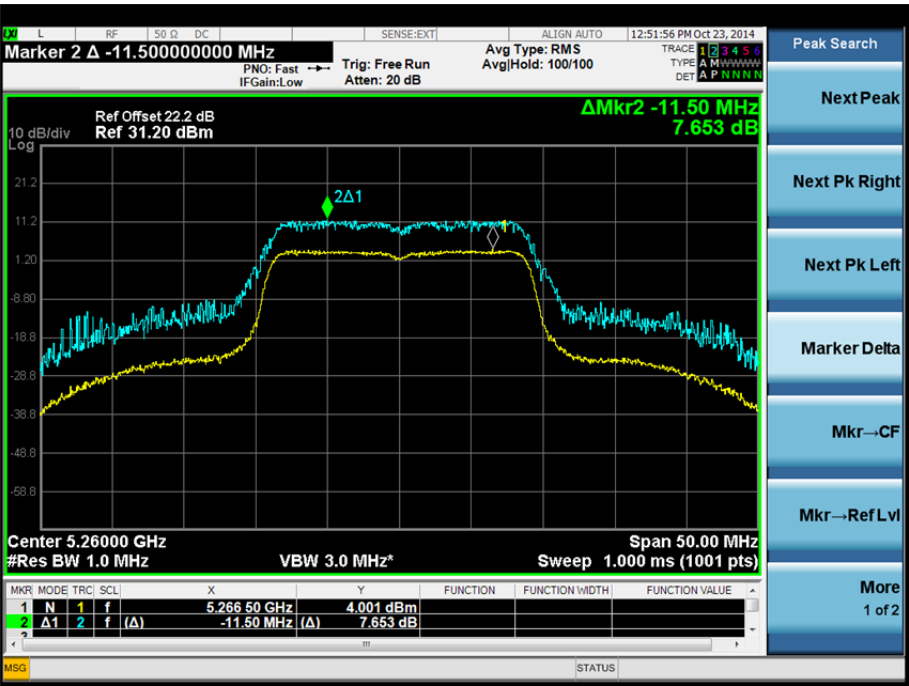
Frequency Band 2

5260 MHz

Modulation: BPSK

Ratio (dB)	7.653
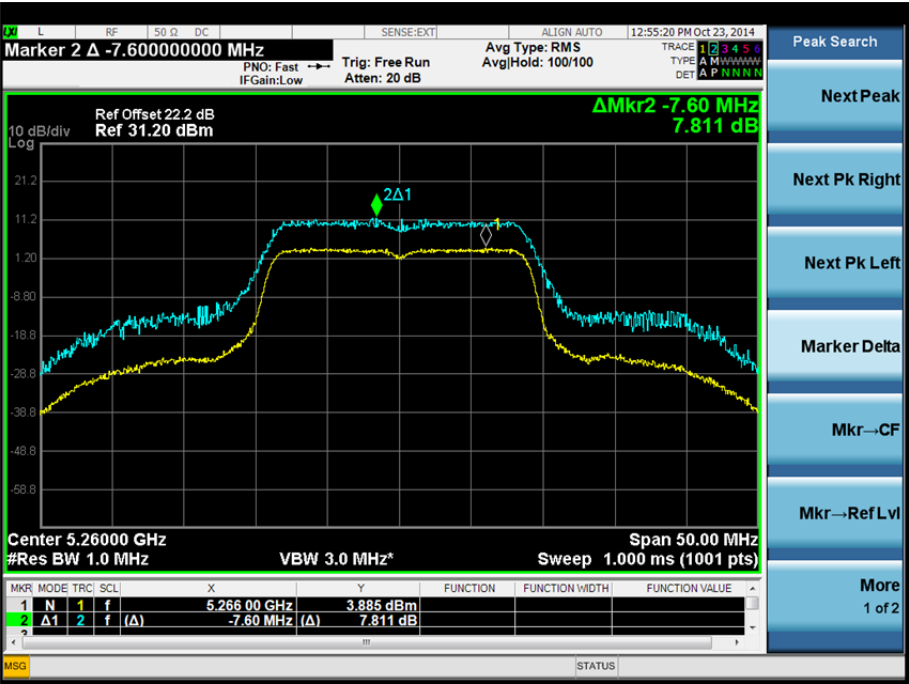
Modulation: QPSK

Ratio (dB)	7.811

Modulation: 16-QAM

Ratio (dB)	7.789

Modulation: 64-QAM

Ratio (dB)	7.550

Modulation: 256-QAM

Ratio (dB)	7.615

5300 MHz

Ratio (dB)	8.042

5320 MHz
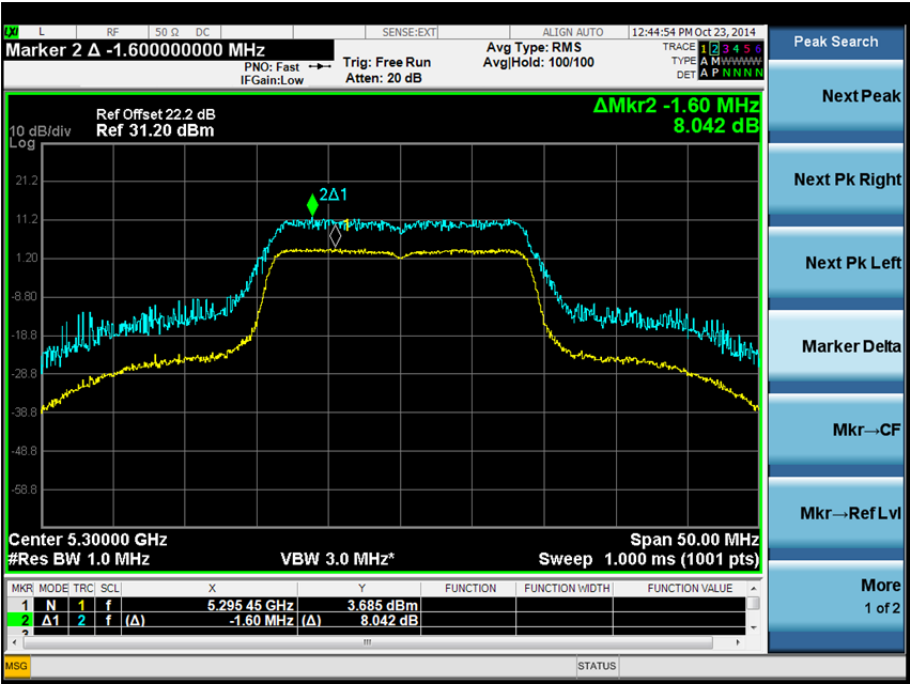
Ratio (dB)	7.962

Frequency Band 3

5500 MHz

Modulation: BPSK

Ratio (dB)	7.906
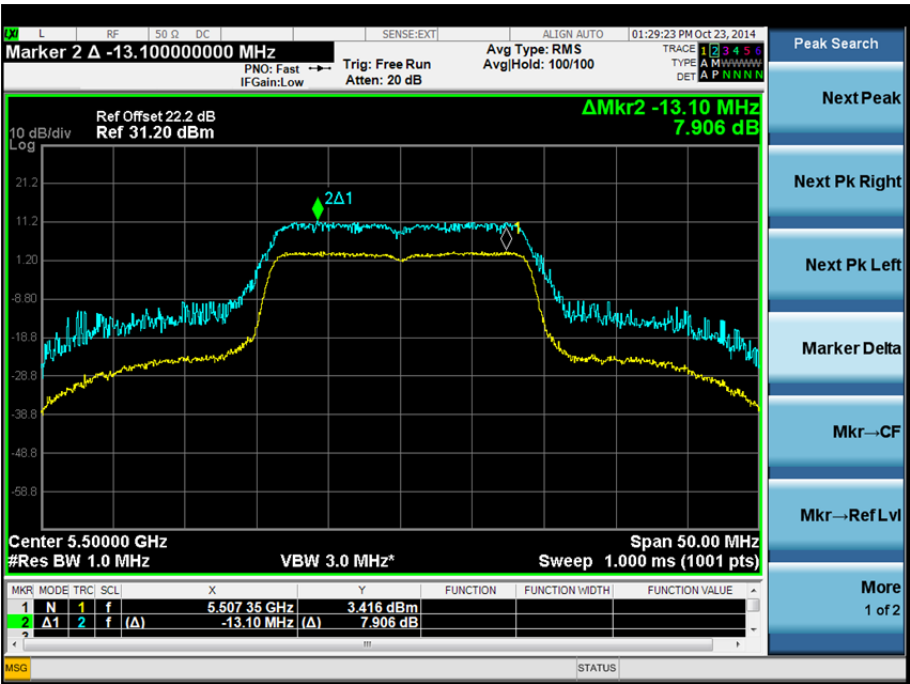
Modulation: QPSK

Ratio (dB)	7.918
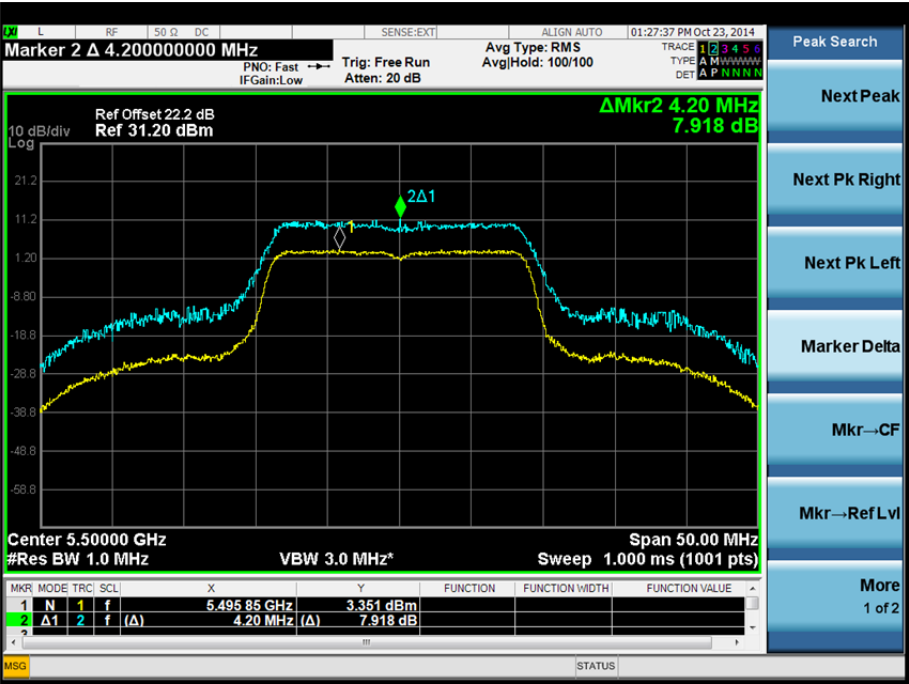
Modulation: 16-QAM

Ratio (dB)	7.802

Modulation: 64-QAM

Ratio (dB)	7.846

Modulation: 256-QAM

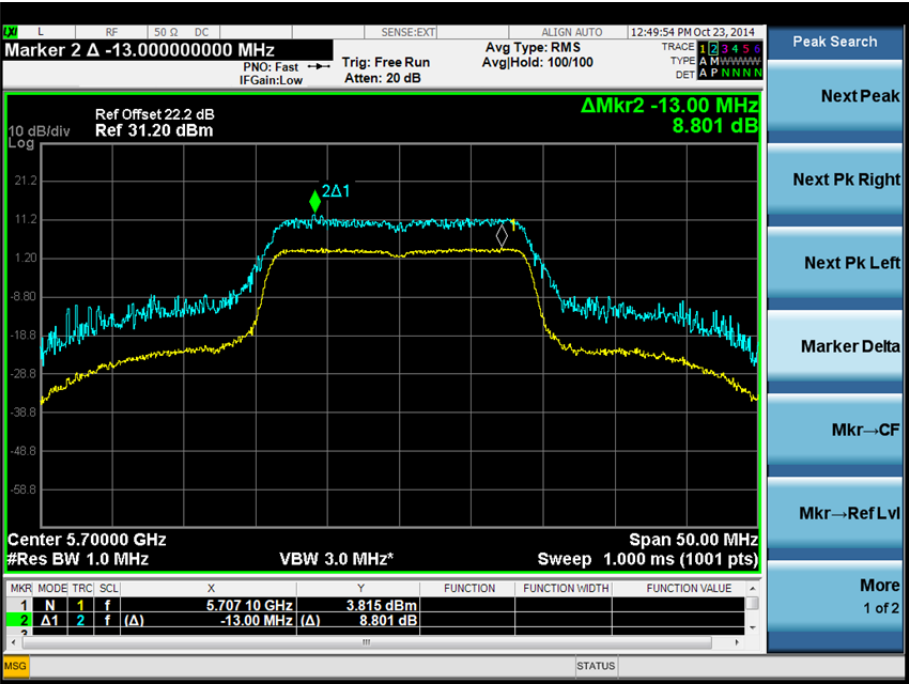| Ratio (dB)	8.772

5580 MHz

Ratio (dB)	7.551

5700 MHz

Ratio (dB)	8.801

Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

802.11(n) 20 MHz BW

Frequency Band 1

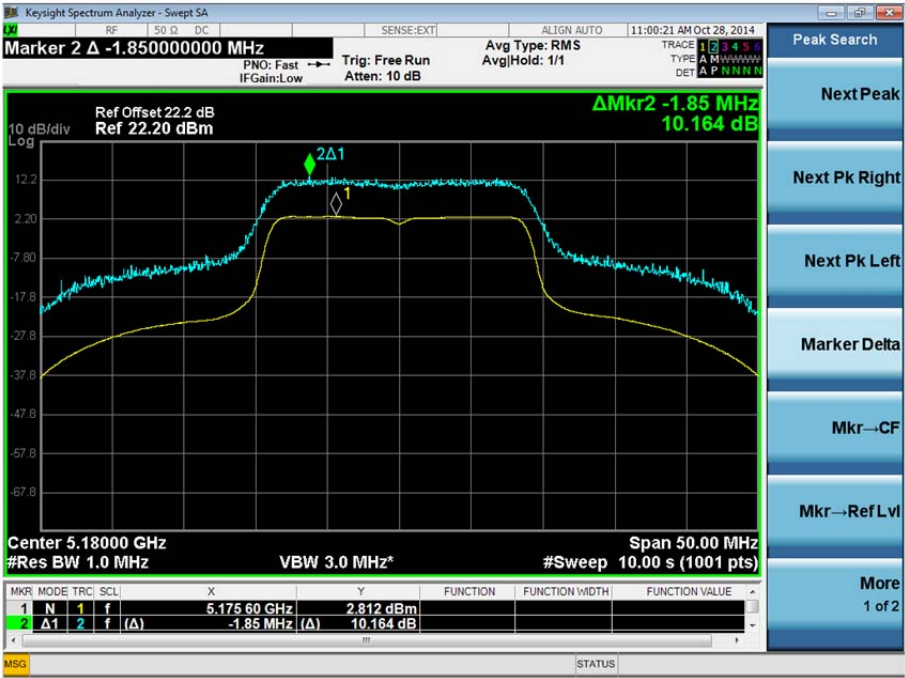5180 MHz

Modulation: BPSK

Ratio (dB)	9.343

Modulation: QPSK

Ratio (dB)	10.164

Modulation: 16QAM

Ratio (dB)	10.614
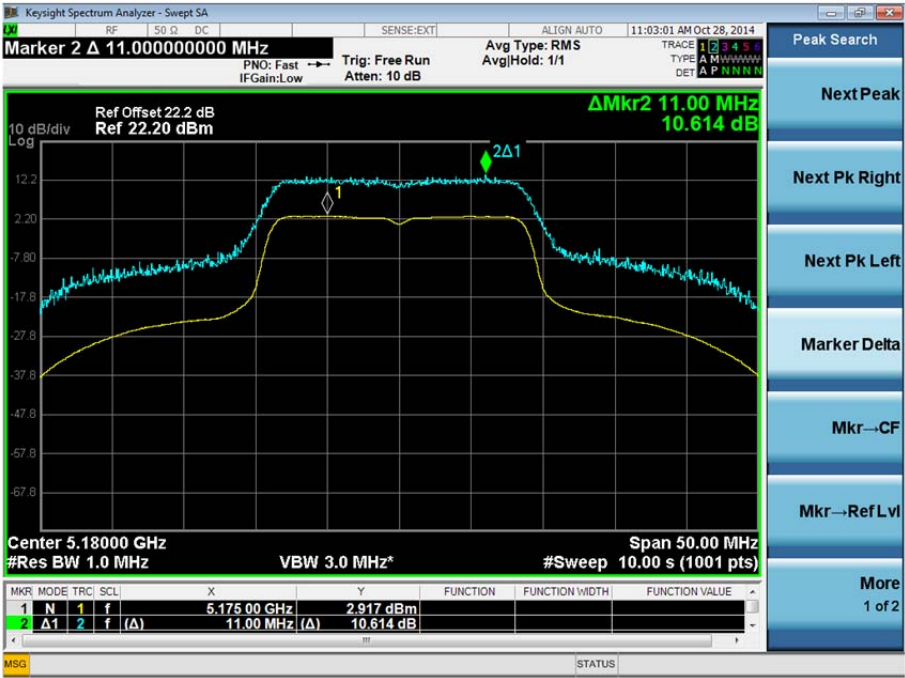
Modulation: 64QAM

Ratio (dB)	10.510

5220 MHz

Ratio (dB)	9.639

5240 MHz

Ratio (dB)	9.598
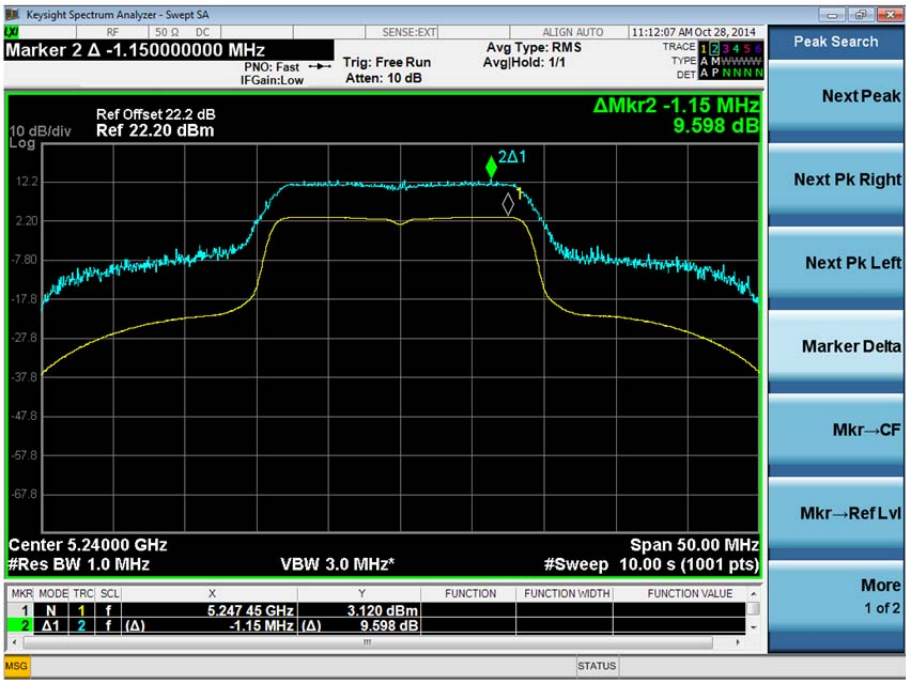
Frequency Band 2

5260 MHz

Modulation: BPSK

Ratio (dB)	9.459

Modulation: QPSK

Ratio (dB)	9.960
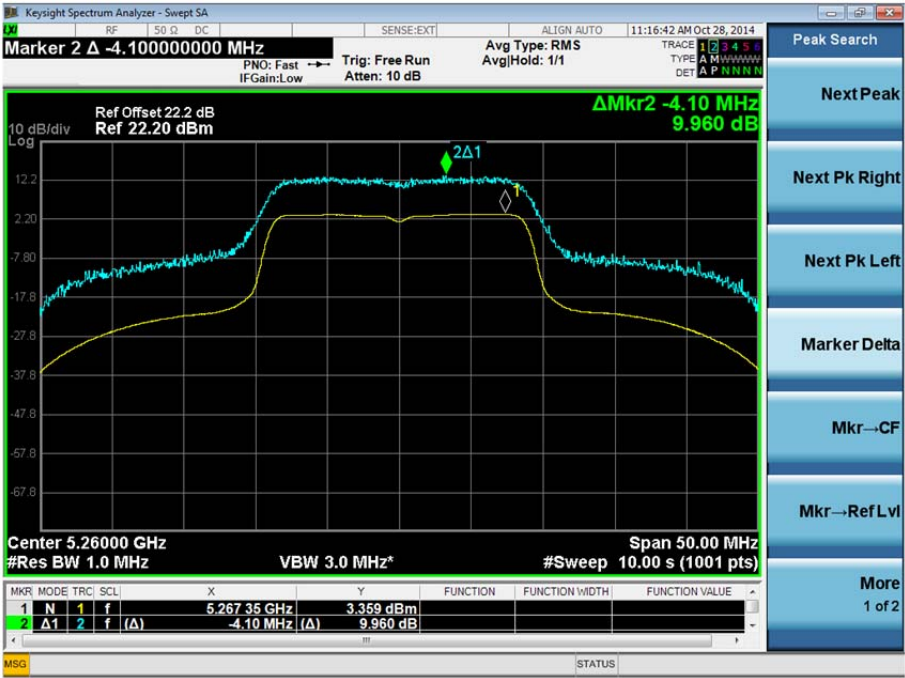
Modulation: 16QAM

Ratio (dB)	10.108
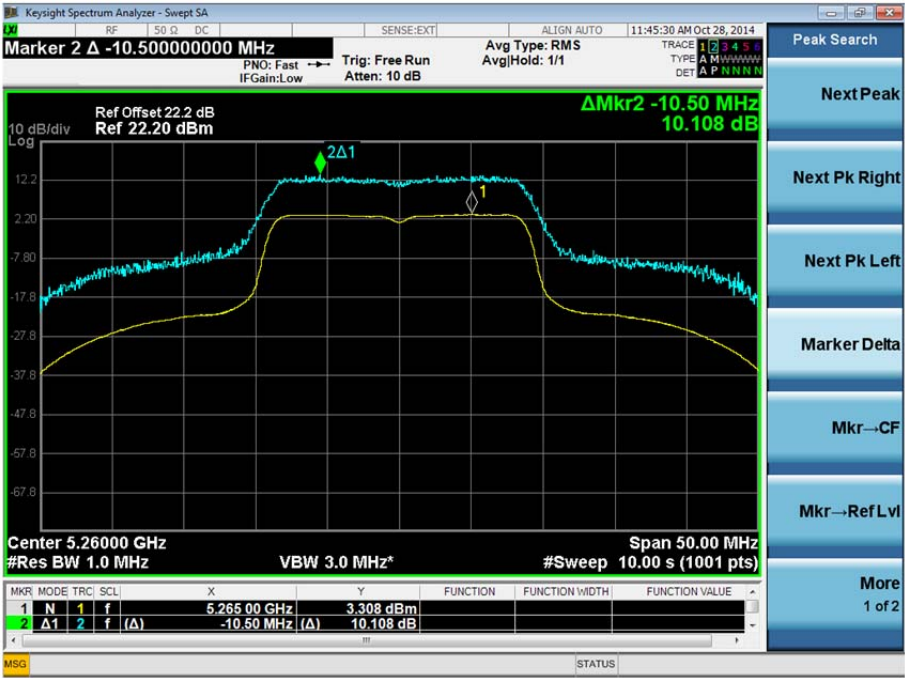
Modulation: 64QAM
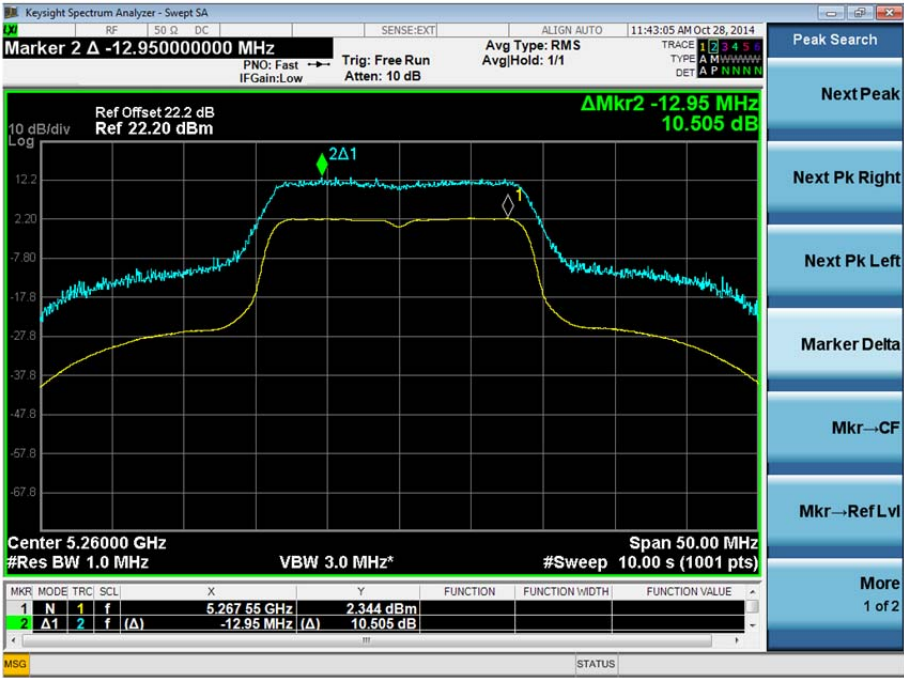
Ratio (dB)	10.505

5300 MHz
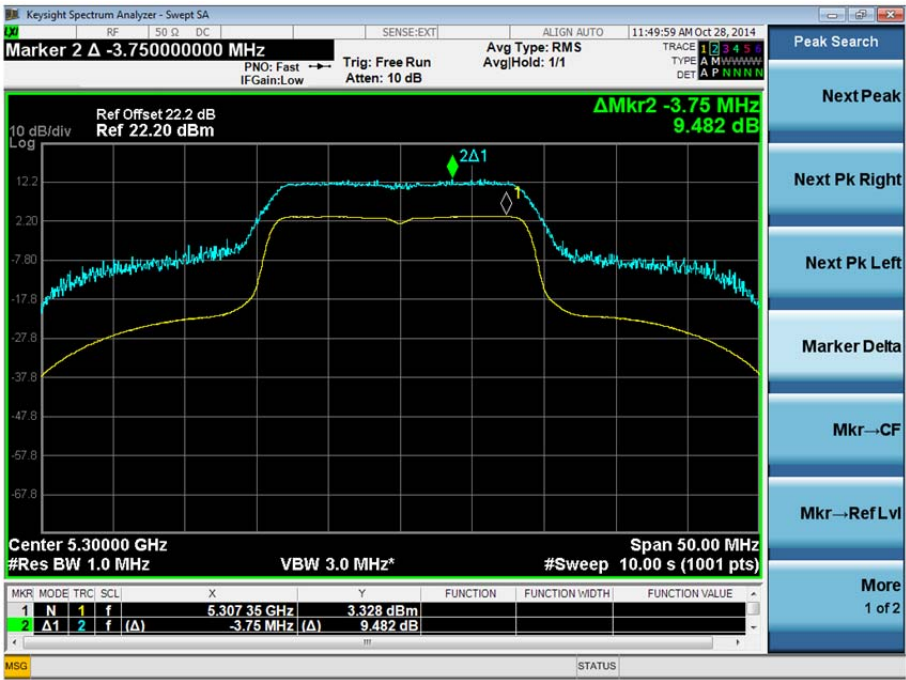
Ratio (dB)	9.482

5320 MHz

Ratio (dB)	9.792

Frequency Band 3

5500 MHz

Modulation: BPSK

Ratio (dB)	9.918
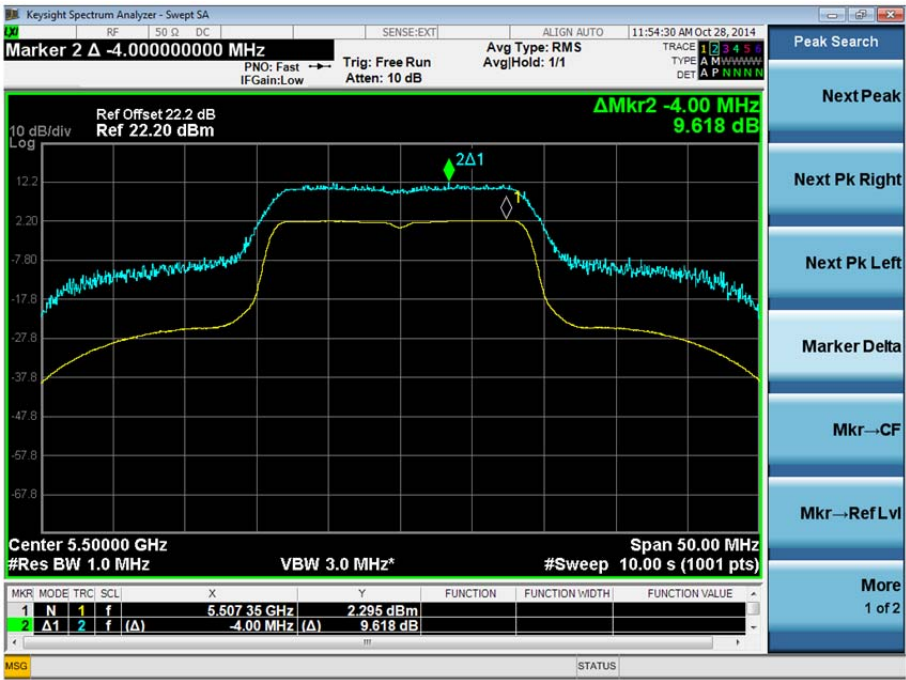
Modulation: QPSK

Ratio (dB)	10.319
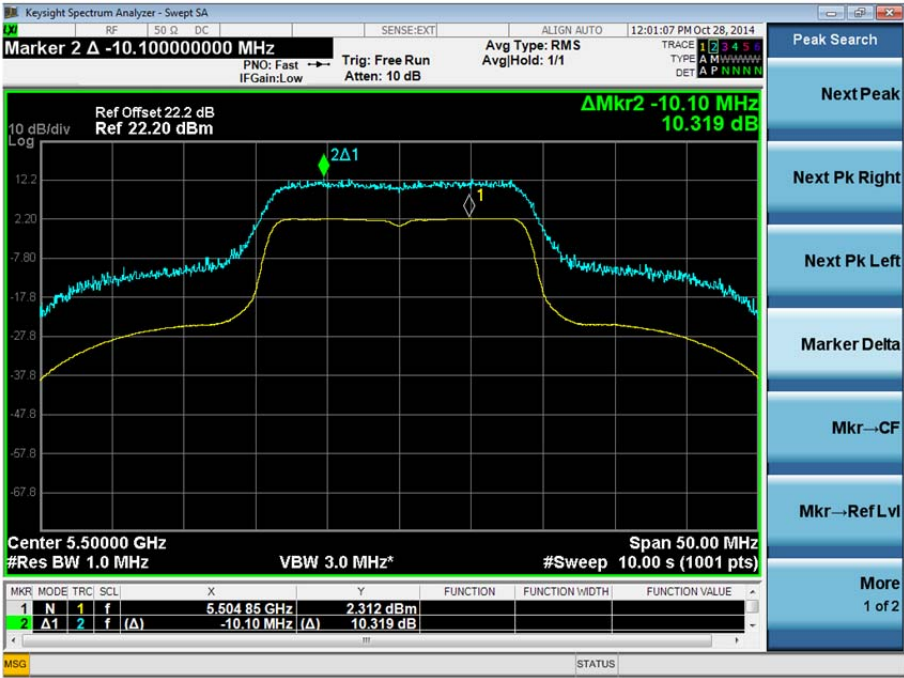
Modulation: 16QAM

Ratio (dB)	11.061
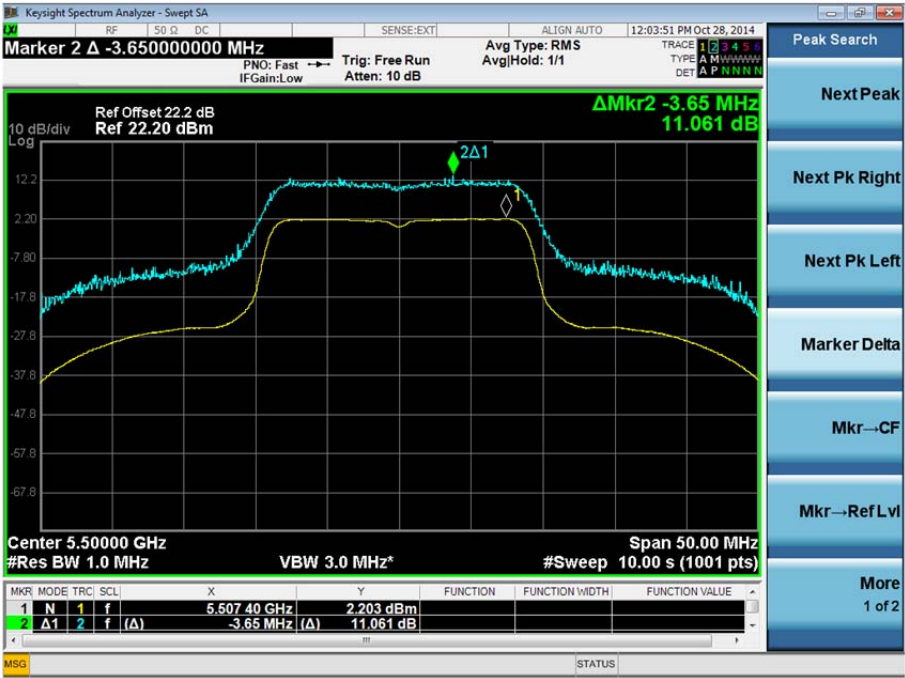
Modulation: 64QAM

Ratio (dB)	9.103

5580 MHz

Ratio (dB)	9.599
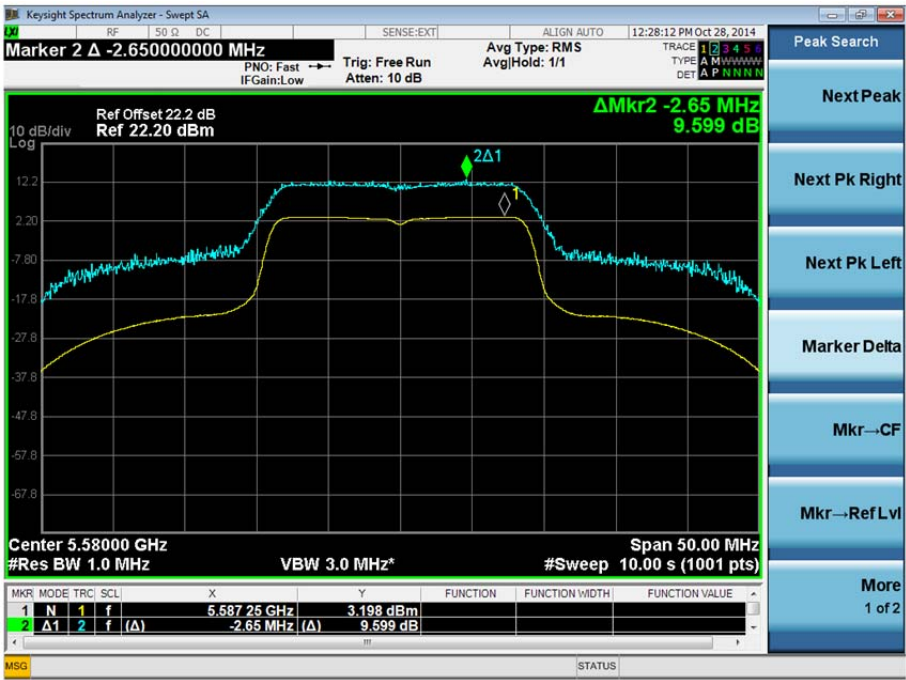
5700 MHz

Ratio (dB)	9.730

Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.
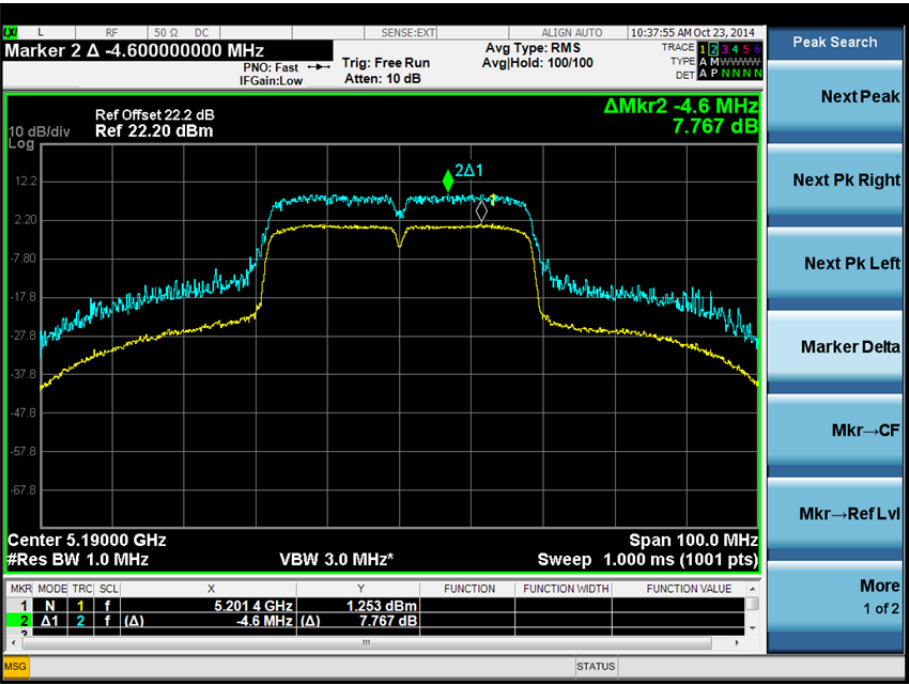
802.11(n) 40 MHz BW

Frequency Band 1

5190 MHz

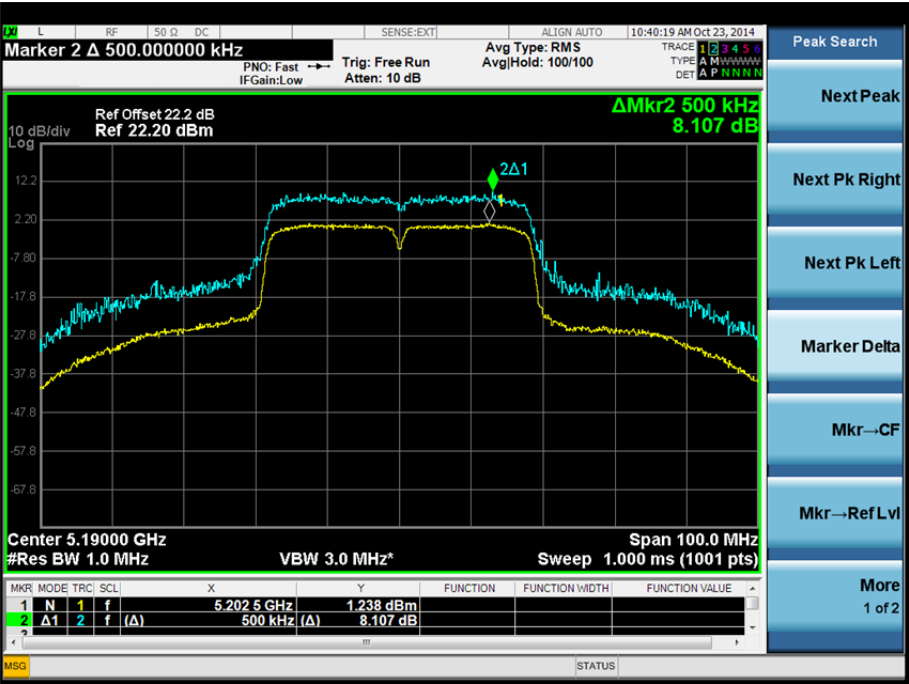Modulation: BPSK

Ratio (dB)	7.767

Modulation: QPSK

Ratio (dB)	8.107

Modulation: 16-QAM

Ratio (dB)	8.247

Modulation: 64-QAM

Ratio (dB)	8.283