



Full

TEST REPORT

No. I14D00033-RFW

For

Client : Moxee Technologies

**Production : WCDMA/GSM (GPRS) Dual-Mode
Digital Mobile Phone**

Model Name : X1

FCC ID: 2ADHZ-MOXEEEX1

Hardware Version: MBV1.0

Software Version: MOXEE_X1_V1.1

Issued date: 2014-11-28

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I14D00033-RFW	00	2014-11-28	Initial creation of test report

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION	5
1.2.	TESTING ENVIRONMENT	5
1.3.	PROJECT DATA	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION	5
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
4.	REFERENCE DOCUMENTS	8
4.1.	REFERENCE DOCUMENTS FOR TESTING	8
5.	SUMMARY OF TEST RESULTS	9
5.1.	NOTES	10
5.2.	STATEMENTS	11
6.	TEST RESULT	12
6.1.	MAXIMUM OUTPUT POWER	12
6.1.1.	MAXIMUM PEAK OUTPUT POWER-CONDUCTED	12
6.1.2.	MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	13
6.2.	PEAK POWER SPECTRAL DENSITY	14
6.3.	OCCUPIED 6DB BANDWIDTH	19
6.4.	BAND EDGES COMPLIANCE	25
6.5.	TRANSMITTER SPURIOUS EMISSION-CONDUCTED	29

6.6.	TRANSMITTER SPURIOUS EMISSION-RADIATED.....	39
7.	TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS	53
8.	TEST ENVIRONMENT	54
ANNEX A.	DEVIATIONS FROM PRESCRIBED TEST METHODS	56

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301


1.2. Testing Environment


Normal Temperature:	15-35℃
Extreme Temperature:	-10/+55℃
Relative Humidity:	20-75%


1.3. Project data

Project Leader:	Chen Kan
Testing Start Date:	2014-10-20
Testing End Date:	2014-11-10

1.4. Signature


Wang Daming
(Prepared this test report)


Liu Jianquan
(Reviewed this test report)


Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Moxee Technologies
Address: 10900 NE 8th Street, #1000 washington, America
Contact Person: Joe Phillips
Telephone: 425-890-7897
Postcode: 98004

2.2. Manufacturer Information

Company Name: Moxee Technologies
Address: 10900 NE 8th Street, #1000 washington, America
Contact Person: Joe Phillips
Telephone: 425-890-7897
Postcode: 98004

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model name	X1
WLAN Frequency	2400MHz-2483.5MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	-10/+55℃
Nominal Voltage	3.8V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.5V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N02	862240021000672	MBV1.0	MOXEE_X1_V 1.1	2014-10-20

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2014
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz	2009

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	/	P
Peak Power Spectral Density	15.247(e)	/	P
Occupied 6dB Bandwidth	15.247(d)	/	P
Band Edges Compliance	15.247(b)	/	P
Transmitter Spurious Emission-Conducted	15.247	/	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	/	P
AC Powerline Conducted Emission	15.107,15.207	/	P

Please refer to part 5 for detail.

The measurements are according to ANSI 63.10.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	3.7V
Humidity	Hnom	40%
Air Pressure	Anom	1010hPa

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

5.2. Statements

The product name X1, supporting GSM/GPRS /WCDMA/HSDPA/HSUPA/BT/WLAN, manufactured by Shanghai Wind Communication Technologies Co.,Ltd is a new product for testing.

Note: All tests were carried out while using a fully battery charged.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Maximum Output Power

Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

The measurement is according to ANSI 63.10. EUT is operated in continuous transmitting mode.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

6.1.1. Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate(Mbps)	Test Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	19.97	/	/
	2	20.00	19.78	20.48
	5.5	19.66	/	/
	11	19.89	/	/
802.11g	6	21.88	/	/
	9	22.60	/	/
	12	22.39	/	/
	18	21.88	/	/
	24	22.26	/	/
	36	22.45	/	/
	48	22.66	22.42	21.88
	54	22.32	/	/

The data rate 2Mbps and 48Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n mode

Mode	Data Rate(Index)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	MCS0	22.16	/	/
	MCS1	22.49	/	/
	MCS2	22.52	/	/
	MCS3	22.62	/	/
	MCS4	22.27	/	/
	MCS5	22.90	/	/
	MCS6	22.97	/	/
	MCS7	23.05	23.01	22.37
802.11n(40MHz)	MCS0	/	/	/
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MCS7 is selected as worse condition, and the following case are performed with this condition.

6.1.2. Maximum Average Output Power-conducted
802.11b/g mode

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	18.17	18.08	17.82
802.11g	15.51	15.13	14.52

802.11n mode

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	15.61	15.23	14.62
802.11n(40MHz)	/	/	/

Conclusion: PASS

6.2. Peak Power Spectral Density

Measure Limit:

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

The measurement is according to ANSI 63.10 D01 DTS V03.

Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=3KHz, VBW=10KHz,span more than 1.5 times channel bandwidth.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:
802.11b/g mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11b	1	Fig.1	-4.08	P
	6	Fig.2	-4.29	P
	11	Fig.3	-4.54	P
802.11g	1	Fig.4	-10.46	P
	6	Fig.5	-10.73	P
	11	Fig.6	-11.57	P

802.11n mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig.7	-10.23	P
	6	Fig.8	-11.64	P
	11	Fig.9	-11.40	P

802.11g(40MHz)	1	/	/	P
	6	/	/	P
	11	/	/	P

Conclusion: PASS

Test graphs as below:



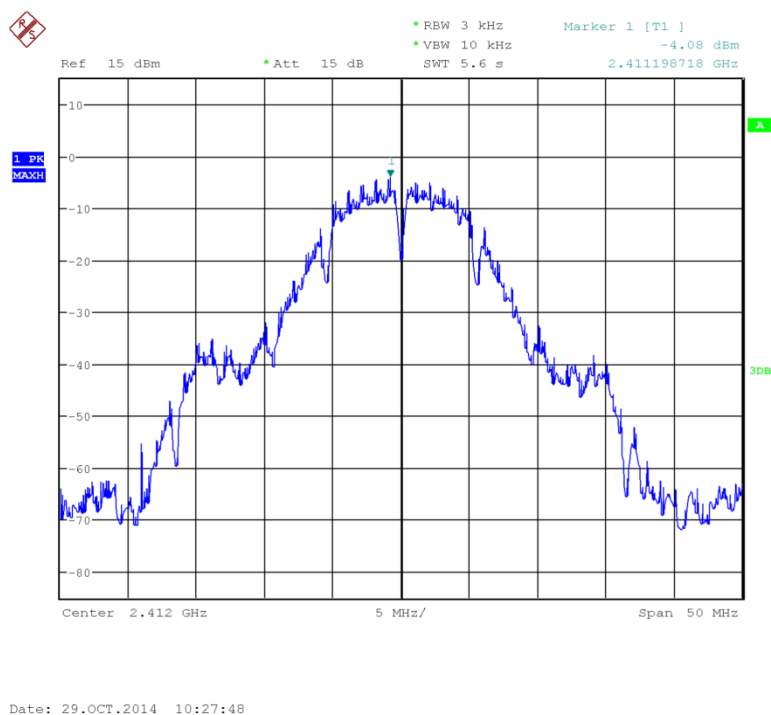


Fig.1 Power Spectral Density (802.1b,Ch1)

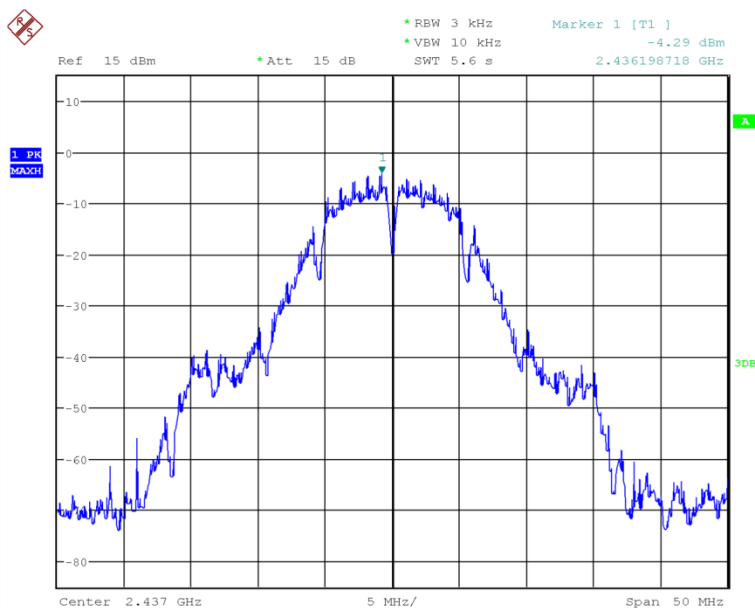


Date: 29.OCT.2014 10:28:13

Fig.2 Power Spectral Density (802.1b,Ch6)

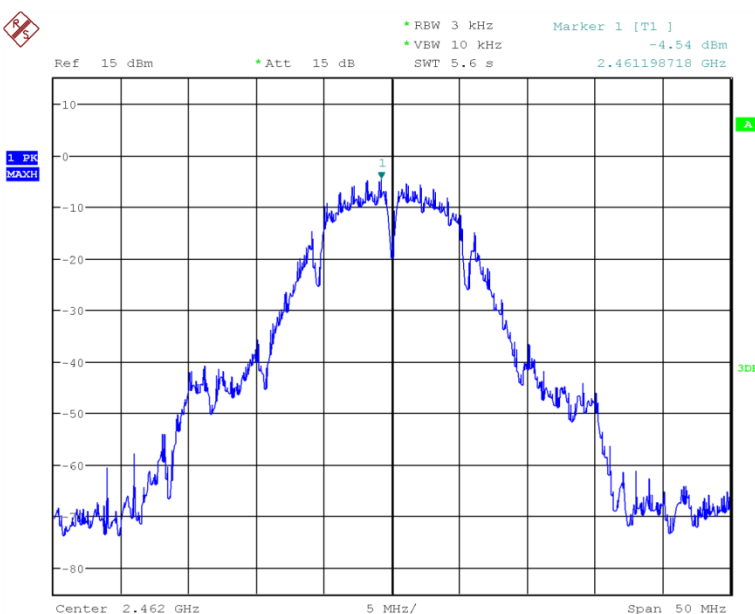


Date: 29.OCT.2014 10:29:00

Fig.3 Power Spectral Density (802.1b,Ch11)

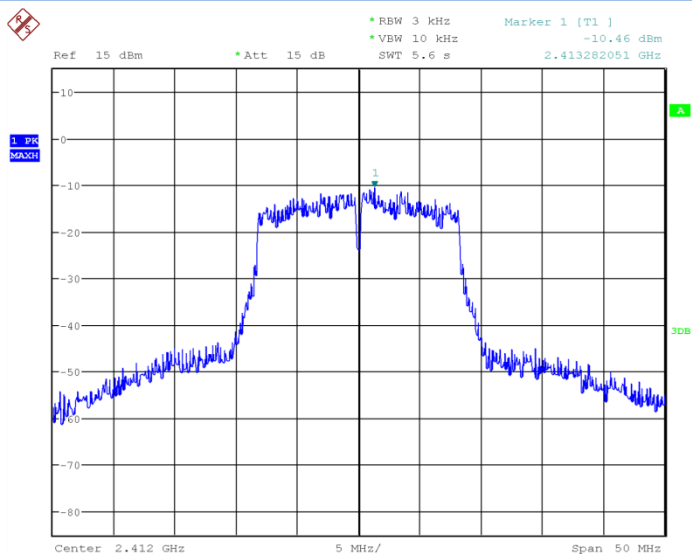


Date: 29.OCT.2014 10:29:53

Fig.4 Power Spectral Density (802.1g,Ch1)

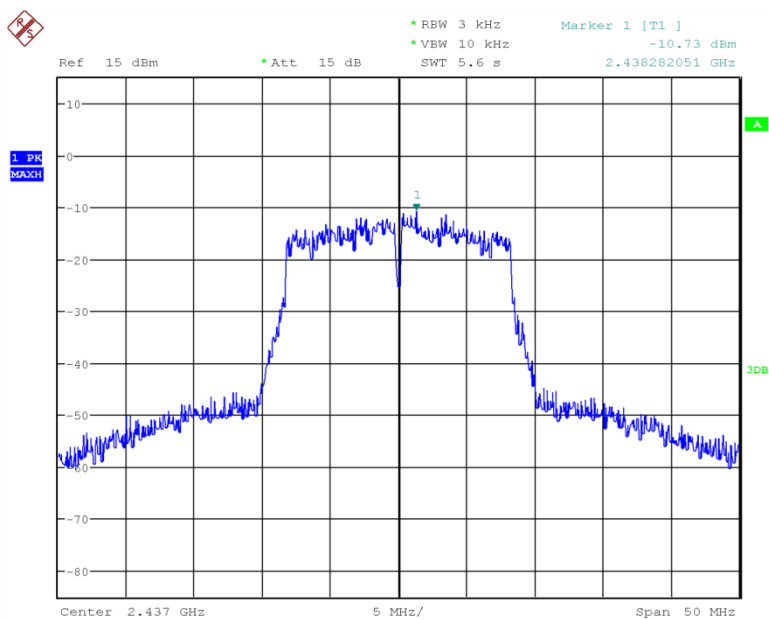


Date: 29.OCT.2014 10:30:26

Fig.5 Power Spectral Density (802.1g,Ch6)

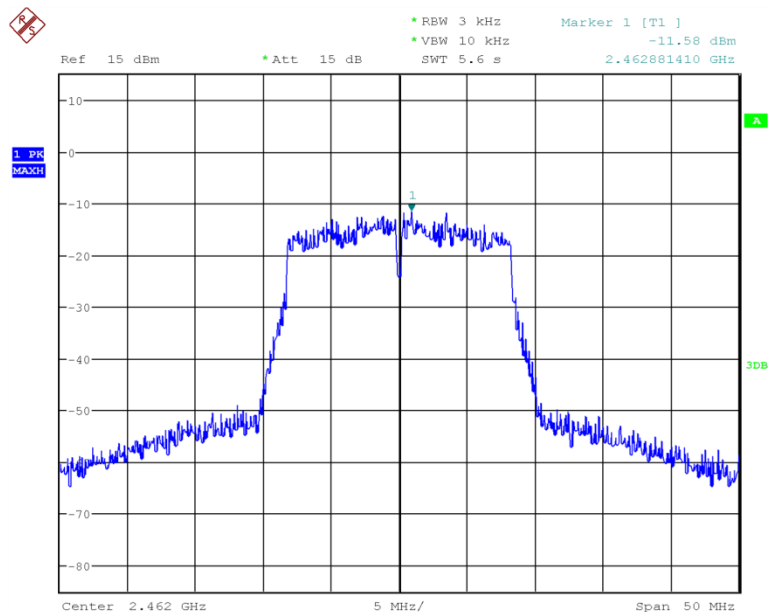


Date: 29.OCT.2014 10:31:12

Fig.6 Power Spectral Density (802.1g,Ch11)

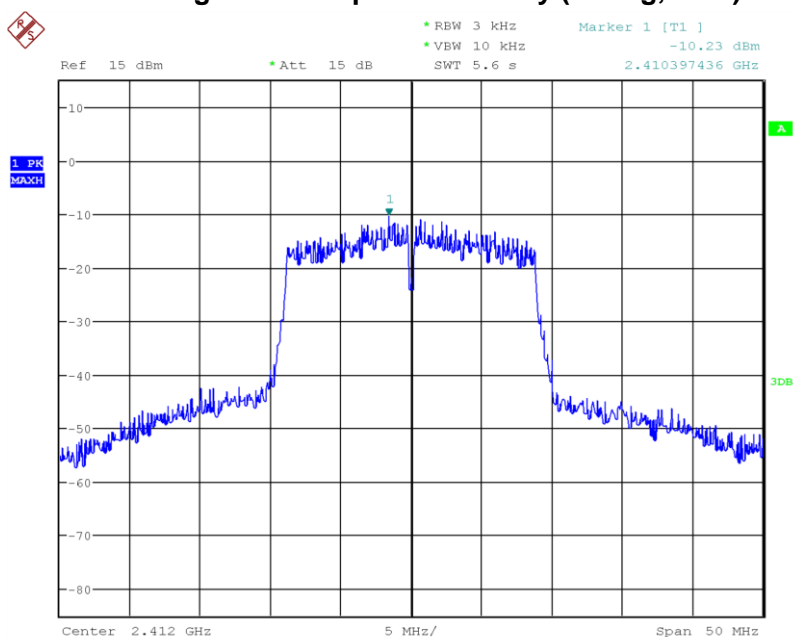


Date: 29.OCT.2014 10:31:47

Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)

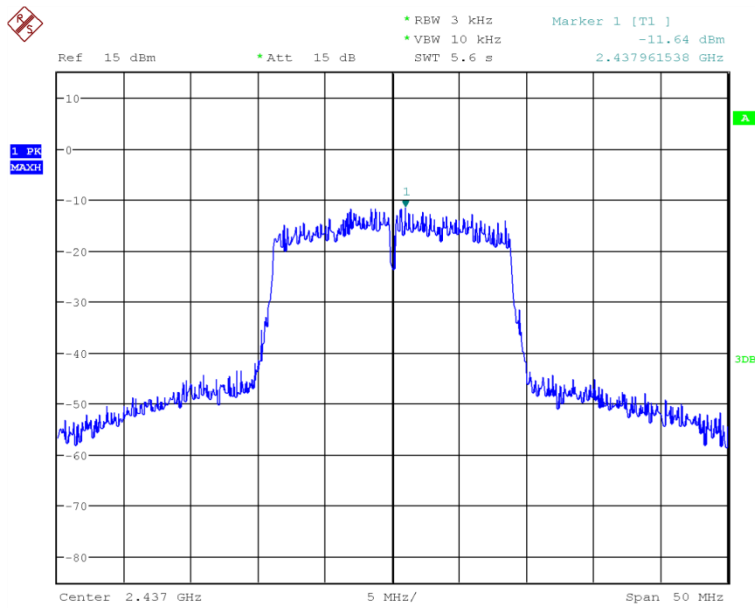

Date: 29.OCT.2014 10:32:35

Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)

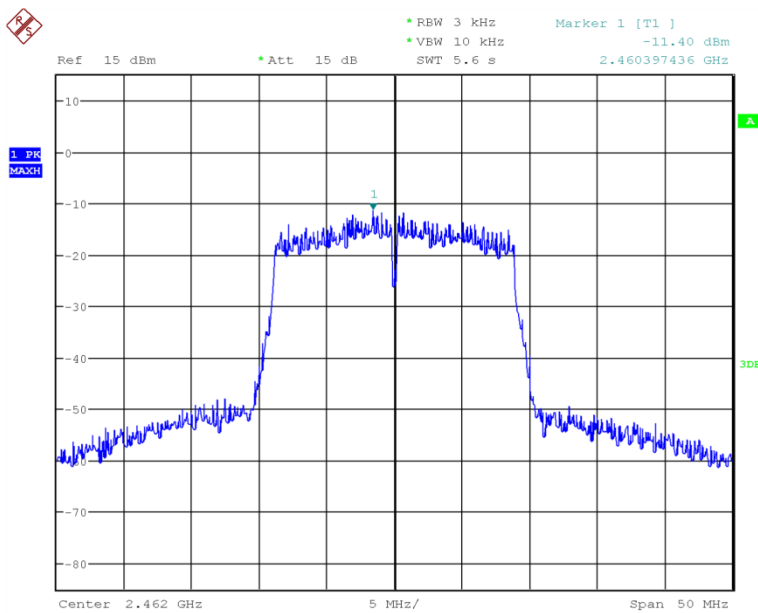

Date: 29.OCT.2014 10:32:57

Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)

6.3. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit(KHz)
----------	------------

FCC 47 CFR Part 15.247(a)	≥500
---------------------------	------

The measurement is according to ANSI 63.10.

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz,span more than 1.5 times channel bandwidth.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

Measurement Result:

802.11b/g mode


Mode	Channel	Occupied 6dB Bandwidth(KHz)		Conclusion
802.11b	1	Fig.10	10.02	P
	6	Fig.11	10.02	P
	11	Fig.12	9.94	P
802.11g	1	Fig.13	16.51	P
	6	Fig.14	16.51	P
	11	Fig.15	16.43	P

802.11n mode

Mode	Channel	Occupied 6dB Bandwidth(KHz)		Conclusion
802.11n(20MHz)	1	Fig.16	17.63	P
	6	Fig.17	17.63	P
	11	Fig.18	17.63	P
802.11n(40MHz)	1	/	/	P
	6	/	/	P
	11	/	/	P


Conclusion: PASS

Test graphs as below:

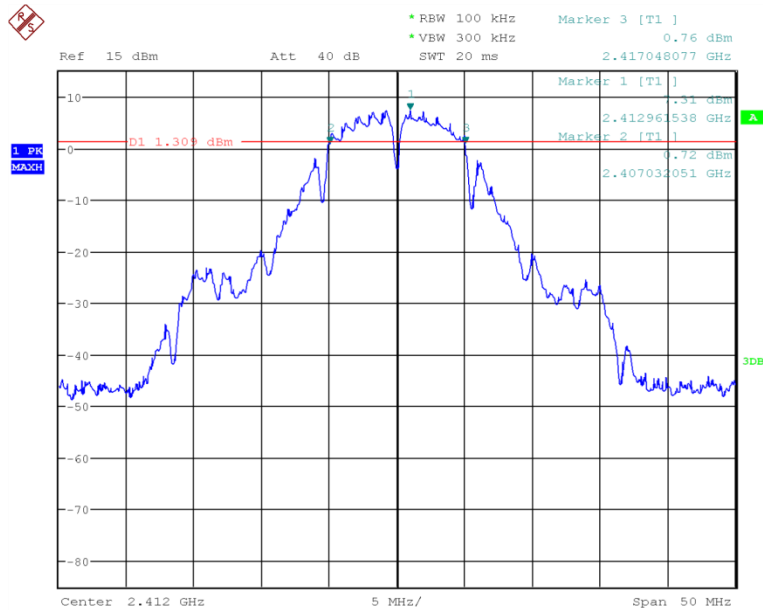


Date: 29.OCT.2014 10:45:37

Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)

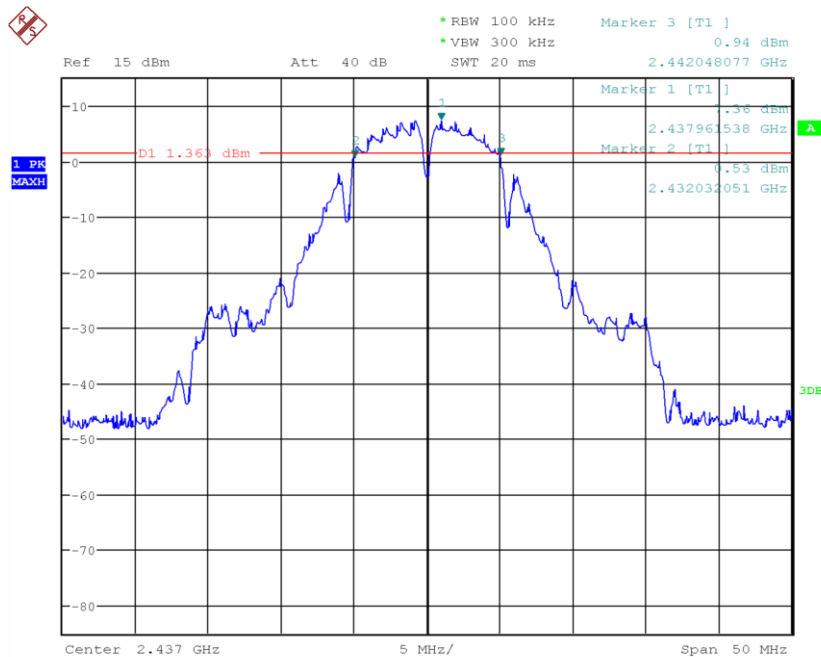


Date: 29.OCT.2014 10:46:16

Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)

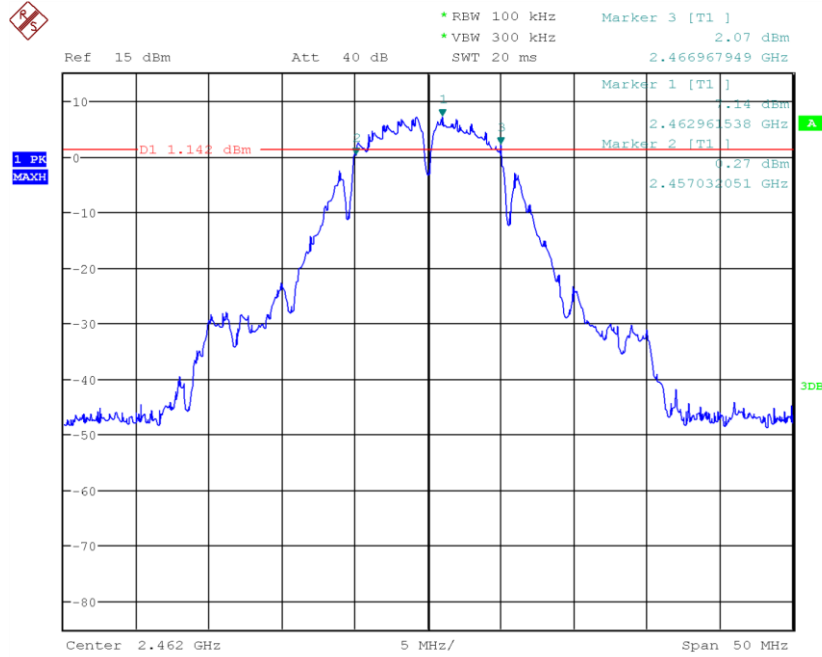


Date: 29.OCT.2014 10:46:54

Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)

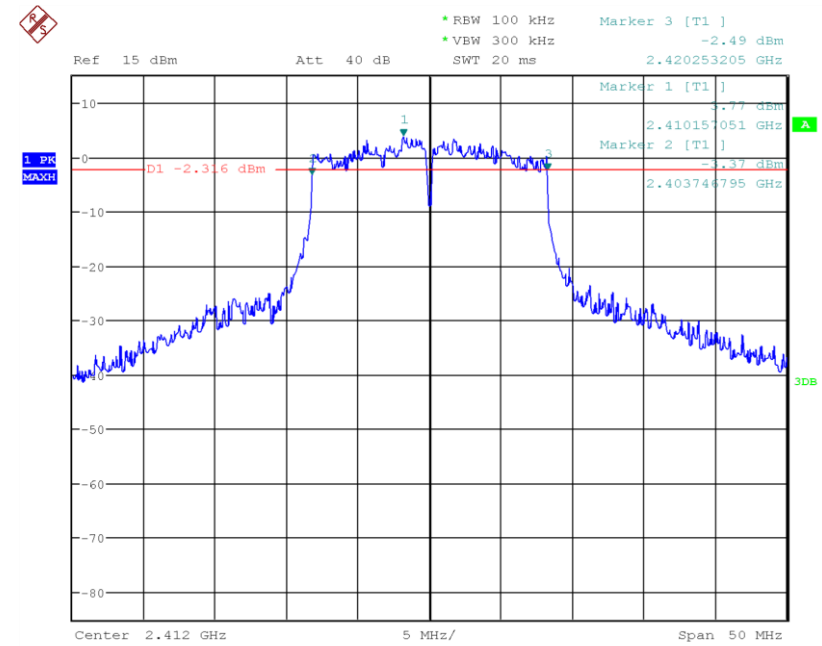


Date: 29.OCT.2014 10:49:08

Fig.13 Occupied 6dB Bandwidth (802.11g, Ch1)

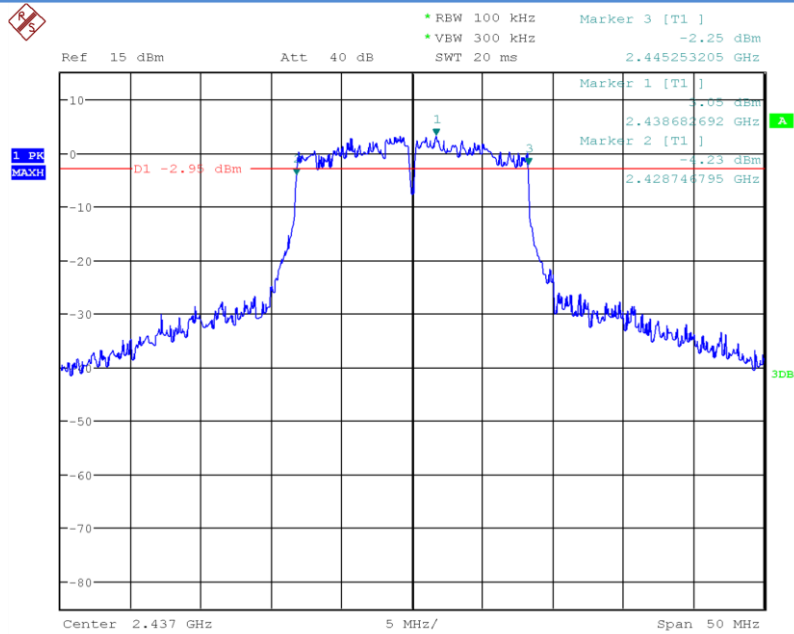


Date: 29.OCT.2014 10:56:47

Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)

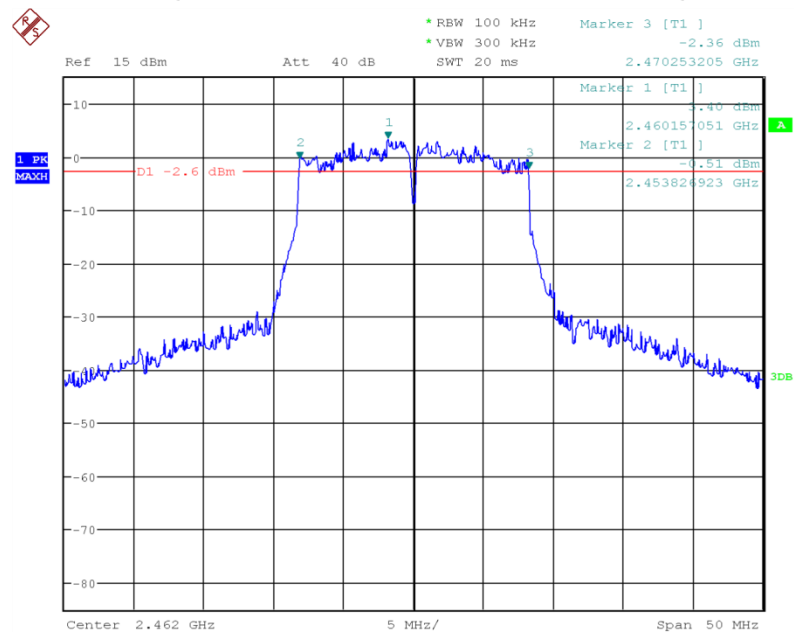


Date: 29.OCT.2014 11:03:16

Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)

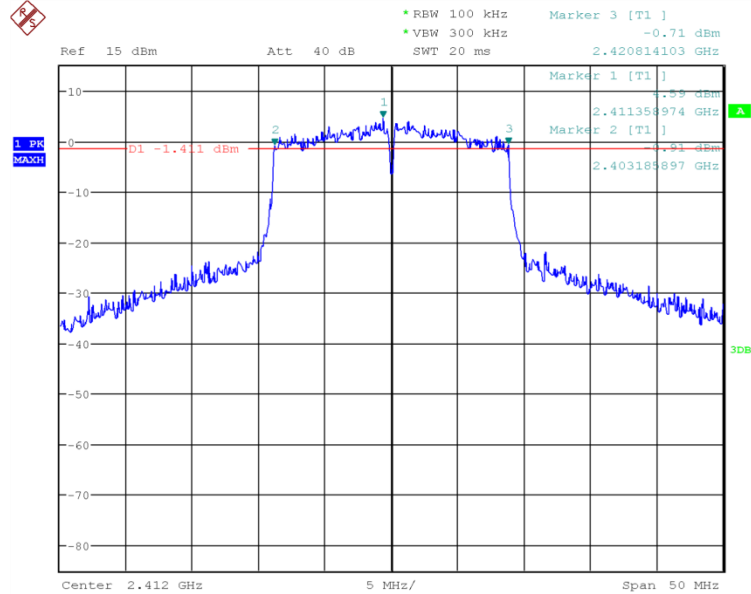


Date: 29.OCT.2014 11:05:45

Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)

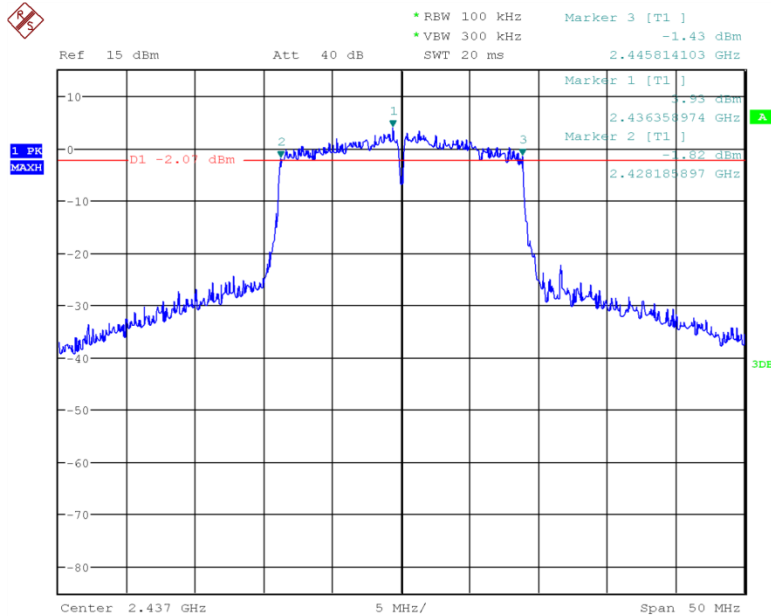

Date: 29.OCT.2014 11:06:47

Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)

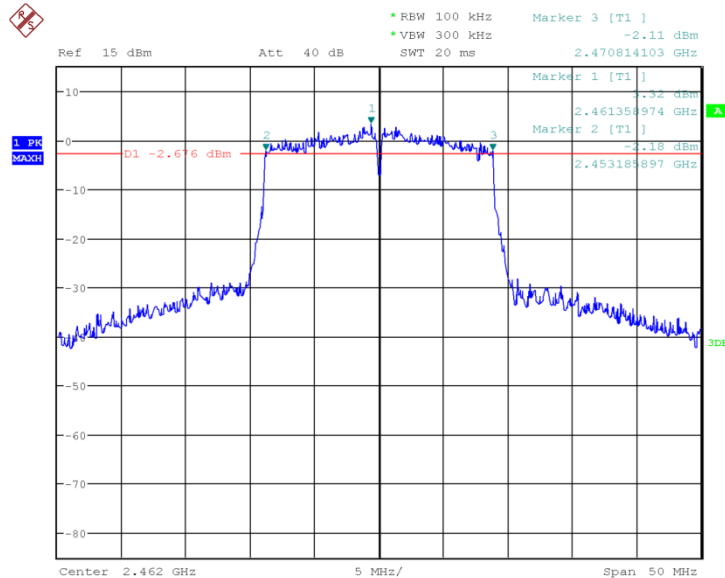

Date: 29.OCT.2014 11:07:53

Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)

6.4. Band Edges Compliance

Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

The measurement is according to ANSI 63.10.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P

802.11n mode

Mode	Channel	Test Results	Conclusion
------	---------	--------------	------------

802.11n(20MHz)	1	Fig.23	P
	11	Fig.24	P
802.11(40MHz)	/	/	/
	/	/	/


Conclusion: PASS

Test graphs as blew:




Date: 29.OCT.2014 13:28:15

Fig.19 Band Edges (802.11b, Ch1)

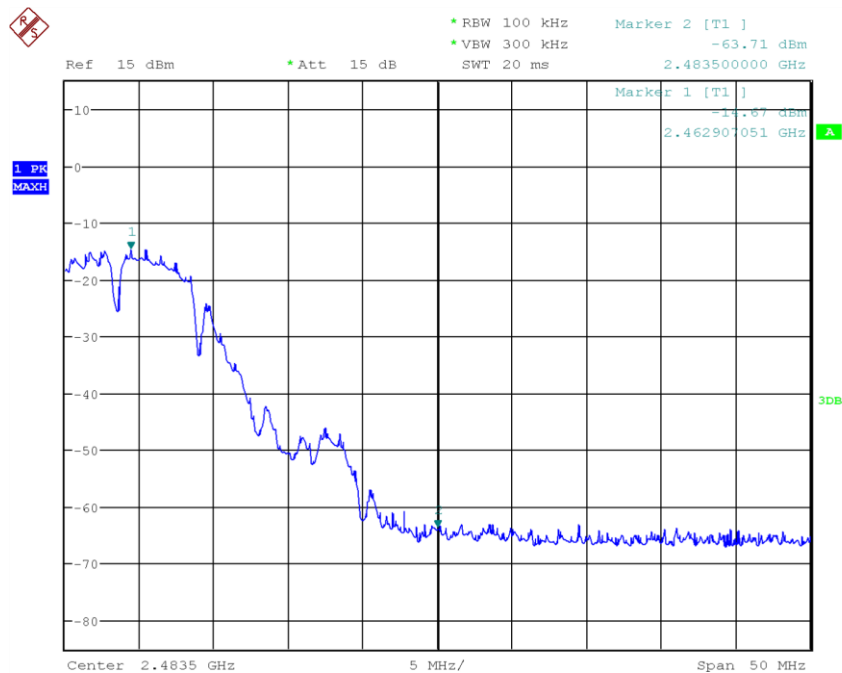


Date: 29.OCT.2014 13:29:35

Fig.20 Band Edges (802.11b, Ch11)

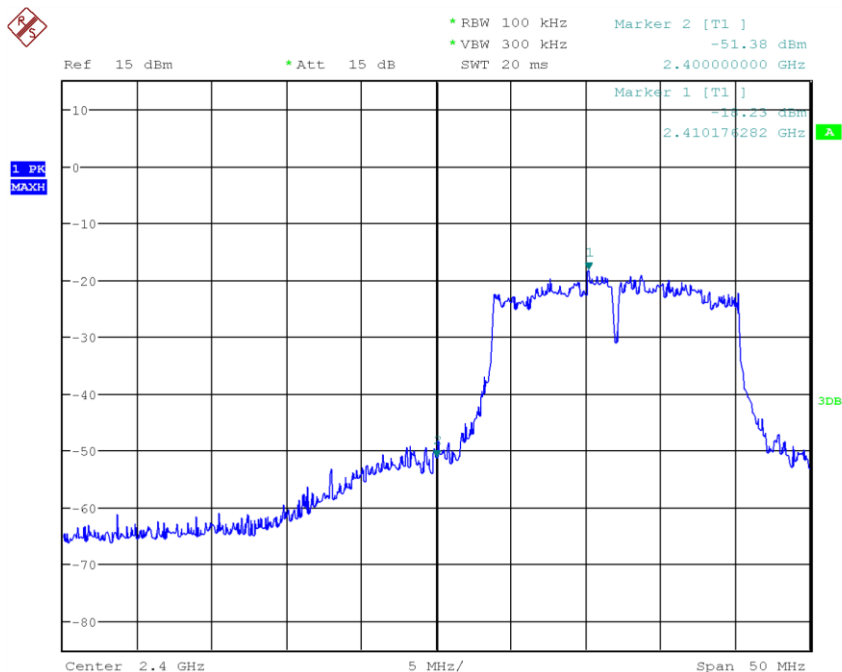


Date: 29.OCT.2014 13:32:48

Fig.21 Band Edges (802.11g, Ch1)

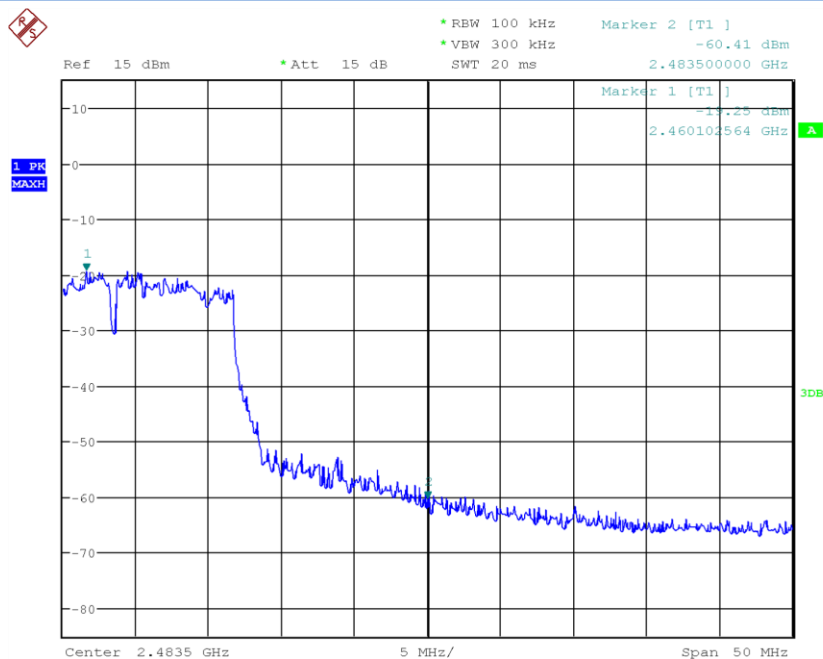


Date: 29.OCT.2014 13:33:23

Fig.22 Band Edges (802.11g, Ch11)

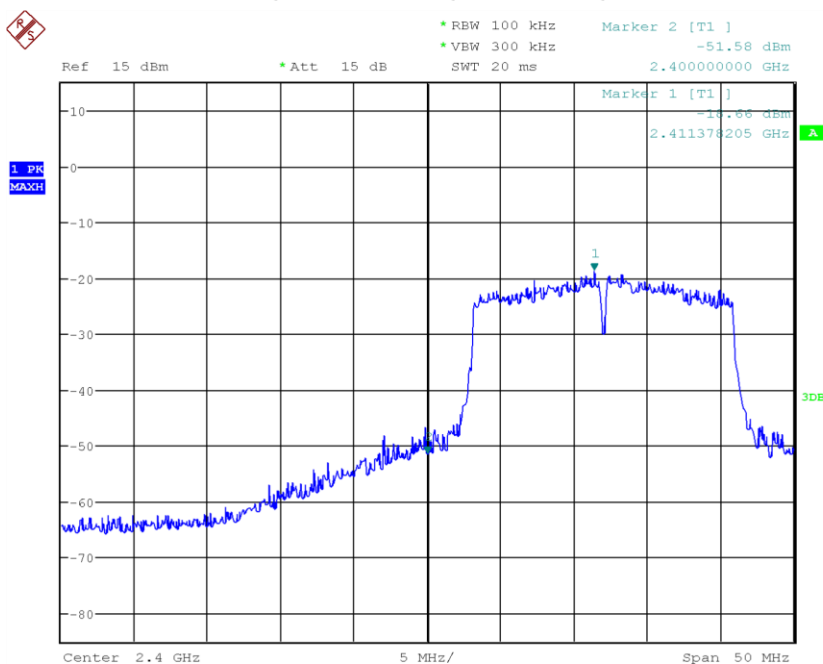

Date: 29.OCT.2014 13:33:46

Fig.23 Band Edges (802.11n-20MHz, Ch1)

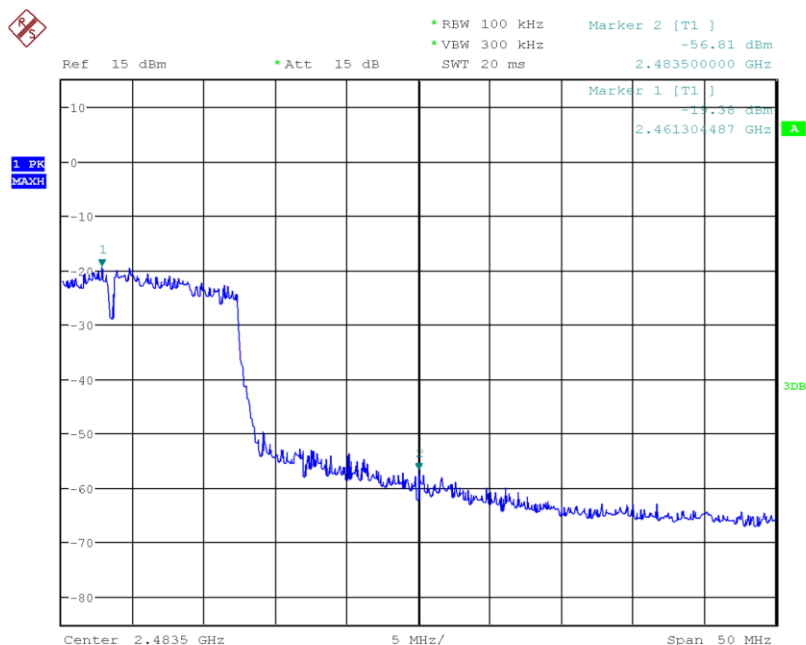

Date: 29.OCT.2014 13:34:06

Fig.24 Band Edges (802.11b-20MHz, Ch11)

6.5. Transmitter Spurious Emission-conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

This measurement is according to ANSI 63.10.

Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

Measurement Result:
802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412GHz	Fig.25	P
		30MHz~26GHz	Fig.26	P
	6	2.437GHz	Fig.27	P
		30MHz~26GHz	Fig.28	P
	11	2.472GHz	Fig.29	P
		30MHz~26GHz	Fig.30	P
802.11g	1	2.412GHz	Fig.31	P
		30MHz~26GHz	Fig.32	P
	6	2.437GHz	Fig.33	P
		30MHz~26GHz	Fig.34	P
	11	2.472GHz	Fig.35	P
		30MHz~26GHz	Fig.36	P


802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig.37	P
		30MHz~26GHz	Fig.38	P
	6	2.437GHz	Fig.39	P
		30MHz~26GHz	Fig.40	P
	11	2.472GHz	Fig.41	P
		30MHz~26GHz	Fig.42	P
802.11n(40MHz)	1	/	/	/
		/	/	/
	6	/	/	/

		/		/
	11	/	/	/
		/		/


Conclusion: PASS

Test graphs as below:

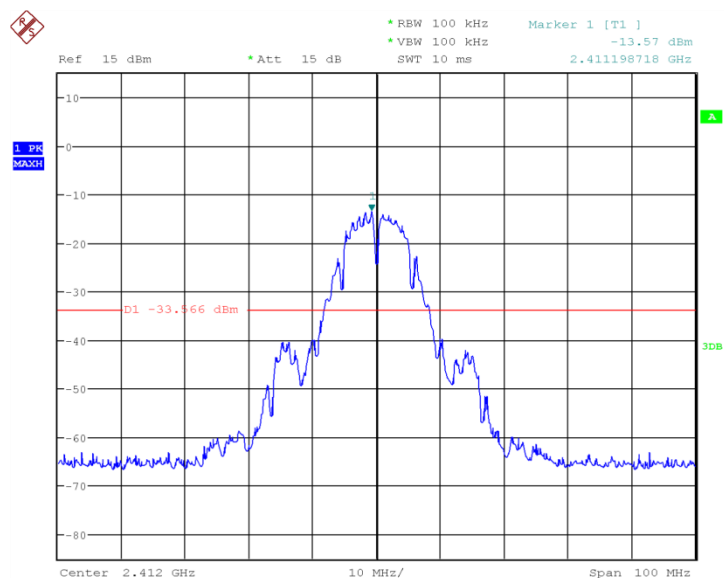


Date: 29.OCT.2014 13:04:42

Fig.25 Conducted Spurious Emission (802.11b, Ch1)

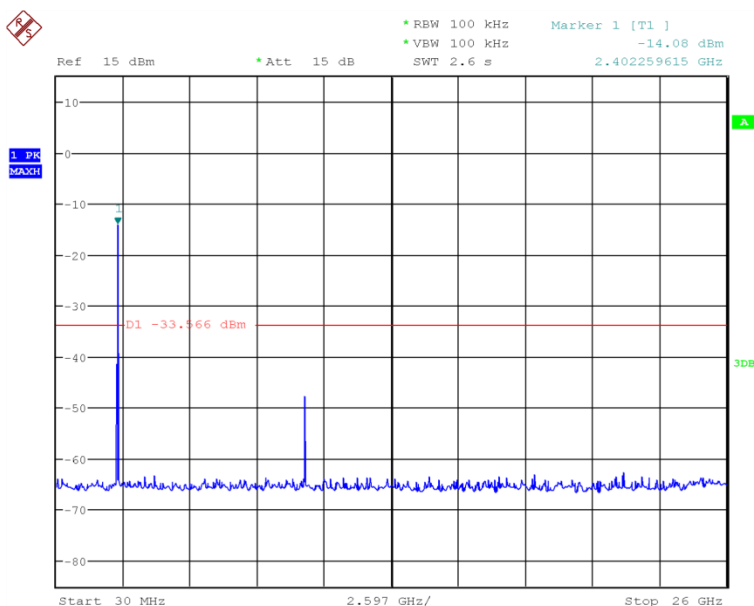


Date: 29.OCT.2014 13:05:02

Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)

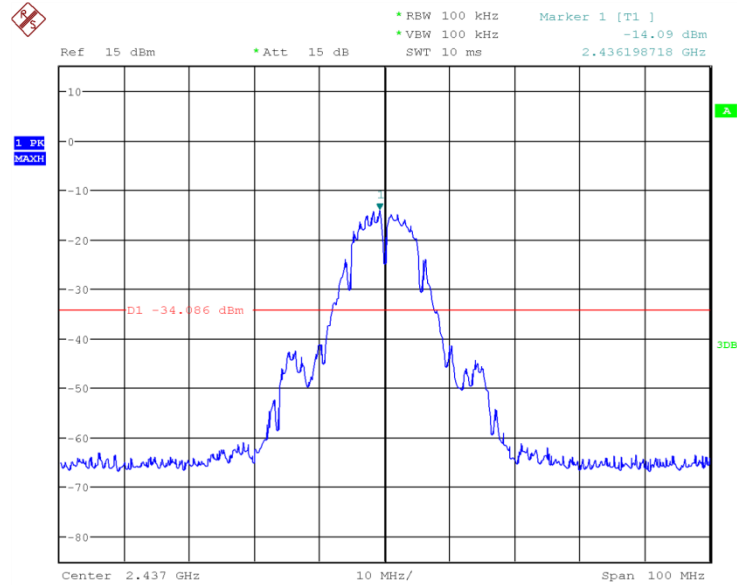


Date: 29.OCT.2014 13:05:58

Fig.27 Conducted Spurious Emission (802.11b, Ch6)

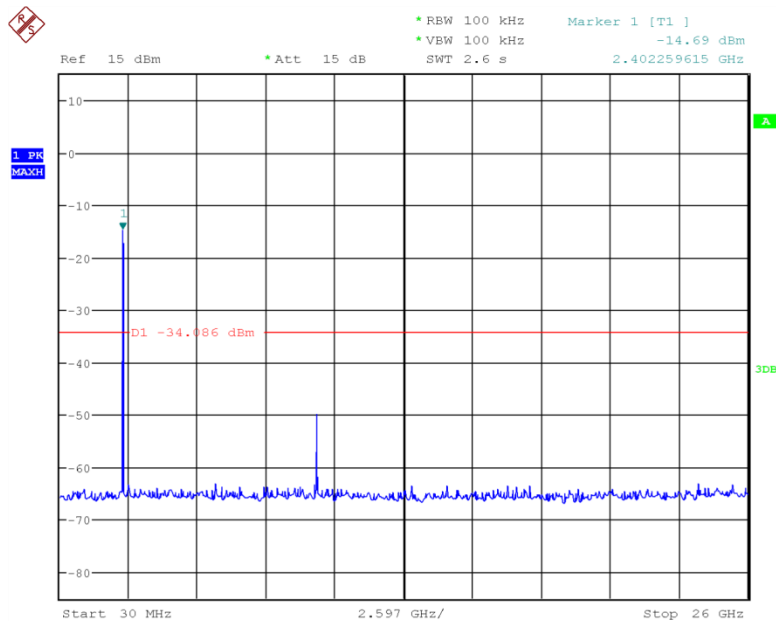


Date: 29.OCT.2014 13:06:18

Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)

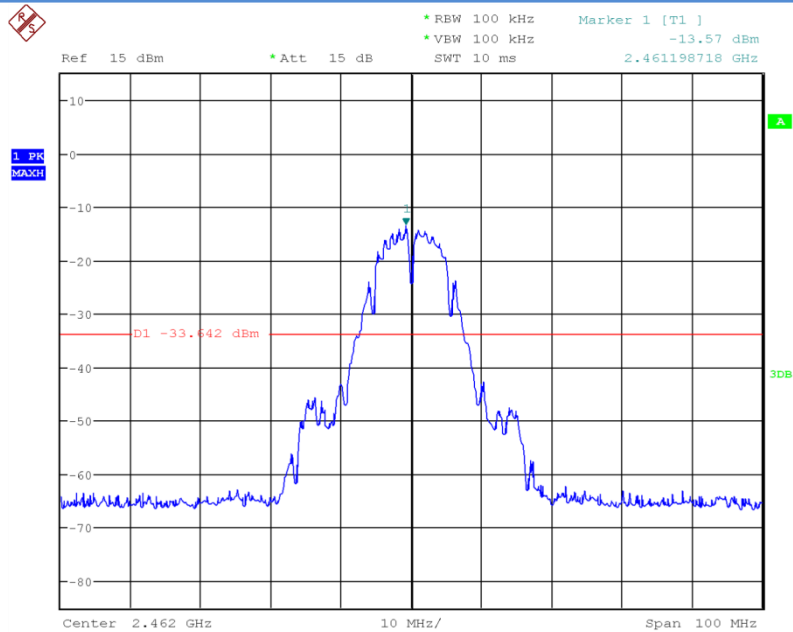


Date: 29.OCT.2014 13:07:43

Fig.29 Conducted Spurious Emission (802.11b, Ch11)

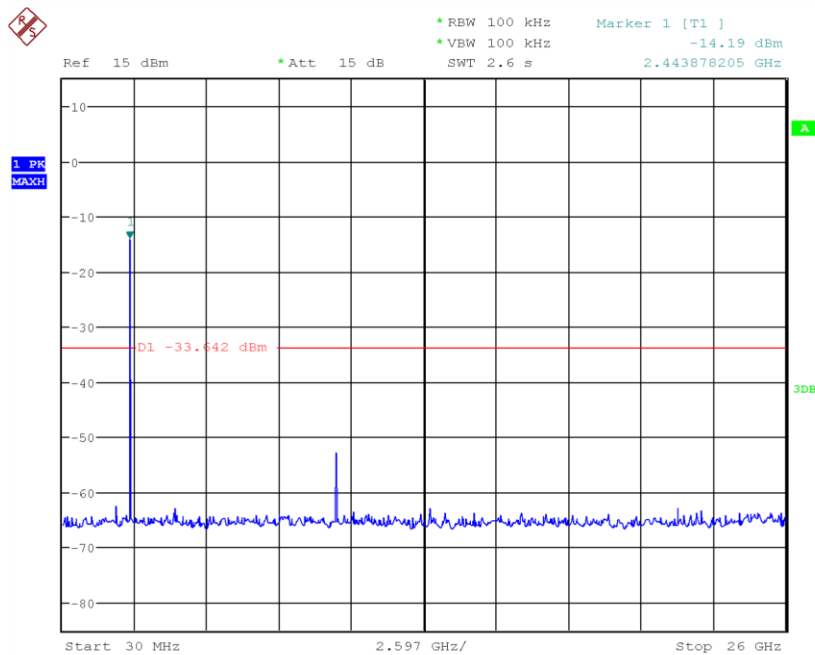


Date: 29.OCT.2014 13:08:03

Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)

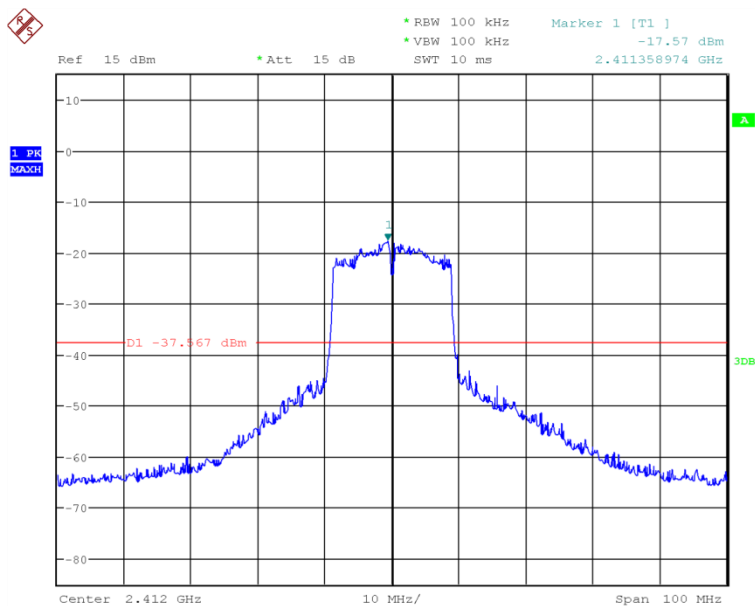


Date: 29.OCT.2014 13:13:39

Fig.31 Conducted Spurious Emission (802.11g, Ch1)

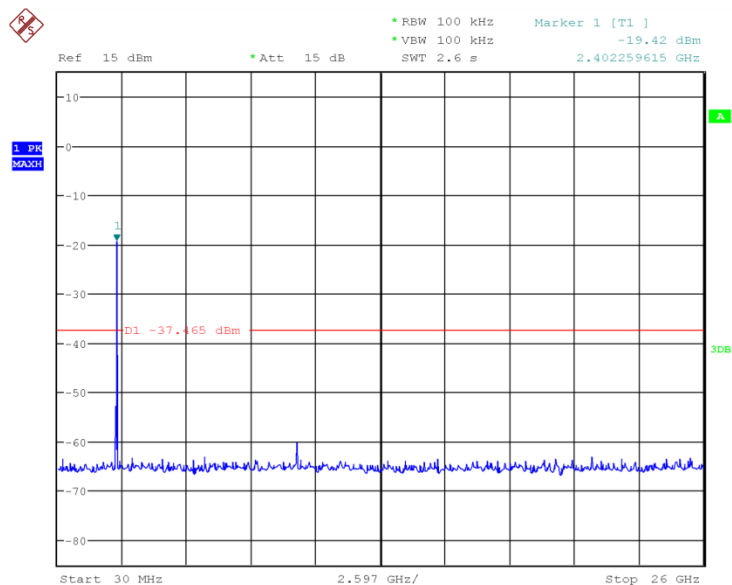


Date: 29.OCT.2014 13:09:05

Fig.32 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)

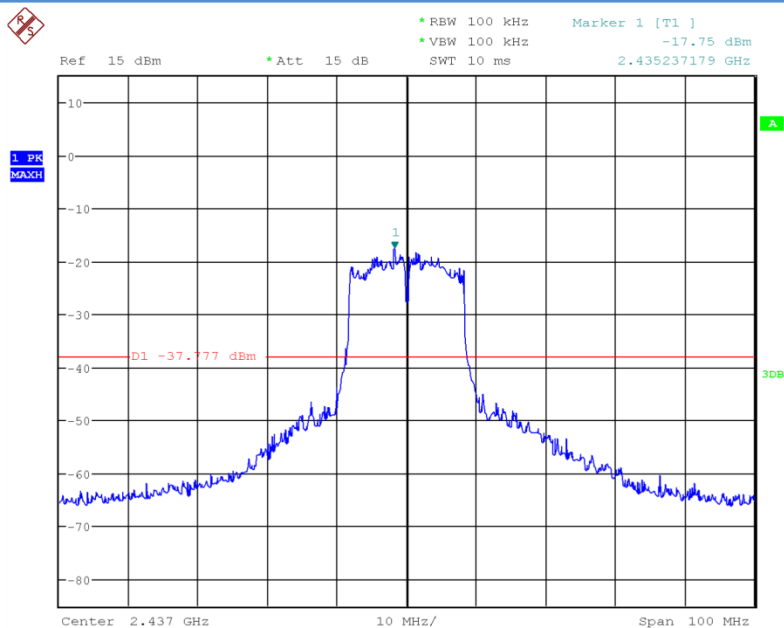


Date: 29.OCT.2014 13:09:31

Fig.33 Conducted Spurious Emission (802.11g, Ch6)

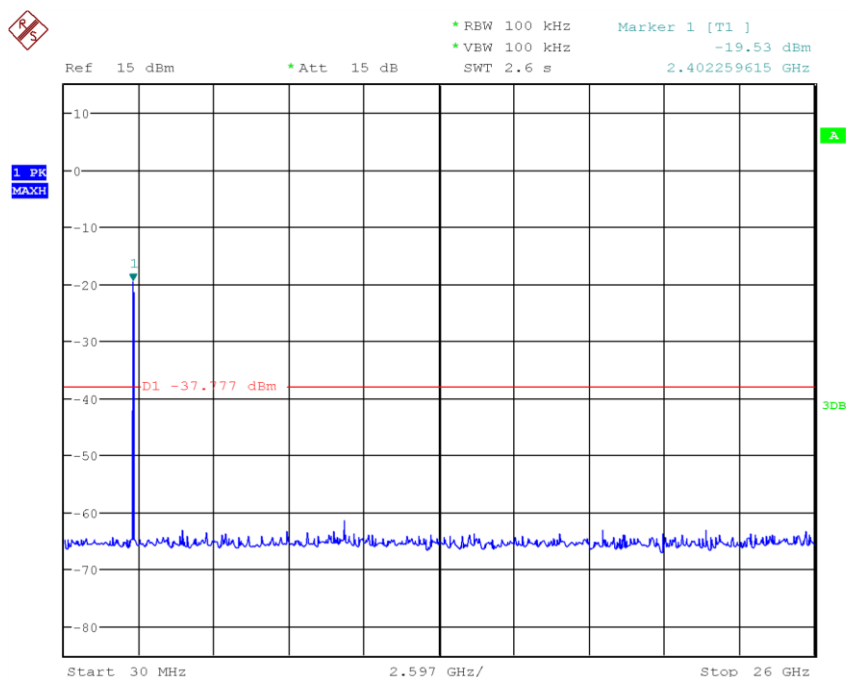


Date: 29.OCT.2014 13:09:50

Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)

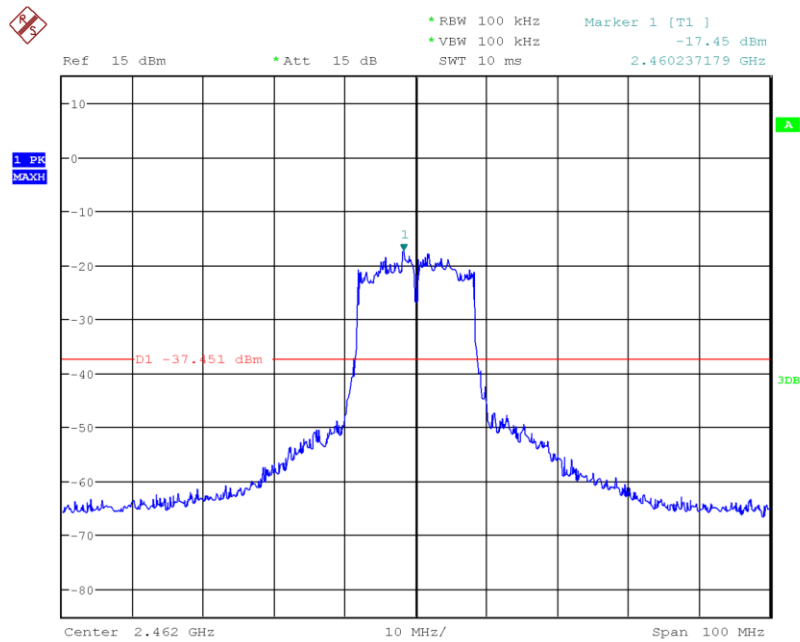


Date: 29.OCT.2014 13:12:15

Fig.35 Conducted Spurious Emission (802.11g, Ch11)

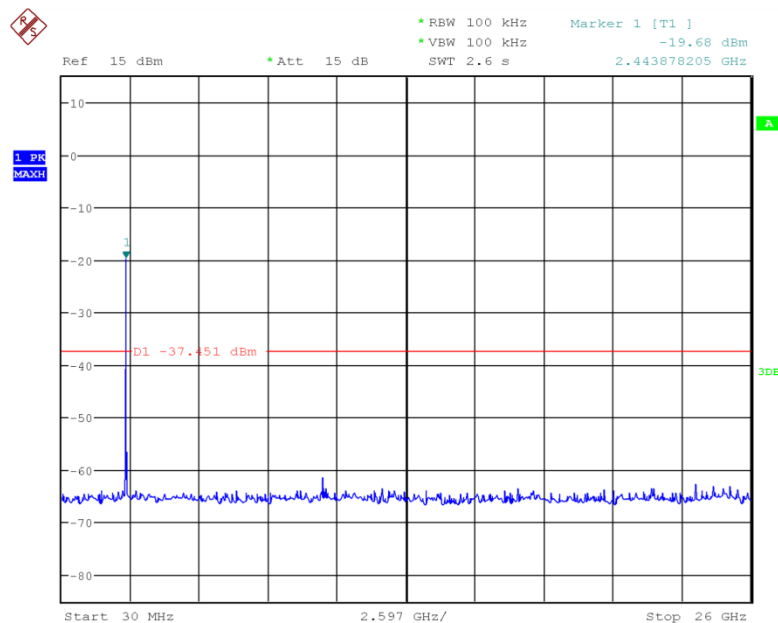


Date: 29.OCT.2014 13:12:35

Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)

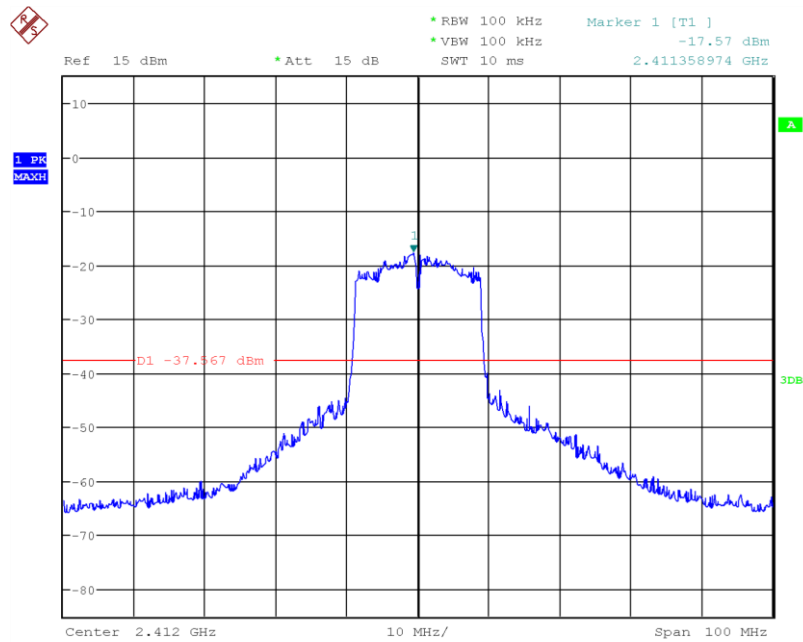


Date: 29.OCT.2014 13:13:39

Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)

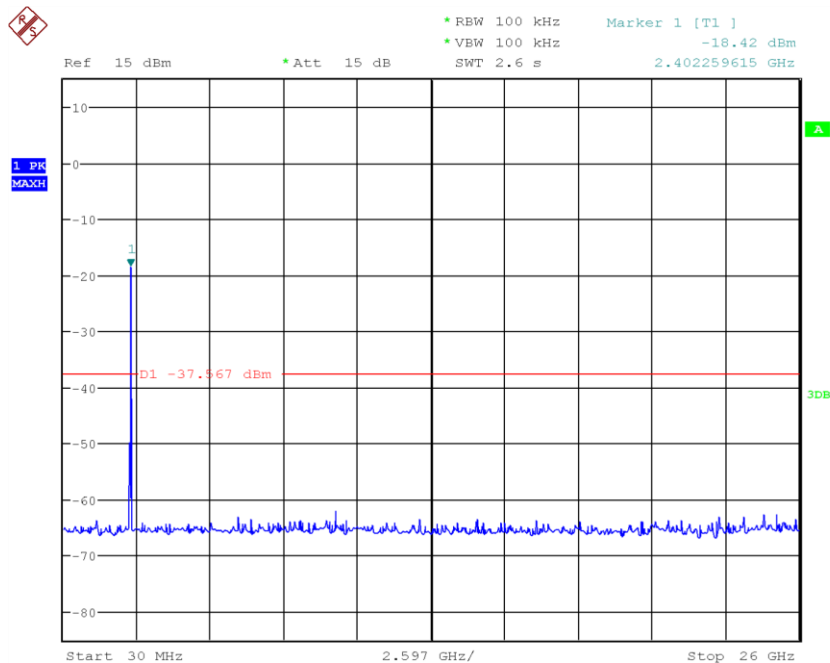


Date: 29.OCT.2014 13:13:59

Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)

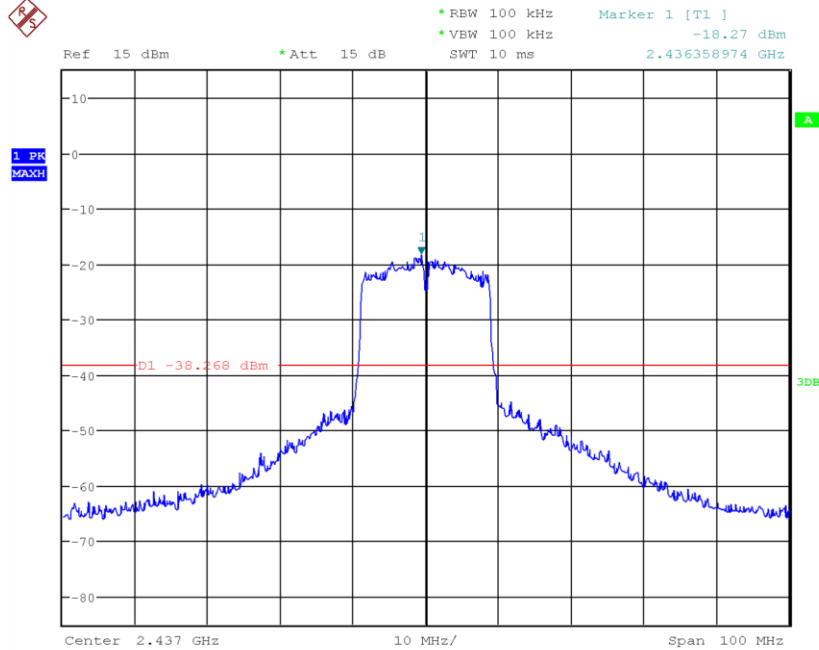


Date: 29.OCT.2014 13:14:26

Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)

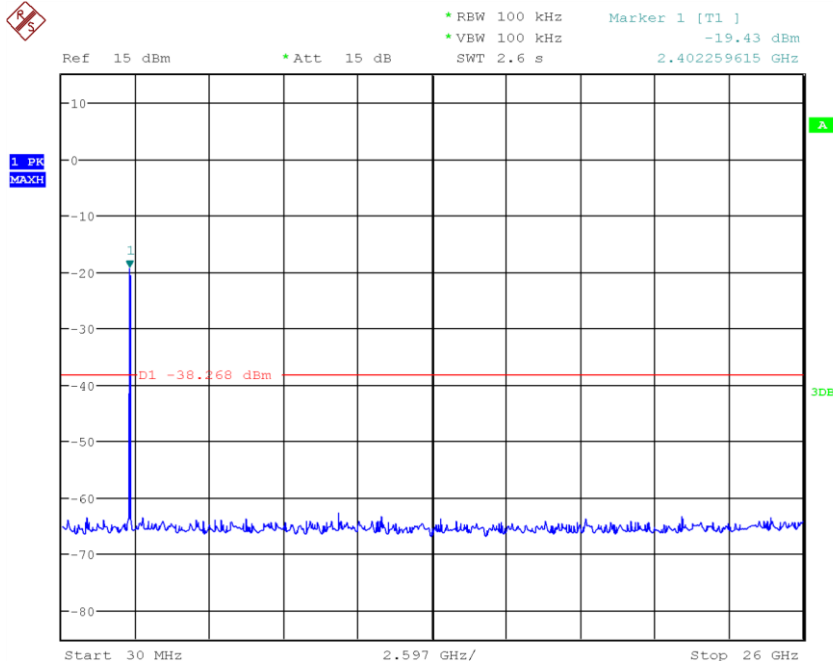


Date: 29.OCT.2014 13:14:46

Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)

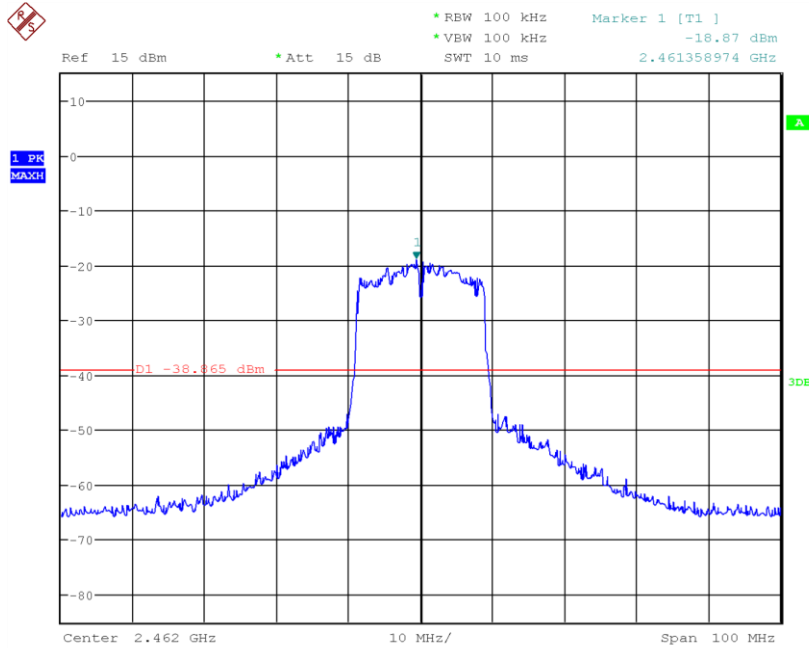

Date: 29.OCT.2014 13:16:45

Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)

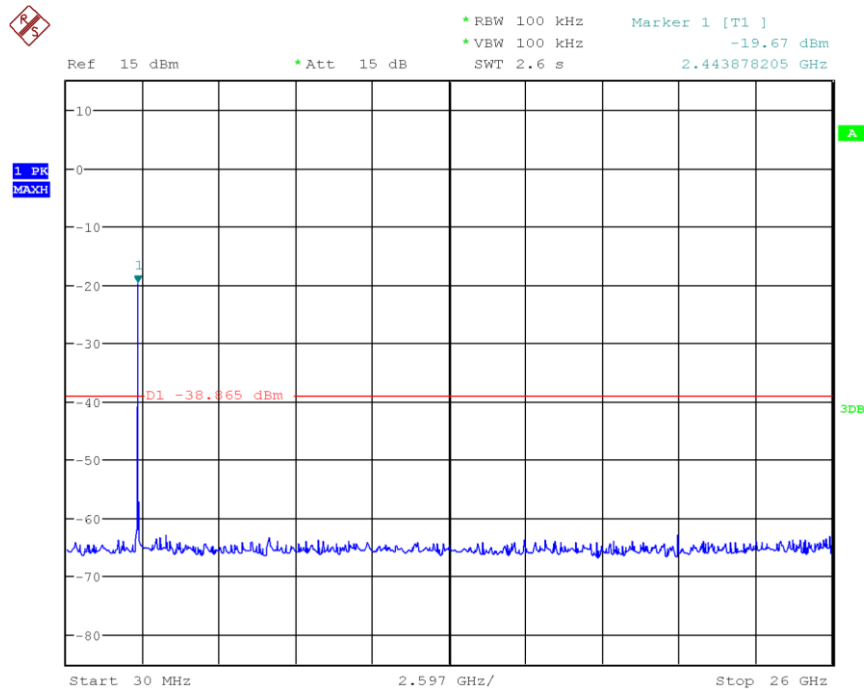

Date: 29.OCT.2014 13:17:05

Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)

6.6. Transmitter Spurious Emission-Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI 63.10 and KDB558704.

Limit in restricted band:

Frequency of emission(MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

Test condition:

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI 63.10-2009 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz~2.45GHz	Fig.44	P
	Power	2.45GHz~2.5GHz	Fig.45	P
	1	30MHz~1GHz	Fig.46	P
		1GHz~3GHz	Fig.47	P
		3GHz~18GHz	Fig.48	P
802.11g	Power	2.38GHz~2.45GHz	Fig.49	P
	Power	2.45GHz~2.5GHz	Fig.50	P
	11	30MHz~1GHz	Fig.51	P
		1GHz~3GHz	Fig.52	P
		3GHz~18GHz	Fig.53	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.54	P
	Power	2.45GHz~2.5GHz	Fig.55	P
	1	30MHz~1GHz	Fig.56	P
		1GHz~3GHz	Fig.57	P
		3GHz~18GHz	Fig.58	P
/	All channels	18GHz~26.5GHz	Fig.59	P

Conclusion: PASS
Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea} + A_{Rpi}$ = $P_{Mea} + \text{Cable Loss}$.

802.11b mode
Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------

34.716864	26.62	-25.9	52.52	V
39.663468	30.10	-24.6	54.7	H
152.196332	24.40	-27.8	52.2	H
172.150120	21.67	-26.4	48.07	H
186.926244	26.22	-25.5	51.72	V

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2752.920962	53.43	10.4	43.03	V
2819.738269	54.10	11.2	42.9	H

Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14870.97613	55.45	21.6	33.85	V
15539.74107	56.6	23.2	33.4	V

802.11g
Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.668832	25.09	-25.9	50.99	V
39.270416	25.43	-24.7	50.13	H
51.545248	21.44	-24.7	46.14	V
152.55388	21.29	-27.8	49.09	H

Ch11 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2815.804423	54.51	11.2	43.31	V
2969.30577	55.59	13.2	42.39	V

Ch11 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------

15472.59227	56.66	23.3	33.36	H
16201.4638	58.96	25.7	33.26	H

802.11n-20MHz
Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.666796	22.84	-25.9	48.74	V
39.510396	21.64	-24.7	46.34	V
51.21128	21.98	-24.7	46.68	V
110.294344	5.66	-24.7	30.36	H
149.356596	21.77	-28	49.77	H

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2796.365192	53.89	10.9	42.99	V
2824.071923	54.15	11.3	42.85	H


Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
15873.61913	58.09	24.7	33.39	V
16502.30133	59.7	26.9	32.8	H


All Ch 18GHz~26.5GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
21179.000000	45.48	6.97	38.51	V
22748.950000	41.63	3.05	38.58	H
23684.800000	41.59	3.05	38.54	H
24633.400000	40.05	3.05	37.00	V
25567.550000	43.01	2.90	40.11	H
26066.500000	42.06	2.90	39.16	V

Test graphs as below:

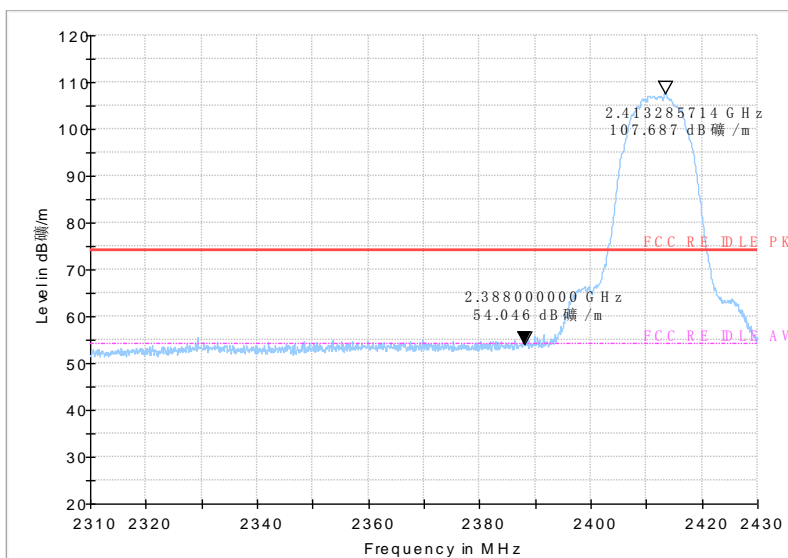


PEAK

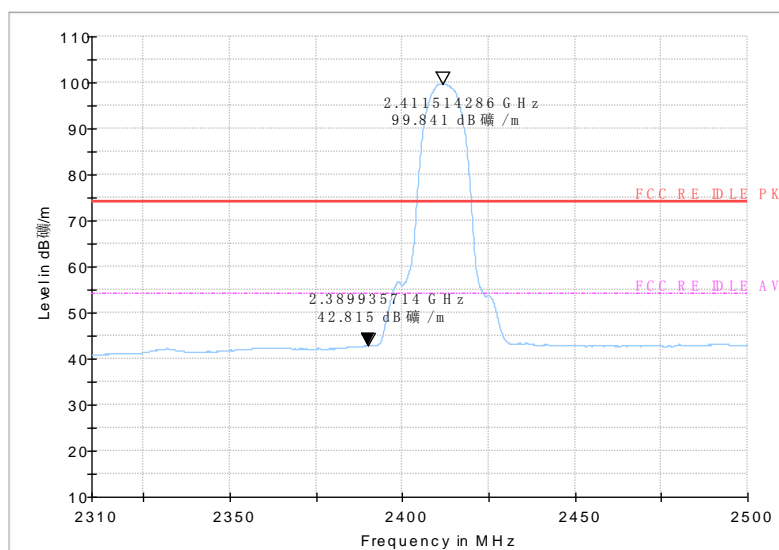


AV

Fig.44 Radiated emission (Power): 802.11b, low channel

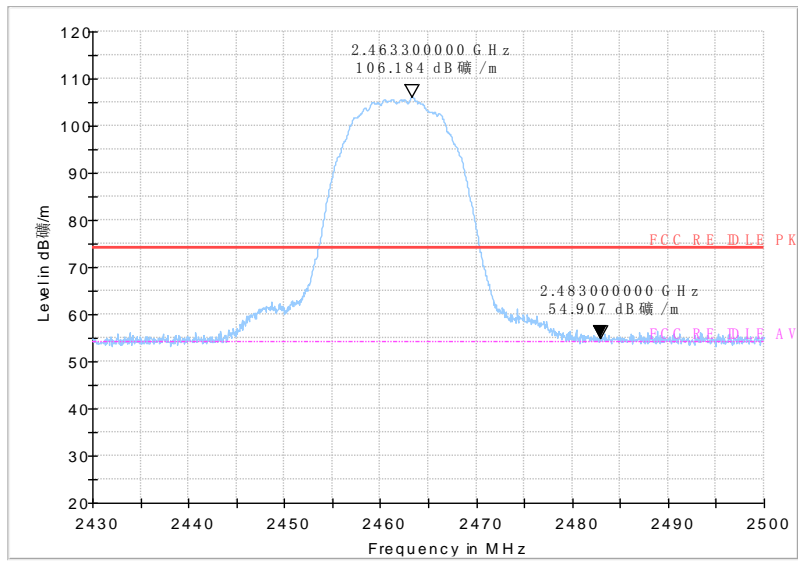

PEAK

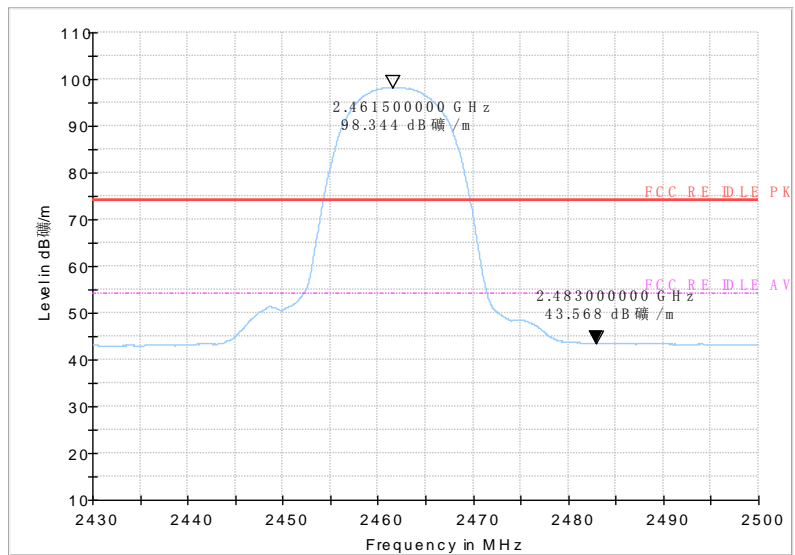

AV

Fig.45 Radiated emission (Power): 802.11b, high channel

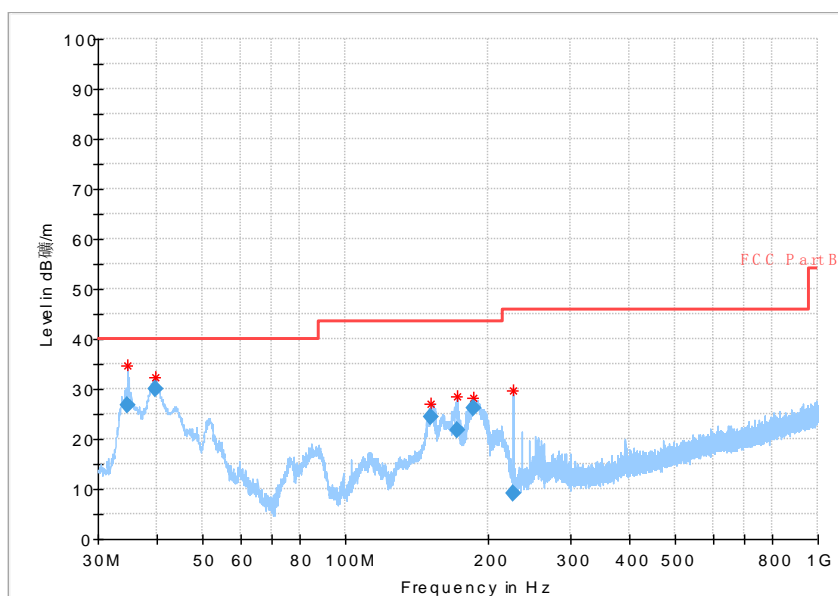


Fig.46 Radiated Spurious Emission (802.11b,Ch1,30MHz~1GHz)

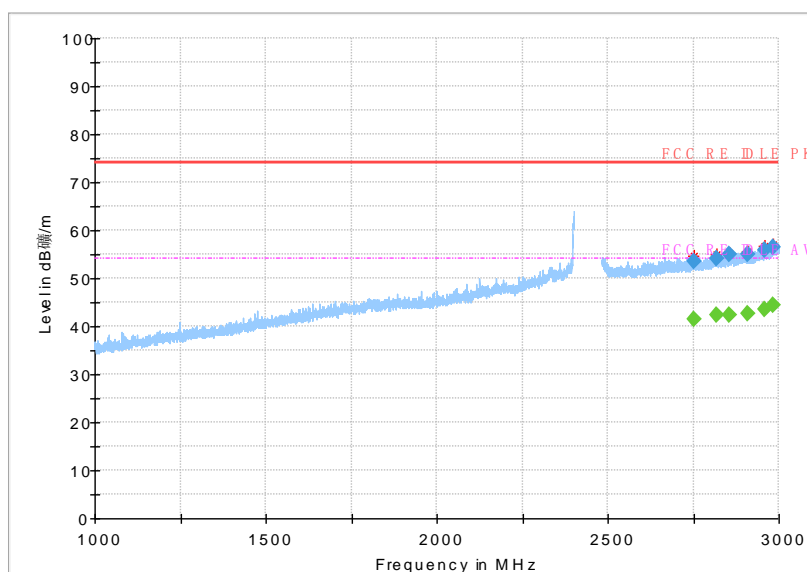


Fig.47 Radiated Spurious Emission (802.11b,Ch1,1GHz~3GHz)



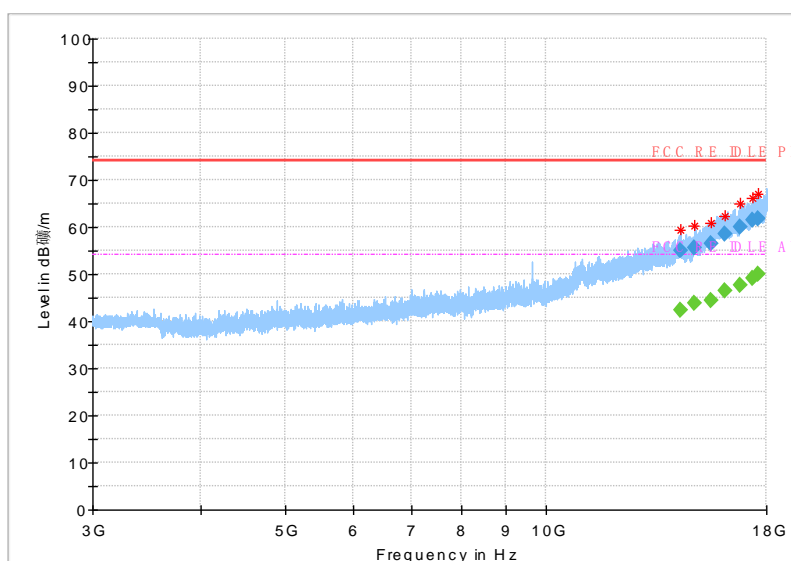


Fig.48 Radiated Spurious Emission (802.11b,Ch1,3GHz~18GHz)

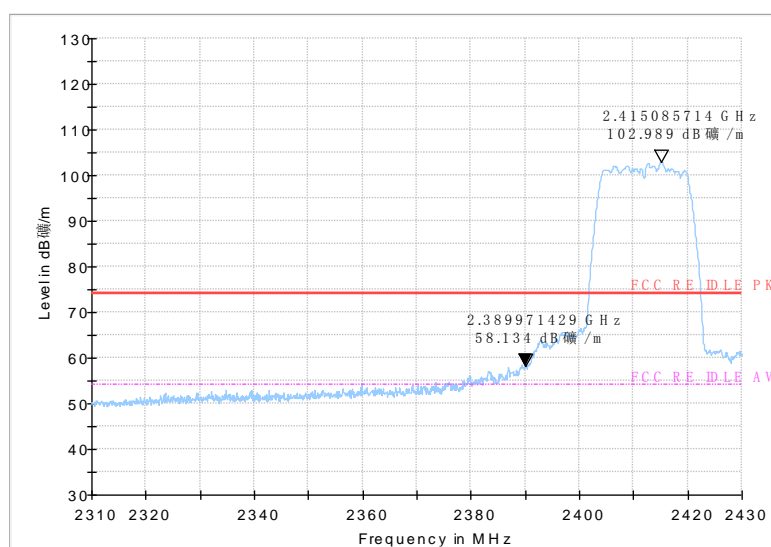


(peak)

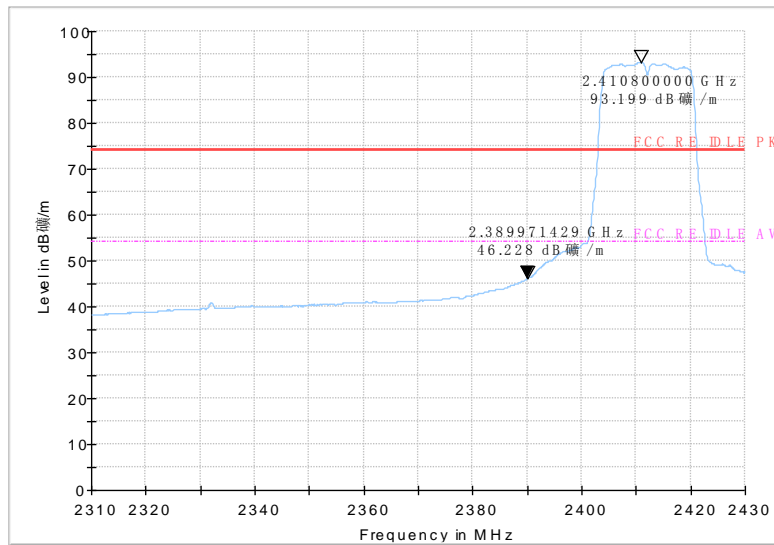


(average)

Fig.49 Radiated emission (Power): 802.11g, low channel

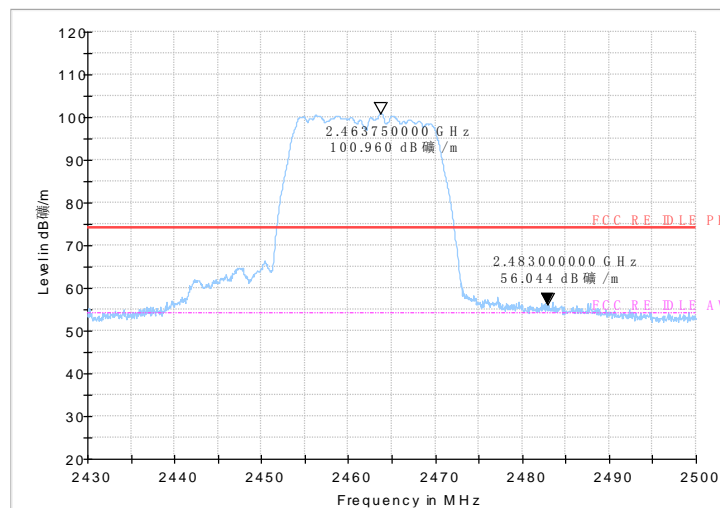

(peak)

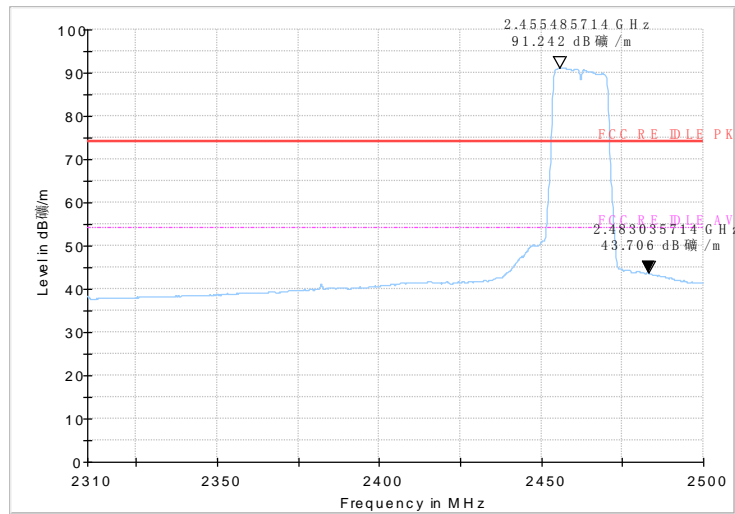

(average)

Fig.50 Radiated emission (Power): 802.11g, high channel

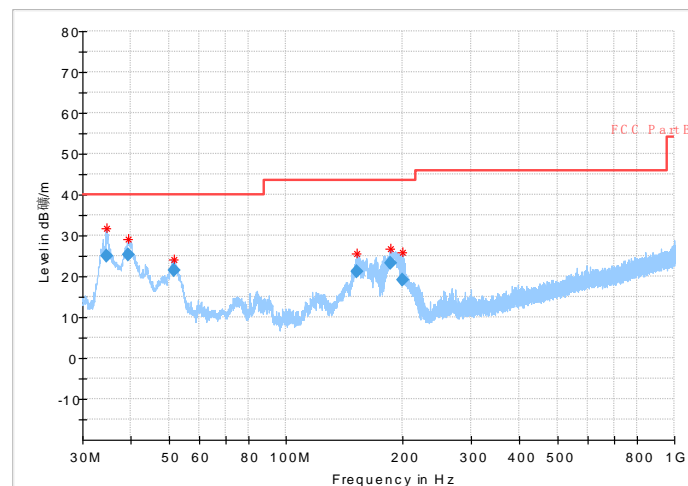


Fig.51 Radiated Spurious Emission (802.11g, Ch11, 30MHz~1GHz)

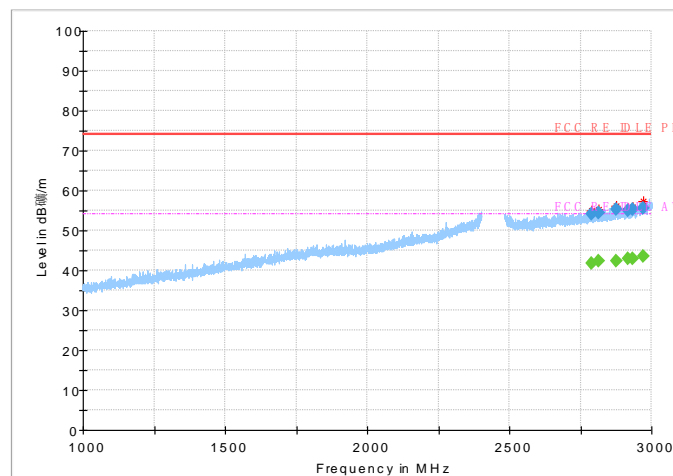


Fig.52 Radiated Spurious Emission (802.11g, Ch11, 1GHz~3GHz)



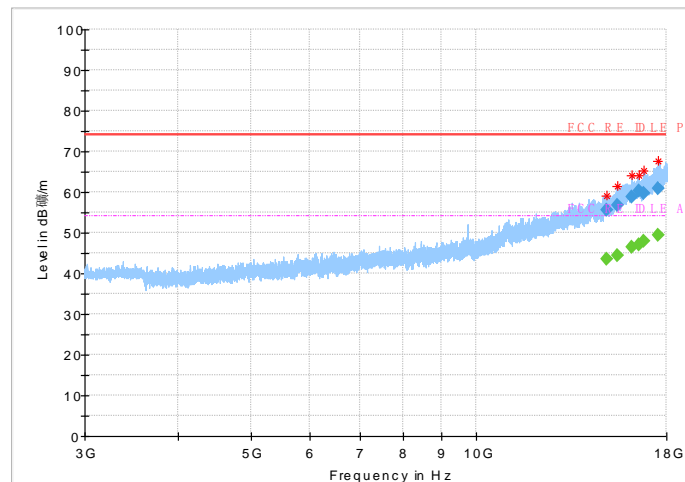


Fig.53 Radiated Spurious Emission (802.11g, Ch11, 3GHz~18GHz)

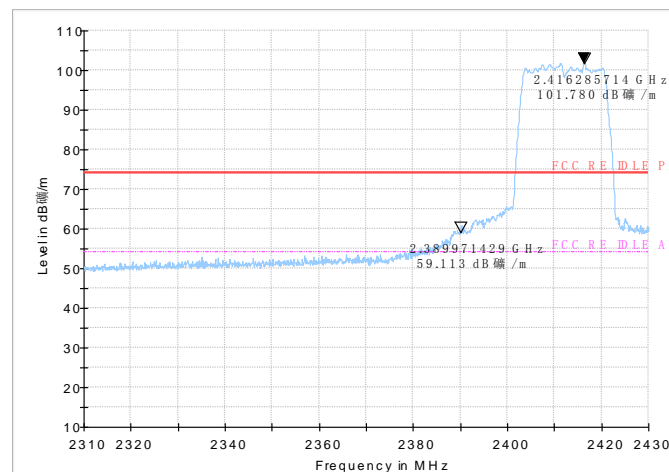

(peak)

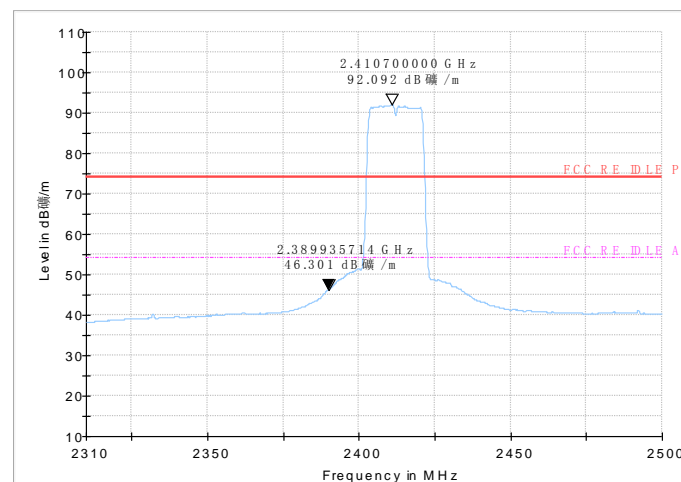

(average)

Fig.54 Radiated emission (Power): 802.11n, low channel

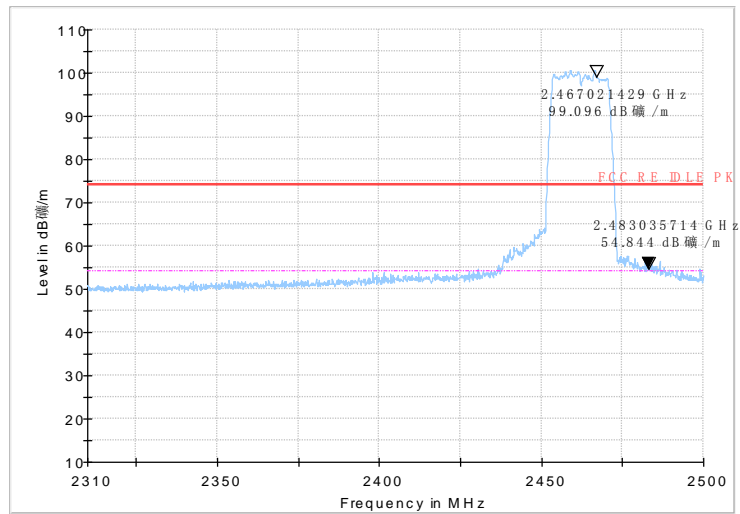


Fig.55 Radiated emission (Power): 802.11n, high channel

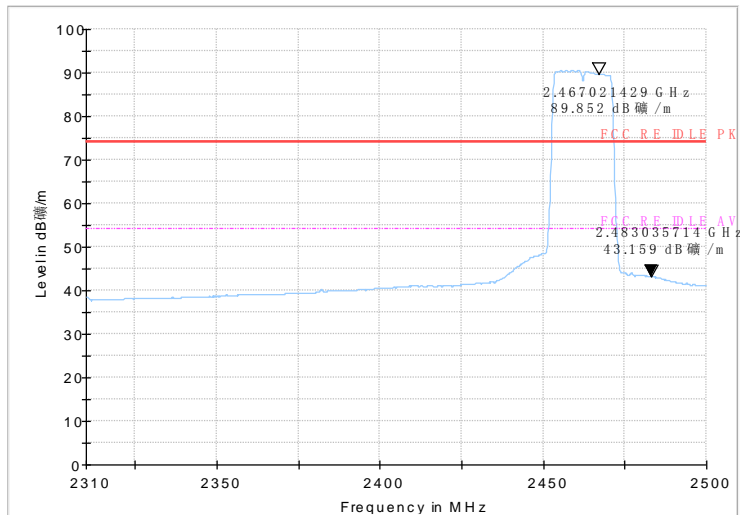


Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)

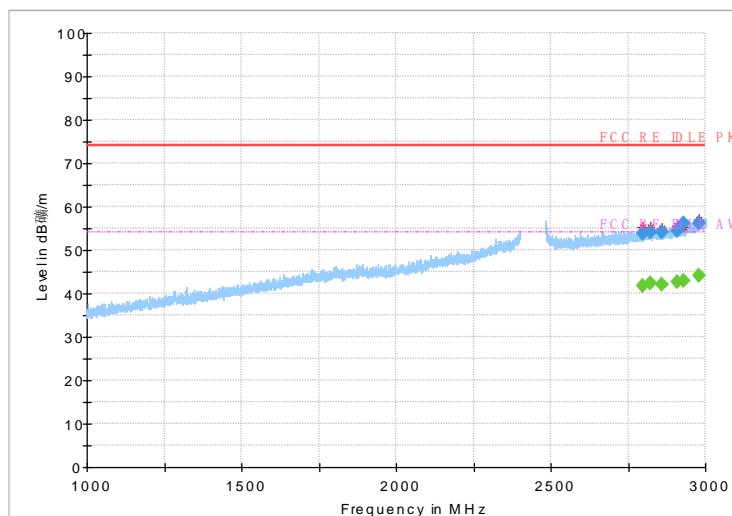


Fig.57 Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)

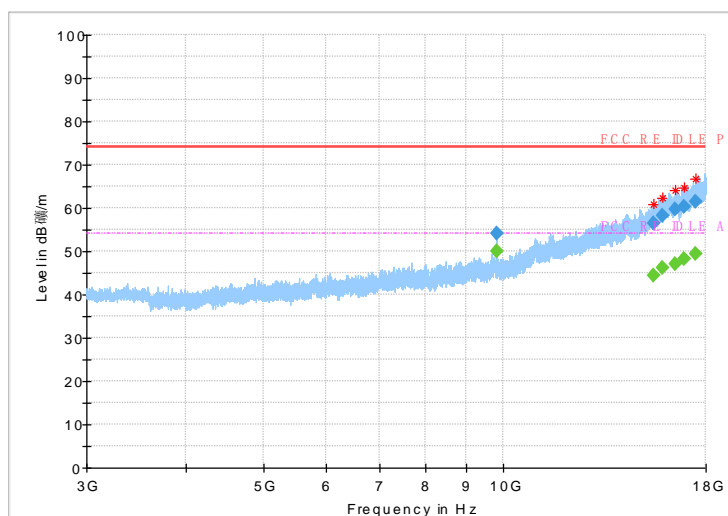


Fig.58 Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)

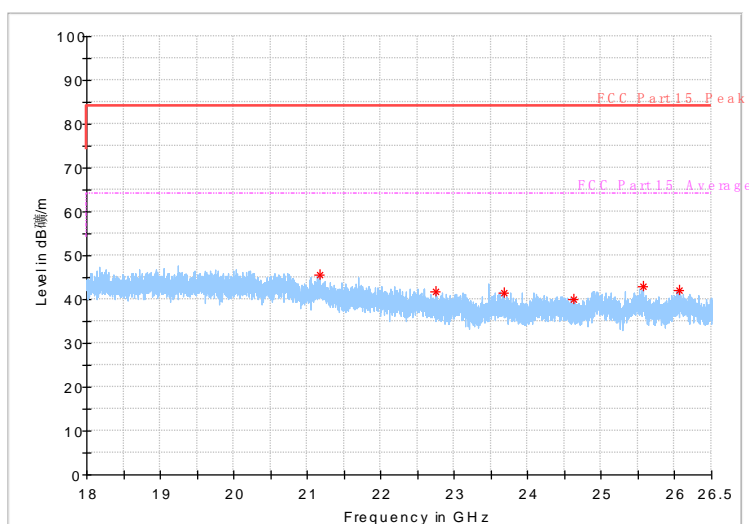


Fig.59 Radiated emission: GFSK, 18 GHz – 26.5 GHz

7. Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ26	101096	R&S	2015-07-06
2	DC Power Supply	ZUP60-14	LOC-220Z006	TDL-Lambda	2015-07-06

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Universal Radio Communication Tester	CMU200	123101	R&S	2015-07-05
3	Test Receiver	ESU40	100307	R&S	2015-07-24
4	Trilog Antenna	VULB9163	19-162515	Schwarzbeck	2017-11-04
5	Double Ridged Guide Antenna	ETS-3117	135885	ETS	2017-05-05
8	2-Line V-Network	ENV216	101380	R&S	2015-07-24

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber2 (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %

Shielding effectiveness	> 110 dB
Electrical insulation	> 10 k Ω
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*******End The Report*******