

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Xiamen Prima Technology Inc.

WiFi module

Model No.: M632USA1

FCC ID: 2ADID-M632USA

Prepared for : Xiamen Prima Technology Inc.
Address : No.178, Xinfeng Road, Xiamen, Fujian, P.R. China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry
Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20172551
Date of Test : Jan. 09, 2018-Feb. 26, 2018
Date of Report : Feb. 27, 2018

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	7
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 6DB BANDWIDTH MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(2).....	11
5.3. EUT Configuration on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	11
5.6. Test Result	12
6. MAXIMUM PEAK OUTPUT POWER	14
6.1. Block Diagram of Test Setup.....	14
6.2. The Requirement For Section 15.247(b)(3).....	14
6.3. EUT Configuration on Measurement	14
6.4. Operating Condition of EUT	14
6.5. Test Procedure	14
6.6. Test Result	15
7. POWER SPECTRAL DENSITY MEASUREMENT	17
7.1. Block Diagram of Test Setup.....	17
7.2. The Requirement For Section 15.247(e).....	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Test Procedure	18
7.6. Test Result	19
8. BAND EDGE COMPLIANCE TEST	21
8.1. Block Diagram of Test Setup.....	21
8.2. The Requirement For Section 15.247(d)	21
8.3. EUT Configuration on Measurement	21
8.4. Operating Condition of EUT	21
8.5. Test Procedure	22
8.6. Test Result	22
9. RADIATED SPURIOUS EMISSION TEST	28
9.1. Block Diagram of Test Setup.....	28
9.2. The Limit For Section 15.247(d)	29
9.3. Restricted bands of operation	30
9.4. Configuration of EUT on Measurement	30

9.5.	Operating Condition of EUT	31
9.6.	Test Procedure	31
9.7.	The Field Strength of Radiation Emission Measurement Results	31
10.	ANTENNA REQUIREMENT.....	44
10.1.	The Requirement	44
10.2.	Antenna Construction	44

Test Report Certification

Applicant : Xiamen Prima Technology Inc.
Address : No.178, Xinfeng Road, Xiamen, Fujian, P.R. China.
Manufacturer : Xiamen Prima Technology Inc.
Address : No.178, Xinfeng Road, Xiamen, Fujian, P.R. China.
Product : WiFi module
Model No. : M632USA1
Trade name : PRIMA

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by SHENZHEN ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and SHENZHEN ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of SHENZHEN ACCURATE TECHNOLOGY CO. LTD.

Date of Test :

Jan. 09, 2018-Feb. 26, 2018

Date of Report:

Feb. 27, 2018

Prepared by :

Tim Zhang

(Tim Zhang, Engineer)

Approved & Authorized Signer :

Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	WiFi module
Model Number	:	M632USA1
Bluetooth version	:	BT V4.0 Dual Mode This report is for BT V4.0 LE mode
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	2dBi
Antenna type	:	External Antenna
Power Supply	:	DC 3.3V
Modulation mode	:	GFSK
Applicant	:	Xiamen Prima Technology Inc.
Address	:	No.178, Xinfeng Road, Xiamen, Fujian, P.R. China
Manufacturer	:	Xiamen Prima Technology Inc.
Address	:	No.178, Xinfeng Road, Xiamen, Fujian, P.R. China
Date of sample received	:	Jan. 09, 2018
Date of Test	:	Jan. 09, 2018-Feb. 26, 2018

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	Jan. 05, 2019
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 06, 2018	Jan. 05, 2019
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 06, 2018	Jan. 05, 2019
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 06, 2018	Jan. 05, 2019
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 06, 2018	Jan. 05, 2019
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	Jan. 05, 2019
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	Jan. 05, 2019
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	Jan. 05, 2019
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	Jan. 05, 2019
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 06, 2018	Jan. 05, 2019
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 06, 2018	Jan. 05, 2019
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	Jan. 05, 2019
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 06, 2018	Jan. 05, 2019
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 06, 2018	Jan. 05, 2019

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2. Configuration and peripherals

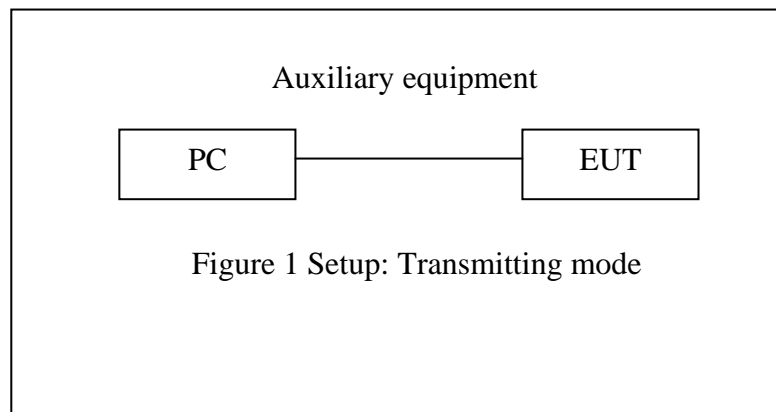

(EUT: WiFi module)


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the EUT is DC 3.3V, According to the FCC standard requirements, conducted emission is not applicable.

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup



(EUT: WiFi module)

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.6.Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.738	0.5	PASS
19	2440	0.732	0.5	PASS
39	2480	0.744	0.5	PASS


The spectrum analyzer plots are attached as below.

channel 0

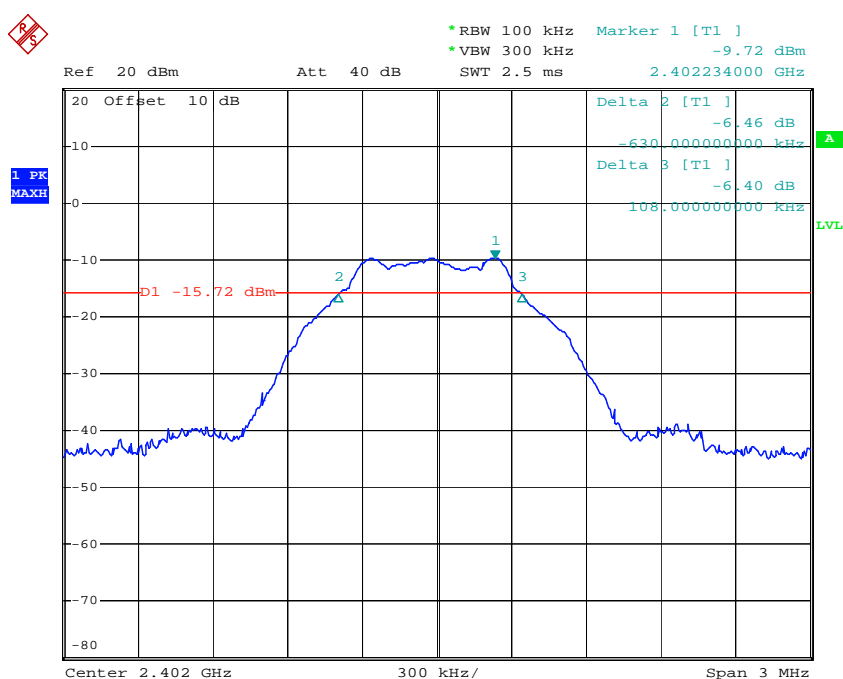


Comment A:
Date: 18.JAN.2018 15:06:47

channel 19

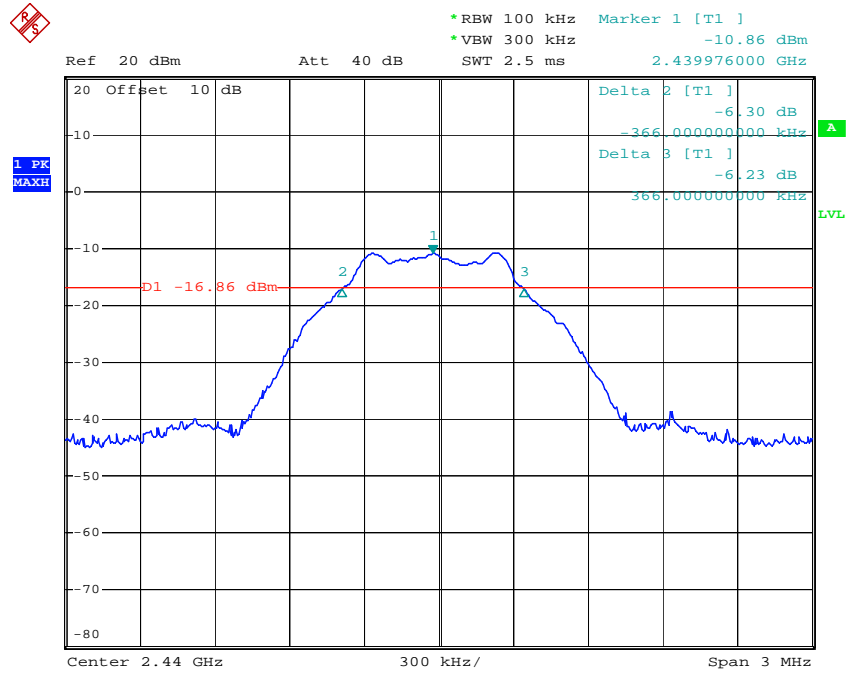

Comment A:
Date: 18.JAN.2018 15:05:33


channel 39

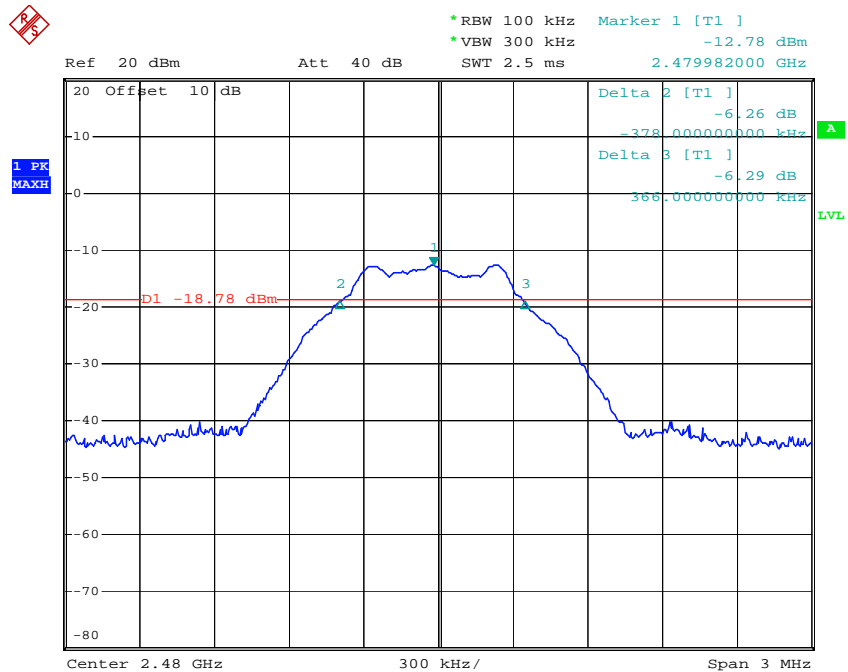

Comment A:
Date: 18.JAN.2018 15:04:26

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



(EUT: WiFi module)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


6.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.

6.5.3. Measurement the maximum peak output power.


6.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-8.92	30	PASS
19	2440	-10.00	30	PASS
39	2480	-11.87	30	PASS

The spectrum analyzer plots are attached as below.

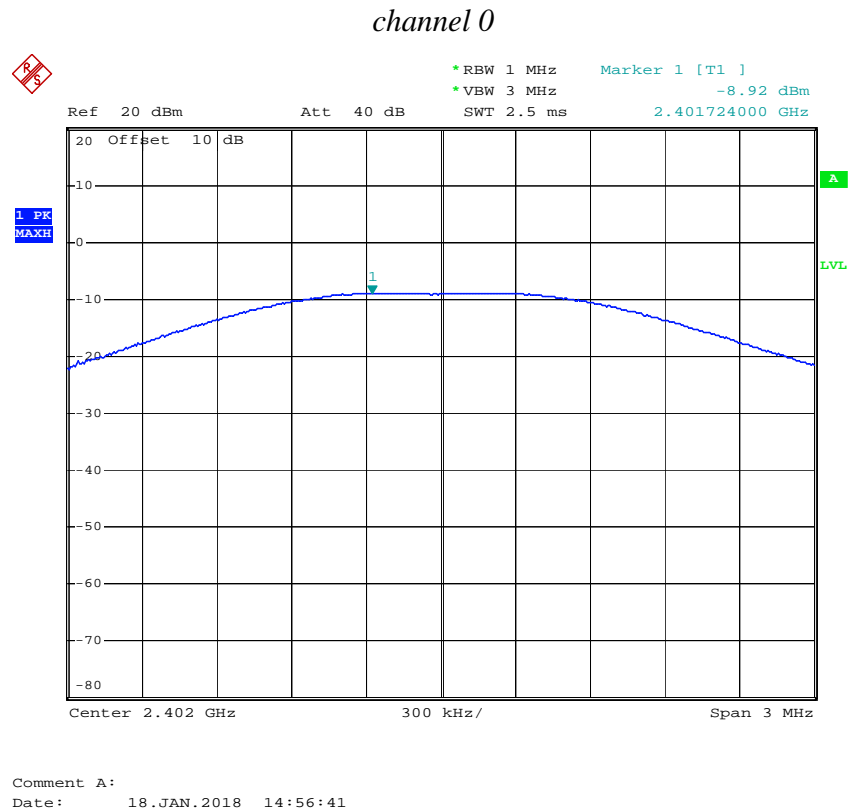


channel 19

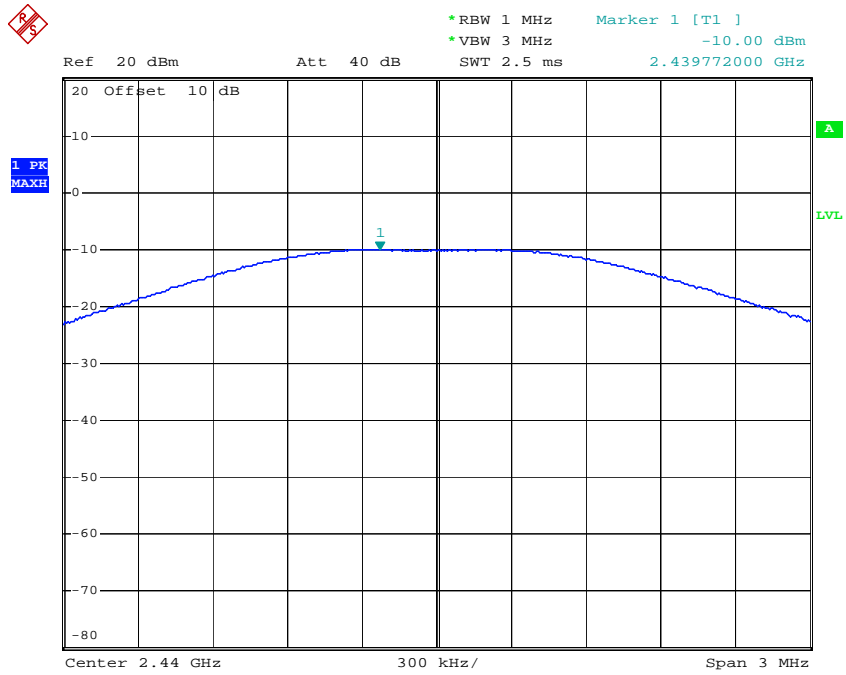

Comment A:
Date: 18.JAN.2018 14:56:23


channel 39

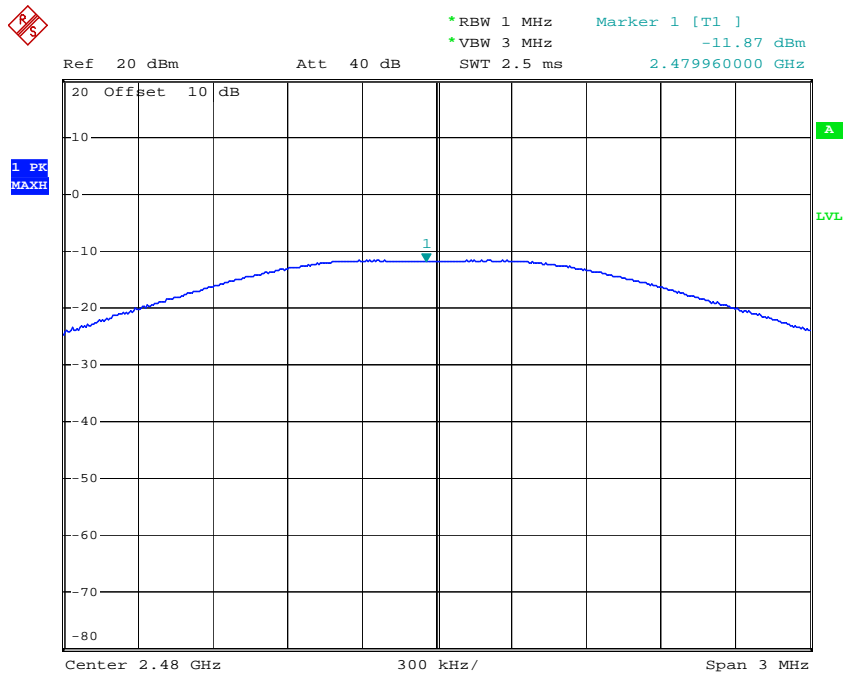

Comment A:
Date: 18.JAN.2018 14:55:58

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: WiFi module)

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

7.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.


7.5.4. Measurement the maximum power spectral density.

7.6. Test Result

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-24.32	8	PASS
19	2440	-25.50	8	PASS
39	2480	-27.21	8	PASS


The spectrum analyzer plots are attached as below.

channel 0

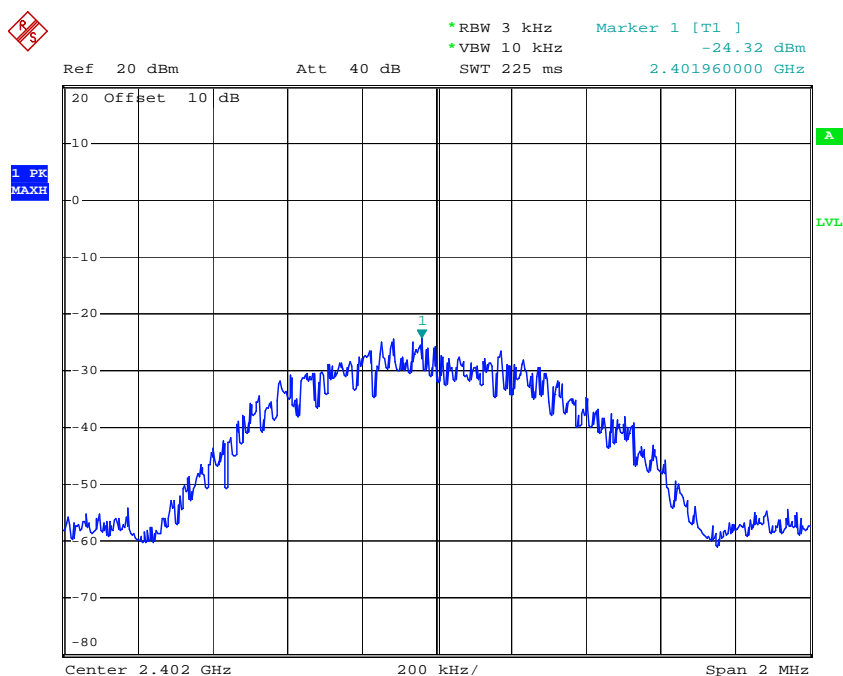


Comment A:
Date: 18.JAN.2018 14:52:14

channel 19

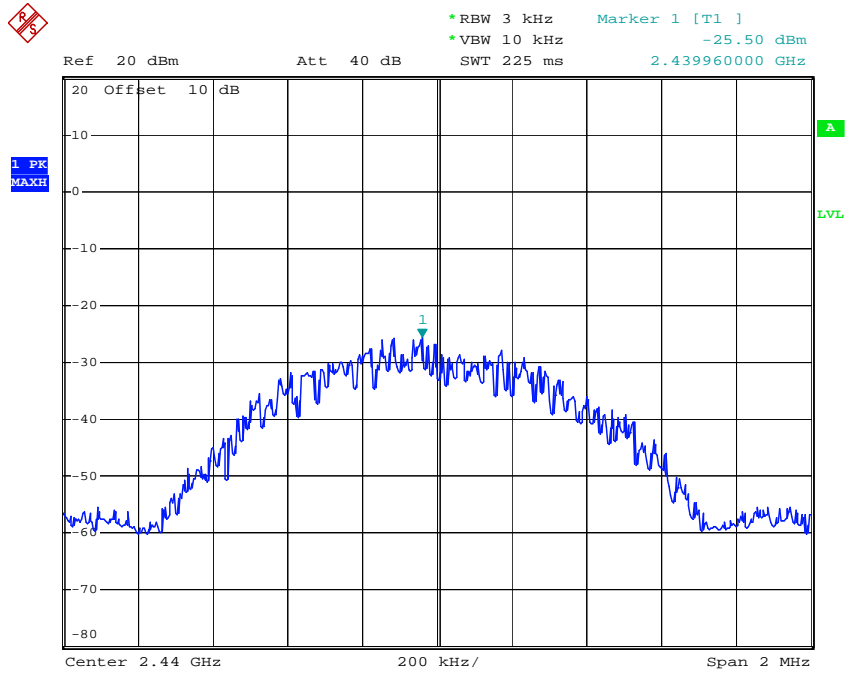

Comment A:
Date: 18.JAN.2018 14:54:11


channel 39

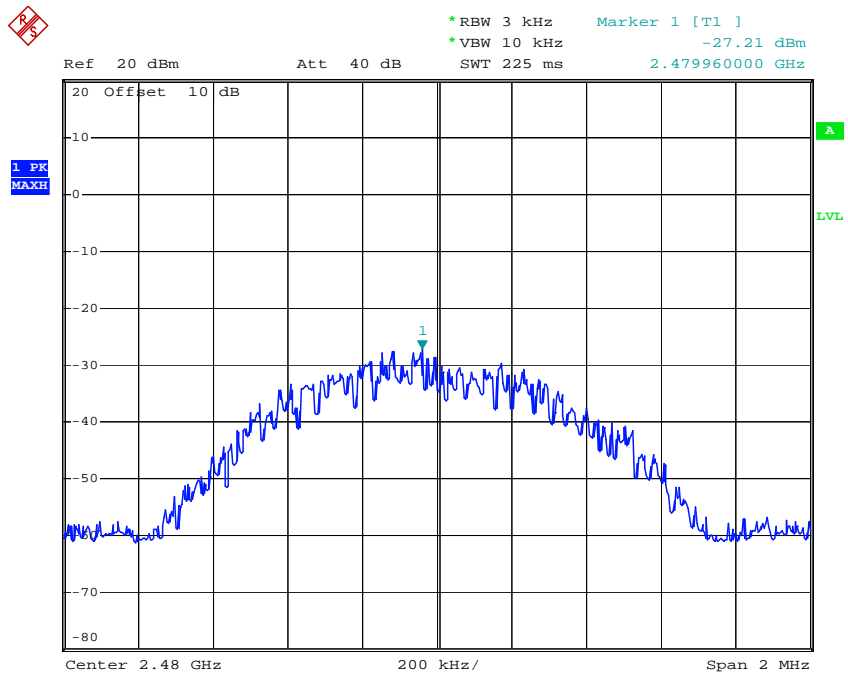

Comment A:
Date: 18.JAN.2018 14:55:20

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



(EUT: WiFi module)

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

8.5.3. Radiate Band Edge:

8.5.4. The EUT is placed on a turntable, which is 0.1m above the ground plane and worked at highest radiated power.

8.5.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

8.5.8. RBW=1MHz, VBW=1MHz


8.5.9. The band edges was measured and recorded.

8.6. Test Result

Pass


Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	33.76	20
39	2.4835GHz	30.50	20

channel 0

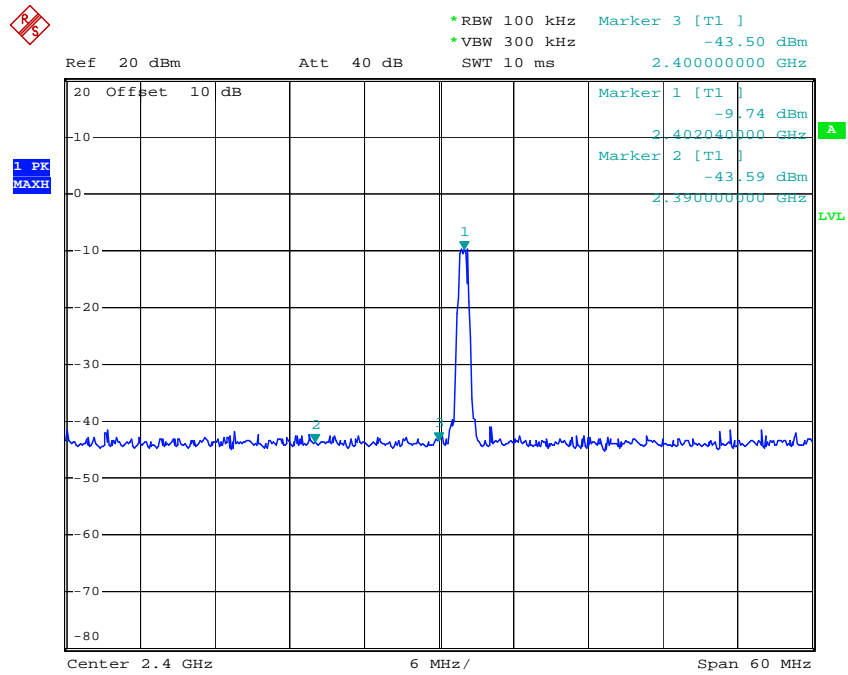

Comment A:
Date: 18.JAN.2018 14:57:48

channel 39

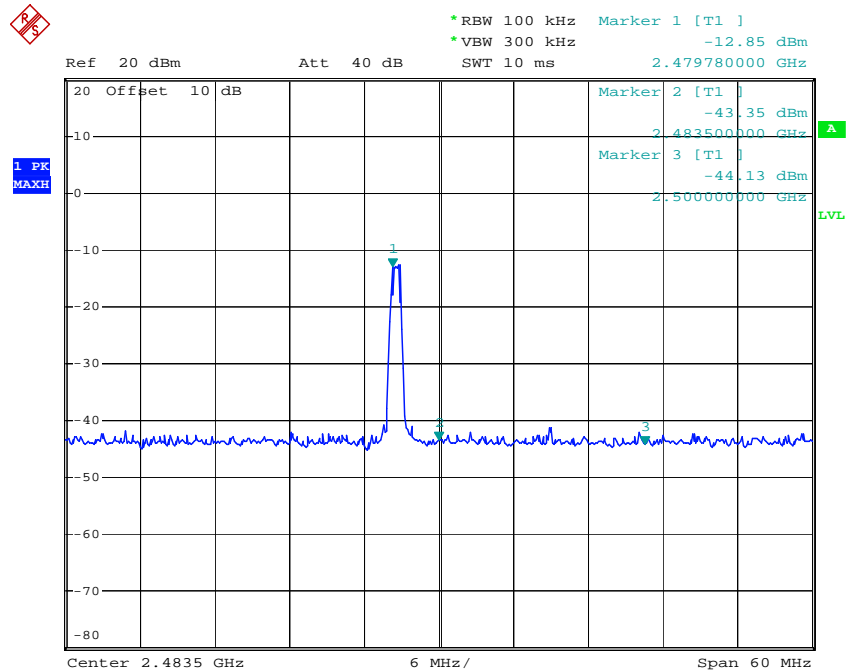

Comment A:
Date: 18.JAN.2018 15:03:00

Radiated Band Edge Result



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #143

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2402MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 18/01/26/

Time: 9/25/25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

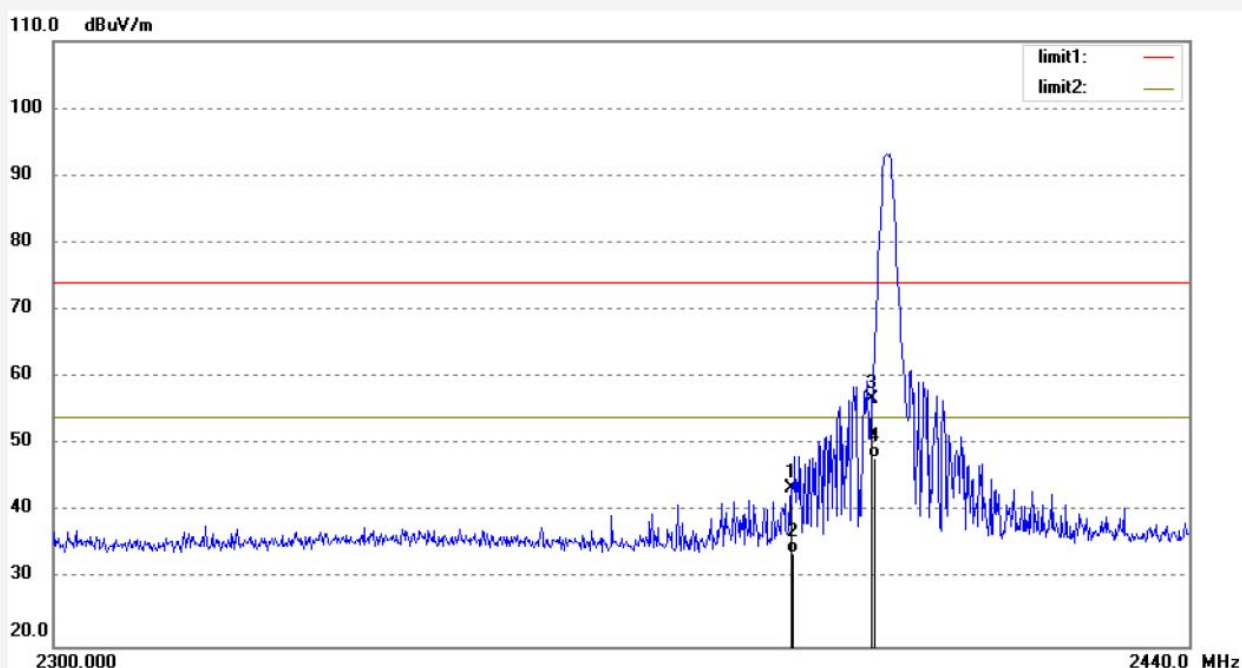


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	47.75	-4.32	43.43	74.00	-30.57	peak	200	153	
2	2390.000	38.15	-4.32	33.83	54.00	-20.17	AVG	200	210	
3	2400.000	61.01	-4.27	56.74	74.00	-17.26	peak	200	91	
4	2400.000	52.34	-4.27	48.07	54.00	-5.93	AVG	200	67	

Job No.: frank2018 #144
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Wifi module
Mode: TX 2402MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 18/01/26/
Time: 9/26/25
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20172551

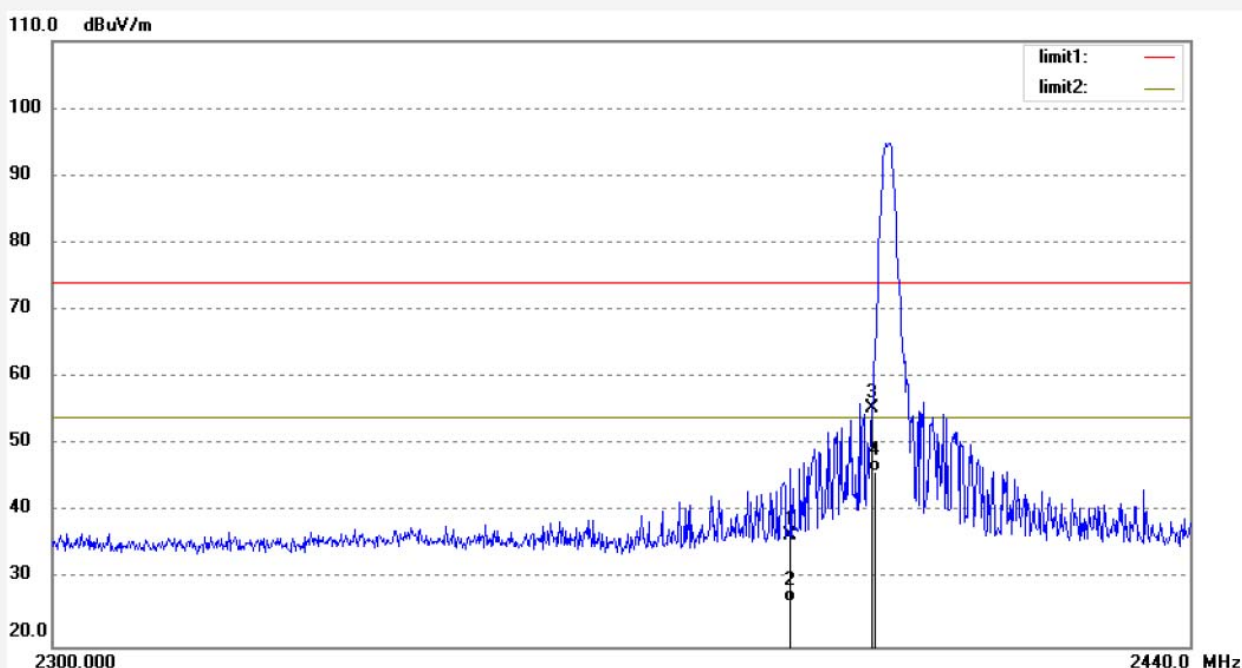

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.87	-4.32	36.55	74.00	-37.45	peak	200	198	
2	2390.000	30.98	-4.32	26.66	54.00	-27.34	AVG	200	54	
3	2400.000	59.63	-4.27	55.36	74.00	-18.64	peak	150	213	
4	2400.000	50.15	-4.27	45.88	54.00	-8.12	AVG	150	102	

Job No.: frank2018 #145

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2480MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 18/01/26/

Time: 9/27/43

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

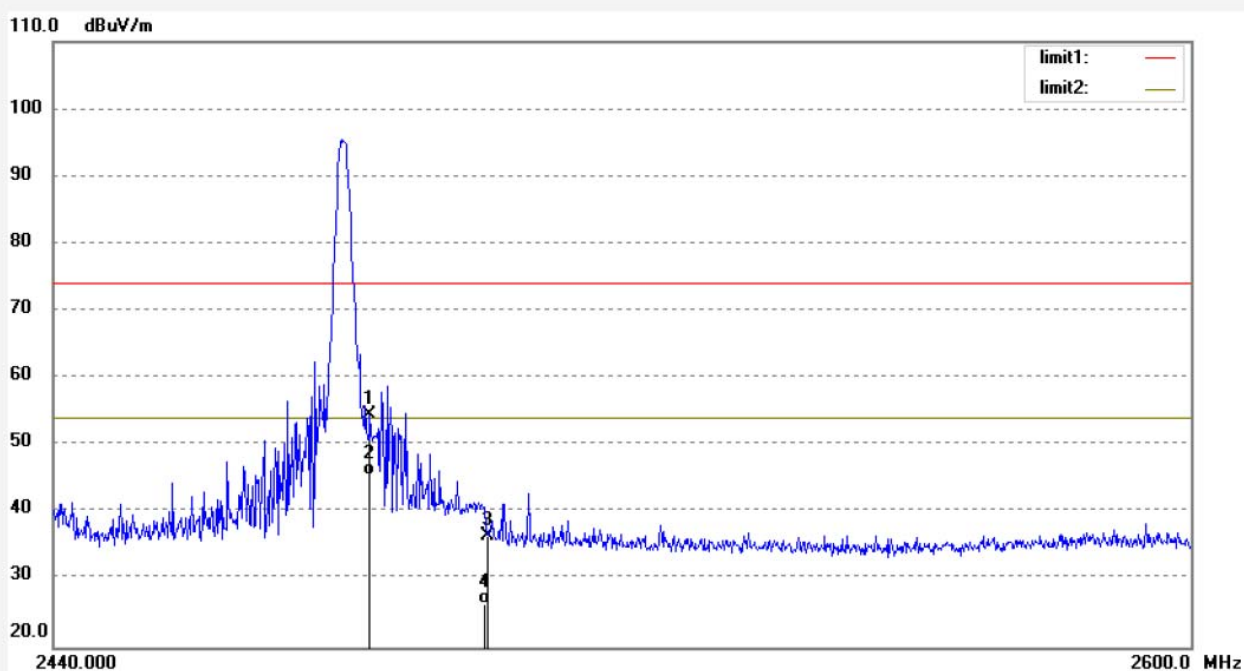

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	58.37	-3.89	54.48	74.00	-19.52	peak	150	159	
2	2483.500	49.38	-3.89	45.49	54.00	-8.51	AVG	150	301	
3	2500.000	40.33	-3.81	36.52	74.00	-37.48	peak	150	218	
4	2500.000	30.25	-3.81	26.44	54.00	-27.56	AVG	150	327	

Job No.: frank2018 #146

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2480MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 18/01/26/

Time: 9/28/34

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

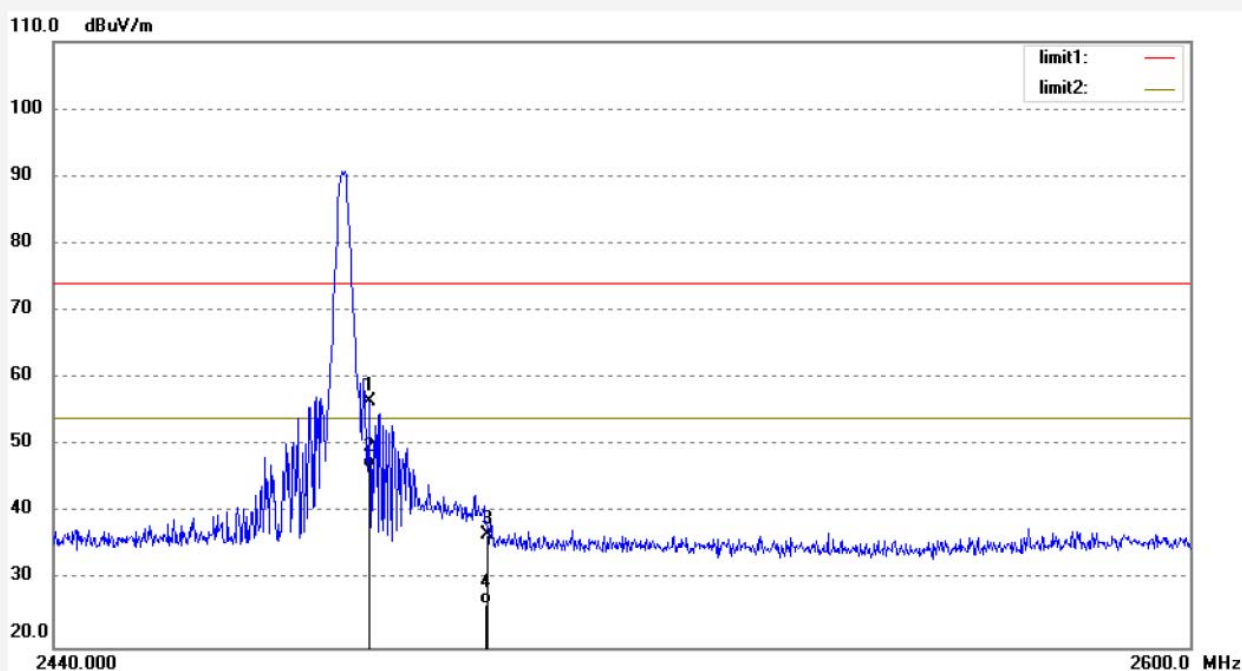

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	60.37	-3.89	56.48	74.00	-17.52	peak	200	251	
2	2483.500	50.63	-3.89	46.74	54.00	-7.26	AVG	200	213	
3	2500.000	40.63	-3.81	36.82	74.00	-37.18	peak	200	180	
4	2500.000	30.15	-3.81	26.34	54.00	-27.66	AVG	200	31	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

9. RADIATED SPURIOUS EMISSION TEST

9.1. Block Diagram of Test Setup


9.1.1. Block diagram of connection between the EUT and peripherals

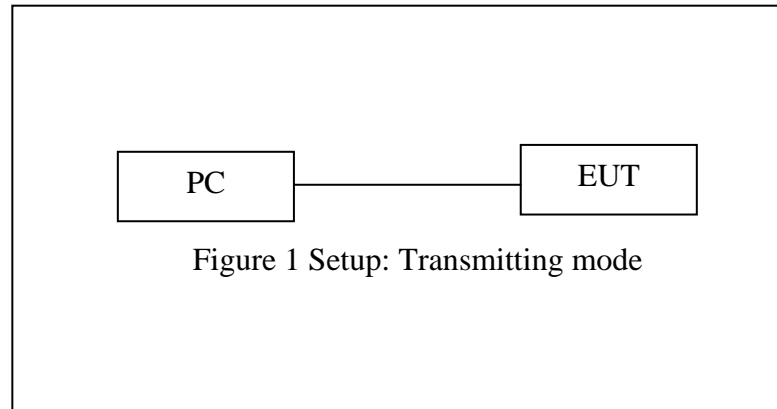


(EUT: WiFi module)

9.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

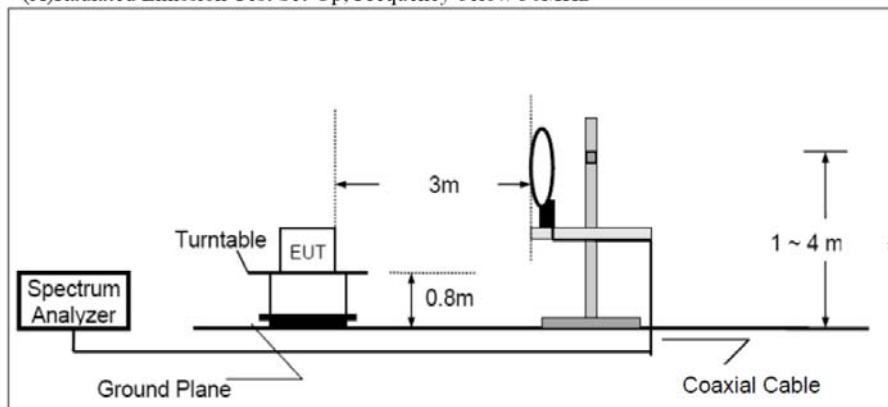

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

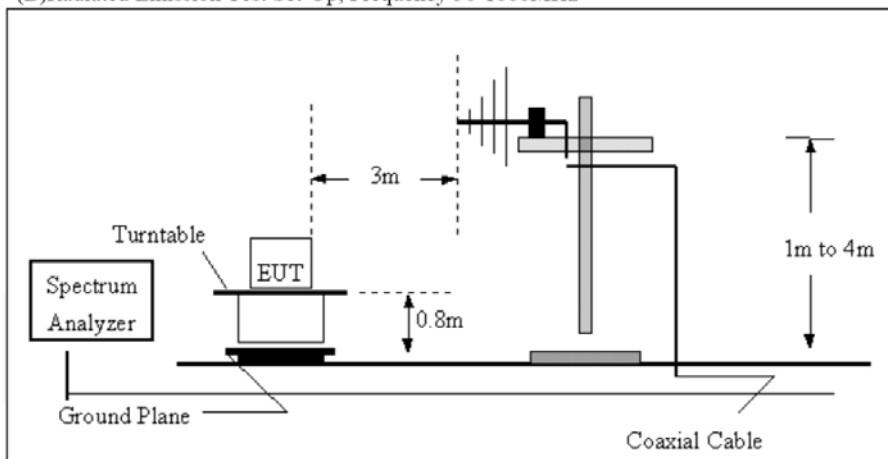

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

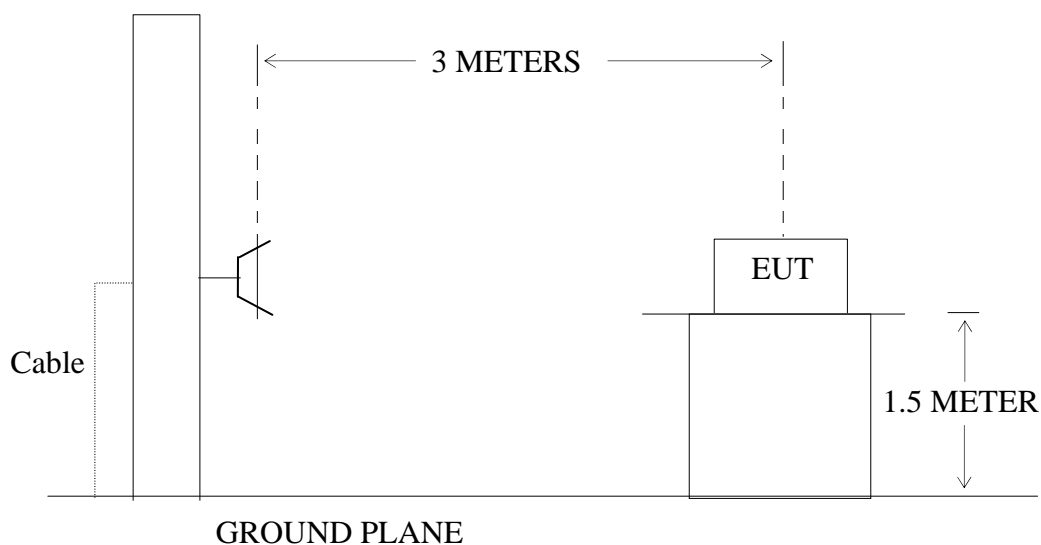

9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

9.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The radiation emissions from 9kHz-30MHz and 18-25GHz are not reported, because the test values lower than the limits of 20dB.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #96
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Wifi module
Mode: TX 2402MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 17:31:52
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20172551

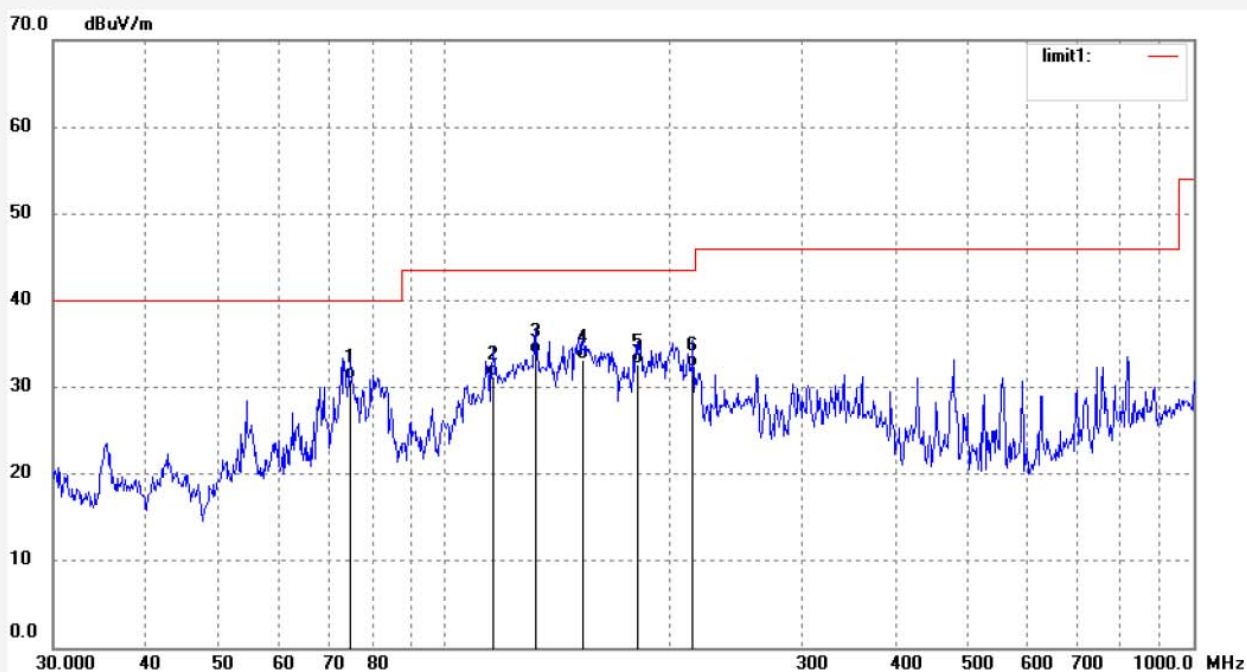

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	74.7934	58.62	-27.69	30.93	40.00	-9.07	QP	200	169	
2	116.0391	58.65	-27.37	31.28	43.50	-12.22	QP	200	164	
3	132.1489	61.67	-27.77	33.90	43.50	-9.60	QP	200	42	
4	153.1627	60.98	-27.77	33.21	43.50	-10.29	QP	200	184	
5	180.6640	58.67	-25.97	32.70	43.50	-10.80	QP	200	327	
6	214.6063	56.38	-24.06	32.32	43.50	-11.18	QP	200	101	

Job No.: frank2018 #95

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2402MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 17:29:25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

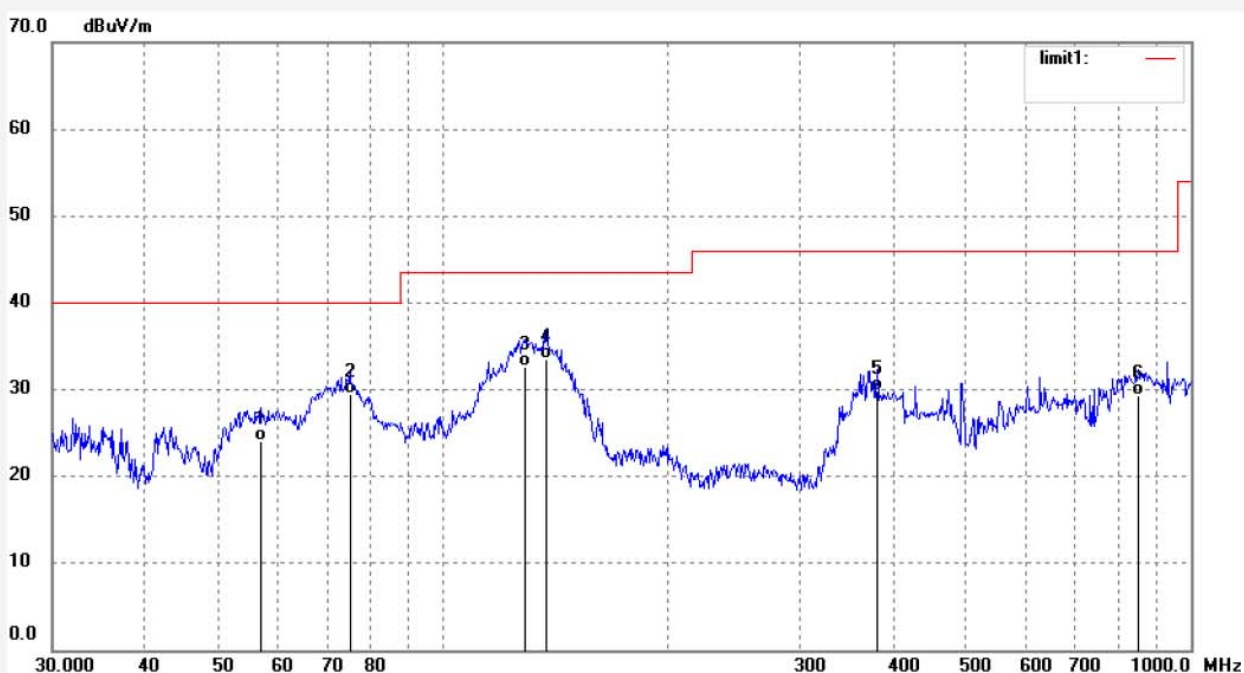

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	57.0645	51.15	-27.09	24.06	40.00	-15.94	QP	100	123	
2	75.0566	57.12	-27.70	29.42	40.00	-10.58	QP	100	150	
3	128.4860	60.35	-27.67	32.68	43.50	-10.82	QP	100	208	
4	137.3565	61.37	-27.89	33.48	43.50	-10.02	QP	100	351	
5	380.5126	48.38	-18.61	29.77	46.00	-16.23	QP	100	305	
6	850.7603	37.35	-8.01	29.34	46.00	-16.66	QP	100	120	

Job No.: frank2018 #97

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2440MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 17:31:52

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

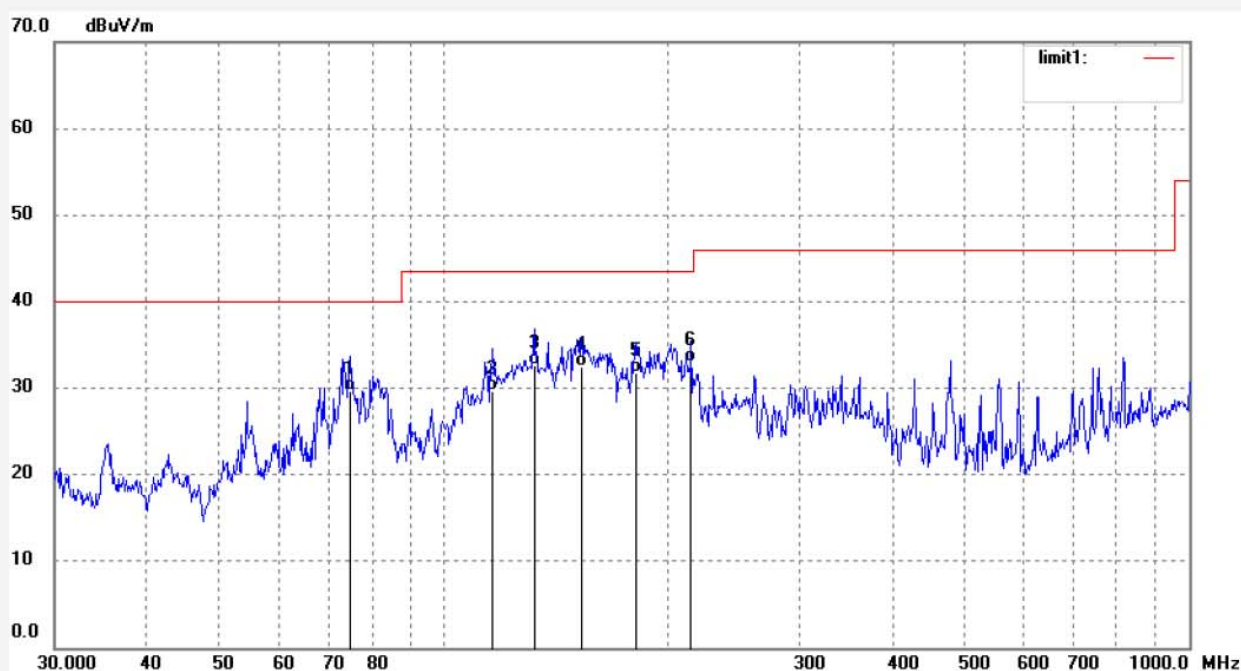

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	74.7934	57.35	-27.69	29.66	40.00	-10.34	QP	200	256	
2	116.0391	57.12	-27.37	29.75	43.50	-13.75	QP	200	198	
3	132.1489	60.38	-27.77	32.61	43.50	-10.89	QP	200	360	
4	153.1627	60.18	-27.77	32.41	43.50	-11.09	QP	200	248	
5	180.6640	57.65	-25.97	31.68	43.50	-11.82	QP	200	151	
6	214.6063	56.98	-24.06	32.92	43.50	-10.58	QP	200	62	

Job No.: frank2018 #98

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2440MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 17:29:25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

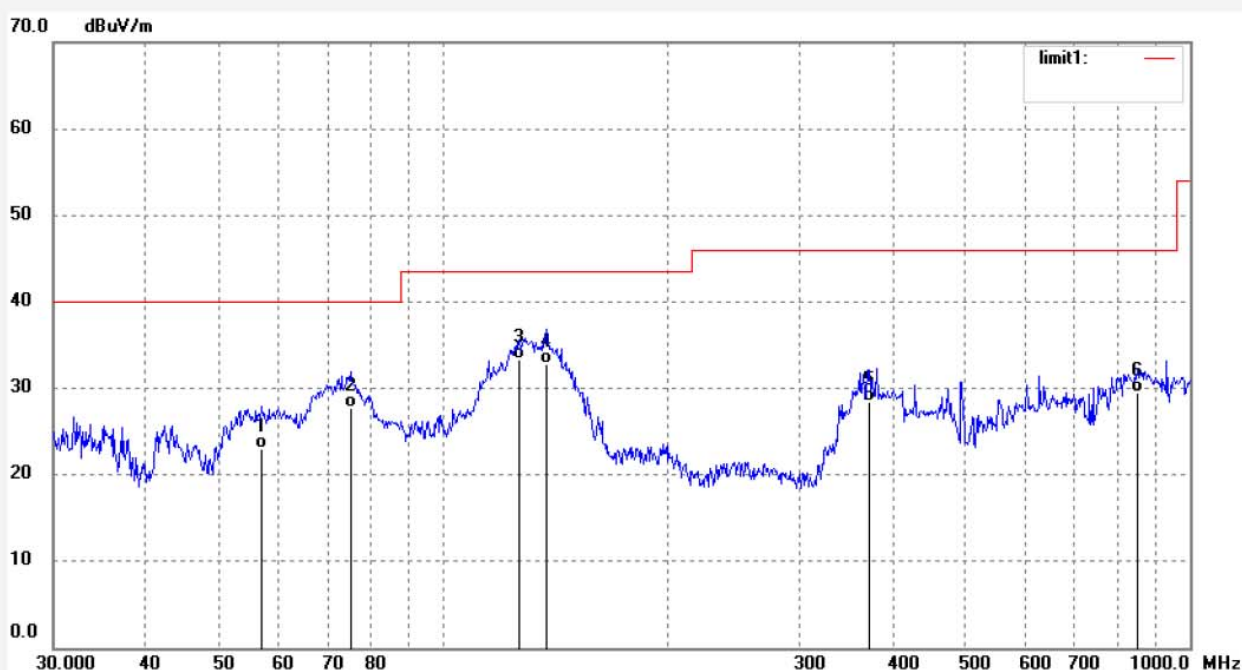

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	57.0645	50.18	-27.09	23.09	40.00	-16.91	QP	100	325	
2	75.0566	55.38	-27.70	27.68	40.00	-12.32	QP	100	147	
3	126.2485	60.89	-27.62	33.27	43.50	-10.23	QP	100	258	
4	137.3565	60.78	-27.89	32.89	43.50	-10.61	QP	100	321	
5	372.5747	47.12	-18.74	28.38	46.00	-17.62	QP	100	134	
6	850.7603	37.48	-8.01	29.47	46.00	-16.53	QP	100	102	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #100
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Wifi module
Mode: TX 2480MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 17:31:52
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20172551

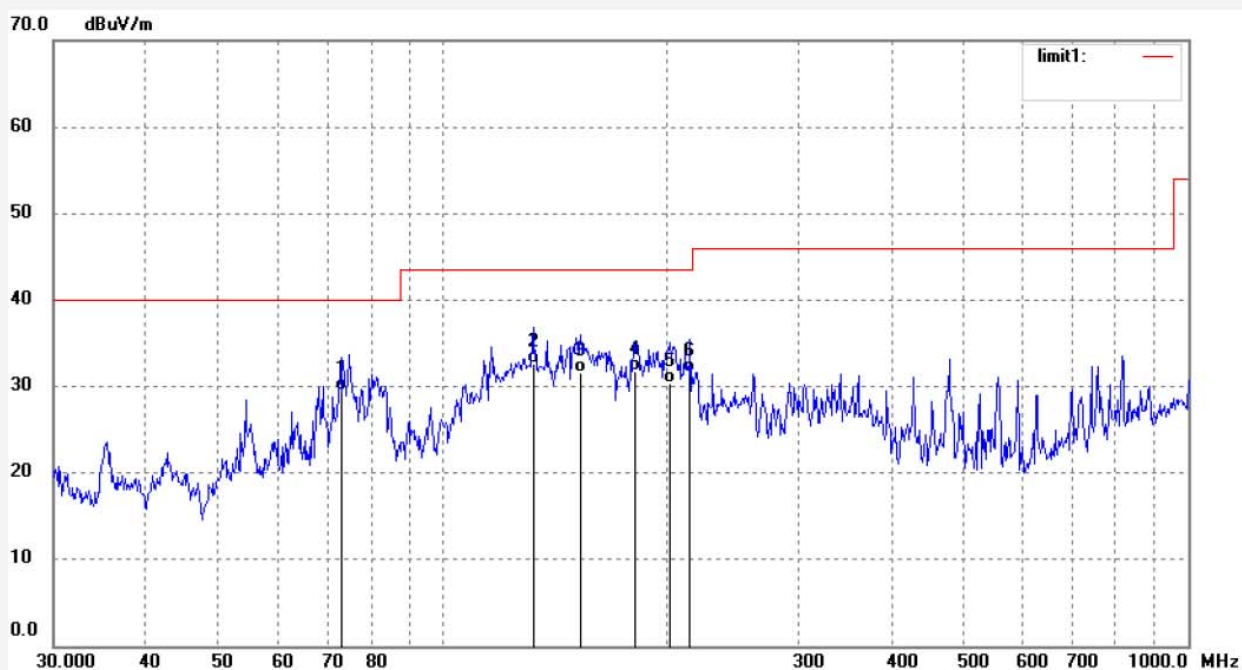

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	73.2330	57.15	-27.63	29.52	40.00	-10.48	QP	200	315	
2	132.1489	60.48	-27.77	32.71	43.50	-10.79	QP	200	55	
3	153.1627	59.35	-27.77	31.58	43.50	-11.92	QP	200	168	
4	180.6639	57.68	-25.97	31.71	43.50	-11.79	QP	200	157	
5	201.4539	54.68	-24.30	30.38	43.50	-13.12	QP	200	120	
6	214.6063	55.68	-24.06	31.62	43.50	-11.88	QP	200	93	

Job No.: frank2018 #99

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2480MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 17:29:25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

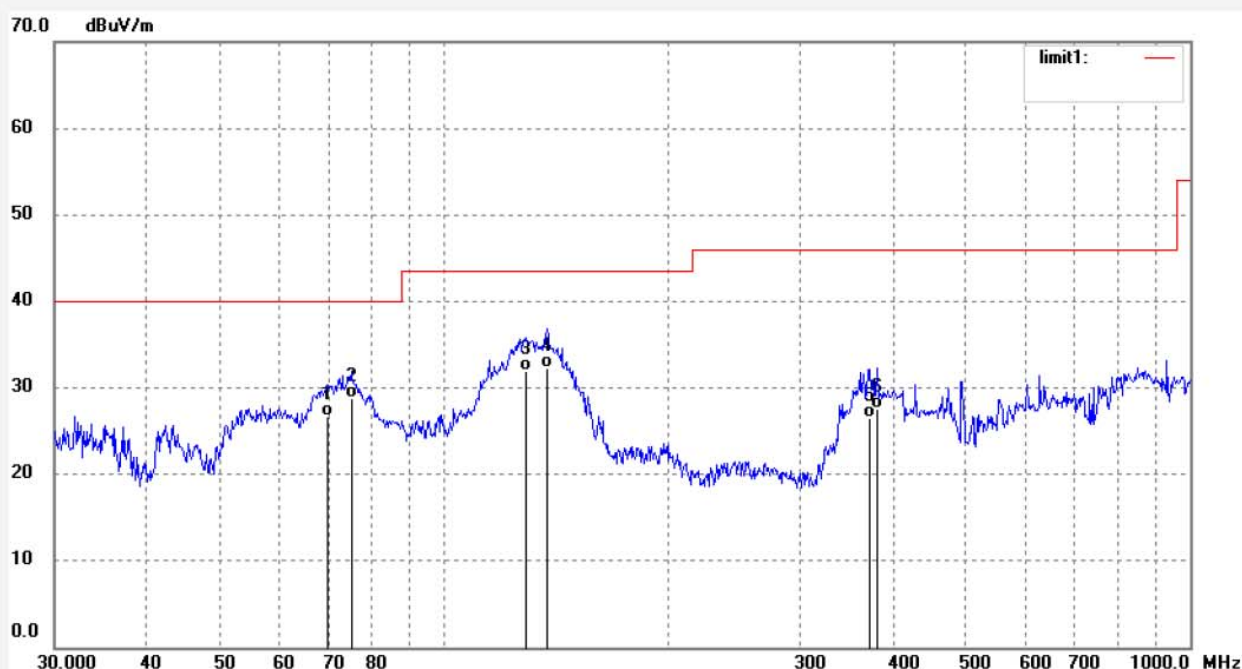

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	69.7179	54.15	-27.47	26.68	40.00	-13.32	QP	100	315	
2	75.0566	56.48	-27.70	28.78	40.00	-11.22	QP	100	178	
3	128.4859	59.68	-27.67	32.01	43.50	-11.49	QP	100	150	
4	137.3565	60.18	-27.89	32.29	43.50	-11.21	QP	100	97	
5	372.5747	45.18	-18.74	26.44	46.00	-19.56	QP	100	102	
6	380.5126	46.15	-18.61	27.54	46.00	-18.46	QP	100	138	

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #120

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2402MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/46/10

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

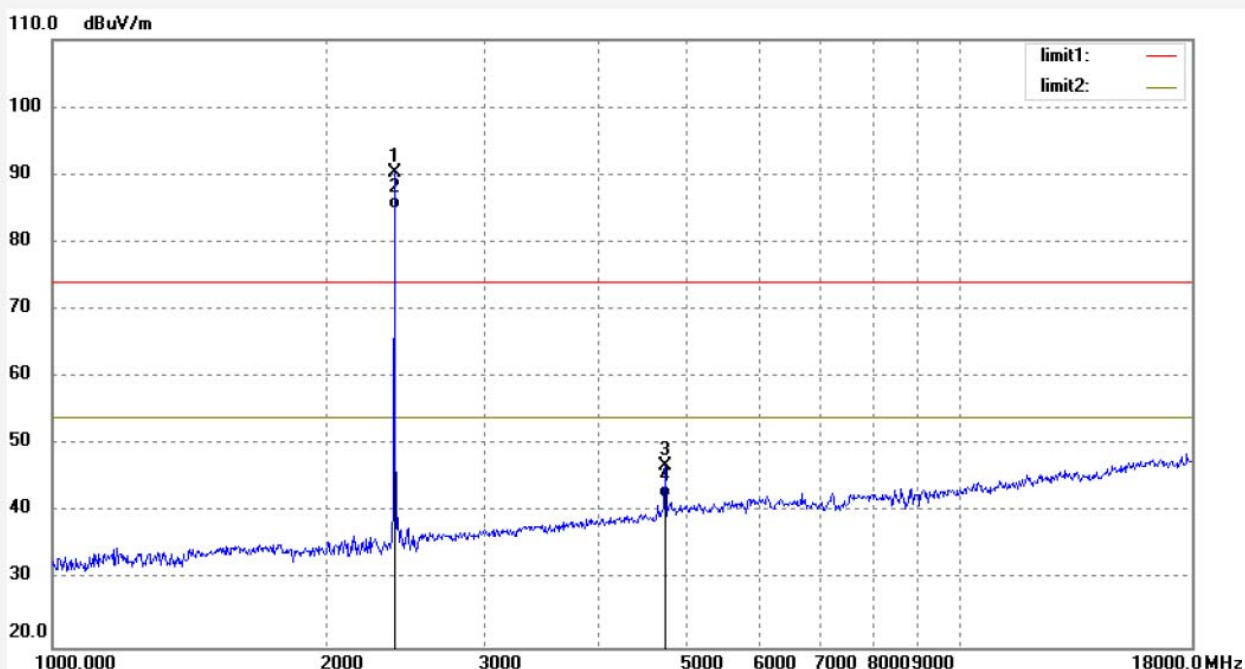

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.419	94.65	-4.37	90.28			peak	200	165	
2	2402.419	89.34	-4.37	84.97			AVG	250	124	
3	4804.857	44.20	2.70	46.90	74.00	-27.10	peak	250	320	
4	4804.857	39.48	2.70	42.18	54.00	-11.82	AVG	250	187	

Job No.: frank2018 #119

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2402MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/45/04

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

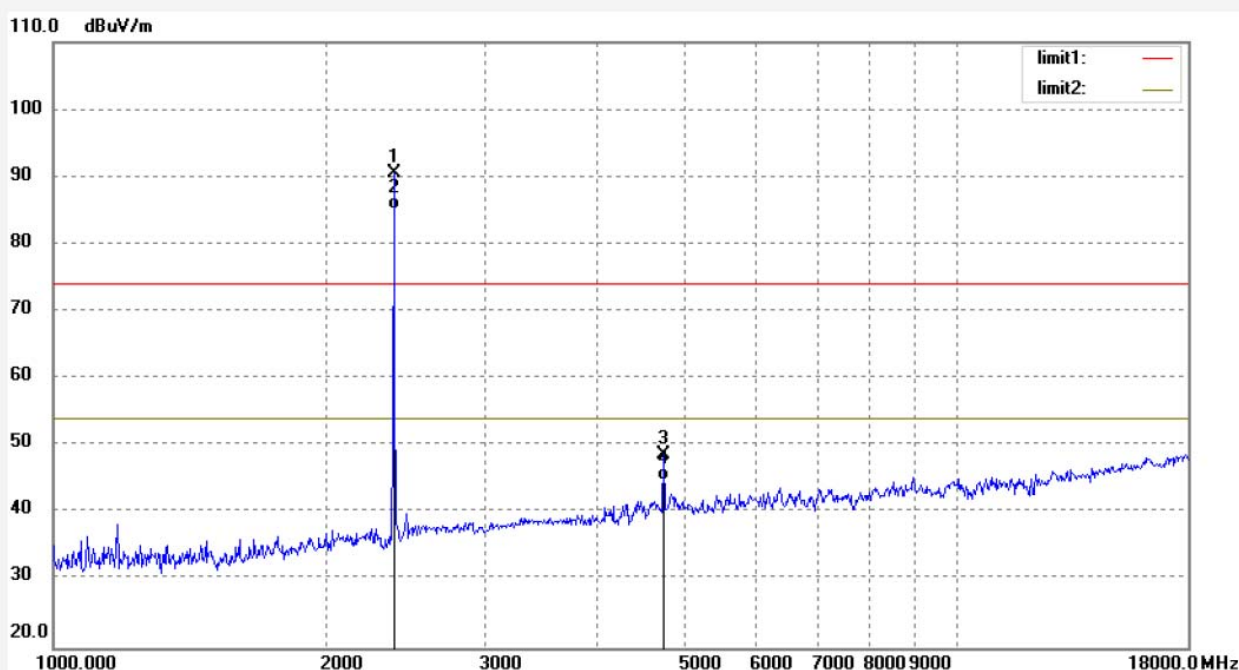

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.419	94.97	-4.37	90.60			peak	150	268	
2	2402.419	89.46	-4.37	85.09			AVG	150	162	
3	4804.857	46.07	2.70	48.77	74.00	-25.23	peak	150	197	
4	4804.857	42.13	2.70	44.83	54.00	-9.17	AVG	150	351	

Job No.: frank2018 #121

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2440MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/47/29

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

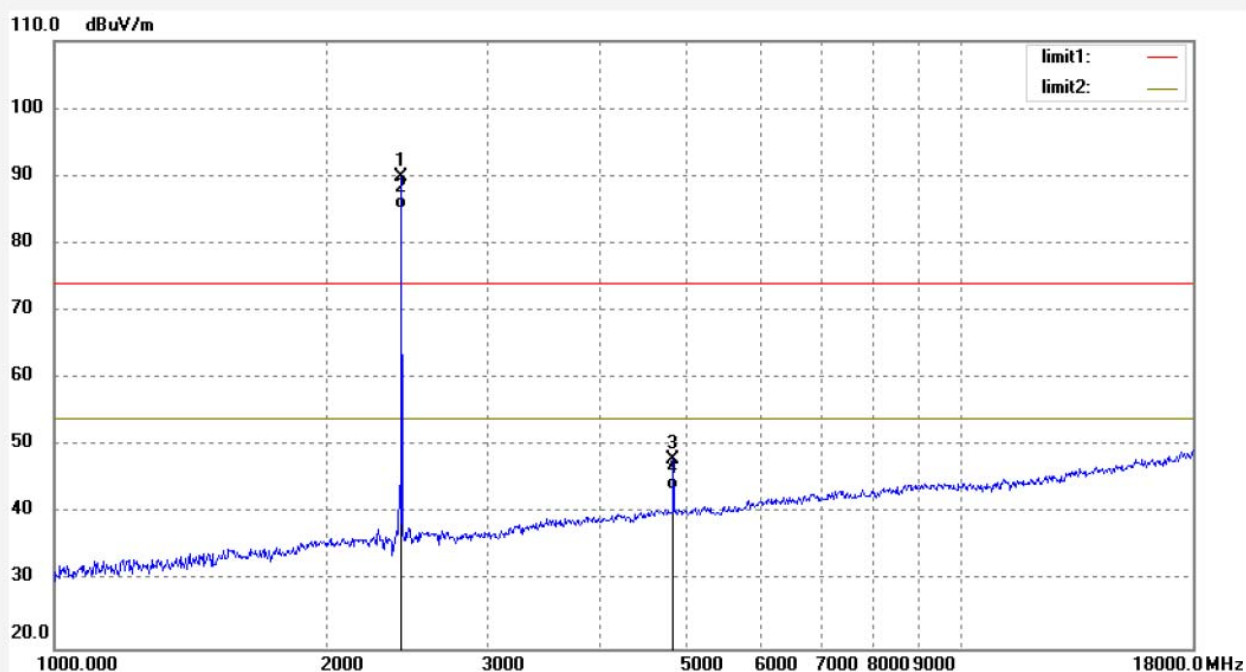

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.121	94.03	-4.20	89.83			peak	200	197	
2	2440.121	89.37	-4.20	85.17			AVG	250	56	
3	4880.324	44.98	3.07	48.05	74.00	-25.95	peak	250	198	
4	4880.324	40.39	3.07	43.46	54.00	-10.54	AVG	200	324	

Job No.: frank2018 #122

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2440MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/48/29

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

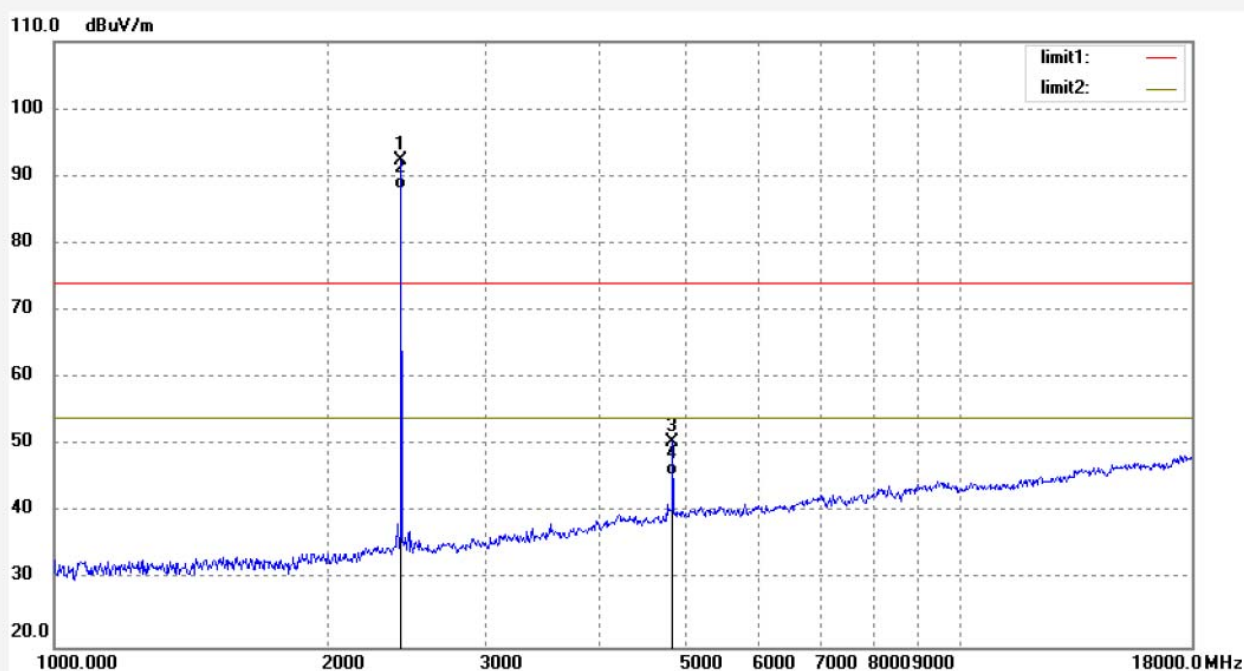

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.121	96.59	-4.20	92.39			peak	150	198	
2	2440.121	92.31	-4.20	88.11			AVG	250	254	
3	4880.324	47.53	3.07	50.60	74.00	-23.40	peak	150	160	
4	4880.324	42.37	3.07	45.44	54.00	-8.56	AVG	250	103	

Job No.: frank2018 #124

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2480MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/50/47

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

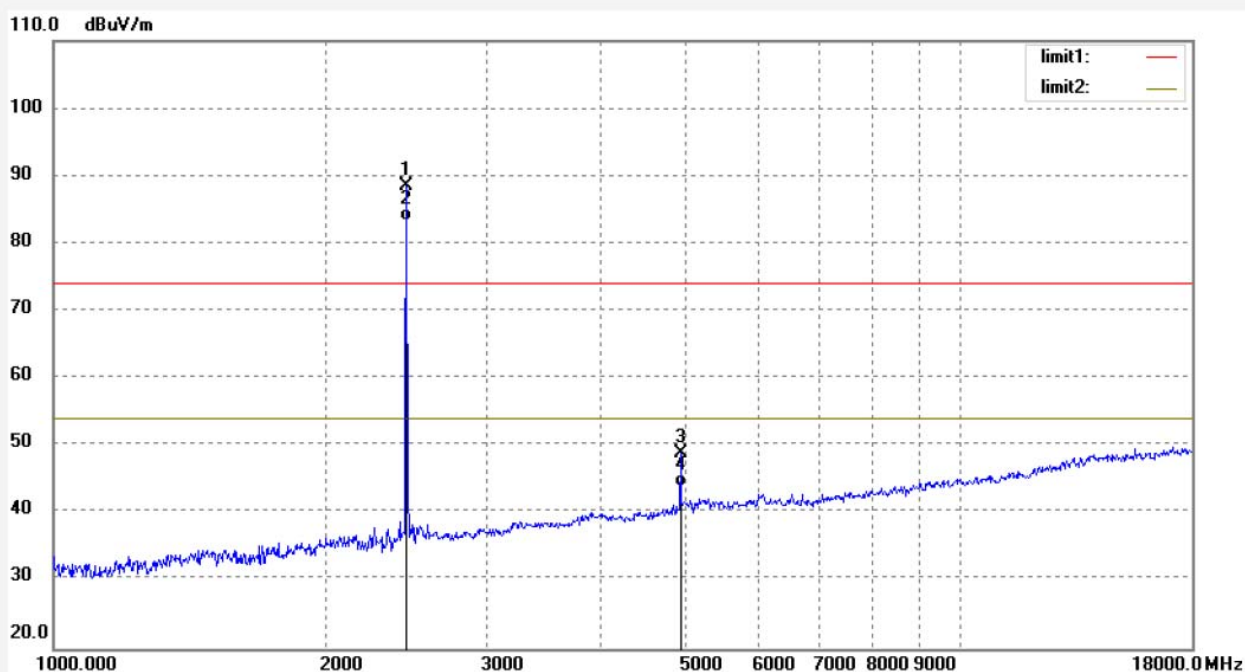

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	92.55	-4.04	88.51			peak	250	192	
2	2480.034	87.37	-4.04	83.33			AVG	250	49	
3	4960.144	45.44	3.50	48.94	74.00	-25.06	peak	250	312	
4	4960.144	40.38	3.50	43.88	54.00	-10.12	AVG	200	102	

Job No.: frank2018 #123

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Wifi module

Mode: TX 2480MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 18/01/24/

Time: 11/49/36

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20172551

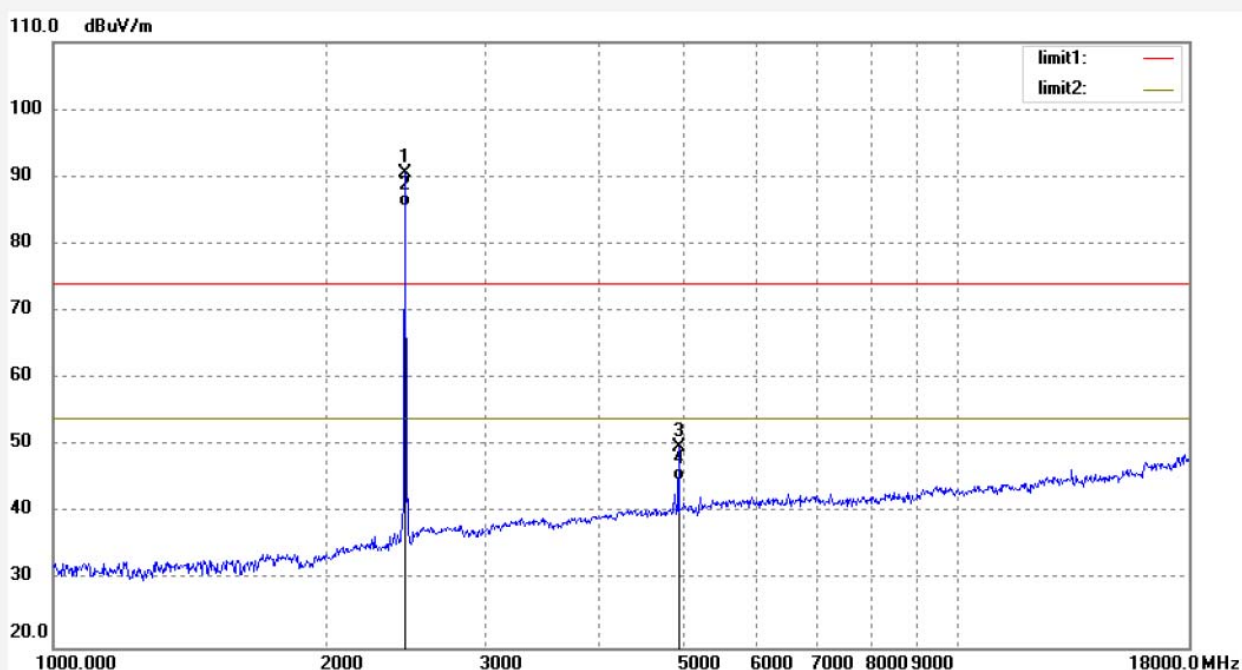

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	94.67	-4.04	90.63			peak	150	309	
2	2480.034	89.64	-4.04	85.60			AVG	150	95	
3	4960.144	46.38	3.50	49.88	74.00	-24.12	peak	150	154	
4	4960.144	41.37	3.50	44.87	54.00	-9.13	AVG	150	160	


10.ANTENNA REQUIREMENT

10.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

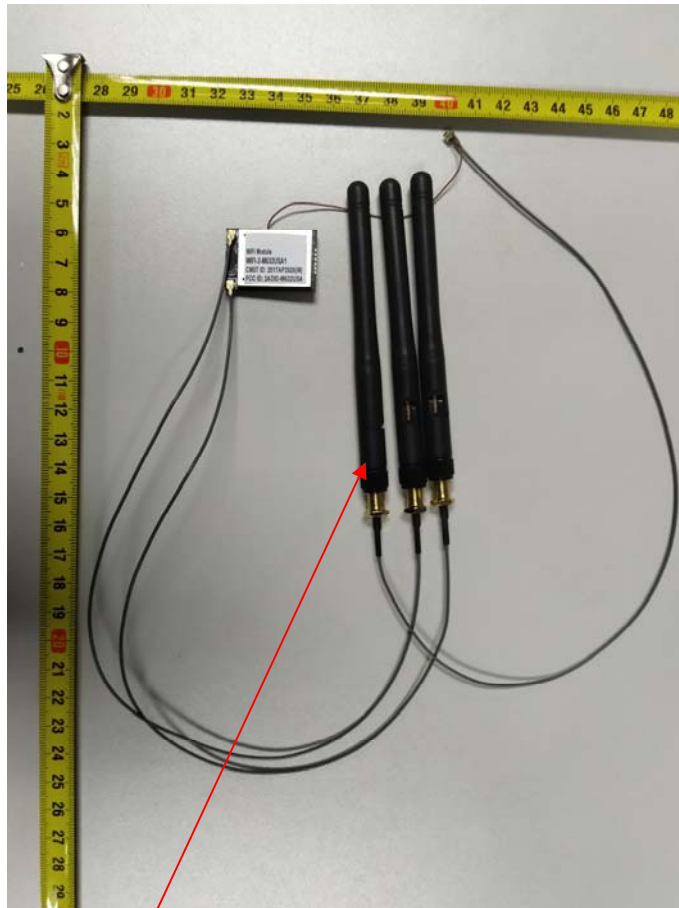

Antenna