CCIS Shenzhen Zhongjian Nanfang Testing Co., Ltd.

FCC REPORT

Applicant:	Sun Cupid Technology (HK) Ltd.
Address of Applicant:	16/F,CEO Tower,77 Wing Hong Street, Cheung Sha Wan, Hong Kong

Equipment Under Test (EUT)

Product Name:	LTE mobile phone
Model No.:	X3
Trade mark:	NUU
FCC ID:	2ADINNUUX3
Applicable standards:	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 Subpart H FCC CFR Title 47 Part24 Subpart E FCC CFR Title 47 Part 27 Subpart L
Date of sample receipt:	18 Mar., 2015
Date of Test:	19 Mar., 2015 to 08 Apr., 2015
Date of report issued:	08 Apr., 2015
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Bruce Zhang
Laboratory Manager

2. Version

Version No.	Date	Description
00	*08 Apr., 2015*	*Original*

Prepared by: *Luna Gao*   *Date:*   *08 Apr., 2015*

Report Clerk

Reviewed by: *Atomb Yang*   *Date:*   *08 Apr., 2015*

Project Engineer

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 2 of 71

3. Contents

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) Part 27.50 (d)(4)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 4 of 71

5. General Information

5.1 Client Information

Applicant:	Sun Cupid Technology (HK) Ltd.
Address of Applicant:	16/F,CEO Tower,77 Wing Hong Street, Cheung Sha Wan, Hong Kong
Manufacturer/ Factory:	Suncupid(Shen Zhen) Electronic Ltd
Address of Manufacturer/ Factory:	Baolong Industrial City, Longgang District, Shenzhen Hi-Tech Road, Building 1, A 7

5.2 General Description of E.U.T.

Product Name:	LTE mobile phone
Model No.:	X3
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V:826.4MHz-846.6MHz WCDMA Band II:1852.4 MHz -1907.6 MHz WCDMA Band IV:1712.4 MHz -1752.6 MHz
Modulation type:	GSM/GPRS:GMSK, UMTS:QPSK
Antenna type:	Internal Antenna
Antenna gain:	GSM 850: 0.8 dBi PCS 1900: 0.9 dBi WCDMA 850: 0.8dBi WCDMA 1900: 0.9 dBi WCDMA 1700: -3.7 Bi
AC adapter:	Model: HNFG050100UU Input:110-240V AC,50/60Hz 0.2A Output:5V DC MAX 1A
Power supply:	Rechargeable Li-ion Battery DC3.8V-2000mAh

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 5 of 71

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
….	….	….	….
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
…	…	…	…
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
….	….	….	….
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
…	…	…	…
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

WCDMA Band IV	
Channel:	Frequency (MHz)
1312	1712.40
1313	1712.60
….	….
1412	1732.40
1413	1732.60
1414	1732.80
…	…
1512	1752.40
1513	1752.60

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 6 of 71

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60
WCDMA Band IV					
	Channel	Frequency(MHz)			
Lowest channel	1312	1712.40			
Middle channel	1413	1732.60			
Highest channel	1513	1752.60			

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 7 of 71

5.3 Test modes

Communicate mode (GSM850)	Keep the EUT in communicating mode on GSM 850 band.
Data mode (GPRS850)	Keep the EUT in data communicating mode on GPRS 850 band.
Communicate mode (PCS1900)	Keep the EUT in communicating mode on PCS1900 band.
Data mode (GPRS1900)	Keep the EUT in data communicating mode on GPRS1900 band.
Communicate mode (UMTS 850)	Keep the EUT in communicating mode on UMTS 850 band.
Communicate mode (UMTS 1900)	Keep the EUT in communicating mode on UMTS 1900 band.
Data mode (RMC UMTS 850)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 5).
Data mode (RMC UMTS 1700)	Keep the EUT in data communicating mode on RMC in UMTS 1700 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 1700)	Keep the EUT in data communicating mode on HSDPA in UMTS 1700(Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 1700)	Keep the EUT in data communicating mode on HSDPA in UMTS 1700(Sub-test 1~Sub-test 5).
Data mode (RMC UMTS 1900)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 1900)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 1900)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 5).
Remark :	Pre-test output power of all modes, and found GSM 850, PCS 1900, UMTS 850 12.2 kbps RMC & UMTS 1900 12.2 kbps RMC were the worst case. The details please refer to section 6.5.

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E and Part 27 subpart L of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**
Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**
The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**
Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 8 of 71

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.8 Test Instruments list

Radiated Emission:

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	04-19-2014	04-19-2015
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	04-19-2014	04-19-2015
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	04-01-2015	03-31-2016
6	Coaxial Cable	CCIS	N/A	CCIS0017	04-01-2015	03-31-2016
7	Coaxial cable	CCIS	N/A	CCIS0018	04-01-2015	03-31-2016
8	Coaxial Cable	CCIS	N/A	CCIS0019	04-01-2015	03-31-2016
9	Coaxial Cable	CCIS	N/A	CCIS0087	04-01-2015	03-31-2016
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	06-09-2014	06-08-2015
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	03-30-2015	03-29-2016
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP 30	CCIS0023	04-19-2014	04-19-2015
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	04-01-2015	03-31-2016
18	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	05-29-2014	05-28-2015
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-19-2014	04-19-2015

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 9 of 71

6. System test configuration

6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

6.3 Configuration of Tested System
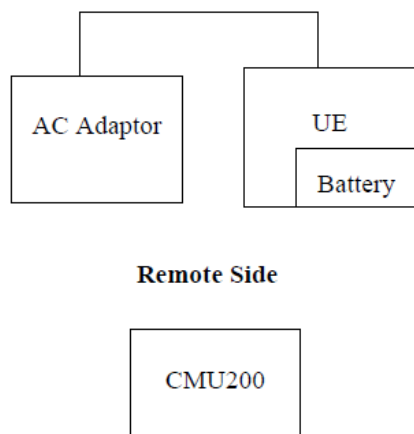
6.4 Description of Test Modes

The EUT has been tested under operating condition.
EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.
The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for three modes (GSM850, PCS1900, WCDMA Band V, WCDMA Band IV and WCDMA Band II) with power adaptor, earphone and Data cable. The worst-case H mode for GSM850, PCS1900, UMTS 850, UMTS 1700 and UMTS 1900.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 10 of 71

6.5 Conducted Output Power

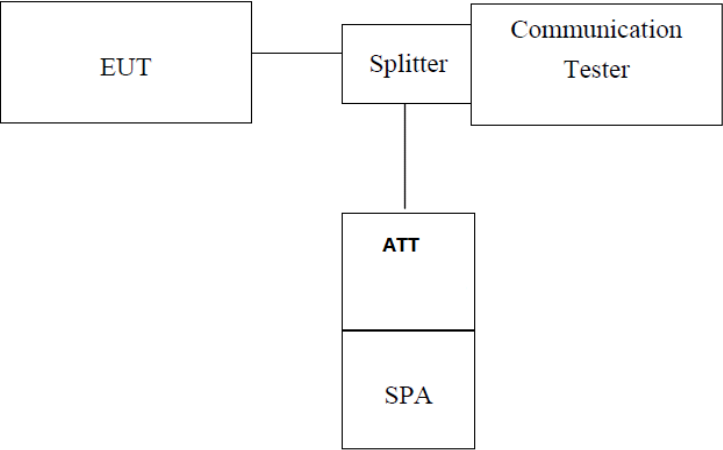|	
Test Requirement:	FCC part 22.913(a), FCC part 24.232(b) and FCC part 27.50(d)
Test Method:	FCC part 2.1046
Limit:	GSM 850 7W PCS 1900 2W WCDMA Band V: 7W WCDMA Band II: 2W WCDMA Band IV: 1W
Test setup:	 Note: Measurement setup for testing on Antenna connector
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the CMU200. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

EUT Mode	Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
GSM 850	128	824.20	32.56	38.45	Pass
	190	836.60	32.56		
	251	848.80	32.58		
GPRS 850 (1 Uplink slot)	128	824.20	32.53		
	190	836.60	32.54		
	251	848.80	32.49		
GPRS 850 (2 Uplink slots)	128	824.20	32.50		
	190	836.60	32.46		
	251	848.80	32.44		
GPRS 850 (3 Uplink slots)	128	824.20	32.40		
	190	836.60	32.34		
	251	848.80	32.54		
GPRS 850 (4 Uplink slots)	128	824.20	32.29		
	190	836.60	32.32		
	251	848.80	32.51		
PCS 1900	512	1850.20	30.48	33.00	Pass
	661	1880.00	30.37		
	810	1909.80	30.39		
GPRS 1900 (1 Uplink slot)	512	1850.20	30.46		
	661	1880.00	30.41		
	810	1909.80	30.45		
GPRS 1900 (2 Uplink slots)	512	1850.20	30.41		
	661	1880.00	30.44		
	810	1909.80	30.33		
GPRS 1900 (3 Uplink slots)	512	1850.20	30.29		
	661	1880.00	30.16		
	810	1909.80	30.06		
GPRS 1900 (4 Uplink slots)	512	1850.20	30.09		
	661	1880.00	29.89		
	810	1909.80	30.25		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 12 of 71

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS 850 HSDPA	Subtest 1	4132	826.40	22.59		
		4183	836.00	22.68		
		4233	846.60	22.61		
	Subtest 2	4132	826.40	22.39		
		4183	836.00	22.48		
		4233	846.60	22.39		
	Subtest 3	4132	826.40	21.09		
		4183	836.00	21.12		
		4233	846.60	21.05		
	Subtest 4	4132	826.40	20.83		
		4183	836.00	20.92		
		4233	846.60	20.75		
UMTS 850 HSUPA	Subtest 1	4132	826.40	21.83		
		4183	836.00	21.93		
		4233	846.60	21.85		
	Subtest 2	4132	826.40	22.45		
		4183	836.00	22.65	38.45	Pass
		4233	846.60	22.52		
	Subtest 3	4132	826.40	21.52		
		4183	836.00	21.63		
		4233	846.60	21.60		
	Subtest 4	4132	826.40	22.51		
		4183	836.00	22.52		
		4233	846.60	22.57		
	Subtest 5	4132	826.40	21.77		
		4183	836.00	21.79		
		4233	846.60	21.81		
UMTS 850 RMC	12.2kbps	4132	826.40	23.54		
		4183	836.00	23.57		
		4233	846.60	23.50		
UMTS 850 AMR	12.2kbps	4132	826.40	23.58		
		4183	836.00	23.54		
		4233	846.60	23.33		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 13 of 71

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS1900 HSDPA	Subtest 1	9262	1852.40	22.82		
		9400	1880.00	22.78		
		9538	1907.60	22.56		
	Subtest 2	9262	1852.40	22.51		
		9400	1880.00	22.67		
		9538	1907.60	22.41		
	Subtest 3	9262	1852.40	21.25		
		9400	1880.00	21.26		
		9538	1907.60	21.07		
	Subtest 4	9262	1852.40	20.98		
		9400	1880.00	21.07		
		9538	1907.60	20.85		
UMTS1900 HSUPA	Subtest 1	9262	1852.40	22.11		
		9400	1880.00	22.13		
		9538	1907.60	21.96		
	Subtest 2	9262	1852.40	22.74		
		9400	1880.00	22.78	33.00	Pass
		9538	1907.60	22.59		
	Subtest 3	9262	1852.40	21.77		
		9400	1880.00	21.76		
		9538	1907.60	21.44		
	Subtest 4	9262	1852.40	22.84		
		9400	1880.00	22.87		
		9538	1907.60	22.50		
	Subtest 5	9262	1852.40	22.00		
		9400	1880.00	22.03		
		9538	1907.60	21.72		
UMTS1900 RMC	12.2kbps	9262	1852.40	23.70		
		9400	1880.00	23.75		
		9538	1907.60	23.57		
UMTS1900 AMR	12.2kbps	9262	1852.40	23.60		
		9400	1880.00	23.60		
		9538	1907.60	23.55		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 14 of 71

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS 1700 HSDPA	Subtest 1	1312	1712.40	23.32		
		1412	1732.40	23.21		
		1513	1752.60	23.41		
	Subtest 2	1312	1712.40	23.09		
		1412	1732.40	23.05		
		1513	1752.60	23.43		
	Subtest 3	1312	1712.40	21.61		
		1412	1732.40	21.52		
		1513	1752.60	21.56		
	Subtest 4	1312	1712.40	21.43		
		1412	1732.40	21.34		
		1513	1752.60	21.55		
UMTS 1700 HSUPA	Subtest 1	1312	1712.40	22.64		
		1412	1732.40	22.60		
		1513	1752.60	22.74		
	Subtest 2	1312	1712.40	23.29	30.00	Pass
		1412	1732.40	23.16		
		1513	1752.60	23.43		
	Subtest 3	1312	1712.40	22.20		
		1412	1732.40	22.17		
		1513	1752.60	22.26		
	Subtest 4	1312	1712.40	23.23		
		1412	1732.40	23.17		
		1513	1752.60	23.43		
	Subtest 5	1312	1712.40	22.46		
		1412	1732.40	22.38		
		1513	1752.60	22.65		
UMTS 1700 RMC	12.2kbps	1312	1712.40	24.36		
		1412	1732.40	24.31		
		1513	1752.60	24.46		
UMTS 1700 AMR	12.2kbps	1312	1712.40	24.34		
		1412	1732.40	24.19		
		1513	1752.60	24.28		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 15 of 71

6.6 Peak-to-Average Ratio

Test Requirement:	FCC part 24.232(d)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, RBW ≥ OBW, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 16 of 71

Mode	Modulation	Channel No.	Frequency (MHz)	PAPR
PCS Band				
GSM	GSM/GMSK	661	1880	0.10
	GPRS/GMSK	661	1880	0.09
WCDMA	WCDMA/QPSK	9400	1880	2.68
	HSDPA/QPSK	9400	1880	3.44
	HSUPA/QPSK	9400	1880	4.36

Test plots as below:

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 17 of 71

GSM
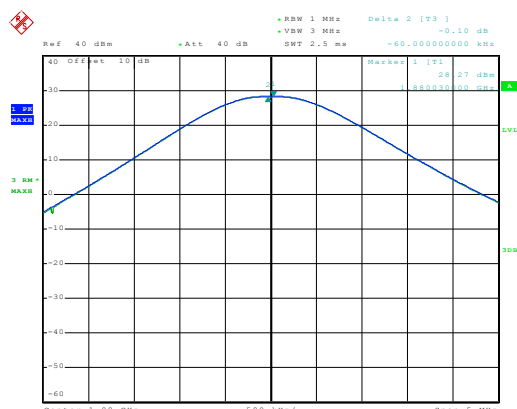
GPRS
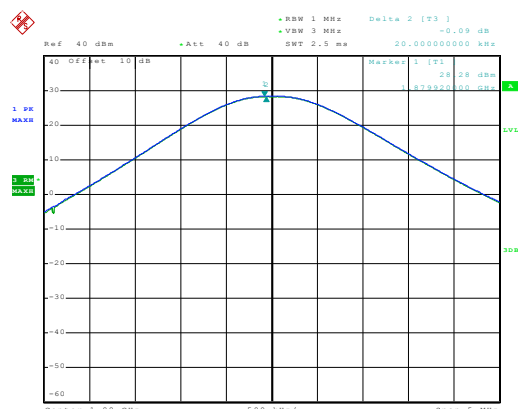
WCDMA
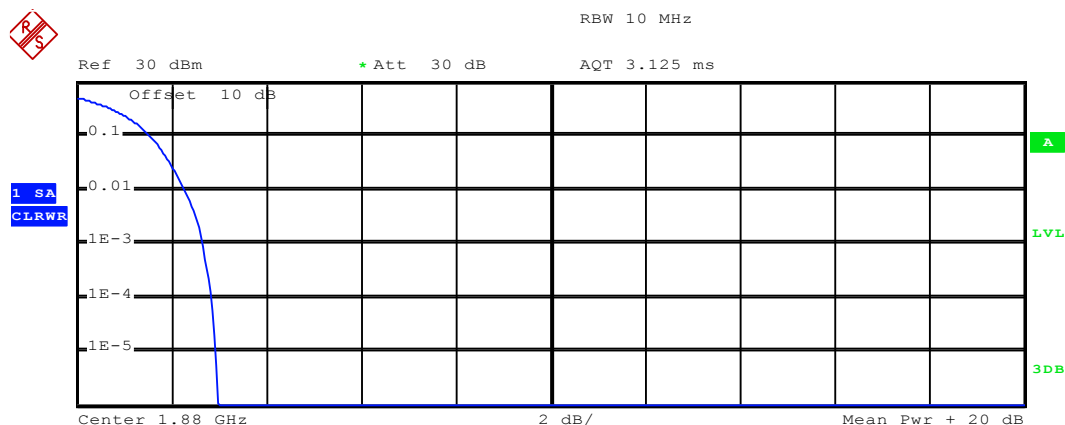
Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean   21.77 dBm
Peak   24.77 dBm
Crest   3.00 dB

10 %   1.56 dB
 1 %   2.28 dB
.1 %   2.68 dB
.01 %   2.84 dB

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 18 of 71

HSDPA

RBW 10 MHz

Ref 30 dBm ⋆ Att 30 dB AQT 3.125 ms

Offset 10 dB

```
0.1
0.01
1E-3
1E-4
1E-5
```

A

LVL

3DB

Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB

1 SA
CLRWR

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	19.49	dBm
Peak	23.22	dBm
Crest	3.73	dB
10 %	1.72	dB
1 %	2.92	dB
.1 %	3.44	dB

HSUPA

RBW 10 MHz

Ref 30 dBm ⋆ Att 30 dB AQT 3.125 ms

Offset 10 dB

```
0.1
0.01
1E-3
1E-4
1E-5
```

A

LVL

3DB

Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB

1 SA
CLRWR

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	19.24	dBm
Peak	24.06	dBm
Crest	4.83	dB
10 %	2.44	dB
1 %	3.92	dB
.1 %	4.36	dB

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 19 of 71

6.7 Occupy Bandwidth

Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b) and FCC part 27.50(d)
Test Method:	FCC part 2.1049
Test setup:	 Note: Measurement setup for testing on Antenna connector
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 20 of 71

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	244	320
	190	836.6	246	322
	251	848.8	244	320
PCS 1900	512	1850.2	246	318
	661	1880.0	242	316
	810	1909.8	242	312
UMTS850 12.2k RMC	4132	824.40	4180	4680
	4183	836.00	4180	4680
	4233	846.60	4180	4780
UMTS1900 12.2k RMC	9262	1852.40	4180	4680
	9400	1880.00	4180	4680
	9538	1907.60	4180	4740
UMTS1700 12.2k RMC	1312	1712.40	4200	4740
	1413	1732.60	4200	4680
	1513	1752.60	4220	4760

Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.

Test plot as follows:

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 21 of 71

99% Occupy bandwidth

GSM850
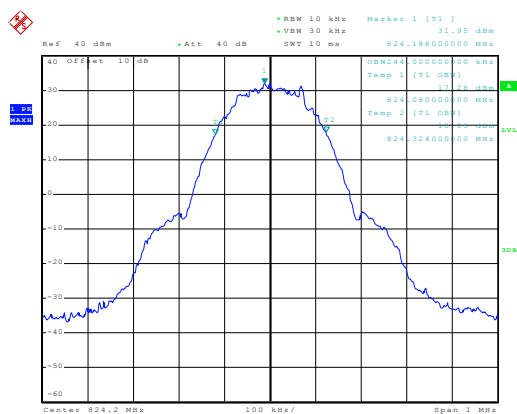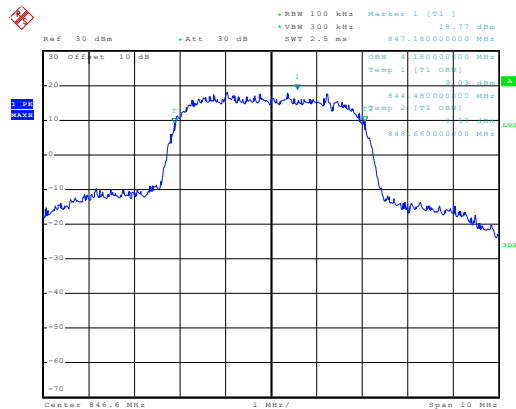

Date: 20.MAR.2015 10:53:39

Lowest channel
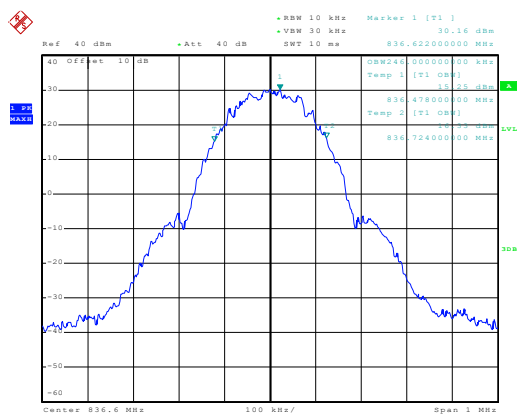
Date: 20.MAR.2015 10:54:23

Middle channel
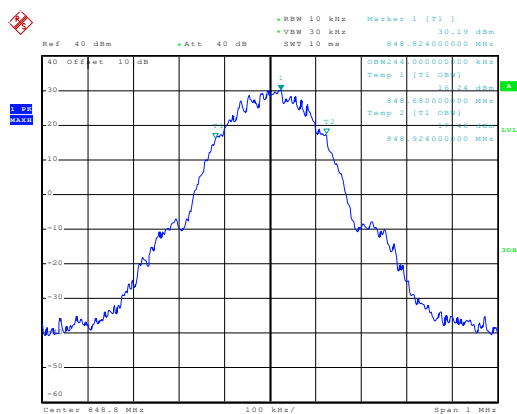
Date: 20.MAR.2015 10:54:46

Highest channel

26dB Emission Bandwidth

GSM850
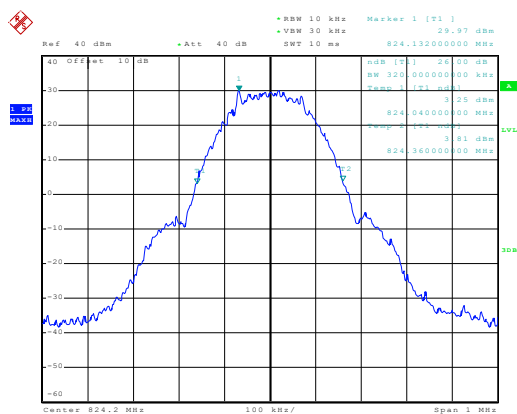
Date: 20.MAR.2015 10:56:54

Lowest channel
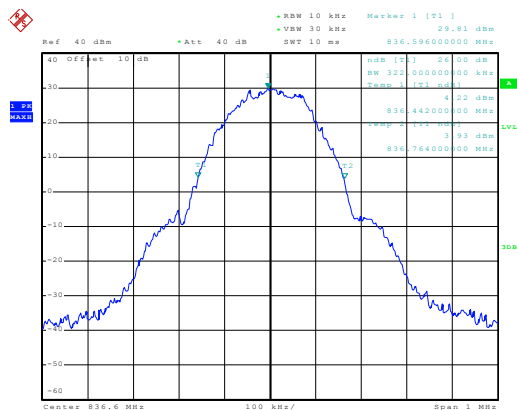
Date: 20.MAR.2015 10:55:58

Middle channel
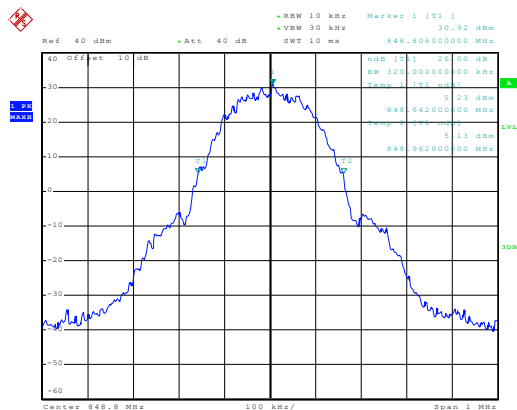
Date: 20.MAR.2015 10:55:18

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 23 of 71

99% Occupy bandwidth

PCS 1900
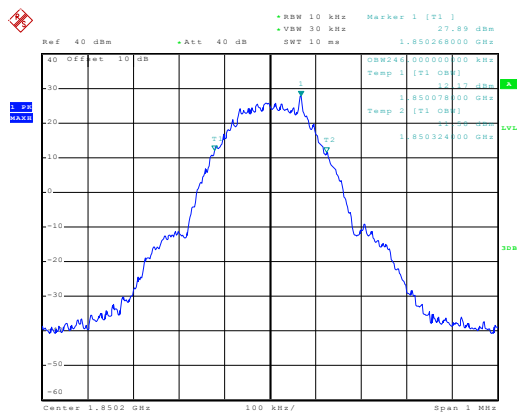
Date: 20.MAR.2015 11:24:23

Lowest channel
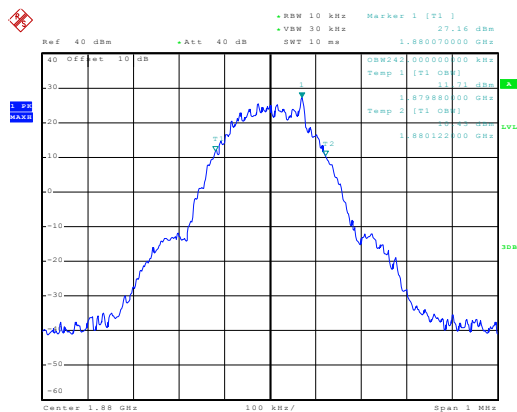
Date: 20.MAR.2015 11:24:48

Middle channel
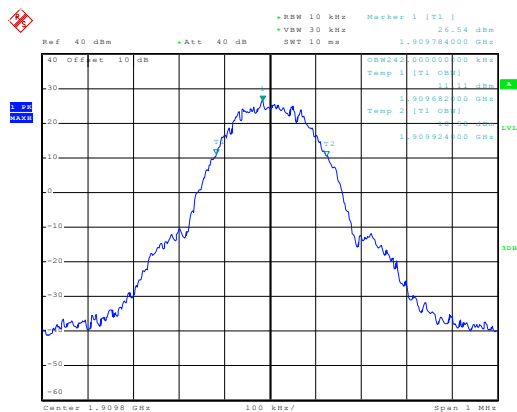
Date: 20.MAR.2015 11:25:21

Highest channel
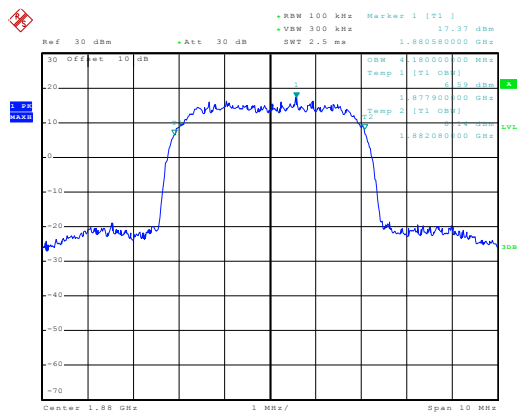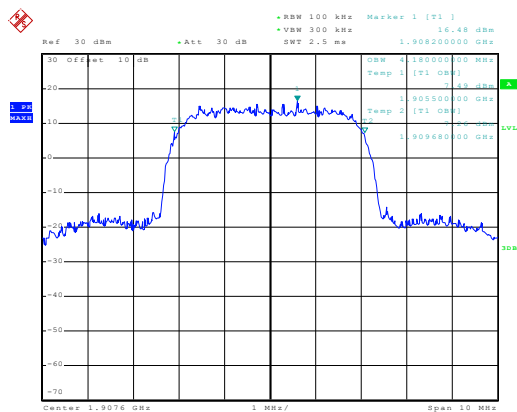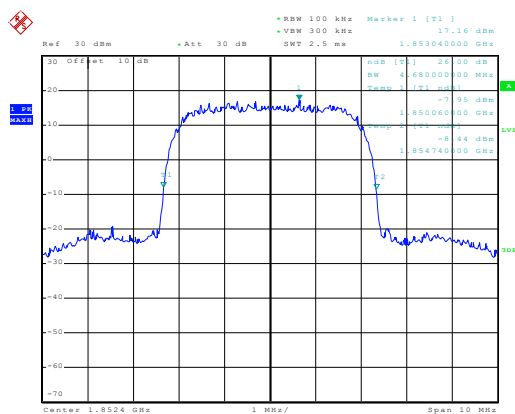

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 24 of 71

26dB Emission Bandwidth

PCS 1900
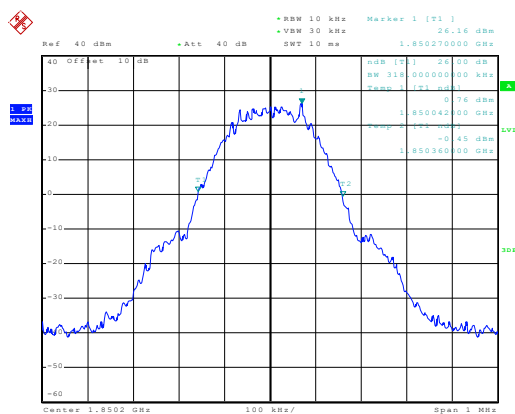
Date: 20.MAR.2015 11:26:49

Lowest channel
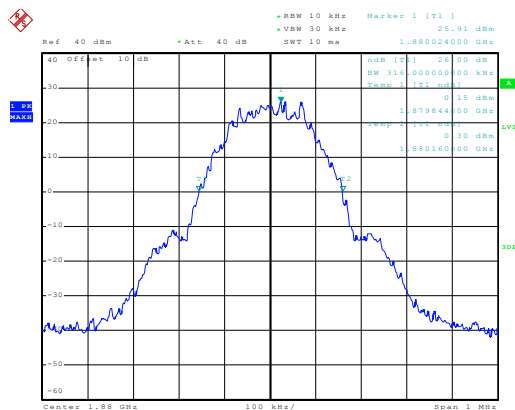
Date: 20.MAR.2015 11:26:16

Middle channel
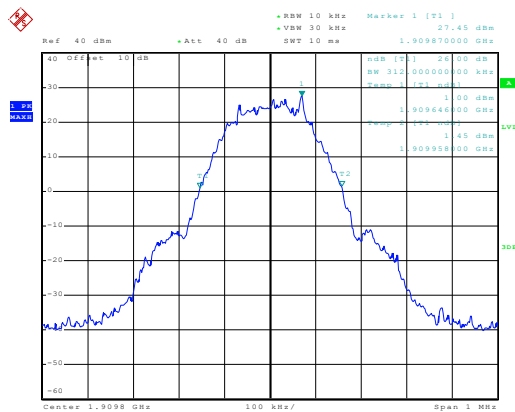
Date: 20.MAR.2015 11:25:52

Highest channel

99% Occupy bandwidth

UMTS 850 12.2k RMC
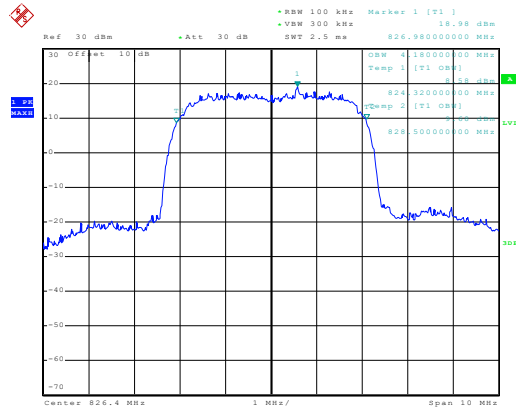
Date: 20.MAR.2015 11:54:32

Lowest channel
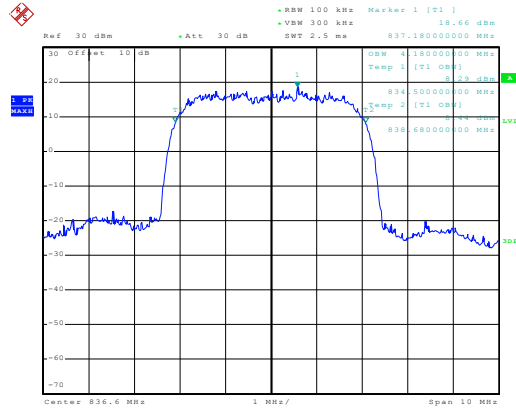
Date: 20.MAR.2015 11:55:11

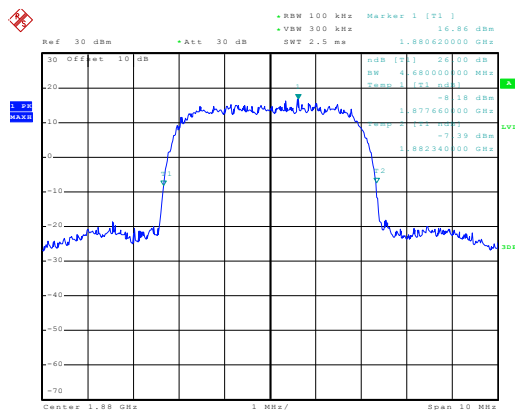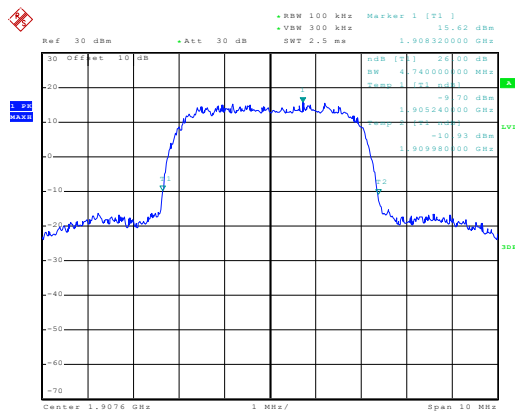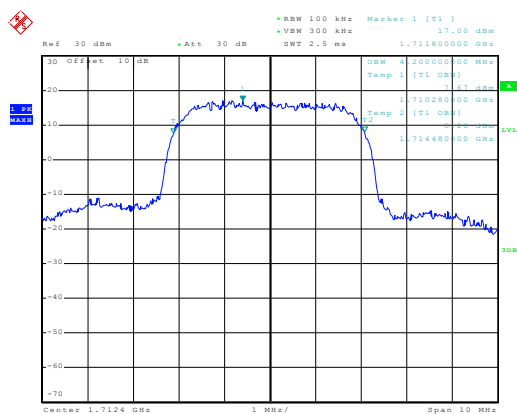Middle channel

Date: 20.MAR.2015 11:55:30

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 26 of 71

26dB Emission Bandwidth

UMTS 850 12.2k RMC

Date: 20.MAR.2015 11:54:43

Lowest channel
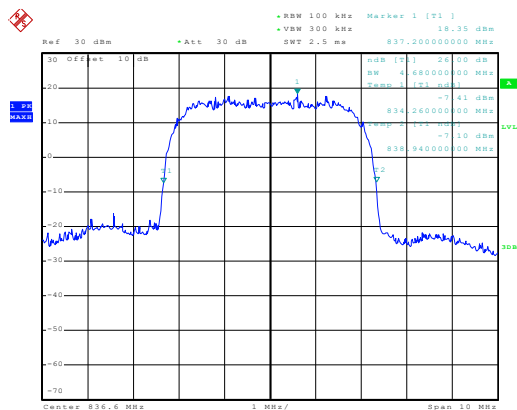
Date: 20.MAR.2015 11:54:59

Middle channel
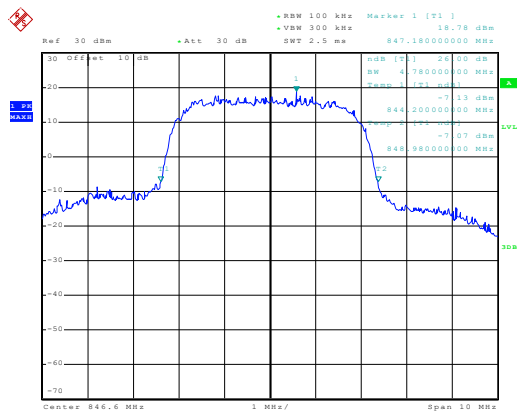
Date: 20.MAR.2015 11:55:40

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 27 of 71

99% Occupy bandwidth

UMTS 1900 12.2k RMC

Date: 20.MAR.2015 12:01:41

Lowest channel

Date: 20.MAR.2015 12:02:26

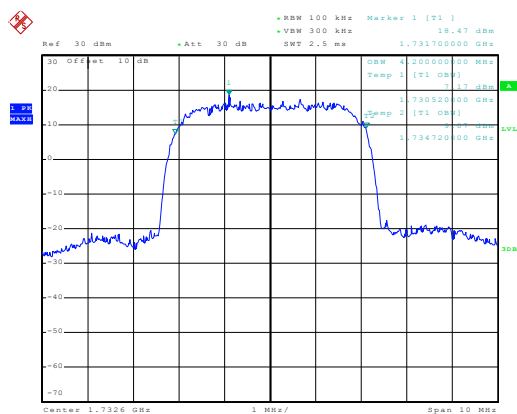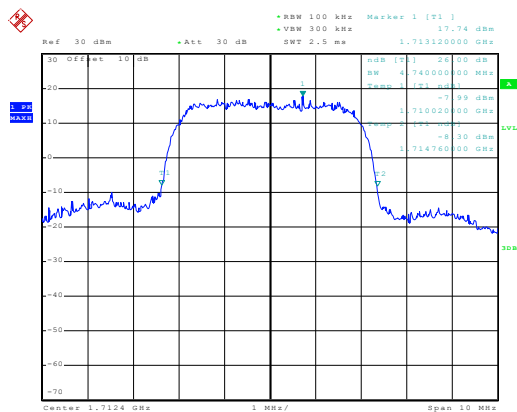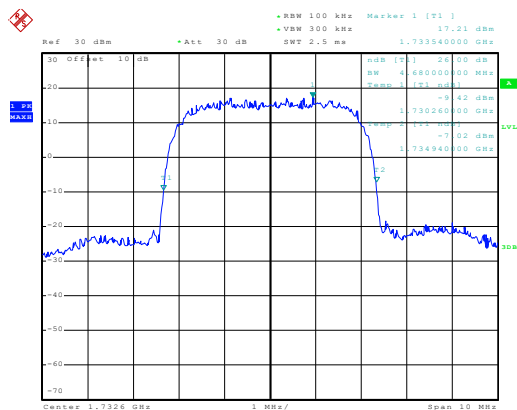Middle channel

Date: 20.MAR.2015 12:02:45

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 28 of 71

26dB Emission Bandwidth

UMTS 1900 12.2k RMC

Lowest channel

Middle channel

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF
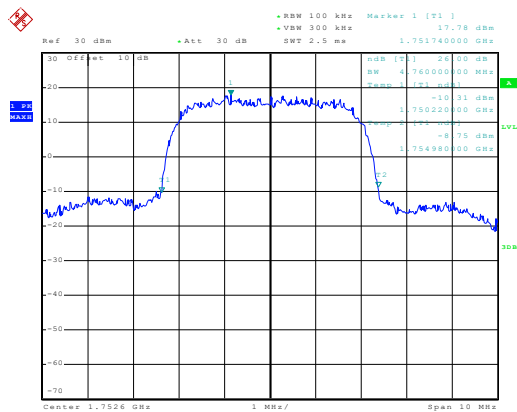
Page 29 of 71

99% Occupy bandwidth

UMTS 1700 12.2k RMC

Date: 20.MAR.2015 13:38:51

Lowest channel

Date: 20.MAR.2015 13:39:27

Middle channel
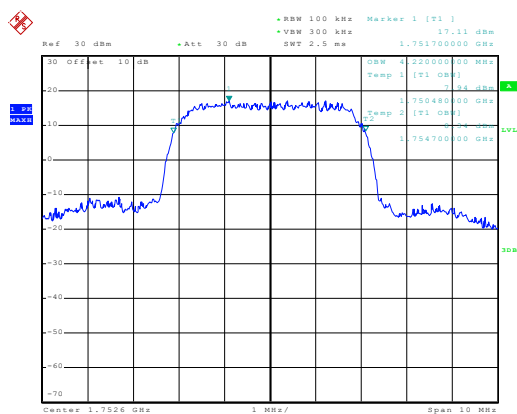
Date: 20.MAR.2015 13:39:50

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 30 of 71

26dB Emission Bandwidth

UMTS 1700 12.2k RMC

Date: 20.MAR.2015 13:38:59

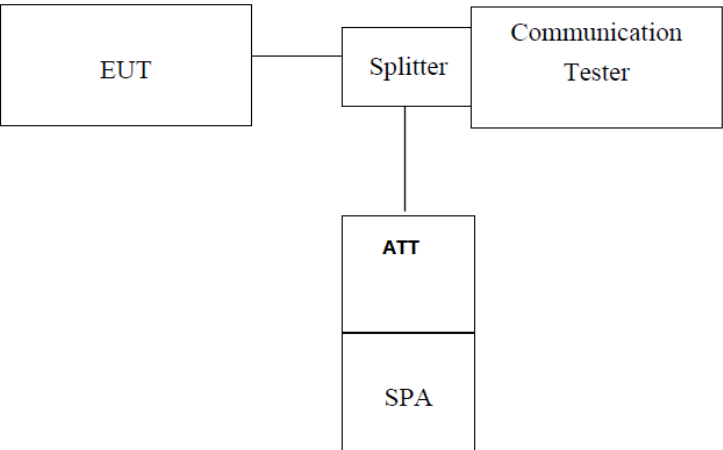Lowest channel

Date: 20.MAR.2015 13:39:18

Middle channel

Date: 20.MAR.2015 13:40:02

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 31 of 71

6.8 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E & 27L there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.9 Out of band emission at antenna terminals

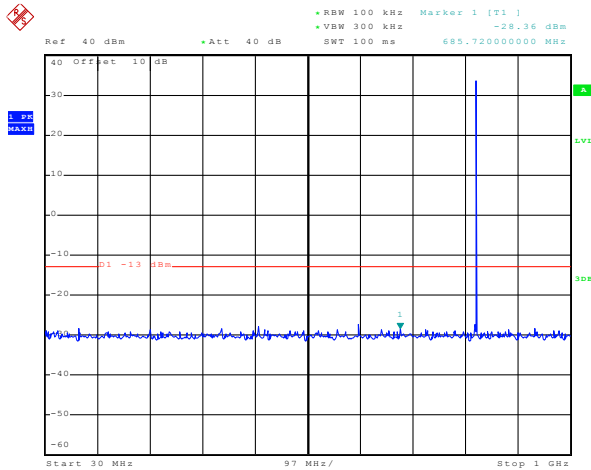|	
Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) and FCC part 27.53(h)
Test Method:	FCC part 2.1051
Limit:	-13dBm
Test setup:	 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	5 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 6 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 7 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 8 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows:

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 32 of 71

Spurious emission
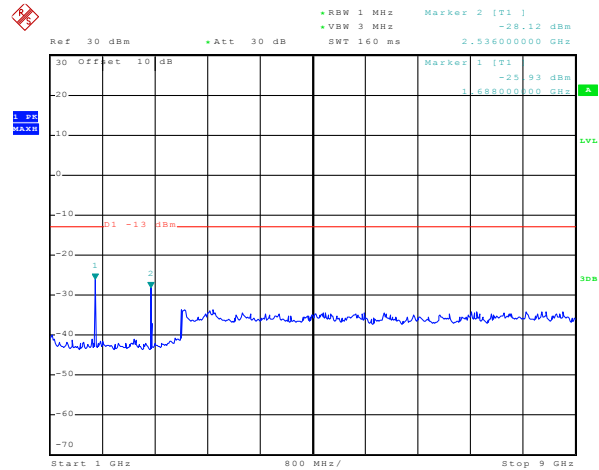
GSM 850

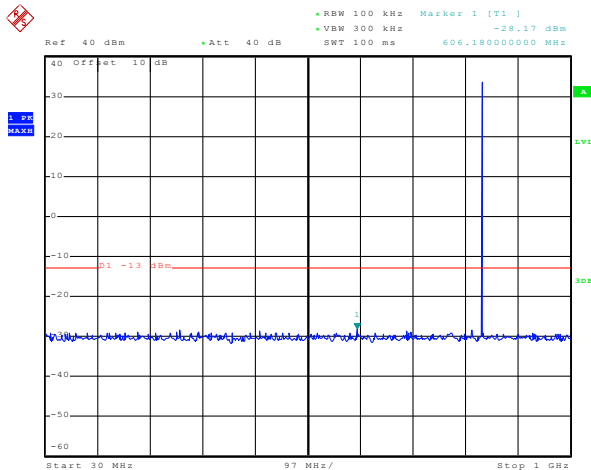### Lowest Channel

Date: 20.MAR.2015 10:58:24

30MHz~1GHz

Date: 20.MAR.2015 11:00:38

1GHz~9GHz
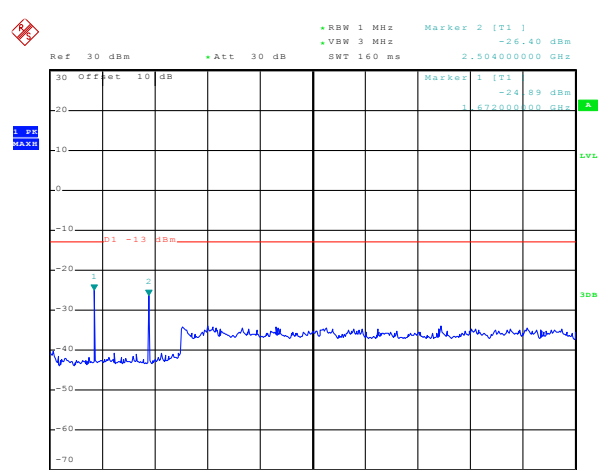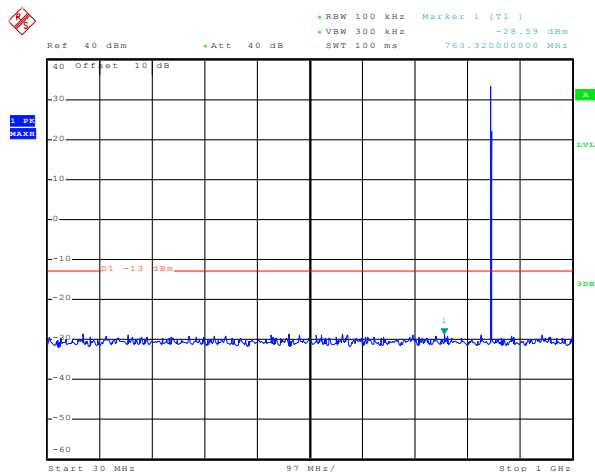
Middle channel

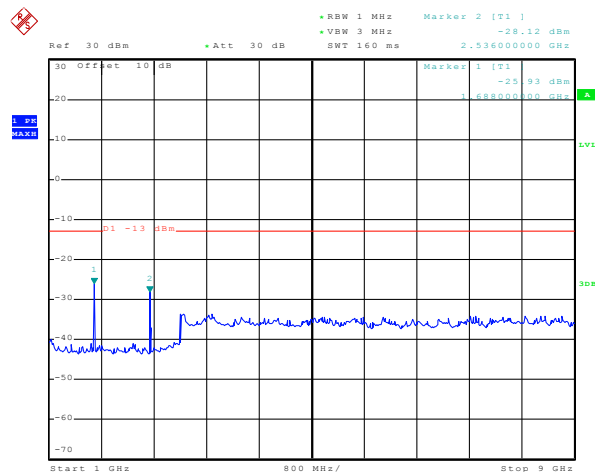Date: 20.MAR.2015 10:59:01

30MHz~1GHz

Date: 20.MAR.2015 11:01:07

1GHz~9GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 33 of 71

Highest Channel

30MHz~1GHz

1GHz~9GHz

PCS 1900

Lowest Channel

30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 34 of 71

Middle Channel

30MHz~1GHz

1GHz~20GHz

Highest Channel

30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 35 of 71
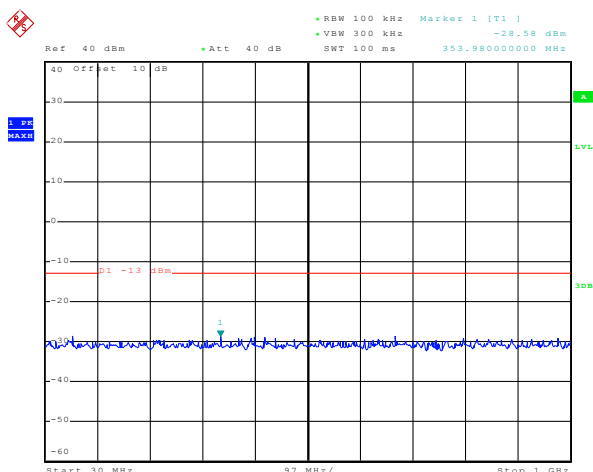
UMTS 850 12.2k RMC

Lowest Channel

30MHz~1GHz

1GHz~9GHz

Middle Channel

30MHz~1GHz

1GHz~9GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 36 of 71
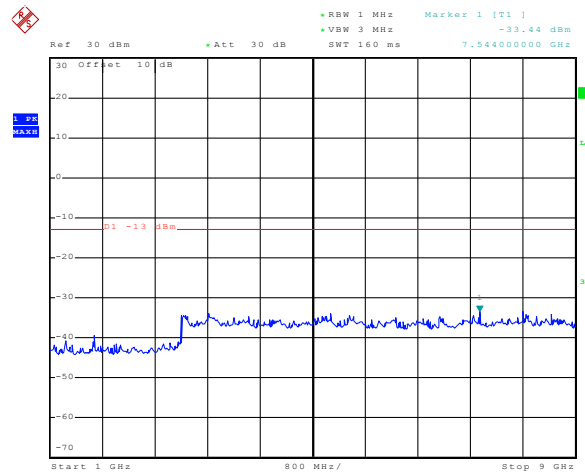
Highest Channel

30MHz~1GHz

1GHz~9GHz

UMTS 1900 12.2k RMC

Lowest Channel

30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 37 of 71

Middle Channel

Date: 20.MAR.2015 11:58:29

30MHz~1GHz
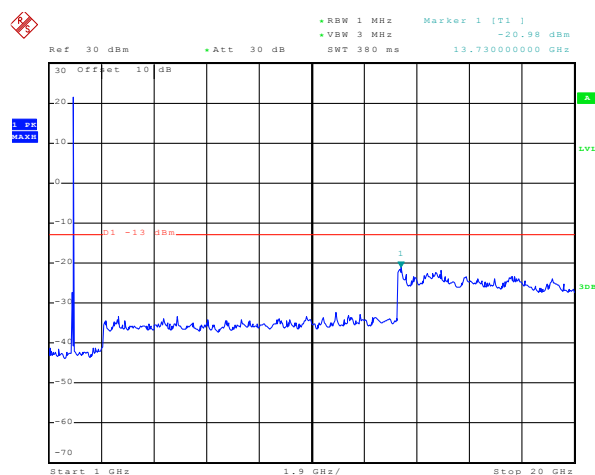
Date: 20.MAR.2015 12:00:47

1GHz~20GHz

Highest Channel
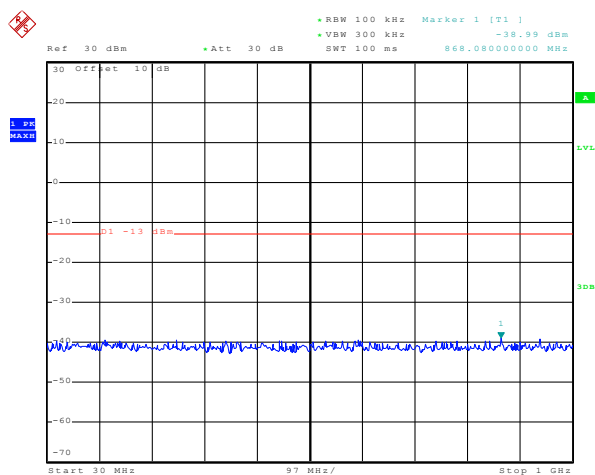
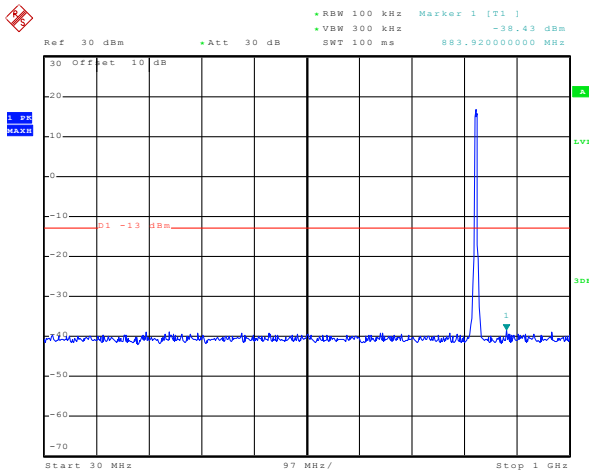Date: 20.MAR.2015 11:58:45

30MHz~1GHz
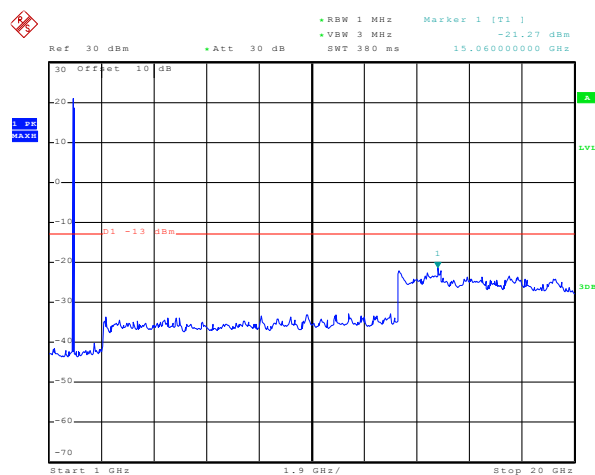
Date: 20.MAR.2015 12:01:05
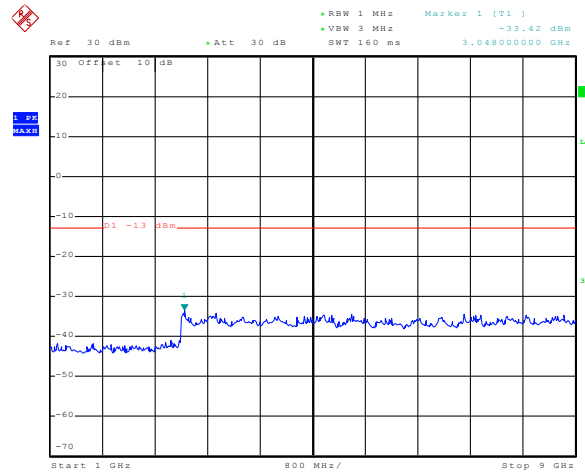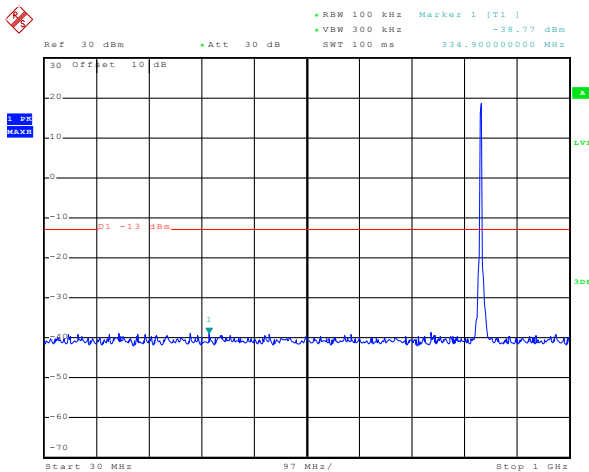
1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 38 of 71

UMTS 1700 12.2k RMC

Lowest Channel
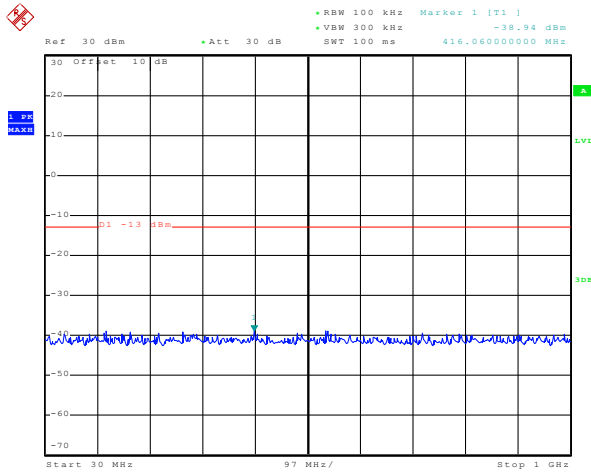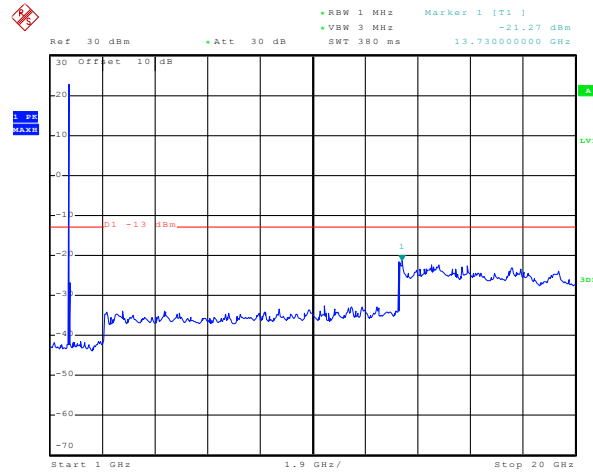
30MHz~1GHz

1GHz~20GHz

Middle Channel
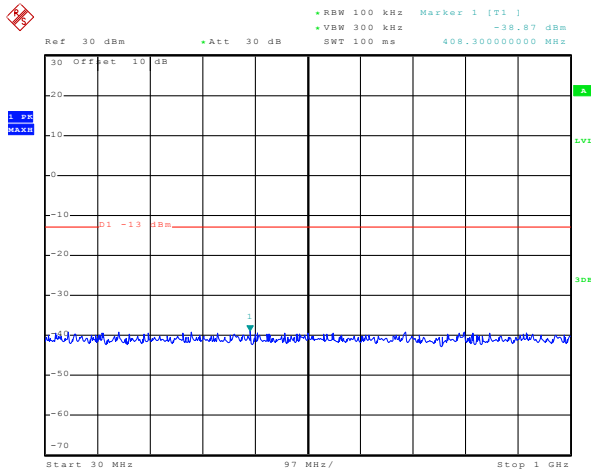
30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 39 of 71

Highest Channel

Date: 20.MAR.2015 13:36:23

30MHz~1GHz
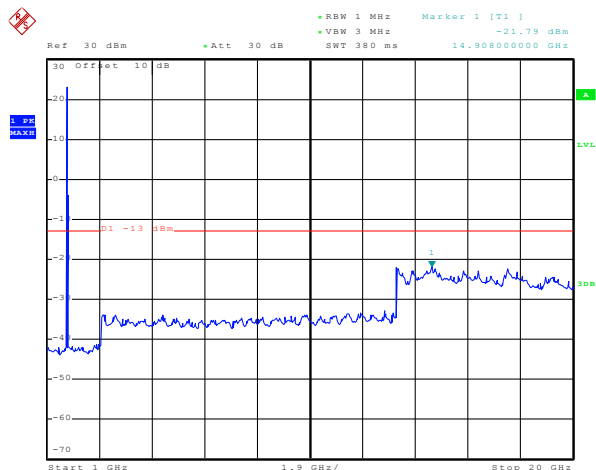
Date: 20.MAR.2015 13:38:13

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 40 of 71

Band edge emission

GSM850
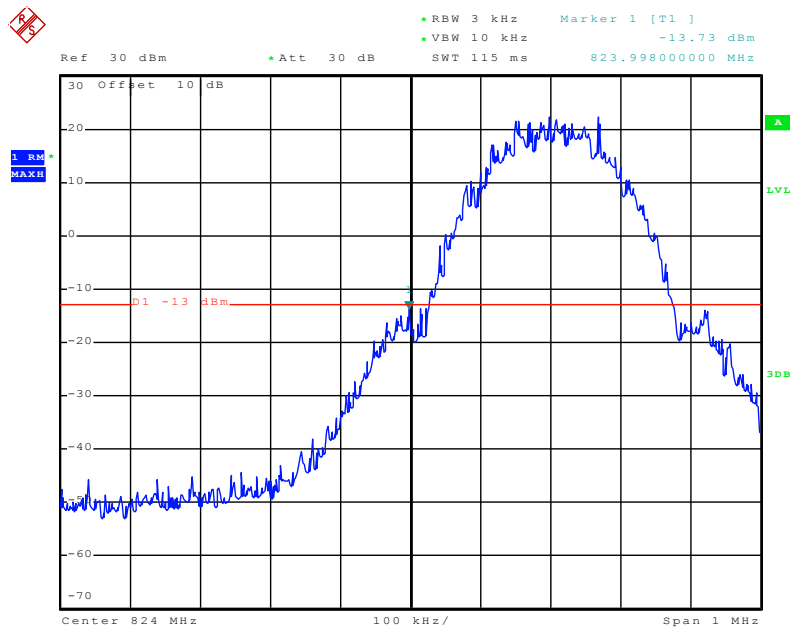
Date: 23.MAR.2015 17:42:57

Lowest channel
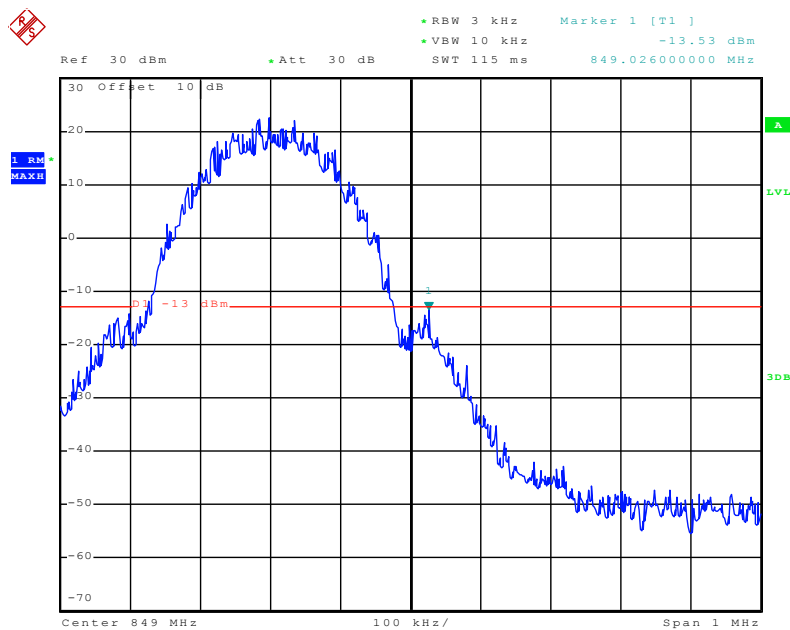
Date: 23.MAR.2015 17:43:23

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 41 of 71

PCS1900
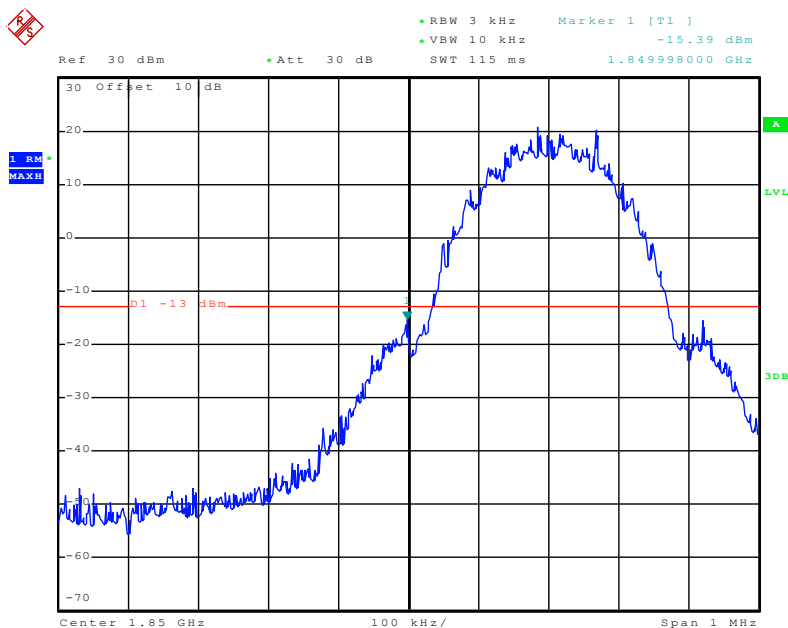
Date: 20.MAR.2015 11:37:08

Lowest channel
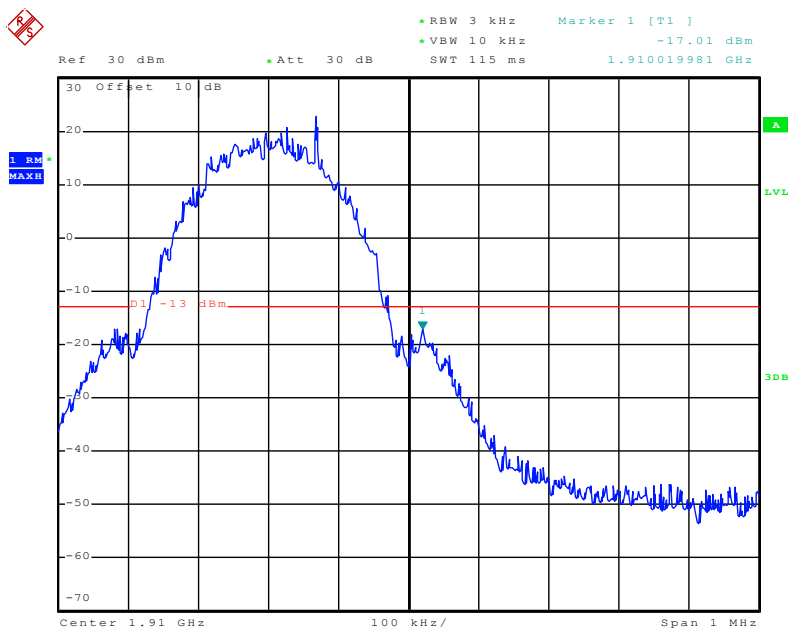
Date: 20.MAR.2015 11:36:21

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 42 of 71

UMTS850 12.2k RMC
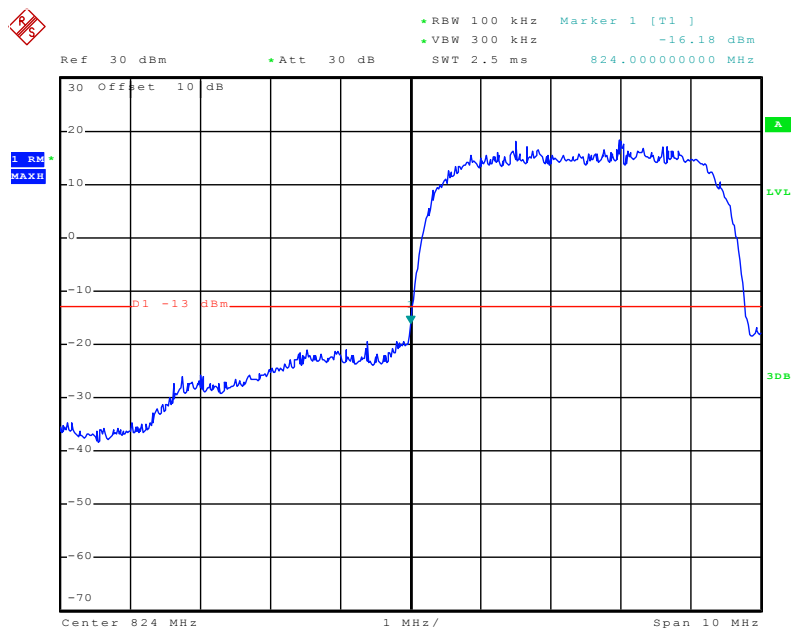
Date: 20.MAR.2015 12:04:28

Lowest channel
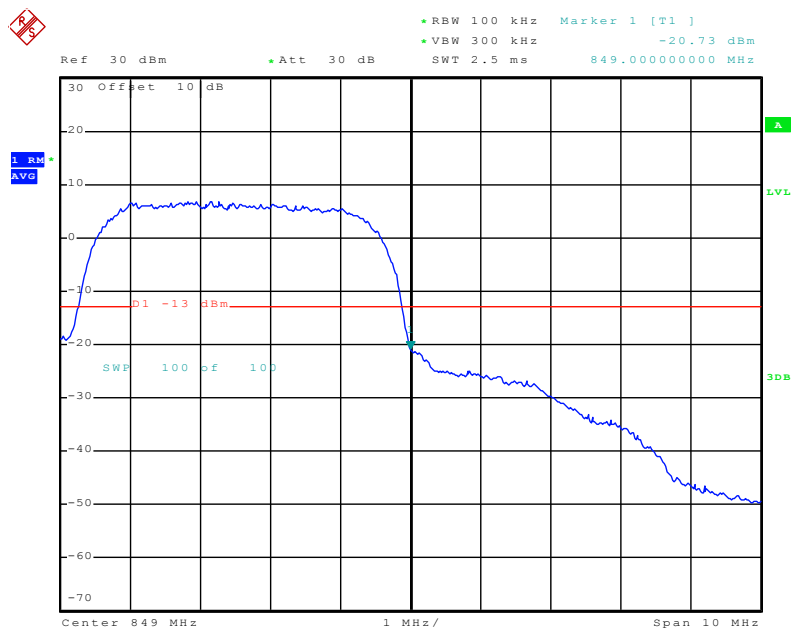
Date: 20.MAR.2015 12:05:03

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 43 of 71
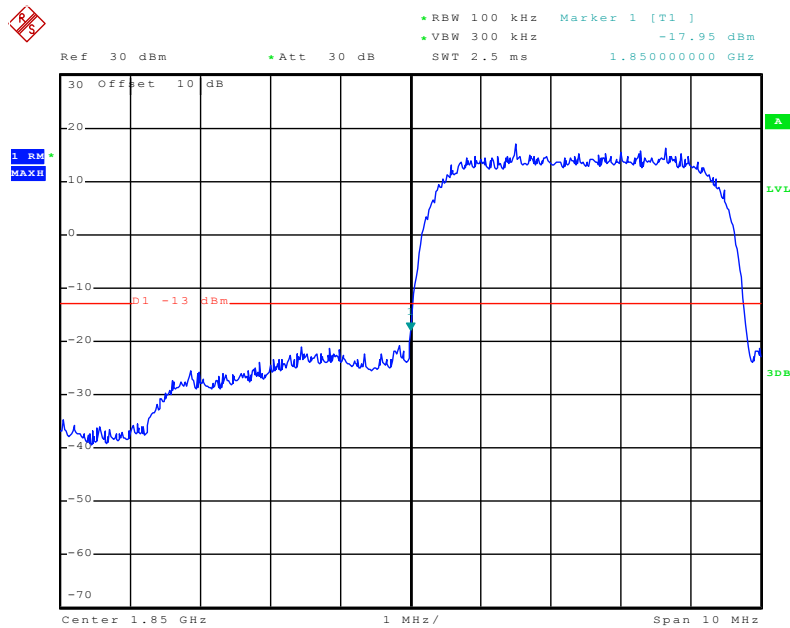
UMTS 1900 12.2k RMC

Date: 20.MAR.2015 11:57:55

Lowest channel
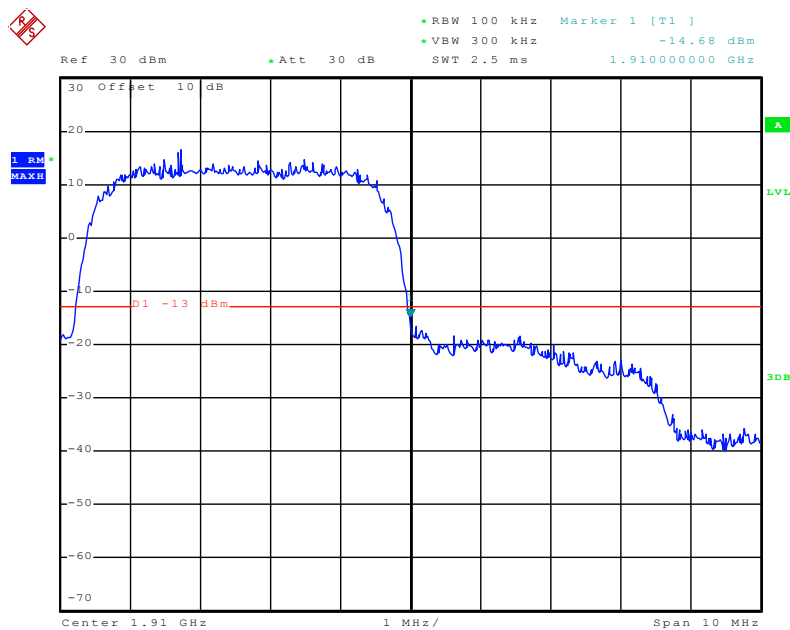
Date: 20.MAR.2015 11:57:34

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 44 of 71

UMTS 1700 12.2k RMC
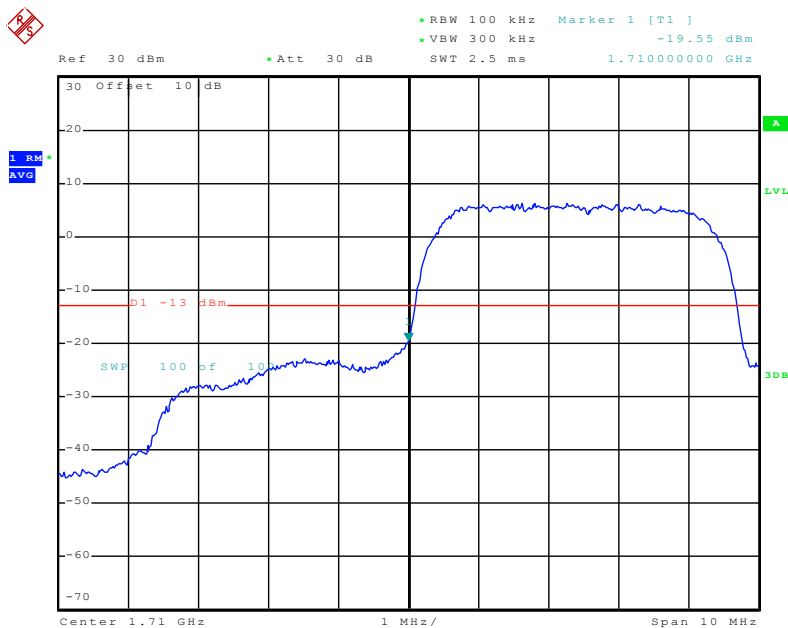
Date: 20.MAR.2015 13:35:04
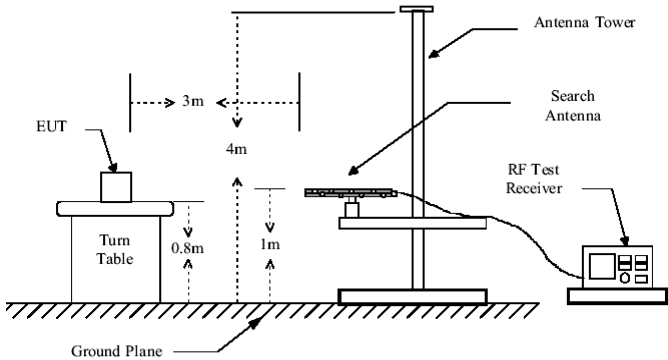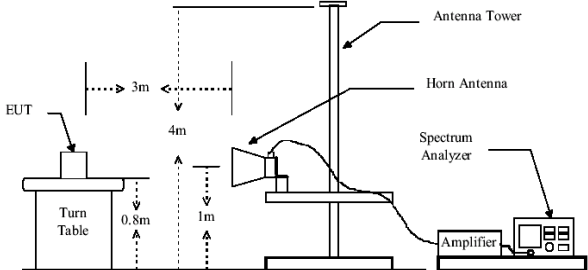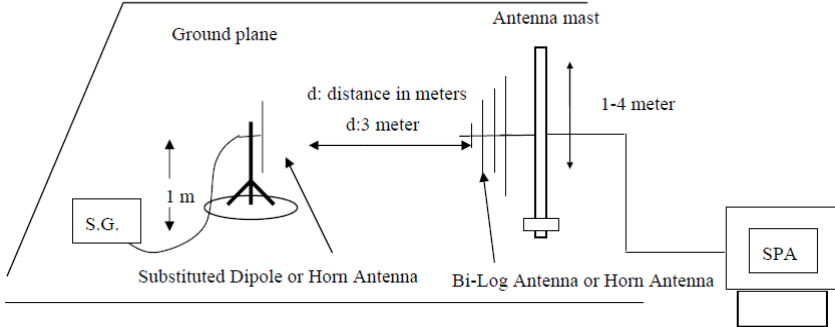
Lowest channel
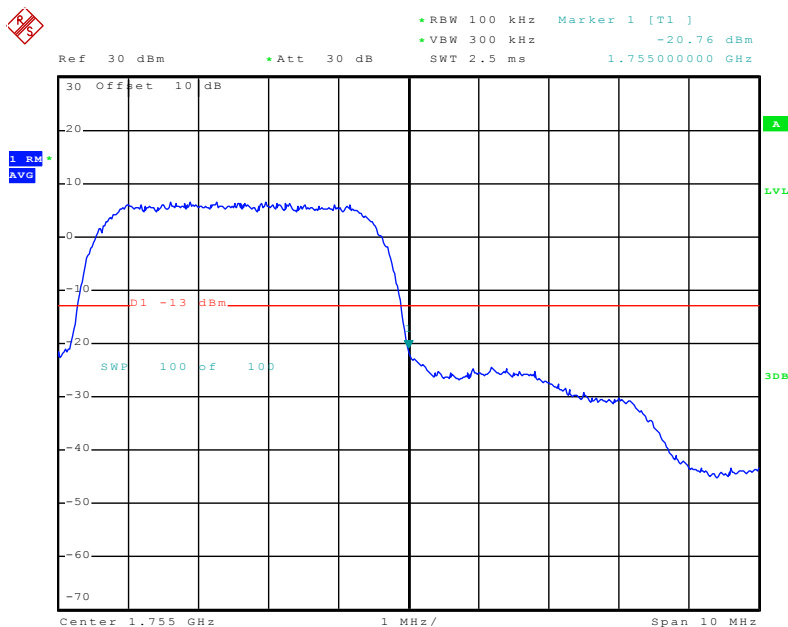
Date: 20.MAR.2015 13:35:52

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 45 of 71

6.10　ERP, EIRP Measurement

Test Requirement:	FCC part 22.913(a), FCC part 24.232(b) and FCC part 27.50(d)
Test Method:	FCC part 2.1046
Limit:	GSM850 7W ERP PCS1900 2W EIRP WCDMA Band V: 7W ERP WCDMA Band II: 2W EIRP WCDMA Band IV: 1W EIRP
Test setup:	Below 1GHz Above 1GHz Substituted method:

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 46 of 71

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB) 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB) 5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case)

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	190	H	V	27.15	38.45	Pass
			H	26.93		
		E1	V	26.58		
			H	26.35		
		E2	V	26.45		
			H	26.17		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
PCS1900	810	H	V	15.14	33.00	Pass
			H	13.68		
		E1	V	15.12		
			H	13.56		
		E2	V	15.07		
			H	13.47		
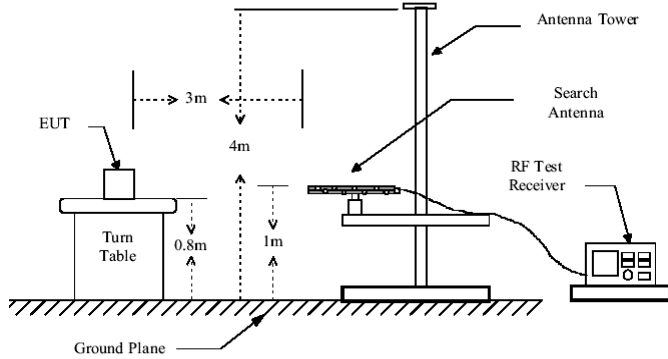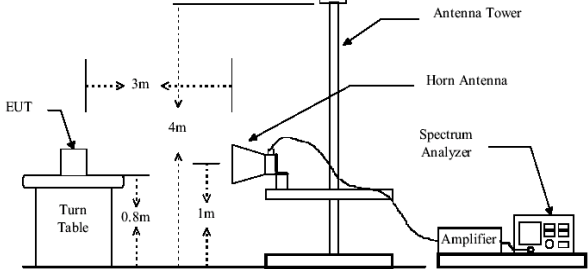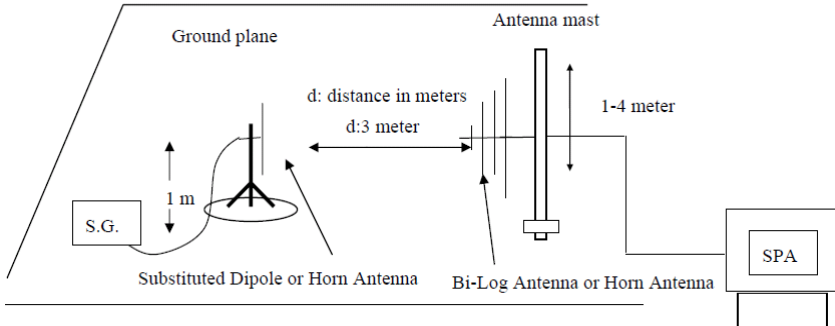
EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
UMTS 850 12.2k RMC	4132	H	V	18.88	38.45	Pass
			H	20.23		
		E1	V	18.69		
			H	19.85		
		E2	V	18.65		
			H	19.67		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
UMTS 1900 12.2k RMC	9538	H	V	11.82	33.00	Pass
			H	12.35		
		E1	V	11.68		
			H	12.23		
		E2	V	11.57		
			H	12.14		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 48 of 71

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
UMTS 1700 12.2k RMC	1312	H	V	11.36	30.00	Pass
			H	5.28		
		E1	V	11.32		
			H	5.26		
		E2	V	11.30		
			H	5.25		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 49 of 71

6.11　Field strength of spurious radiation measurement

Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) and FCC part 27.53(h)
Test Method:	FCC part 2.1053
Limit:	-13dBm
Test setup:	Below 1GHz Above 1GHz Substituted method:
Test Procedure:	1.　The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2.　During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3.　The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

	4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB)
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details. Based on the ERP/EIRP results, we selected GSM850, PCS1900, UMTS RMC 850, UMTS RMC 1700 and UMTS RMC 1900 for Radiated spurious emission test, other modes were not test.
Test results:	Passed

Measurement Data as below (worst case):

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-30.04	-13.00	Pass
2472.60	V	-31.48		
3296.80	V	-37.96		
4121.00	V	-38.26		
1648.40	Horizontal	-34.10		
2472.60	H	-35.49		
3296.80	H	-39.47		
4121.00	H	-37.87		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-29.52	-13.00	Pass
2509.80	V	-33.48		
3346.40	V	-36.74		
4183.00	V	-36.68		
1673.20	Horizontal	-32.82		
2509.80	H	-41.13		
3346.40	H	-38.84		
4183.00	H	-39.25		
Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-23.90	-13.00	Pass
2546.40	V	-31.09		
3395.20	V	-36.31		
4244.00	V	-38.40		
1697.60	Horizontal	-29.60		
2546.40	H	-36.33		
3395.20	H	-38.31		
4244.00	H	-38.17		

Remark:

1. *The emission levels of below 1 GHz are very lower than the limit and not show in test report.*

Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-38.23	-13.00	Pass
5550.60	V	-30.08		
3700.40	Horizontal	-38.21		
5550.60	H	-30.02		
Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-34.24	-13.00	Pass
5640.00	V	-30.62		
3760.00	Horizontal	-38.00		
5640.00	H	-31.68		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-31.72	-13.00	Pass
5729.40	V	-32.70		
3819.60	Horizontal	-36.65		
5729.40	H	-32.42		

Remark:
1.   The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	UMTS850 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-42.32	-13.00	Pass
2479.20	V	-39.92		
3305.60	V	-38.84		
4132.00	V	-37.55		
1652.80	Horizontal	-37.45		
2479.20	H	-38.91		
3305.60	H	-39.25		
4132.00	H	-38.47		
Test mode:	UMTS850 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1672.00	Vertical	-44.07	-13.00	Pass
2508.00	V	-40.69		
3344.00	V	-38.70		
4180.00	V	-37.95		
1672.00	Horizontal	-43.22		
2508.00	H	-41.25		
3344.00	H	-38.37		
4180.00	H	-38.89		
Test mode:	UMTS850 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-35.47	-13.00	Pass
2539.80	V	-41.23		
3386.40	V	-38.68		
4233.00	V	-37.32		
1693.20	Horizontal	-40.80		
2539.80	H	-41.53		
3386.40	H	-38.42		
4233.00	H	-38.73		

Remark:
1. *The emission levels of below 1 GHz are very lower than the limit and not show in test report.*

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 54 of 71

Test mode:	UMTS 1900 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-39.31	-13.00	Pass
5557.20	V	-33.27		
3704.80	Horizontal	-39.08		
5557.20	H	-34.10		
Test mode:	UMTS 1900 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-39.07	-13.00	Pass
5640.00	V	-34.00		
3760.00	Horizontal	-38.30		
5640.00	H	-32.97		
Test mode:	UMTS 1900 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-38.57	-13.00	Pass
5722.80	V	-33.40		
3815.20	Horizontal	-38.78		
5722.80	H	-32.48		

Remark:
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 55 of 71

Test mode:	UMTS 1700 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3424.40	Vertical	-37.62	-13.00	Pass
5136.60	V	-33.53		
3424.40	Horizontal	-38.75		
5136.60	H	-34.86		
Test mode:	UMTS 1700 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3464.80	Vertical	-37.95	-13.00	Pass
5197.20	V	-34.88		
3464.80	Horizontal	-42.11		
5197.20	H	-37.15		
Test mode:	UMTS 1700 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3505.20	Vertical	-38.93	-13.00	Pass
5257.80	V	-33.65		
3505.20	Horizontal	-39.23		
5257.80	H	-33.38		

Remark:
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

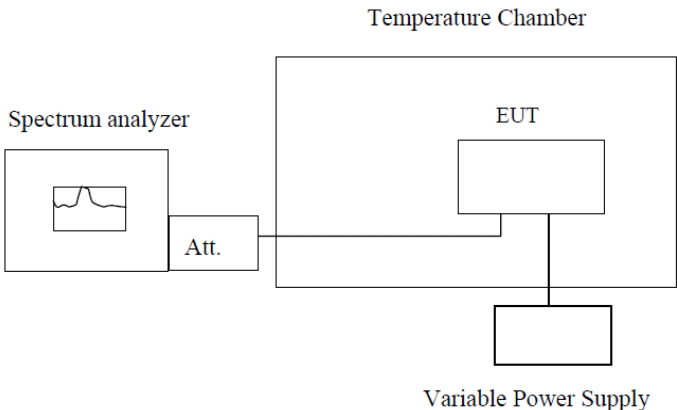## 6.12 Frequency stability V.S. Temperature measurement
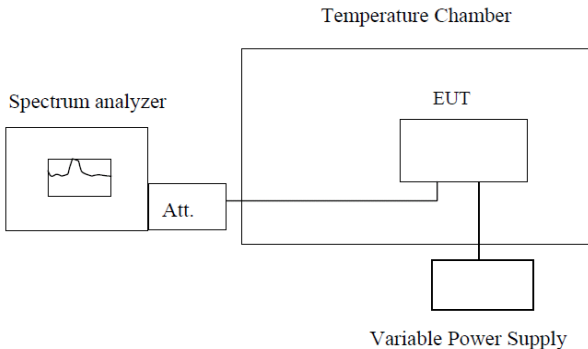
Test Requirement:	FCC Part 2.1055(a)(1)(b)
Test Method:	FCC Part 2.1055(a)(1)(b)
Limit:	2.5 ppm
Test setup:	Temperature Chamber Spectrum analyzer EUT Att. Variable Power Supply **Note :** Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to −30℃. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10℃ increased per stage until the highest temperature of +50℃ reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 57 of 71

Measurement Data:

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	115	0.137461	2.5	Pass
	-20	108	0.129094		
	-10	155	0.185274		
	0	129	0.154196		
	10	97	0.115945		
	20	93	0.111164		
	30	105	0.125508		
	40	116	0.138656		
	50	139	0.166149		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	173	0.092021	2.5	Pass
	-20	95	0.050532		
	-10	158	0.084043		
	0	155	0.082447		
	10	138	0.073404		
	20	143	0.076064		
	30	96	0.051064		
	40	105	0.055851		
	50	108	0.057447		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCIS150300147RF
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 58 of 71

Reference Frequency: UMTS850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	144	0.172125	2.5	Pass
	-20	137	0.163758		
	-10	108	0.129094		
	0	95	0.113555		
	10	78	0.093235		
	20	106	0.126703		
	30	102	0.121922		
	40	81	0.096820		
	50	88	0.105188		
Reference Frequency: UMTS1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	137	0.072872	2.5	Pass
	-20	79	0.042021		
	-10	95	0.050532		
	0	78	0.041489		
	10	83	0.044149		
	20	66	0.035106		
	30	99	0.052660		
	40	76	0.040426		
	50	94	0.050000		
Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	123	0.070992	2.5	Pass
	-20	64	0.036939		
	-10	76	0.043865		
	0	88	0.050791		
	10	75	0.043288		
	20	97	0.055985		
	30	107	0.061757		
	40	84	0.048482		
	50	98	0.056562		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 59 of 71

6.13   Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part 2.1055(d)(1)(2)
Test Method:	FCC Part 2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25℃. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	107	0.127899	2.5	Pass
	3.70	65	0.077695		
	3.40	92	0.109969		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	96	0.051064	2.5	Pass
	3.70	57	0.030319		
	3.40	69	0.036702		

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	93	0.111164	2.5	Pass
	3.70	76	0.090844		
	3.40	58	0.069328		

Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	95	0.050532	2.5	Pass
	3.70	78	0.041489		
	3.40	82	0.043617		

Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	76	0.043865	2.5	Pass
	3.70	61	0.035207		
	3.40	68	0.039247		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCIS150300147RF

Page 61 of 71