

# FCC Part 15C

## Measurement and Test Report

### For

**XPX TECHNOLOGY CO., LTD**

**Rm689B, Huafa 411 Bldg. Huafa N. Road, Futian, Shenzhen, China**

**FCC ID: 2ADIZ-L7**

**FCC Rule(s):** FCC Part 15C

**Product Description:** Tablet PC

**Tested Model:** LIFE 7

**Report No.:** STR14118040I-1

**Tested Date:** 2014-11-06 to 2014-11-19

**Issued Date:** 2014-11-20

**Tested By:** Vigoss Liang / Engineer

**Reviewed By:** Lahm Peng / EMC Manager

**Approved & Authorized By:** Jandy So / PSQ Manager

**Prepared By:**

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. RF EXPOSURE .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. ANTENNA REQUIREMENT .....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION .....	9
<b>5. POWER SPECTRAL DENSITY .....</b>	<b>10</b>
5.1 STANDARD APPLICABLE.....	10
5.2 TEST EQUIPMENT LIST AND DETAILS .....	10
5.3 TEST PROCEDURE.....	10
5.4 ENVIRONMENTAL CONDITIONS .....	10
5.5 SUMMARY OF TEST RESULTS/PLOTS .....	11
<b>6. 6DB BANDWIDTH .....</b>	<b>20</b>
6.1 STANDARD APPLICABLE.....	20
6.2 TEST EQUIPMENT LIST AND DETAILS .....	20
6.3 TEST PROCEDURE.....	20
6.4 ENVIRONMENTAL CONDITIONS .....	20
6.5 SUMMARY OF TEST RESULTS/PLOTS .....	21
<b>7. RF OUTPUT POWER.....</b>	<b>30</b>
7.1 STANDARD APPLICABLE.....	30
7.2 TEST EQUIPMENT LIST AND DETAILS .....	30
7.3 TEST PROCEDURE.....	30
7.4 ENVIRONMENTAL CONDITIONS .....	30
7.5 SUMMARY OF TEST RESULTS/PLOTS .....	31
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>	<b>40</b>
8.1 MEASUREMENT UNCERTAINTY .....	40
8.2 STANDARD APPLICABLE.....	40
8.3 TEST EQUIPMENT LIST AND DETAILS .....	40
8.4 TEST PROCEDURE.....	41
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	41
8.6 ENVIRONMENTAL CONDITIONS .....	42
8.7 SUMMARY OF TEST RESULTS/PLOTS .....	42
<b>9. OUT OF BAND EMISSIONS.....</b>	<b>77</b>
9.1 STANDARD APPLICABLE.....	77
9.2 TEST EQUIPMENT LIST AND DETAILS .....	77
9.3 TEST PROCEDURE.....	77
9.4 ENVIRONMENTAL CONDITIONS .....	78
9.5 SUMMARY OF TEST RESULTS/PLOTS .....	78
<b>10. CONDUCTED EMISSIONS .....</b>	<b>85</b>
10.1 MEASUREMENT UNCERTAINTY .....	85
10.2 TEST EQUIPMENT LIST AND DETAILS .....	85
10.3 TEST PROCEDURE.....	85
10.4 BASIC TEST SETUP BLOCK DIAGRAM.....	85
10.5 ENVIRONMENTAL CONDITIONS .....	86
10.6 TEST RECEIVER SETUP .....	86
10.7 SUMMARY OF TEST RESULTS/PLOTS .....	86
10.8 CONDUCTED EMISSIONS TEST DATA.....	86

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: XPX TECHNOLOGY CO., LTD  
 Address of applicant: Rm689B, Huafa 411 Bldg. Huafa N. Road, Futian, Shenzhen, China  
 Manufacturer: XPX TECHNOLOGY CO., LTD  
 Address of manufacturer: Flat2, 2/F, Wah Wai industrial Building, 53-61 Pak Tin Par Street, Tsuen Wan, NT, HK

General Description of EUT	
Product Name:	Tablet PC
Brand Name:	D3, XPX, ZILO
Model No.:	LIFE 7
Adding Model:	XM77, XM78, DZ7, ZT7
Hardware Version:	A31S-LIFE7-V1.2
Software Version:	XPX-Life-C5RE2T1-G8CR16+12+6+1W1M15+17-A44-20141105
Rated Voltage:	DC 3.7V Li-ion Battery
Battery:	Capacitance: 2100mAh
Power Adaptor:	XC20
	Input: AC100-240V Output: DC 5V, 2A
Device Category:	Portable Device
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The other model listed in the report has different appearance only of LIFE 7 without circuit and electronic construction changed, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2472MHz for 11b/g/n(HT20)
RF Output Power:	11.22dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	13
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.32dBi
Lowest Internal Frequency	32.768KHz

## 1.2 Test Standards

The following report is prepared on behalf of the XPX TECHNOLOGY CO., LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r02 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2442MHz, 2462MHz, 2467MHz, 2472MHz
TM2	802.11g	2412MHz, 2442MHz, 2462MHz, 2467MHz, 2472MHz
TM3	802.11n-HT20	2412MHz, 2442MHz, 2462MHz, 2467MHz, 2472MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Core
Earphone Cable	1.2	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI	1	Shielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R
Monitor	SAMSUNG	B2230H	YDG7HVJ2800050N
U Disk	Kingston	DT100G3	/

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 5.3 Test Procedure

According to the KDB 558074 D01 V03r02, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz	Limit dBm/3kHz
802.11b	2412	3.780	8
	2442	2.165	8
	2462	1.565	8
	2467	2.626	8
	2472	2.729	8
802.11g	2412	0.037	8
	2442	-0.477	8
	2462	-0.426	8
	2467	-0.117	8
	2472	-0.620	8
802.11n HT20	2412	-1.075	8
	2442	-1.377	8
	2462	-1.927	8
	2467	-1.202	8
	2472	-1.642	8

Please refer to the following test plots:


## 802.11b Channel 1-2412MHz

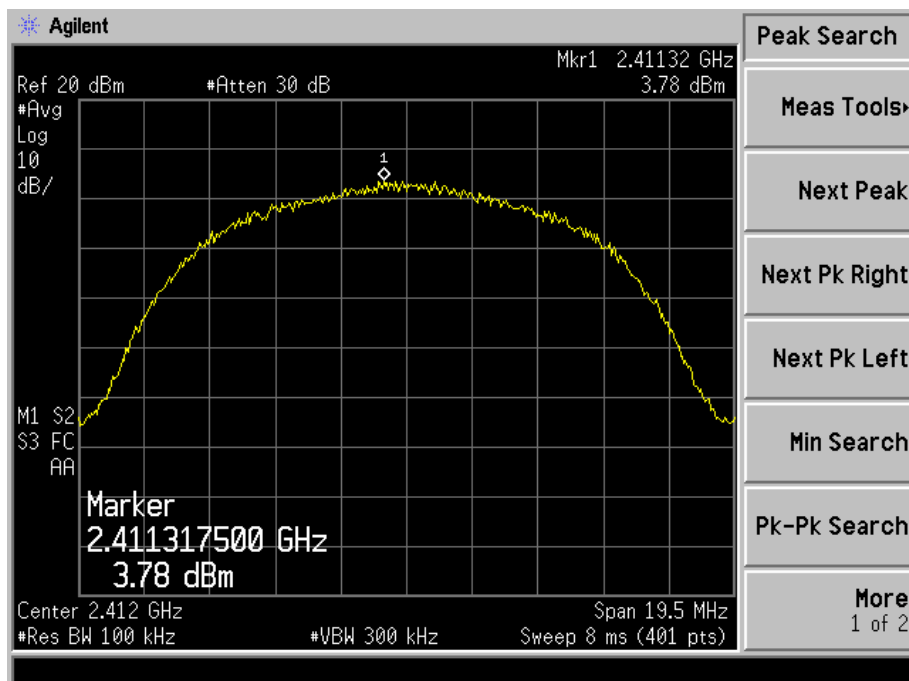


## 802.11b-Channel 7-2442MHz

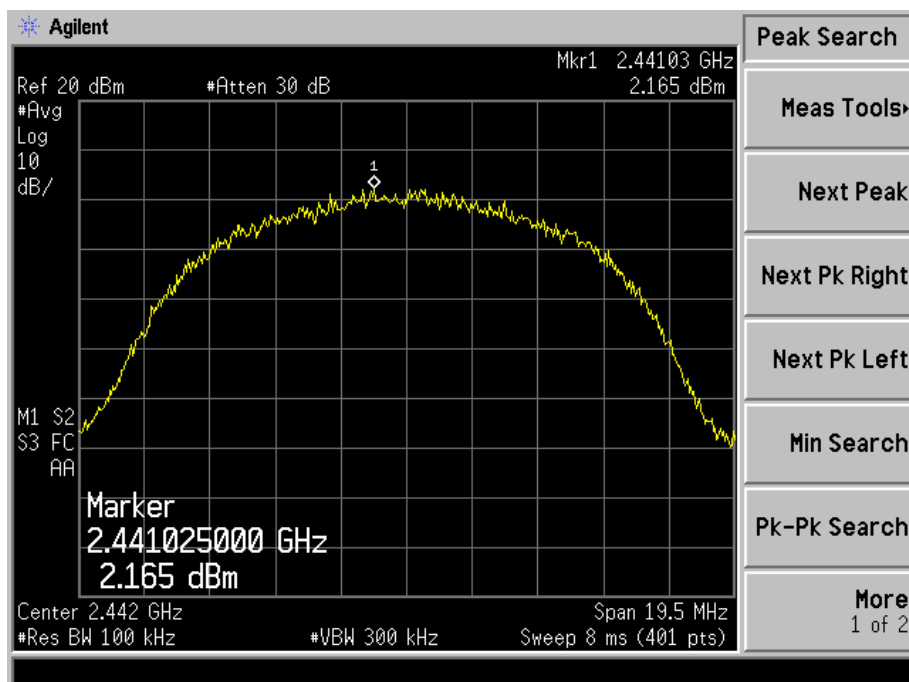


## 802.11b-Channel 11-2462MHz

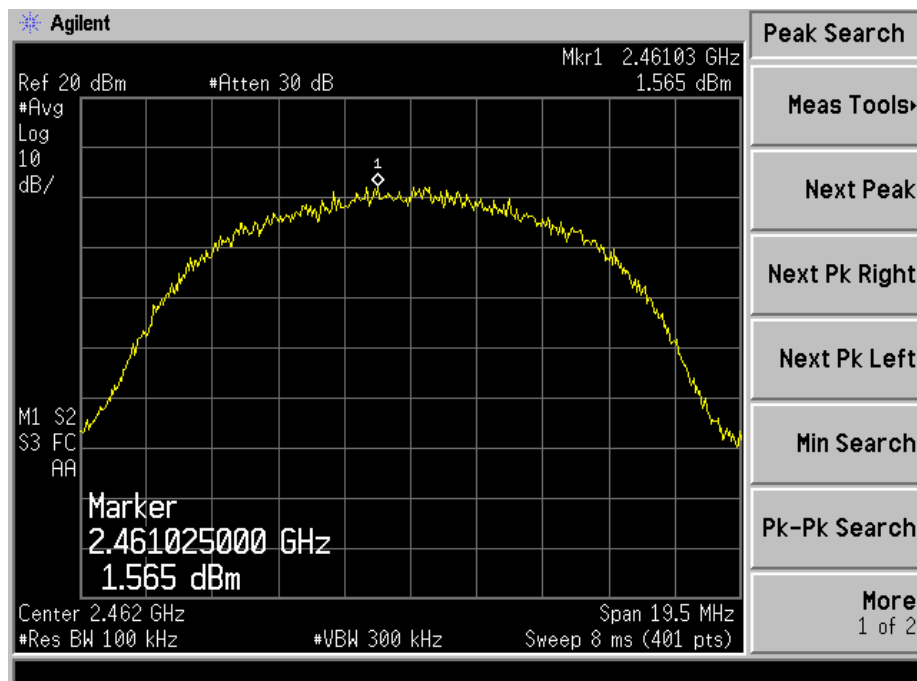


## 802.11b-Channel 12-2467MHz

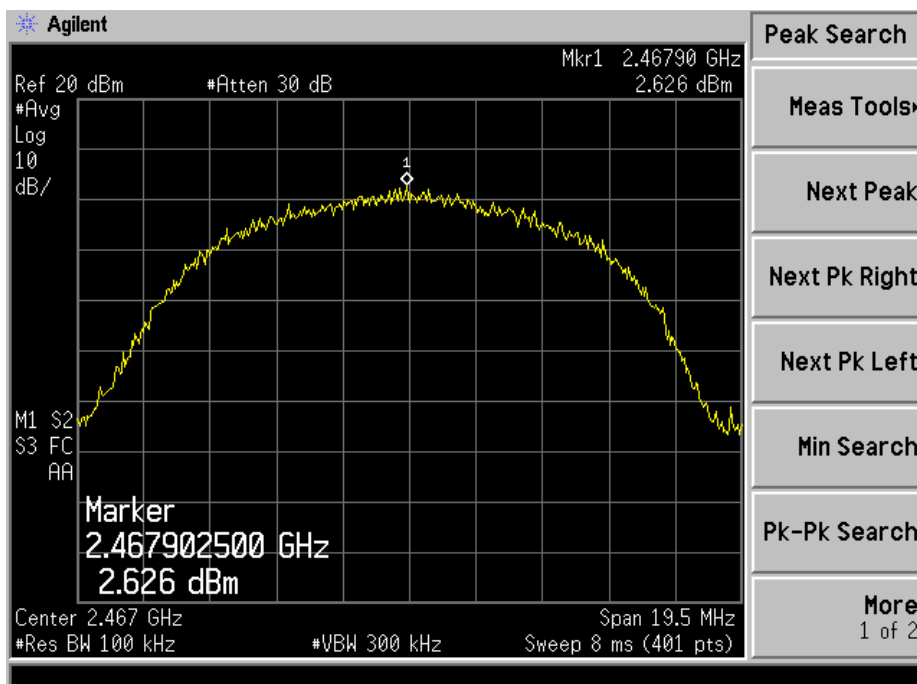


## 802.11b-Channel 13-2472MHz

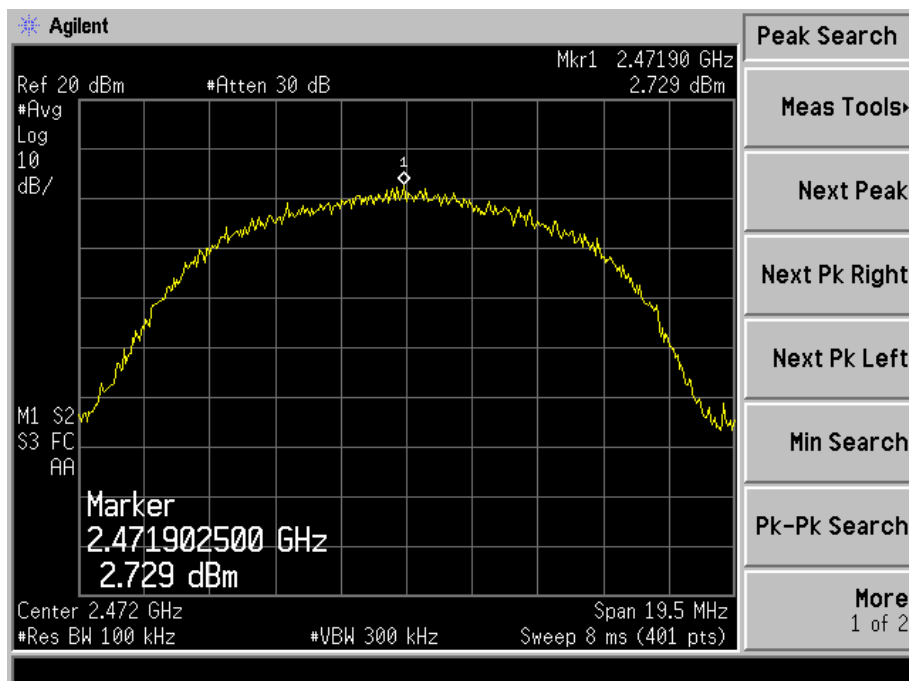


## 802.11g-Channel 1-2412MHz

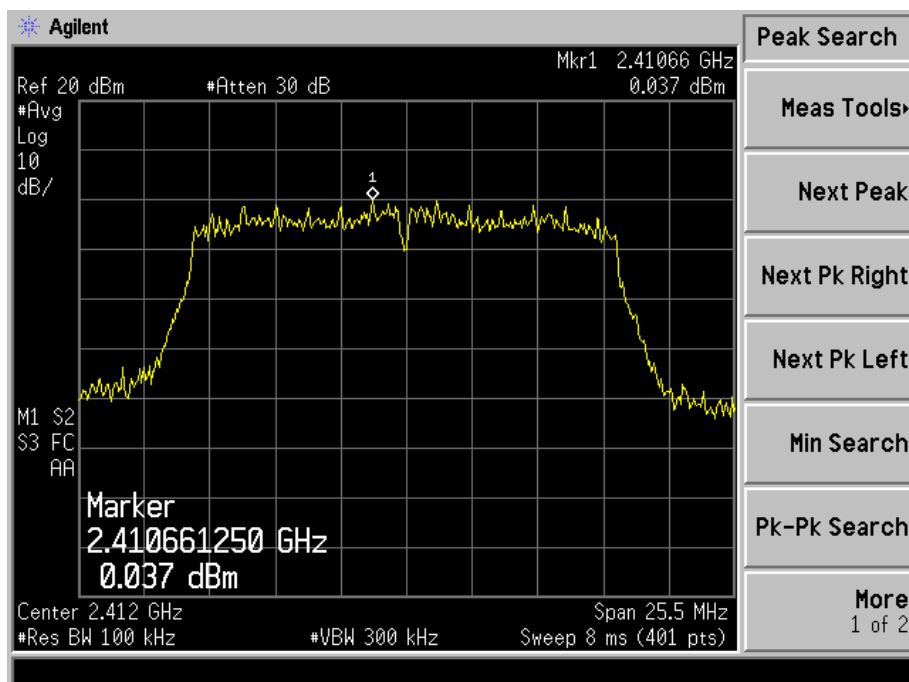


## 802.11g-Channel 7-2442MHz

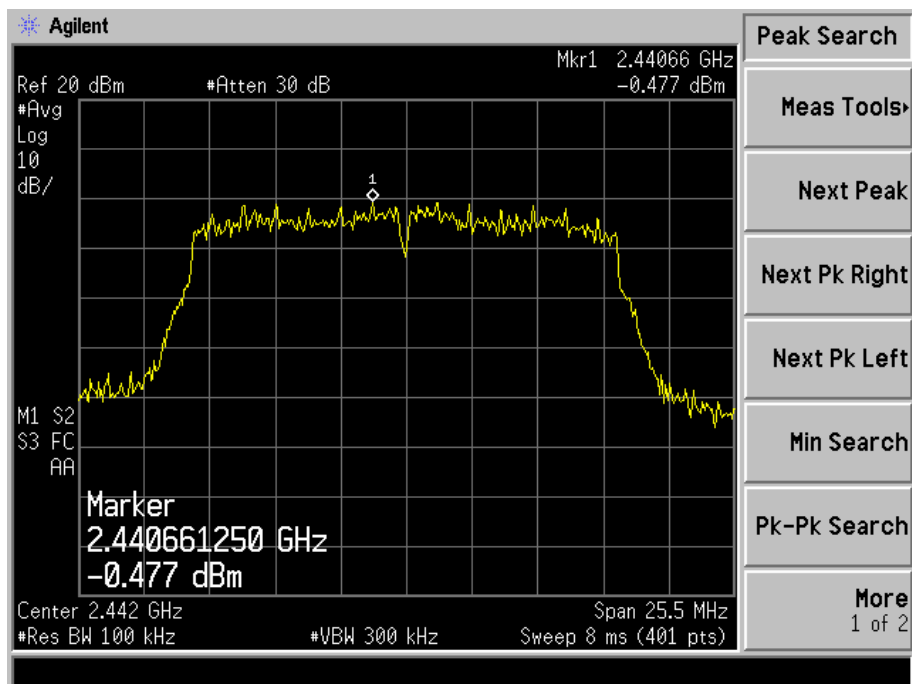


## 802.11b-Channel 11-2462MHz

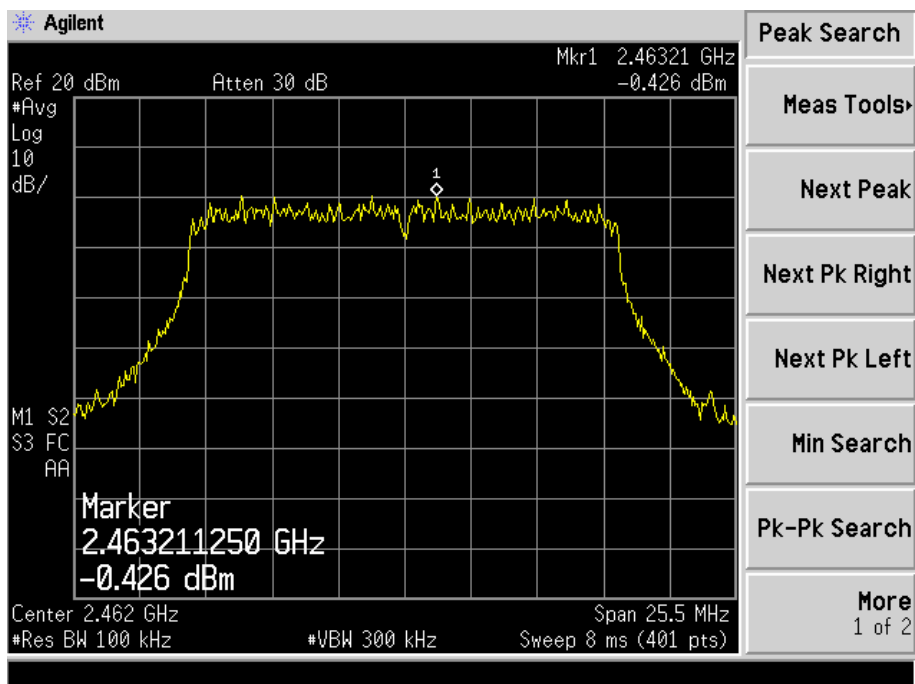

## 802.11g-Channel 12-2467MHz

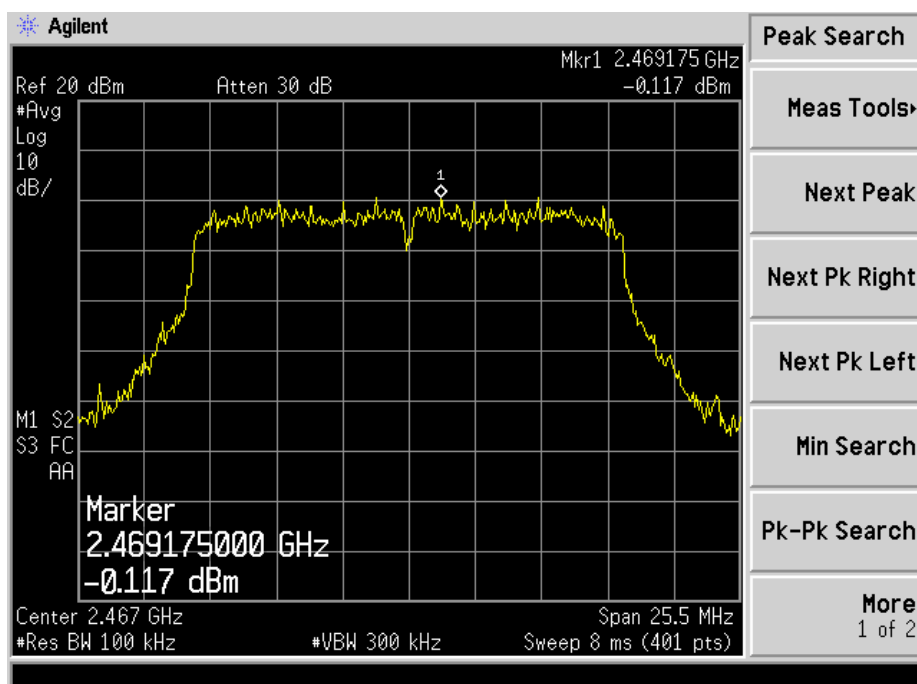


## 802.11g-Channel 13-2472MHz

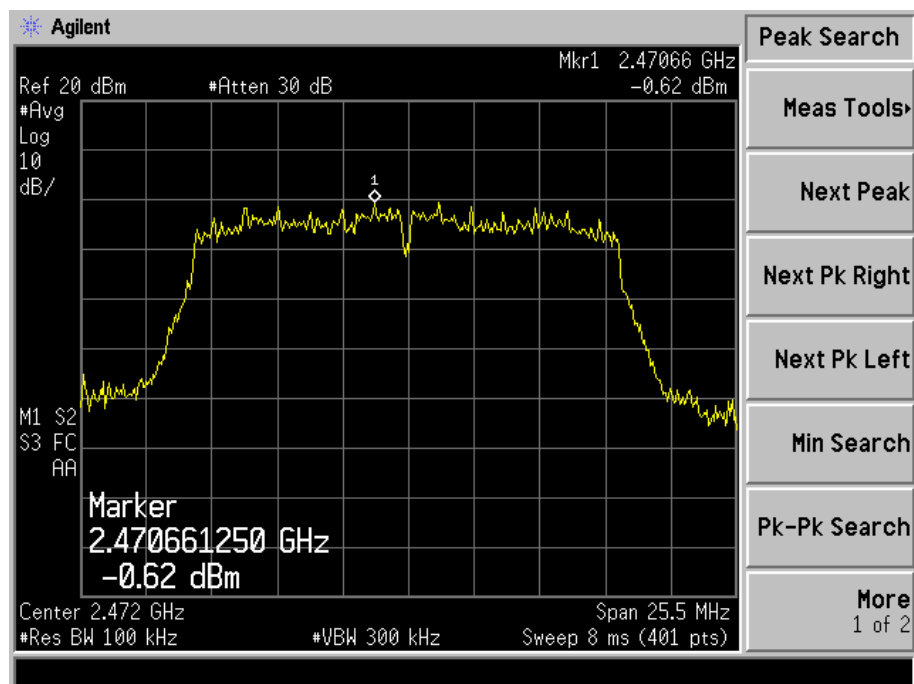





## 802.11n-HT20-Channel 1-2412MHz

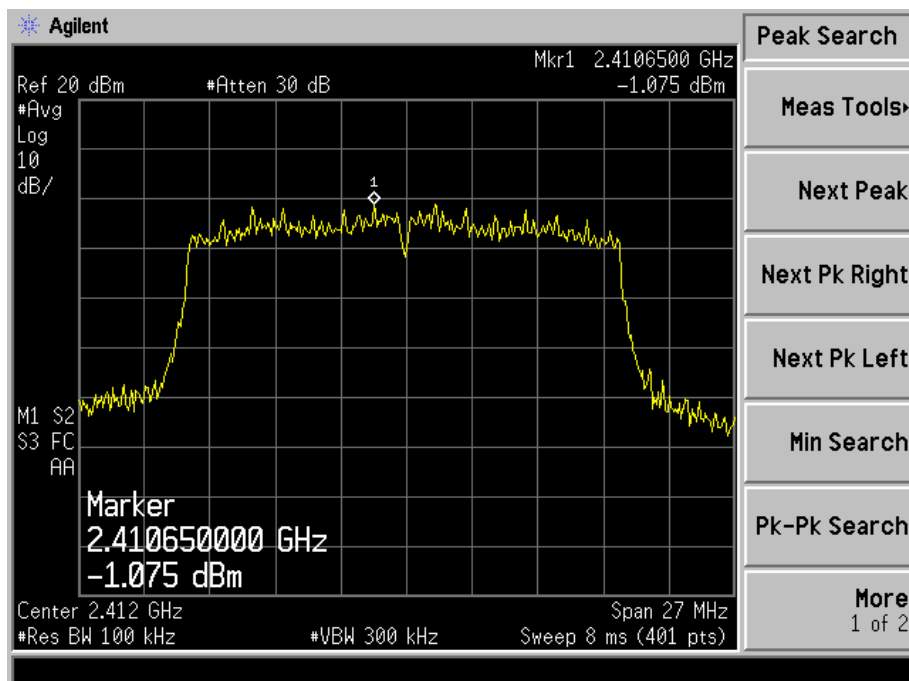


## 802.11n-HT20-Channel 7-2442MHz

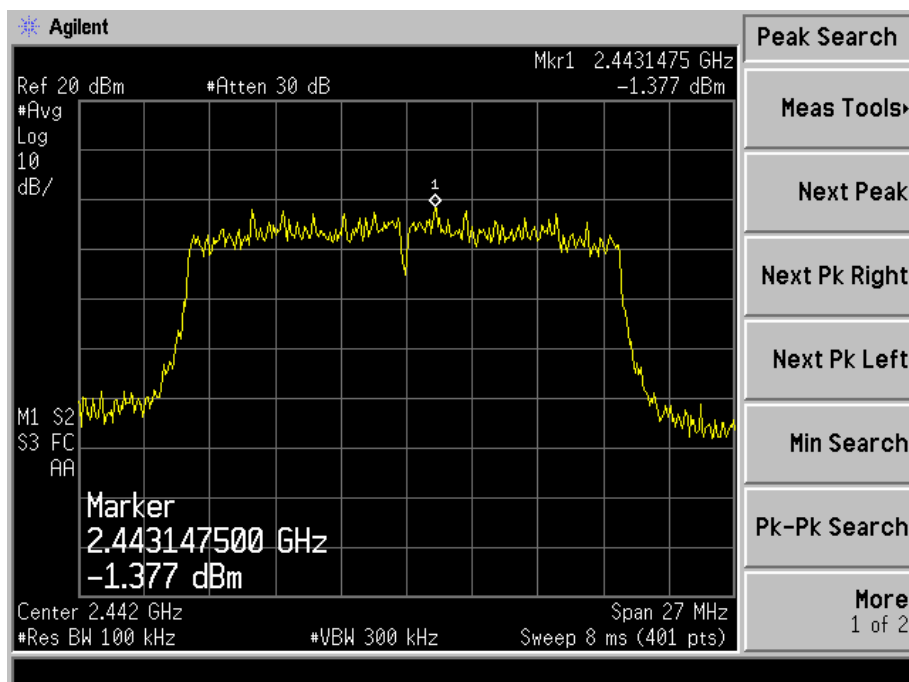


## 802.11n-HT20-Channel 11-2462MHz

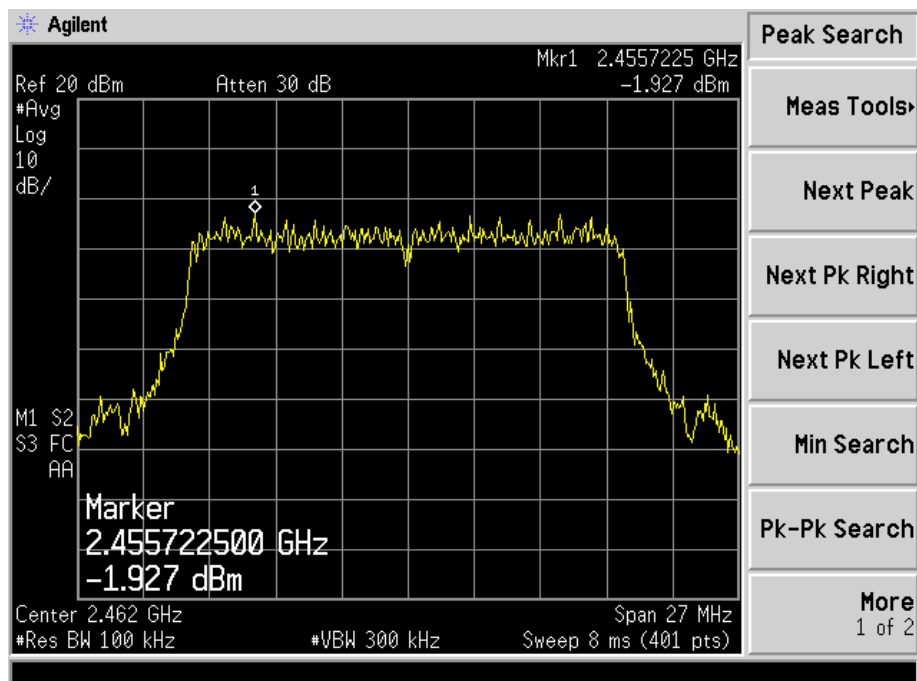

## 802.11n-HT20-Channel 12-2467MHz

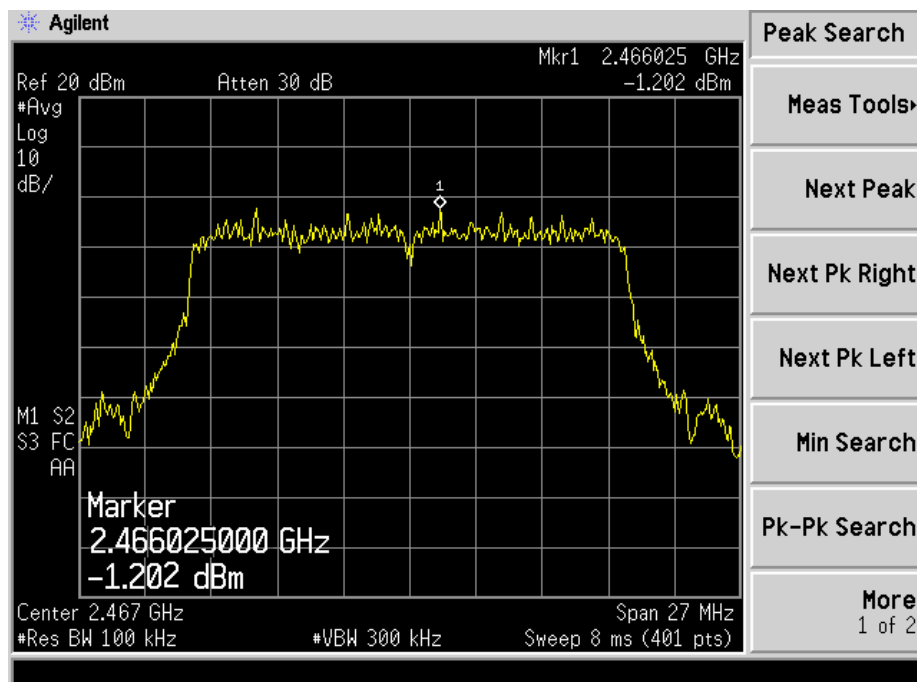

802.11n-HT20-High Channel-2472MHz

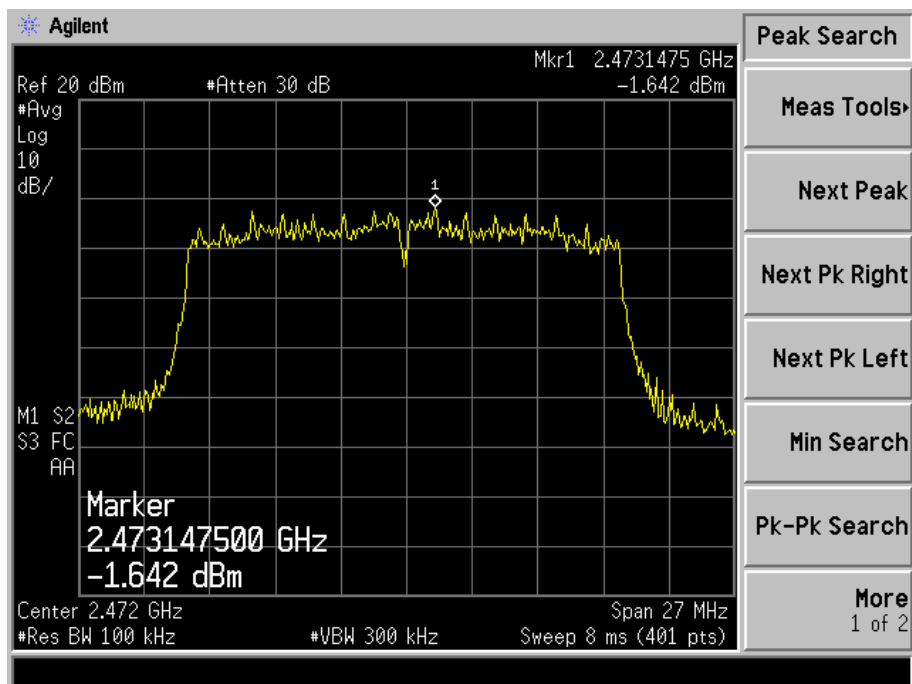

## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 6.3 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

## 6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	7921	12185.9	500
	2442	7511	12155.2	500
	2462	7165	12188.2	500
	2467	8110	12153.9	500
	2472	7113	12181.1	500
802.11g	2412	15765	16268.4	500
	2442	15677	16251.4	500
	2462	15215	16248.1	500
	2467	15204	16204.8	500
	2472	15364	16288.3	500
802.11n-HT20	2412	17243	17464.2	500
	2442	17224	17433.2	500
	2462	17154	17133.7	500
	2467	17319	17448.0	500
	2472	17332	17463.6	500

Please refer to the following test plots:


## 802.11b-Channel 1-2412MHz

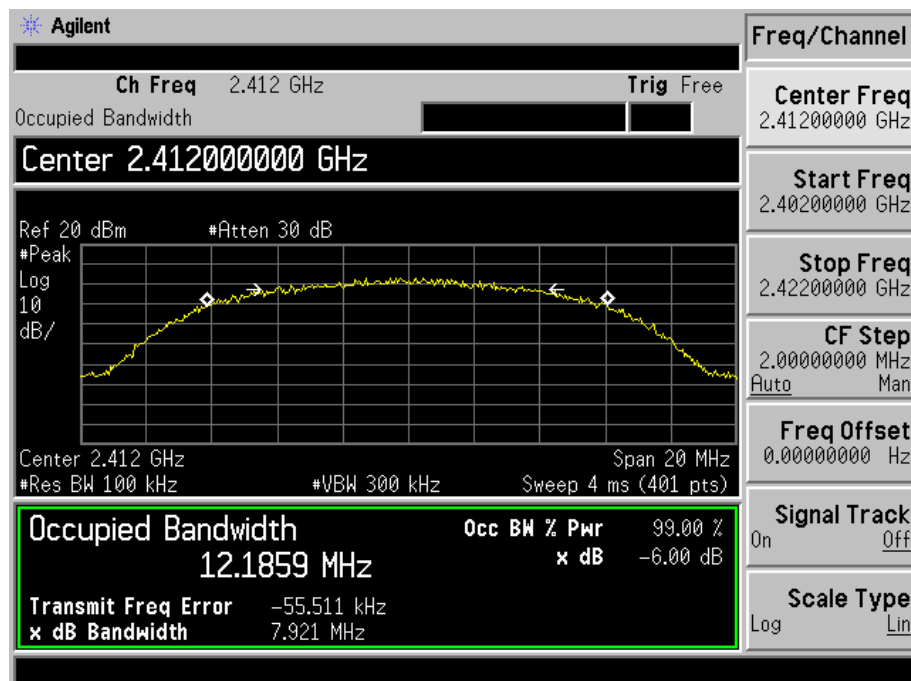


## 802.11b-Channel 7-2442MHz

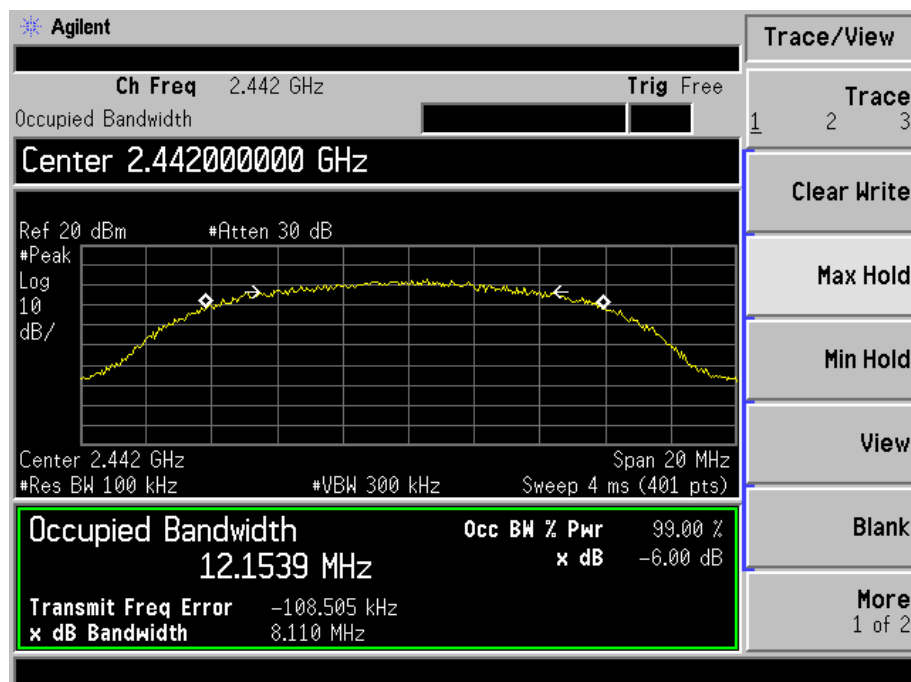


## 802.11b-Channel 11-2462MHz

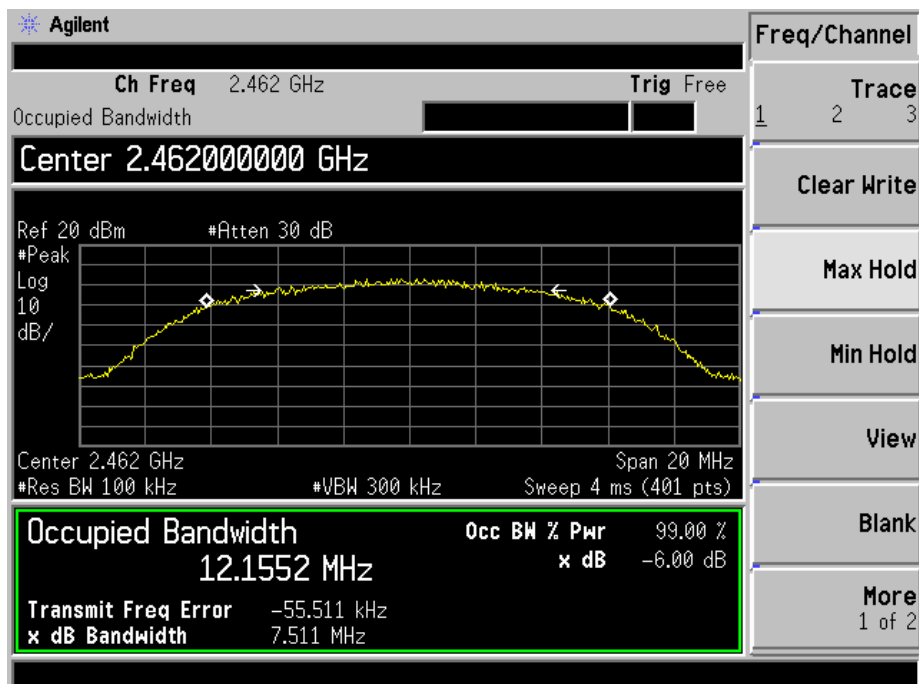


## 802.11b-Channel 12-2467MHz

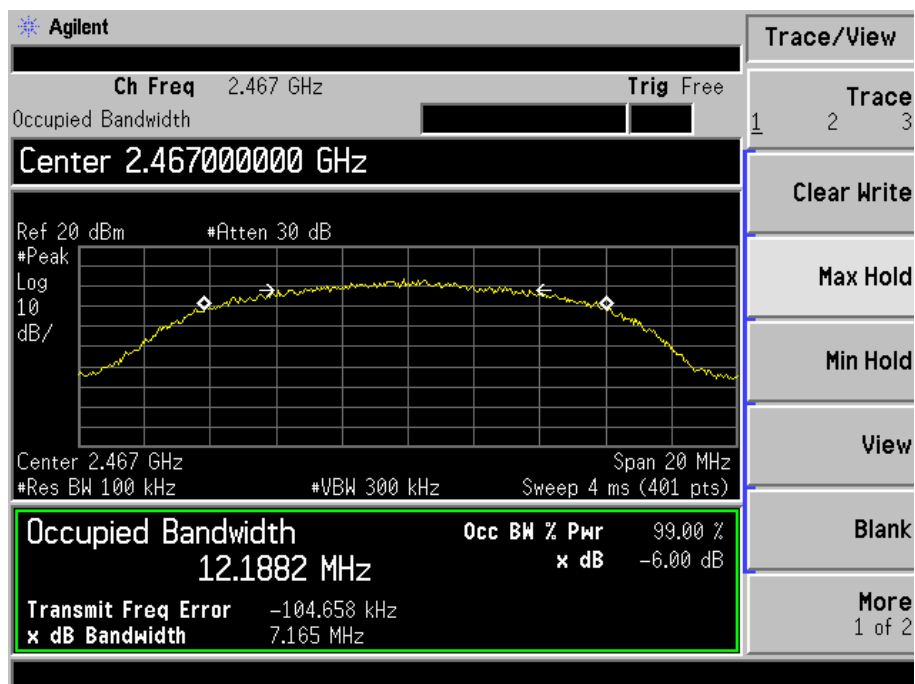

## 802.11b-Channel 13-2472MHz

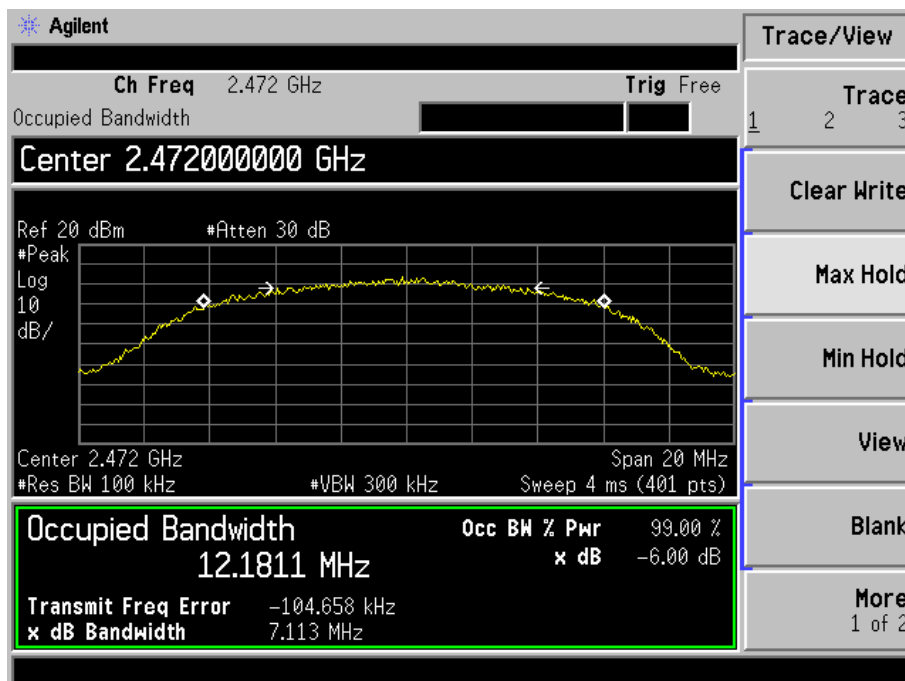


## 802.11g-Channel 1-2412MHz

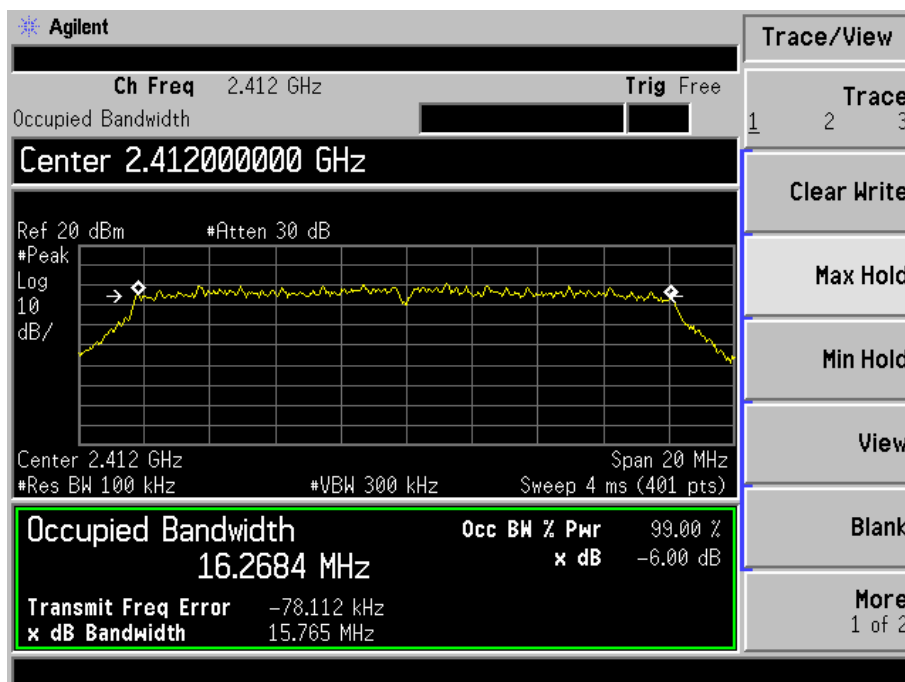





## 802.11g-Channel 7-2442MHz

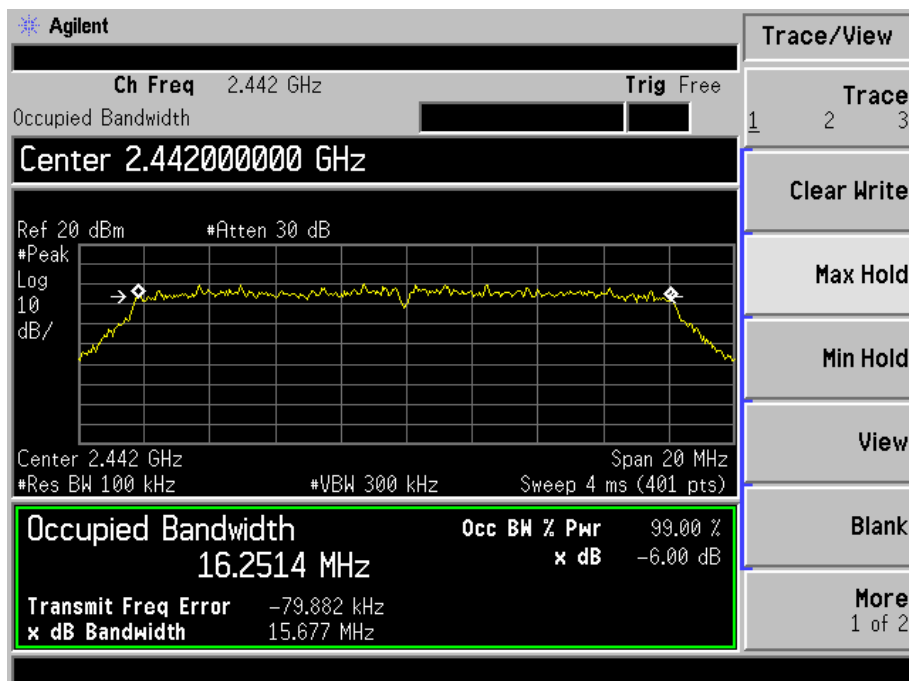


## 802.11g-Channel 11-2462MHz

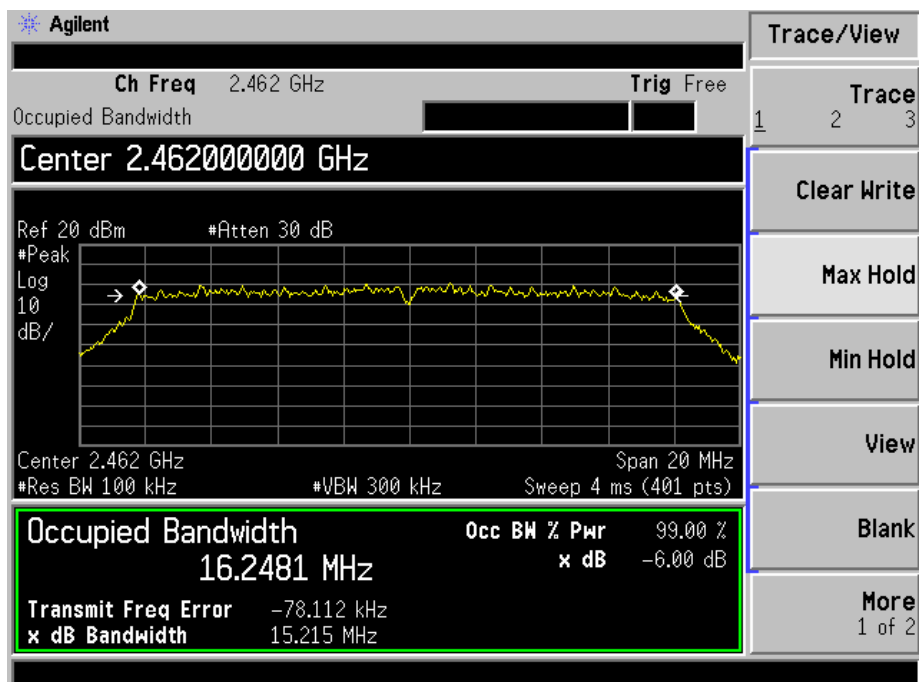


## 802.11g-Channel 12-2467MHz

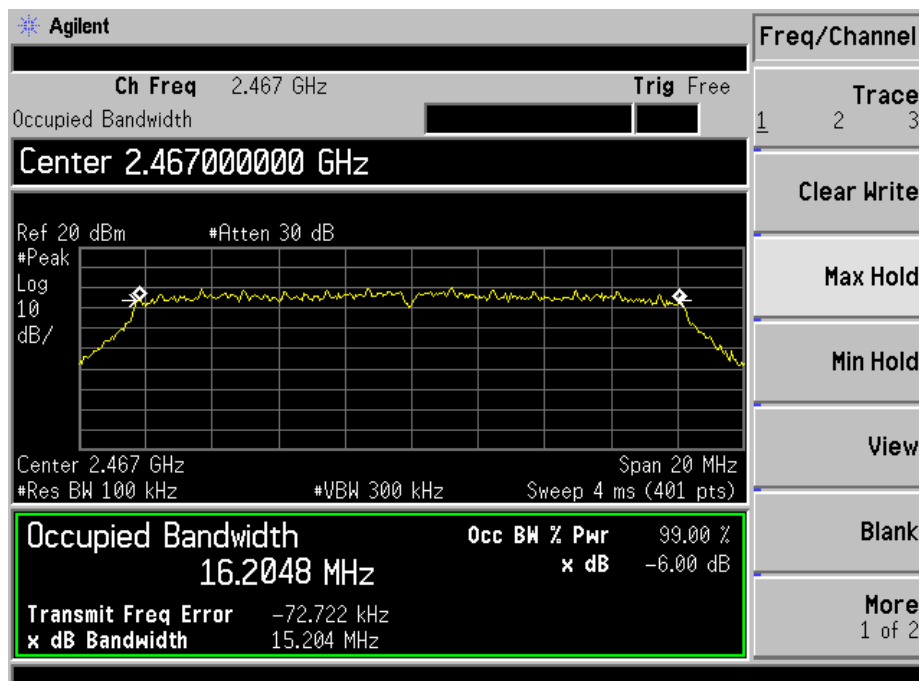


## 802.11g-Channel 13-2472MHz

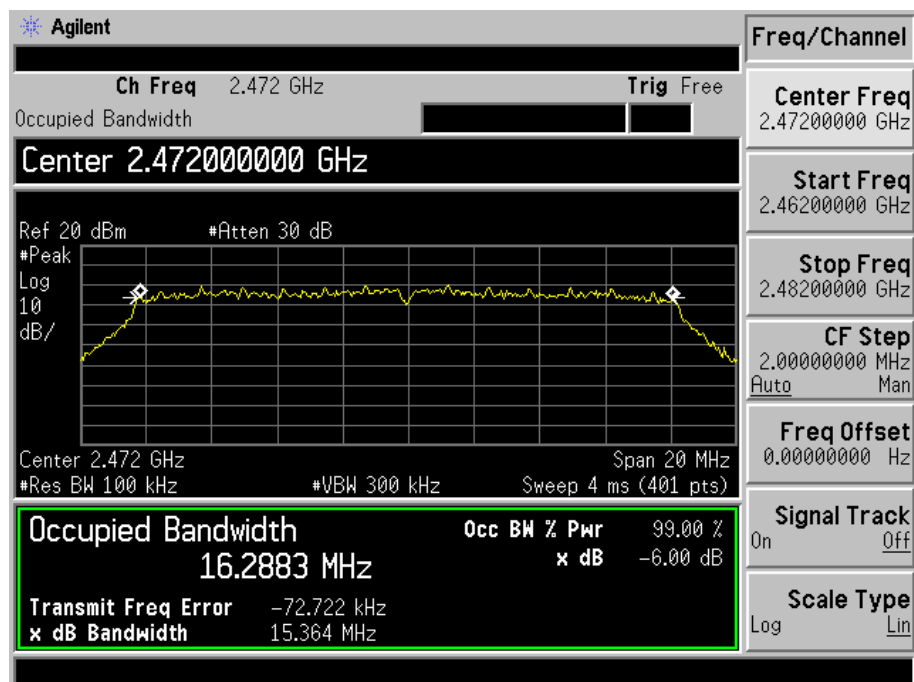


## 802.11n-HT20-Channel 1-2412MHz

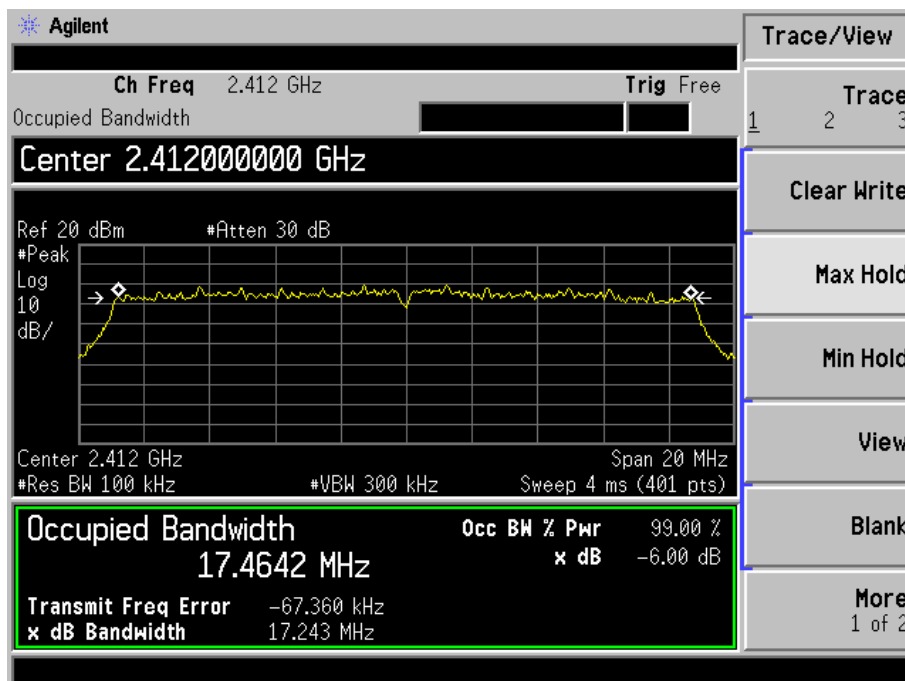


## 802.11n-HT20-Channel 7-2442MHz

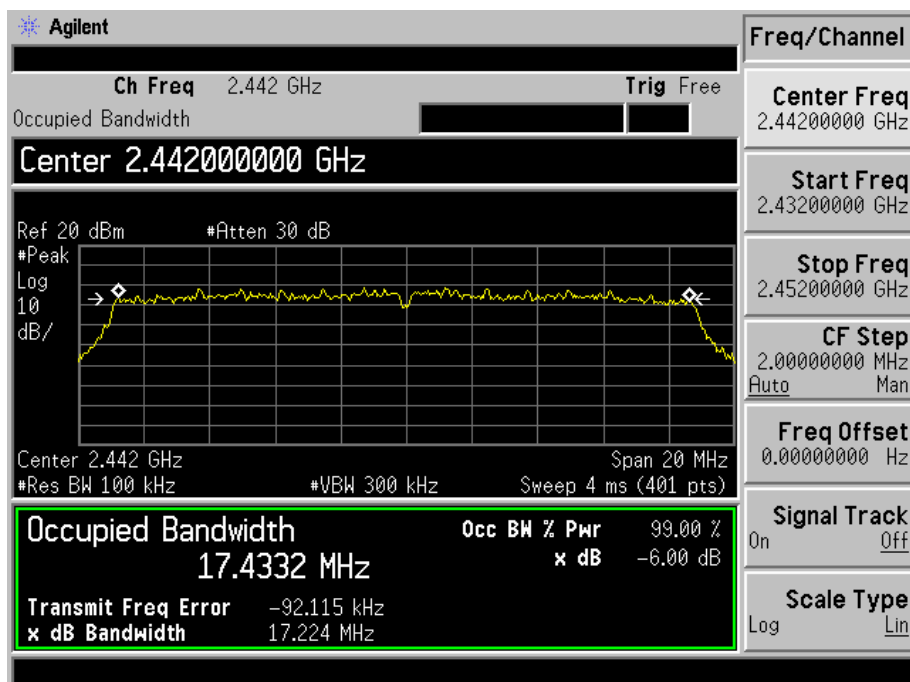


## 802.11n-HT20-Channel 11-2462MHz

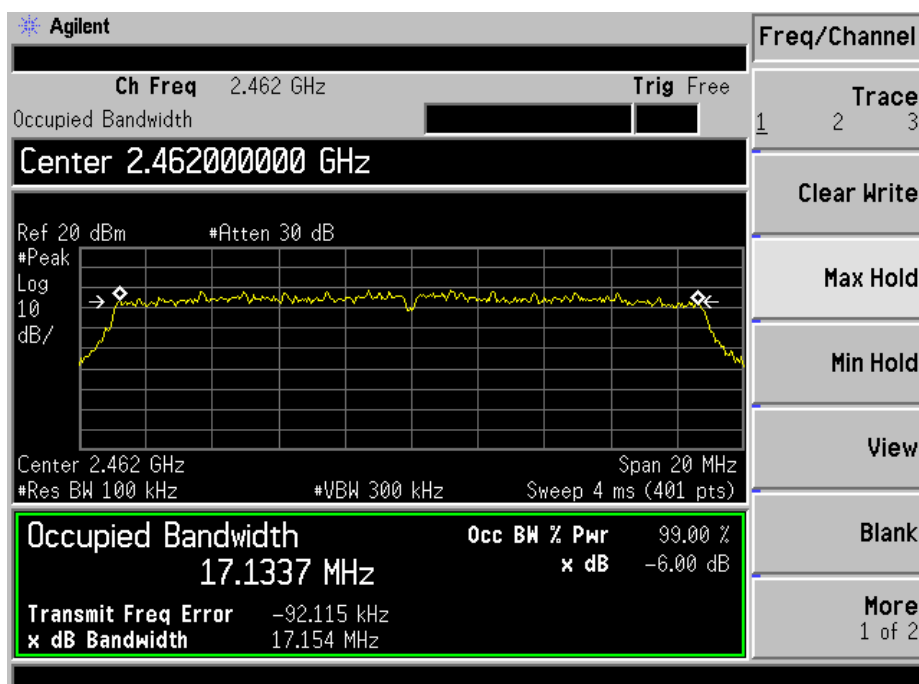

## 802.11n-HT20-Channel 12-2467MHz

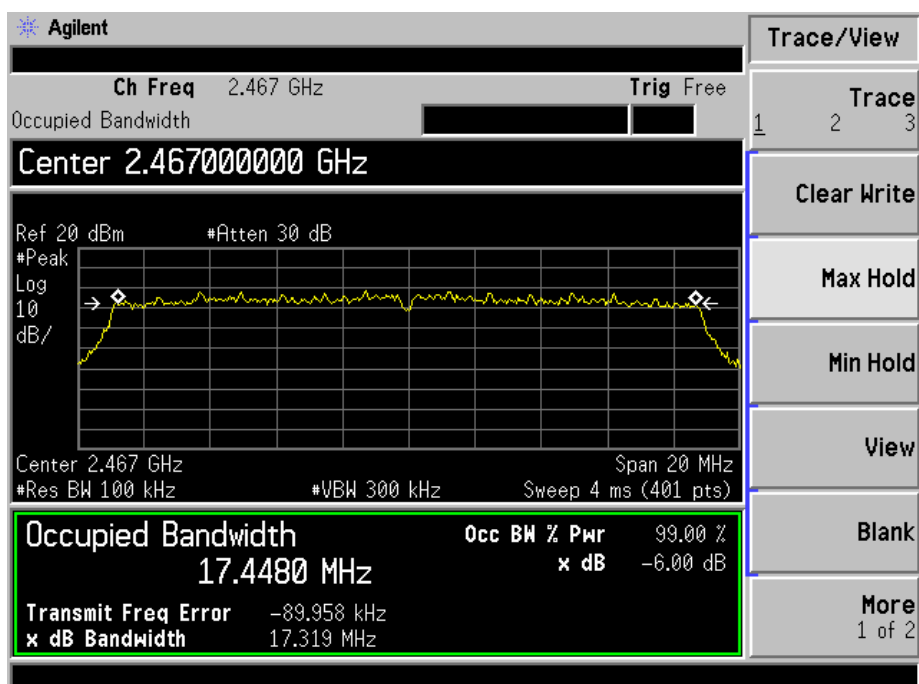

802.11n-HT20-Channel 13-2472MHz

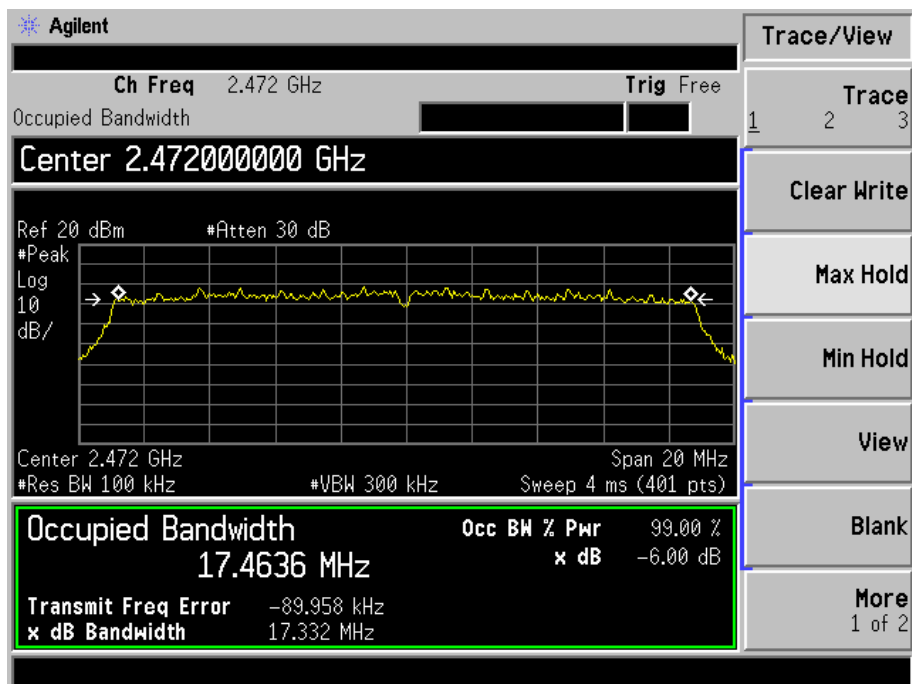

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r02, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

### 7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	11.22	13.24	1000
	2442	10.83	12.11	1000
	2462	11.04	12.71	1000
	2467	10.00	10.00	1000
	2472	10.64	11.59	1000
802.11g_54Mbps	2412	9.74	9.42	1000
	2442	9.50	8.91	1000
	2462	9.04	8.02	1000
	2467	8.97	7.89	1000
	2472	9.09	8.11	1000
802.11n HT20_MCS7	2412	8.49	7.06	1000
	2442	8.10	6.46	1000
	2462	7.70	5.89	1000
	2467	7.38	5.47	1000
	2472	7.88	6.14	1000

Please refer to the following test plots:

## 802.11b-11Mbps-Channel 1-2412MHz

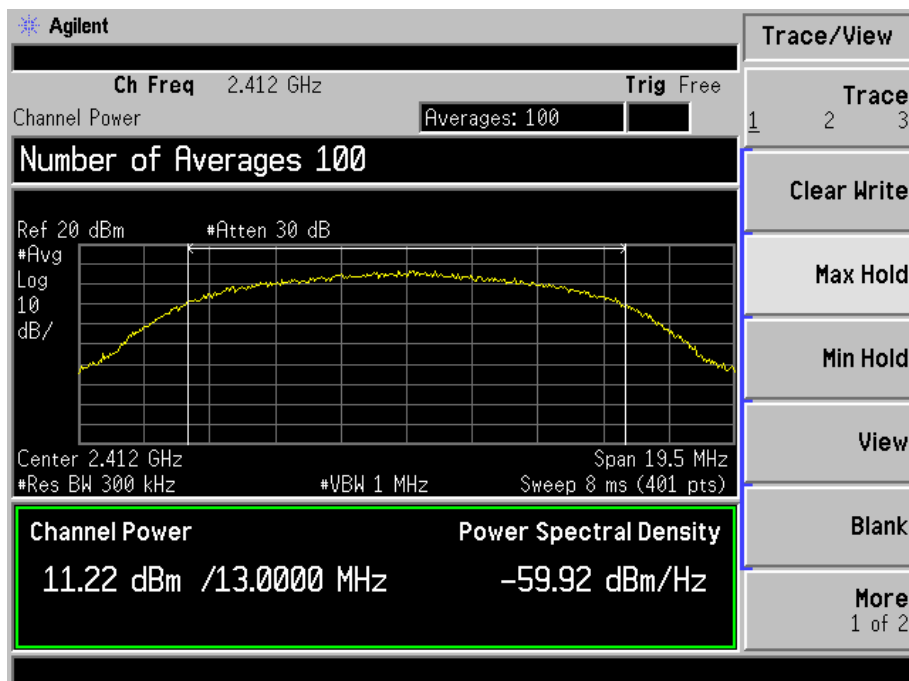


## 802.11b -11Mbps-Channel 7-2442MHz

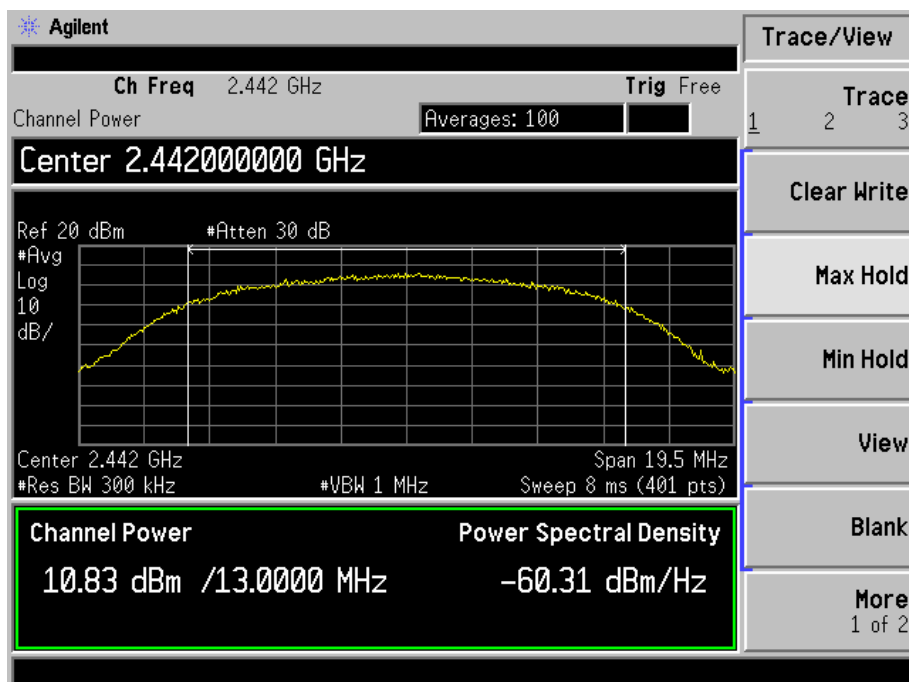





## 802.11b -11Mbps-Channel 11-2462MHz

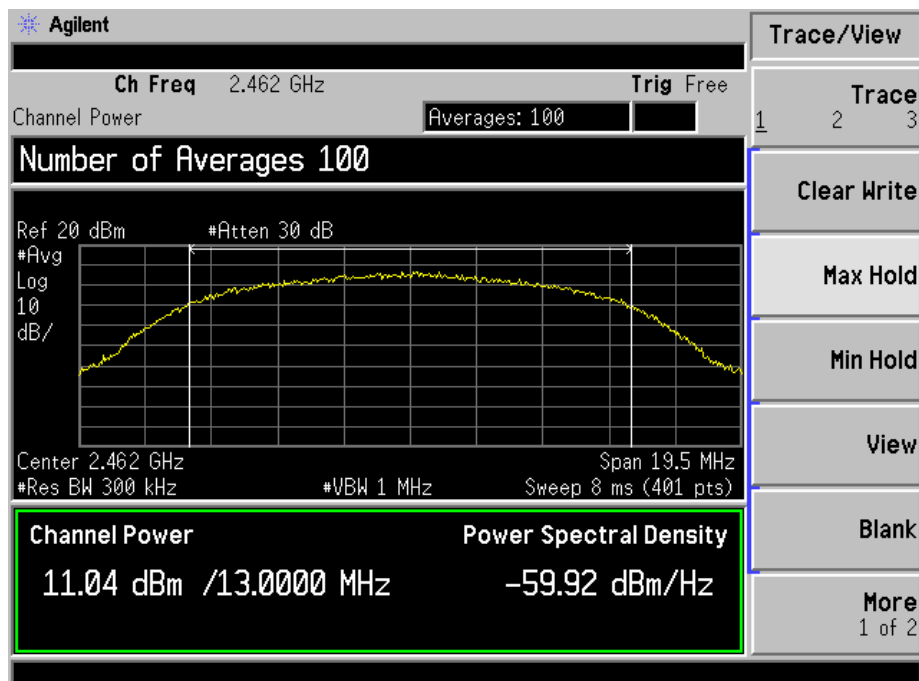


## 802.11b -11Mbps-Channel 12-2467MHz

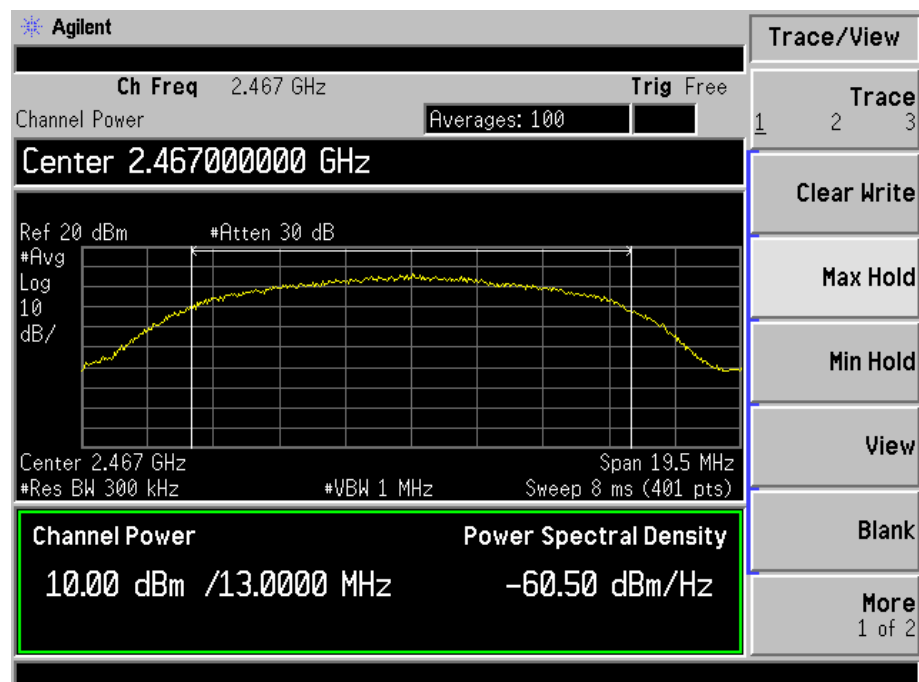


802.11b -11Mbps-Channel 13-2472MHz

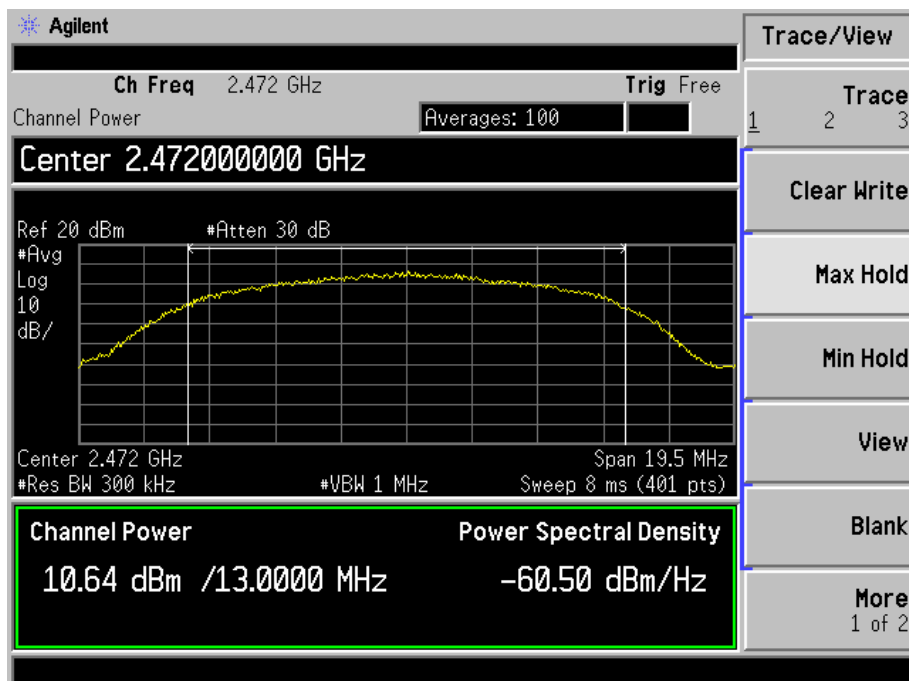


802.11g-54Mbps- Channel 1-2412MHz

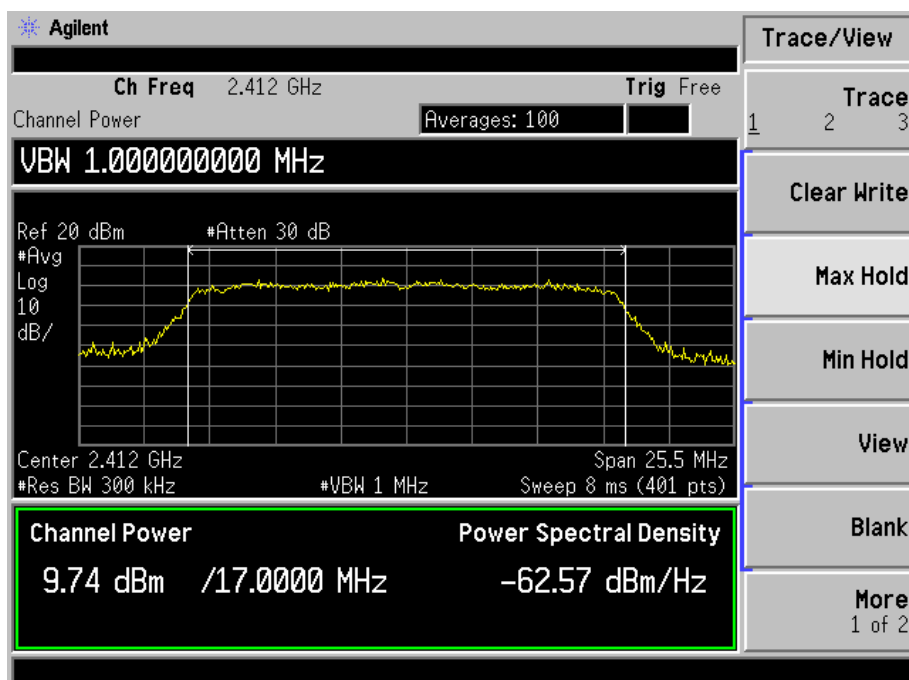


## 802.11g-54Mbps-Channel 7-2442MHz

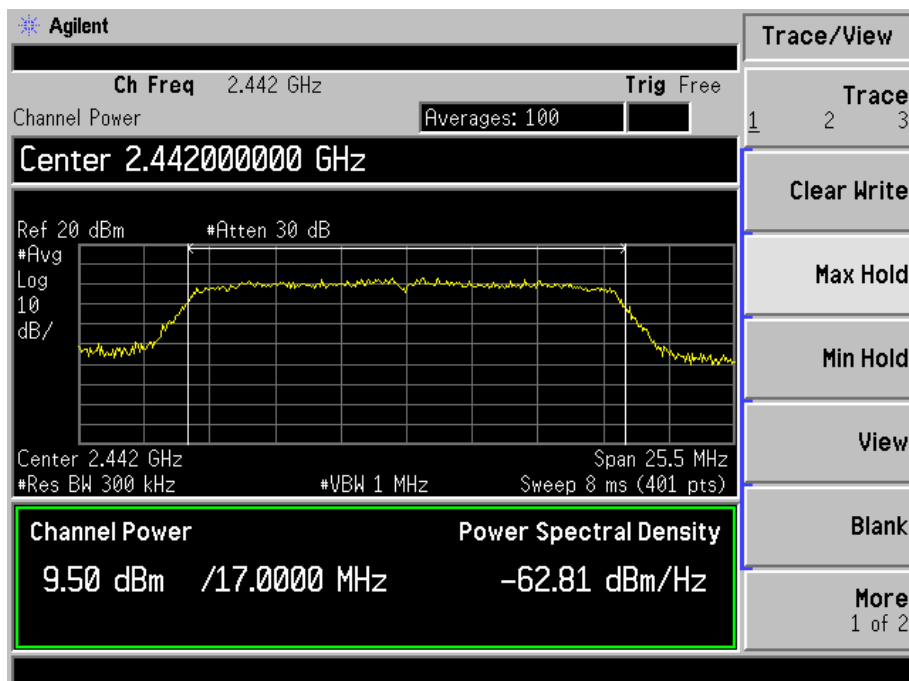


## 802.11g-54Mbps-Channel 11-2462MHz

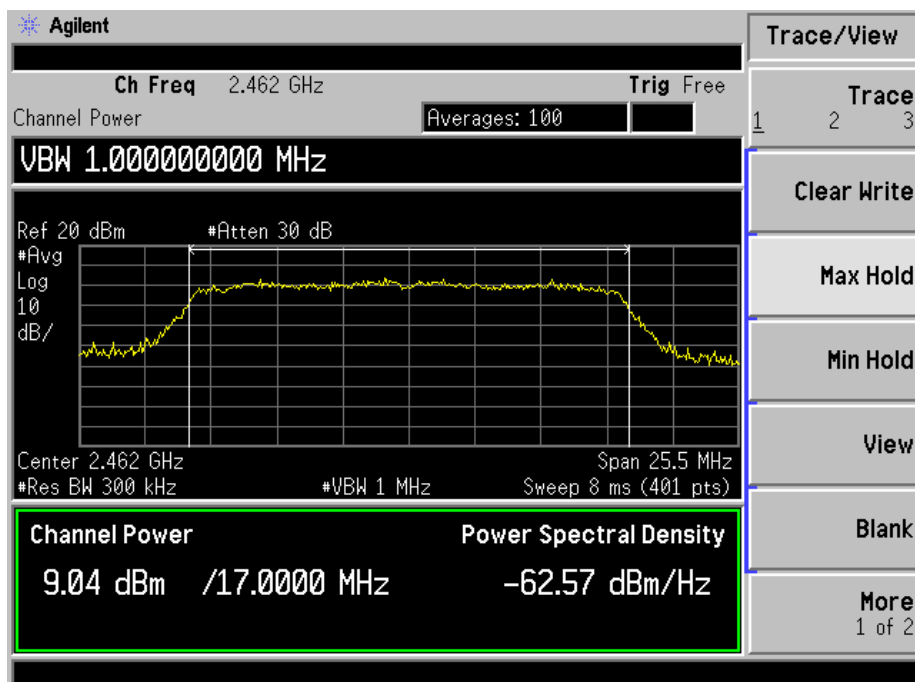


## 802.11g-54Mbps-Channel 12-2467MHz

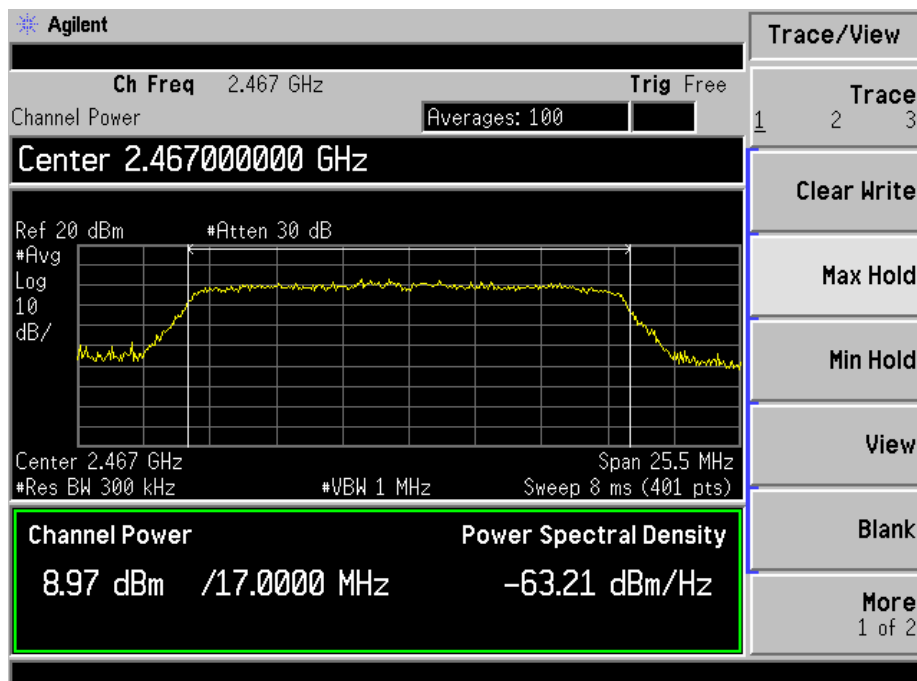


## 802.11g-54Mbps-Channel 13-2472MHz

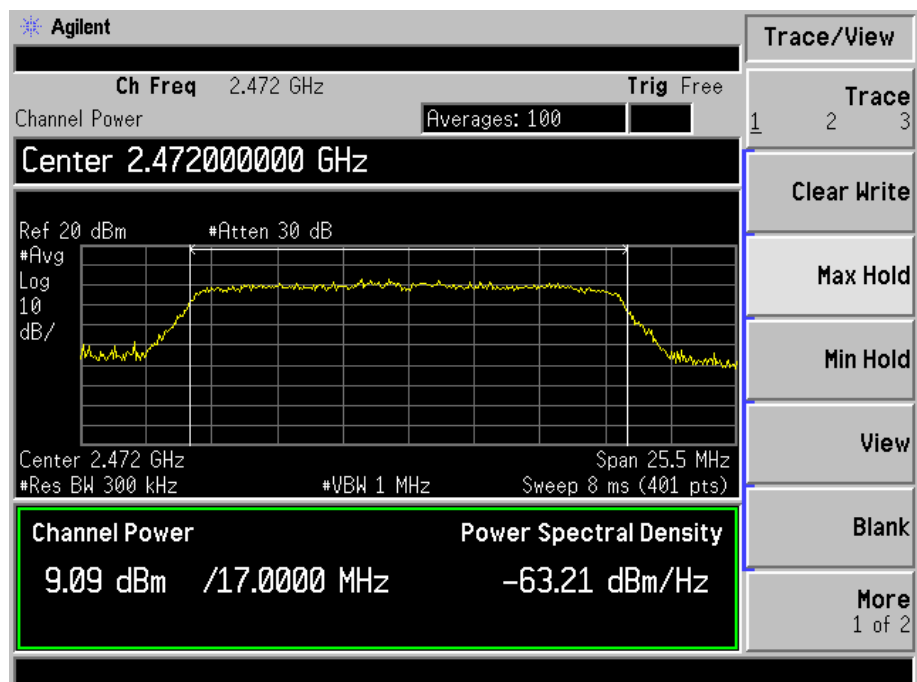


## 802.11n-HT20-MCS7- Channel-2412MHz

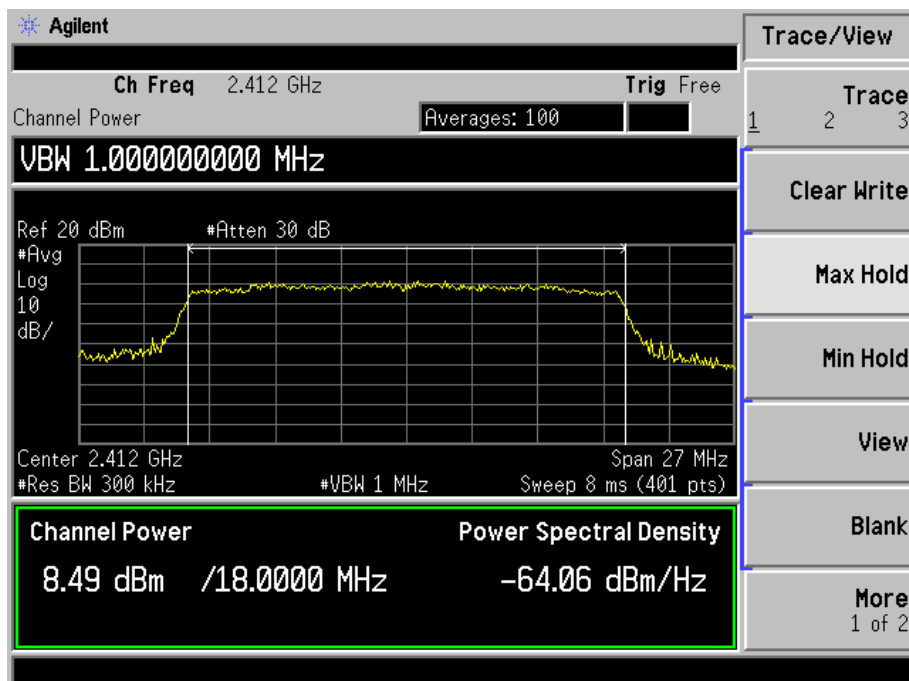


## 802.11n-HT20-MCS7-Channel 7-2442

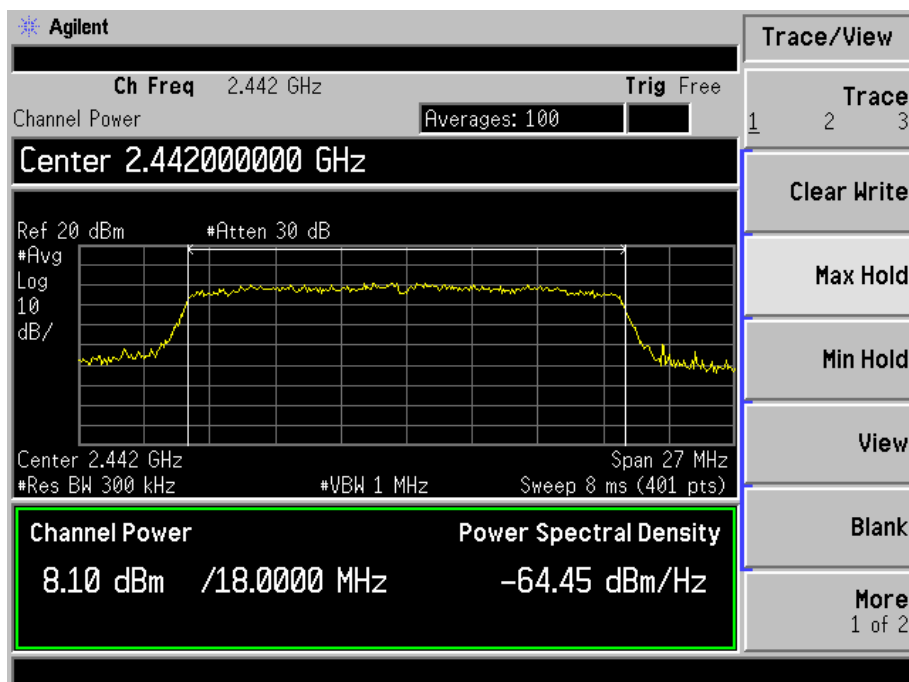


## 802.11n-HT20-MCS7-Channel 11-2462

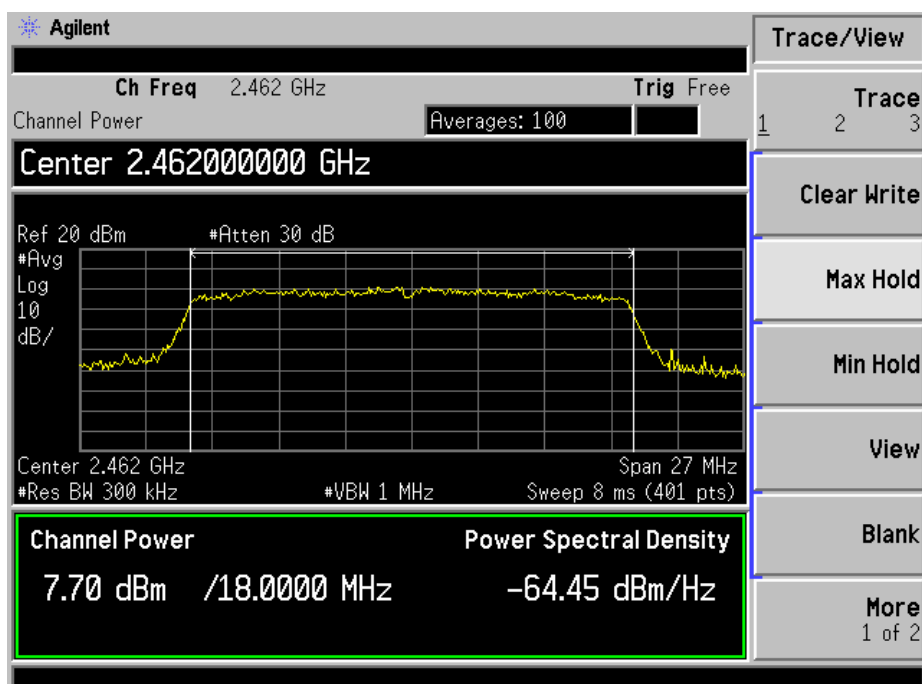

## 802.11n-HT20-MCS7-Channel 12-2467

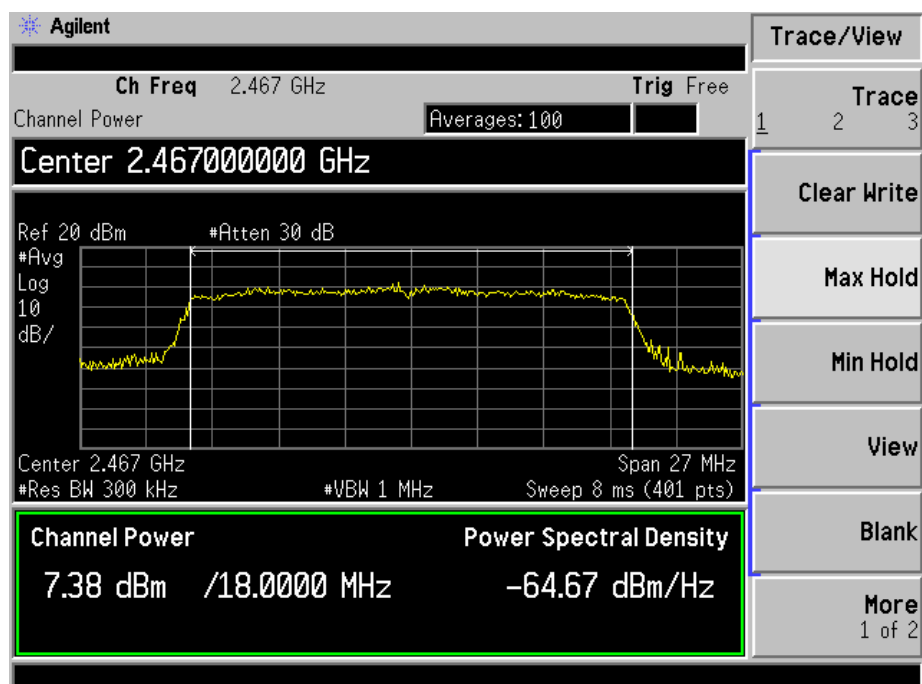

802.11n-HT20-MCS7-Channel 13-24472MHz

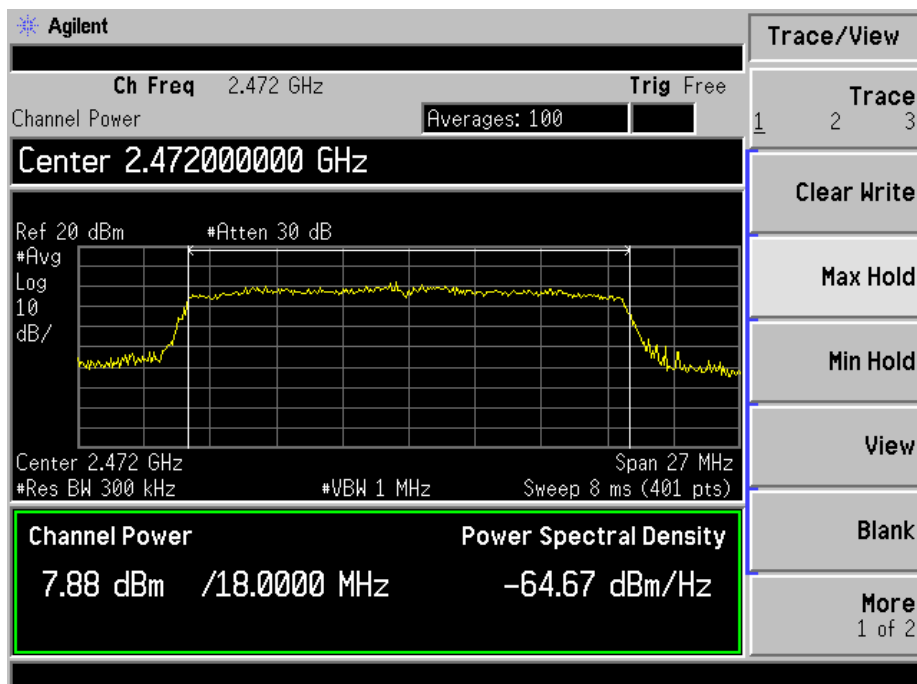

## 8. Field Strength of Spurious Emissions

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Horn Antenna	ETS	3116B	00088203	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23




## 8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

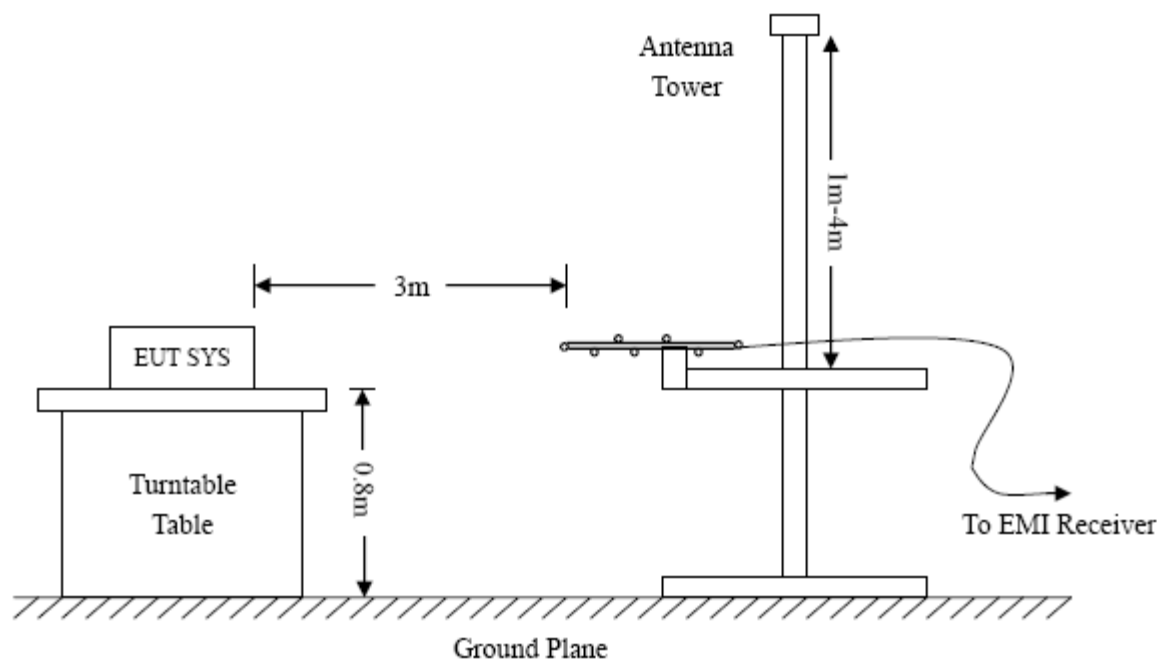

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


## 8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 8.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

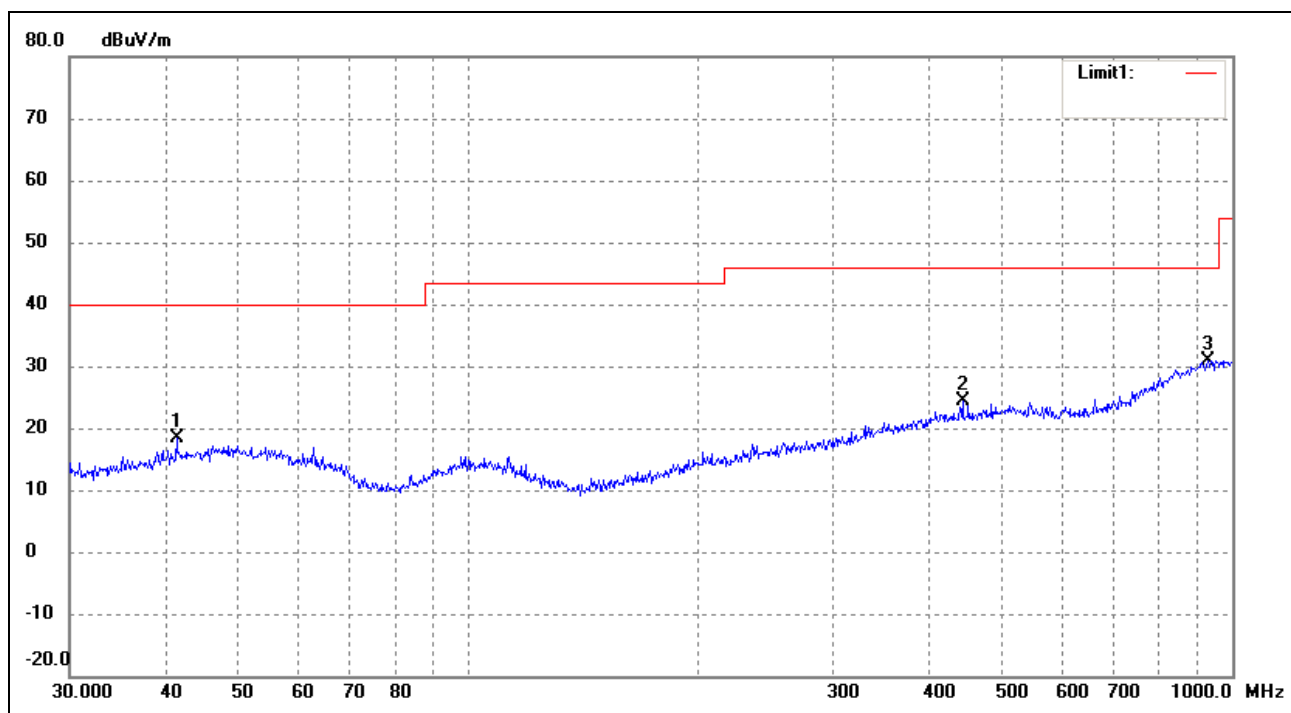**Plot of Radiated Emissions Test Data (30MHz to 1GHz)***EUT:* Tablet PC*Tested Model:* LIFE 7*Operating Condition:* 802.11b Transmitting Channel 1-2412MHz*Comment:* Battery: DC3.7V*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	41.4215	26.49	-8.17	18.32	40.00	-21.68	0	100	peak
2	443.2943	26.72	-2.23	24.49	46.00	-21.51	0	100	peak
3	929.0082	25.29	5.70	30.99	46.00	-15.01	0	100	peak

Test Specification: Vertical

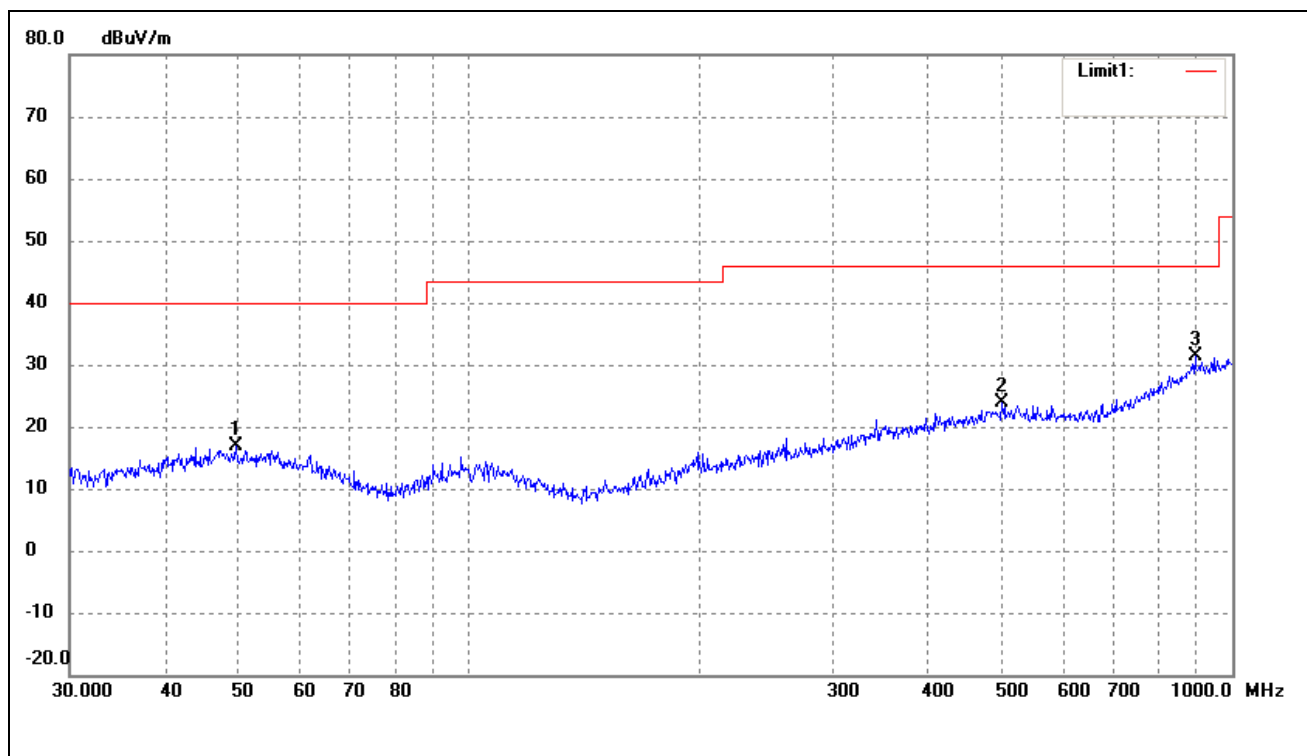


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.5328	24.29	-7.45	16.84	40.00	-23.16	360	100	peak
2	499.4247	25.10	-1.14	23.96	46.00	-22.04	360	100	peak
3	893.8567	26.12	5.26	31.38	46.00	-14.62	0	100	peak

Operating Condition: 802.11b Transmitting Channel 7-2442MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

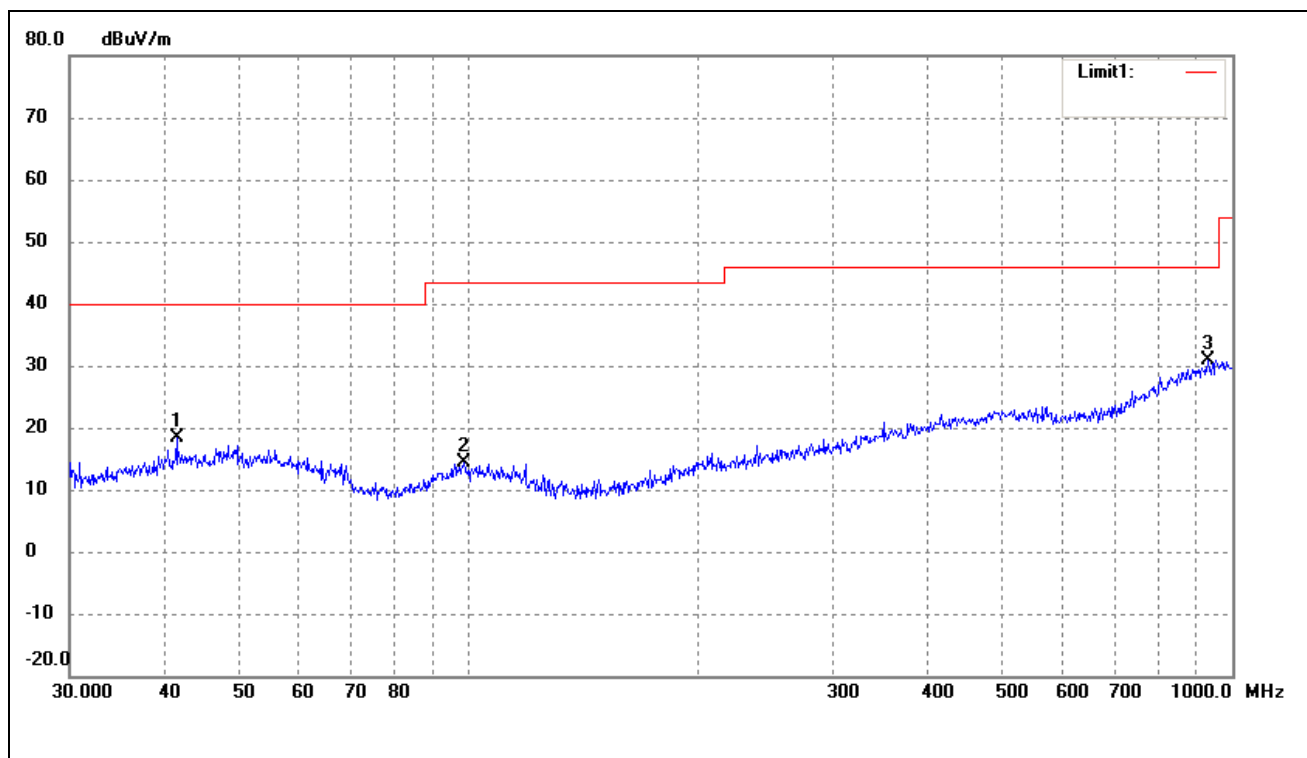

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	41.4215	26.49	-8.17	18.32	40.00	-21.68	360	100	peak
2	98.4866	24.04	-9.75	14.29	43.50	-29.21	0	100	peak
3	929.0082	25.29	5.70	30.99	46.00	-15.01	360	100	peak

Test Specification: Vertical

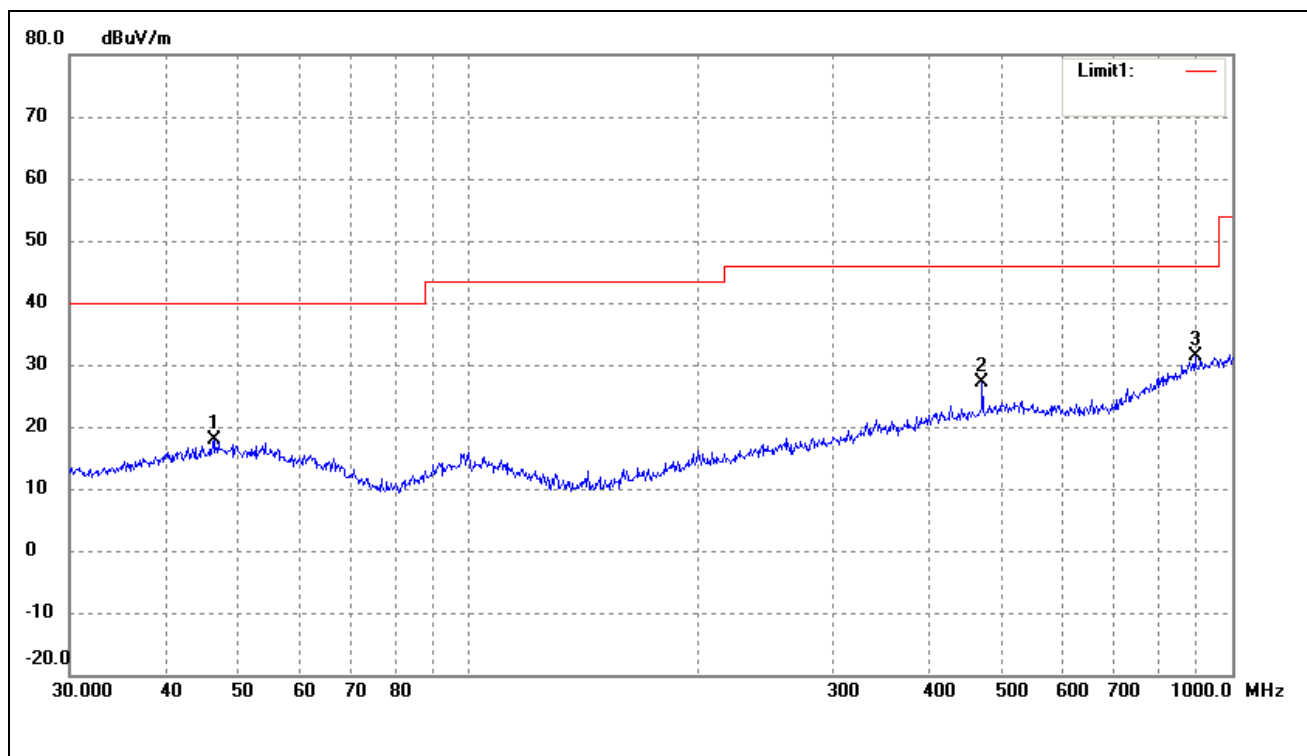


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	46.3402	25.42	-7.46	17.96	40.00	-22.04	0	100	peak
2	470.5232	28.86	-1.80	27.06	46.00	-18.94	0	100	peak
3	893.8567	26.12	5.26	31.38	46.00	-14.62	0	100	peak

Operating Condition: 802.11b Transmitting Channel 11-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

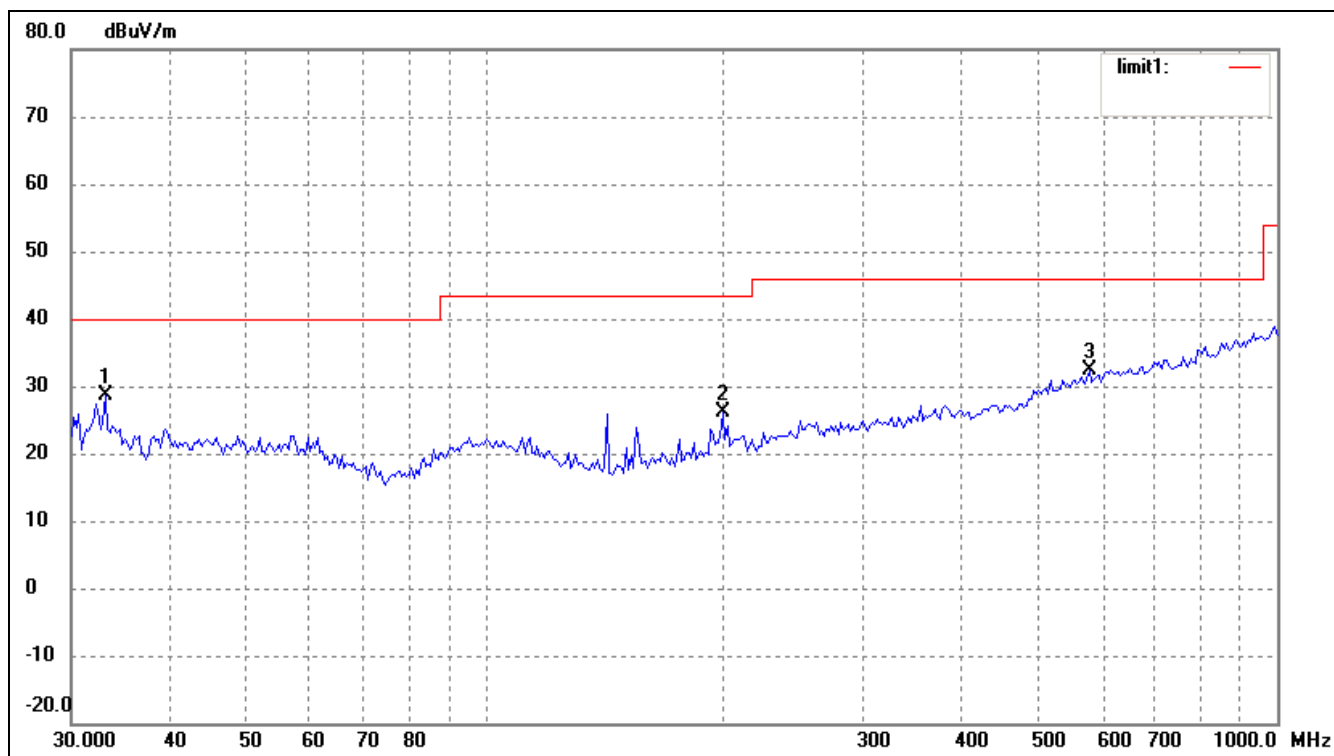

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	21.97	6.77	28.74	40.00	-11.26	15	100	peak
2	199.2855	19.53	6.58	26.11	43.50	-17.39	15	100	peak
3	578.6699	16.09	16.18	32.27	46.00	-13.73	15	100	peak

Test Specification: Vertical

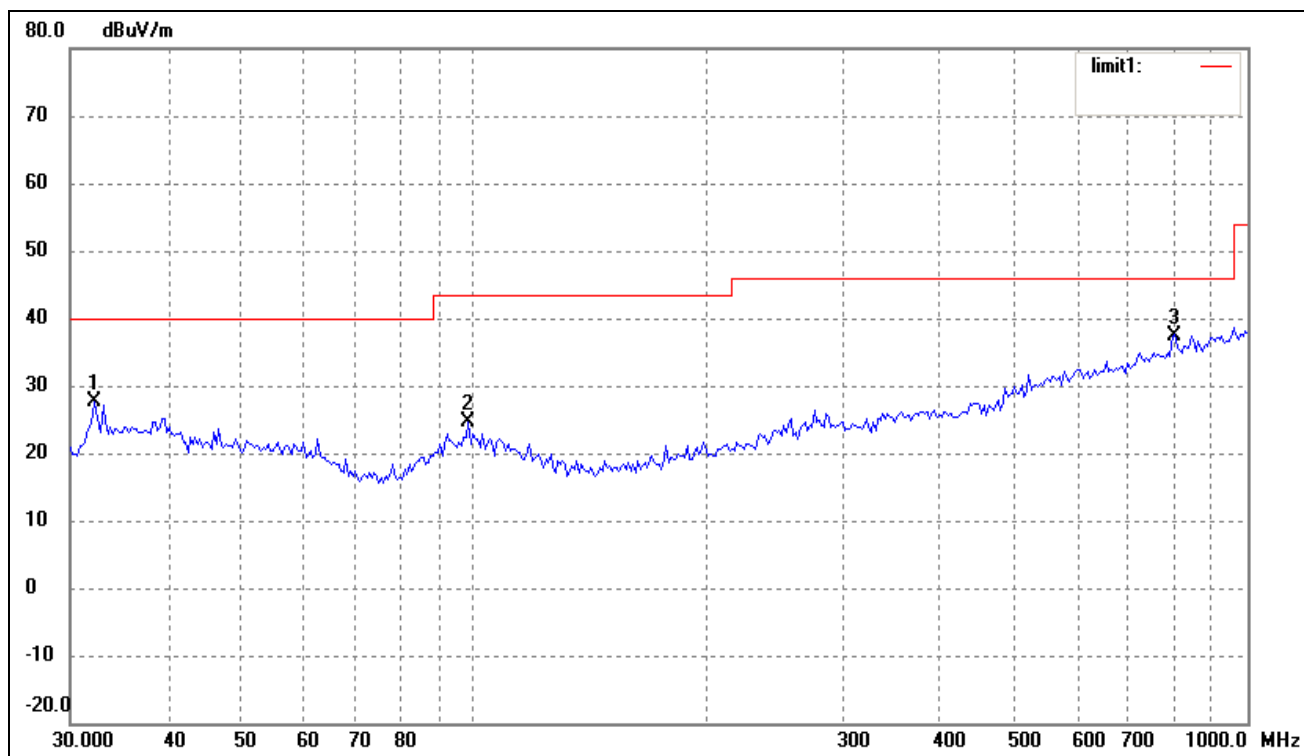


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.1795	20.84	6.77	27.61	40.00	-12.39	146	100	peak
2	98.1419	16.21	8.30	24.51	43.50	-18.99	146	100	peak
3	804.6028	18.40	19.10	37.50	46.00	-8.50	146	100	peak
4	32.1795	20.84	6.77	27.61	40.00	-12.39	146	100	peak



Operating Condition: 802.11b Transmitting Channel 12-2467MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

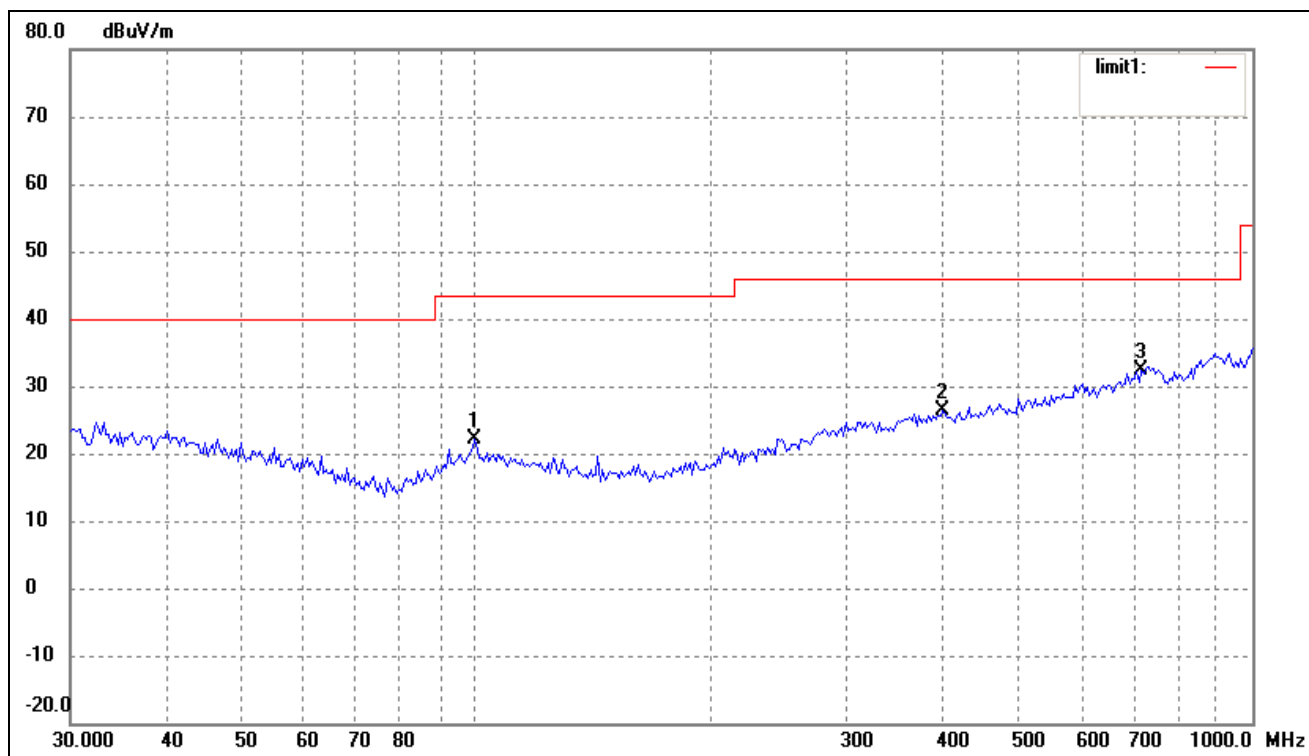

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	99.5281	15.35	6.72	22.07	43.50	-21.43	12	100	peak
2	399.0302	14.90	11.50	26.40	46.00	-19.60	12	100	peak
3	719.1995	15.81	16.59	32.40	46.00	-13.60	12	100	peak

Test Specification: Vertical

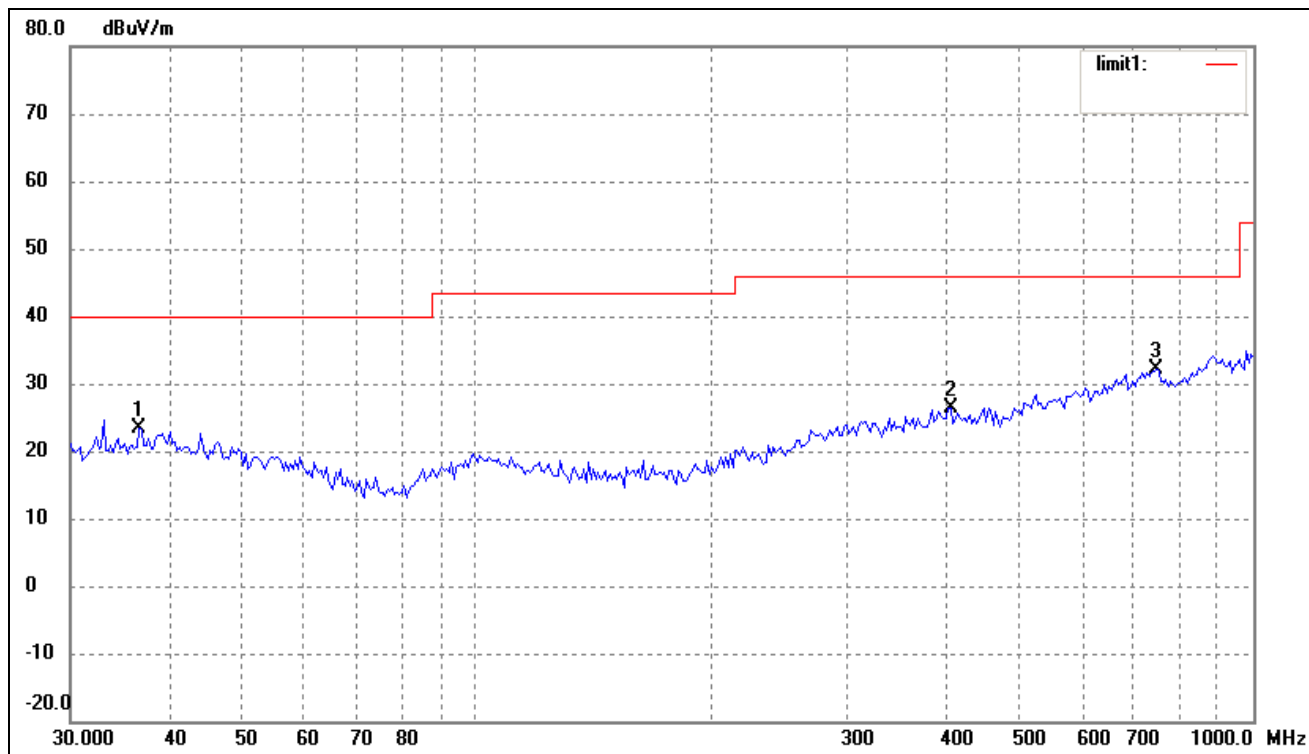


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( • )	(cm)	
1	36.7662	14.28	9.16	23.44	40.00	-16.56	0	100	peak
2	407.5145	15.19	11.22	26.41	46.00	-19.59	0	100	peak
3	750.1083	14.37	17.78	32.15	46.00	-13.85	0	100	peak

Operating Condition: 802.11b Transmitting Channel 13-2472MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

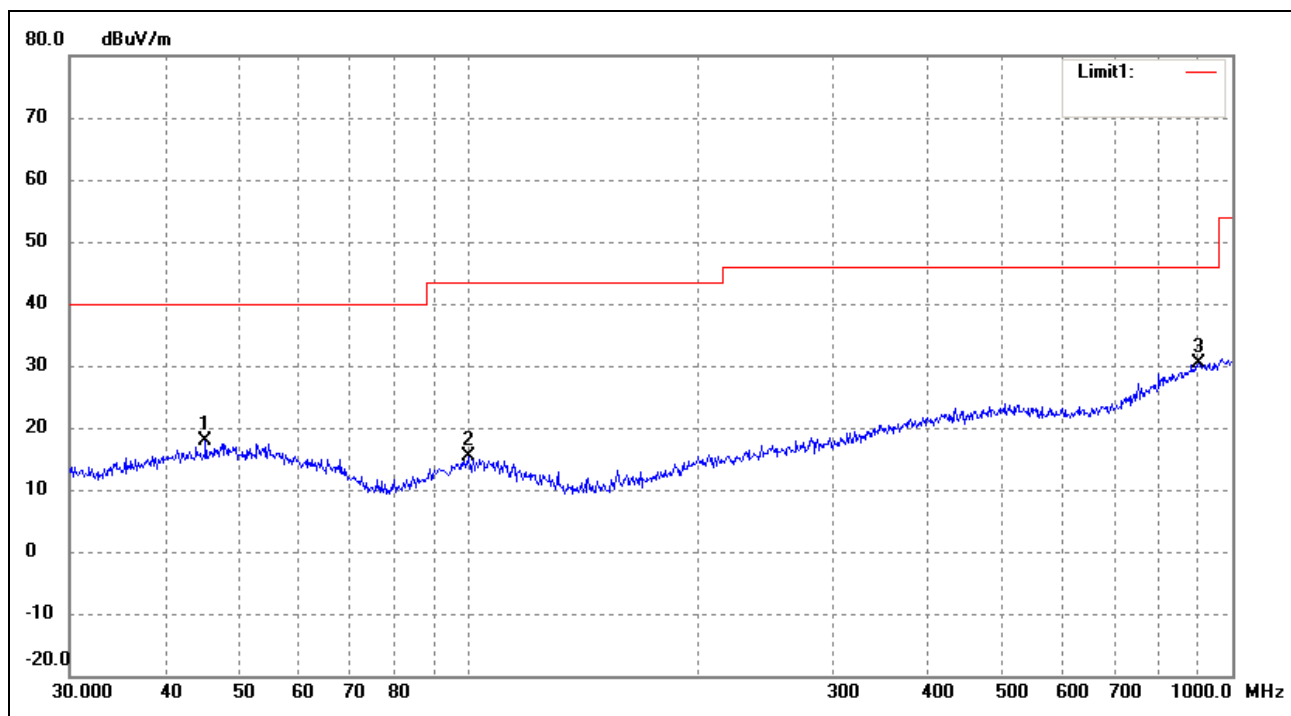


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	45.2166	25.24	-7.47	17.77	40.00	-22.23	0	100	peak
2	99.8777	24.98	-9.58	15.40	43.50	-28.10	360	100	peak
3	903.3094	25.04	5.42	30.46	46.00	-15.54	360	100	peak

Test Specification: Vertical

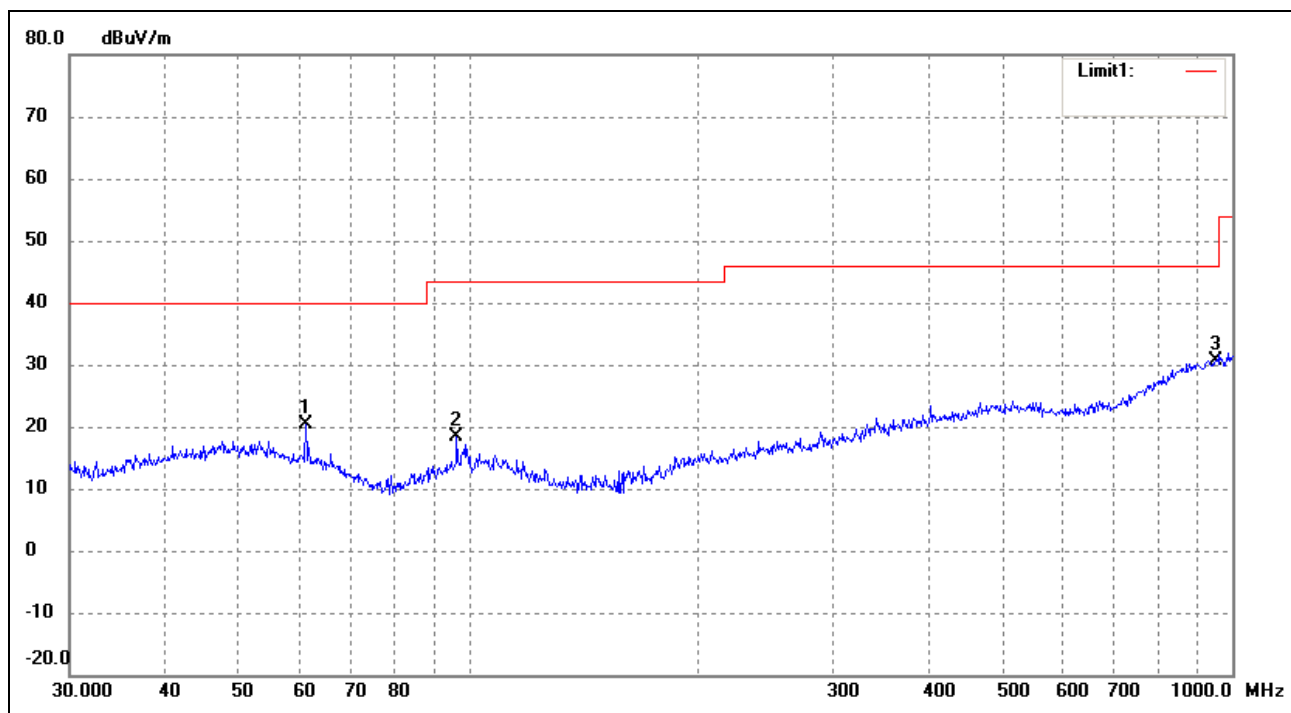


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	61.1315	29.58	-9.22	20.36	40.00	-19.64	0	100	peak
2	96.4361	28.37	-9.99	18.38	43.50	-25.12	0	100	peak
3	952.0937	24.60	5.96	30.56	46.00	-15.44	0	100	peak

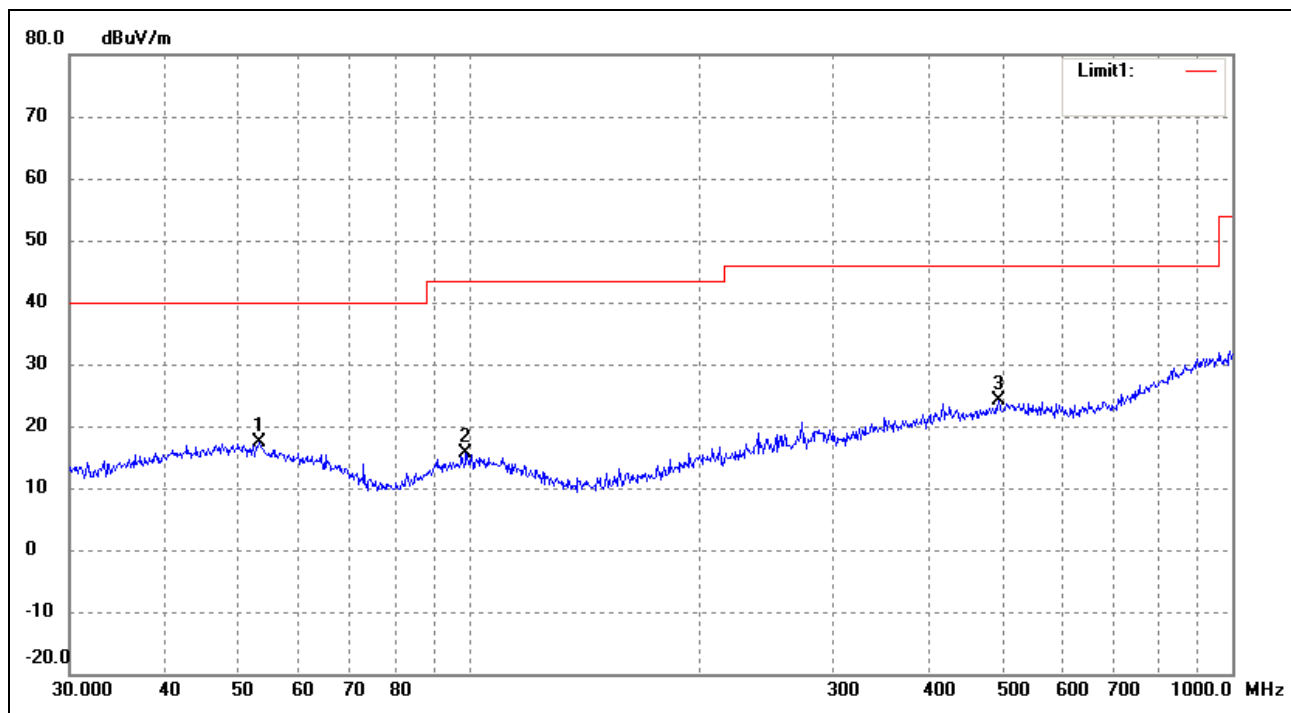**Plot of Radiated Emissions Test Data (30MHz to 1GHz)***EUT: Tablet PC**Tested Model: LIFE 7**Operating Condition: 802.11g Transmitting Channel 1-2412MHz**Comment: Battery: DC3.7V**Test Specification: Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	53.1313	25.02	-7.76	17.26	40.00	-22.74	0	100	peak
2	99.1797	25.18	-9.66	15.52	43.50	-27.98	360	100	peak
3	494.1984	25.33	-1.26	24.07	46.00	-21.93	360	100	peak

Test Specification: Vertical

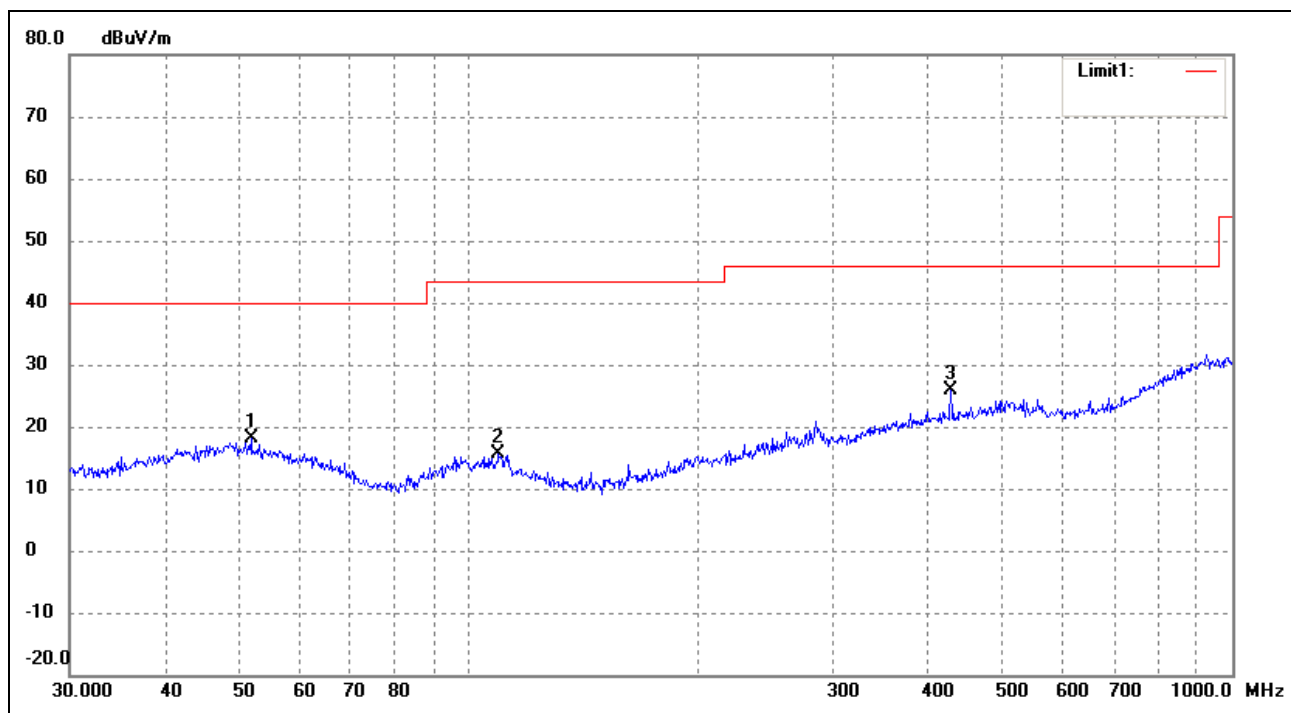


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	51.8430	25.68	-7.63	18.05	40.00	-21.95	0	100	peak
2	109.4116	25.20	-9.59	15.61	43.50	-27.89	0	100	peak
3	428.0193	28.36	-2.38	25.98	46.00	-20.02	0	100	peak

Operating Condition: 802.11g Transmitting Channel 7-2442MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

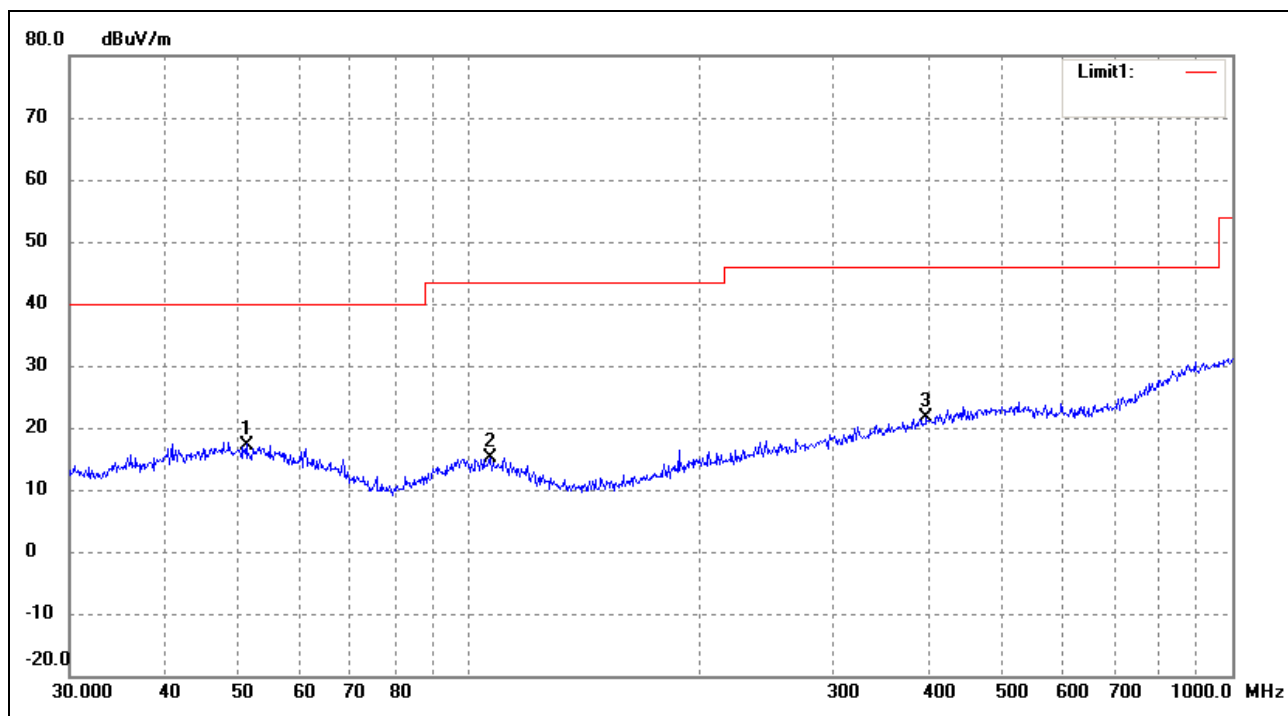

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	51.1209	24.81	-7.56	17.25	40.00	-22.75	20	100	peak
2	106.7587	24.78	-9.59	15.19	43.50	-28.31	100	100	peak
3	397.6334	24.69	-3.00	21.69	46.00	-24.31	270	100	peak

Test Specification: Vertical

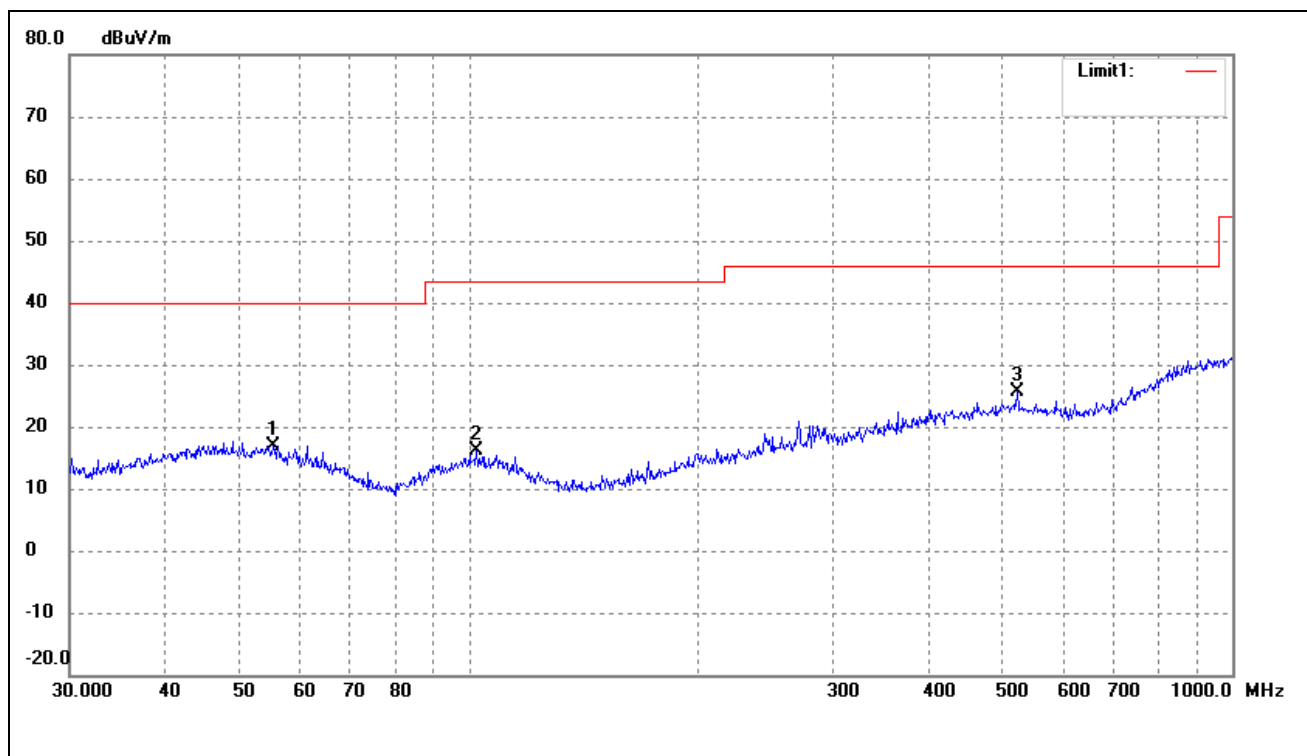


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	55.4147	24.87	-7.99	16.88	40.00	-23.12	360	100	peak
2	102.3597	25.75	-9.57	16.18	43.50	-27.32	0	100	peak
3	522.7180	26.89	-1.23	25.66	46.00	-20.34	360	100	peak



Operating Condition: 802.11g Transmitting Channel 11-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

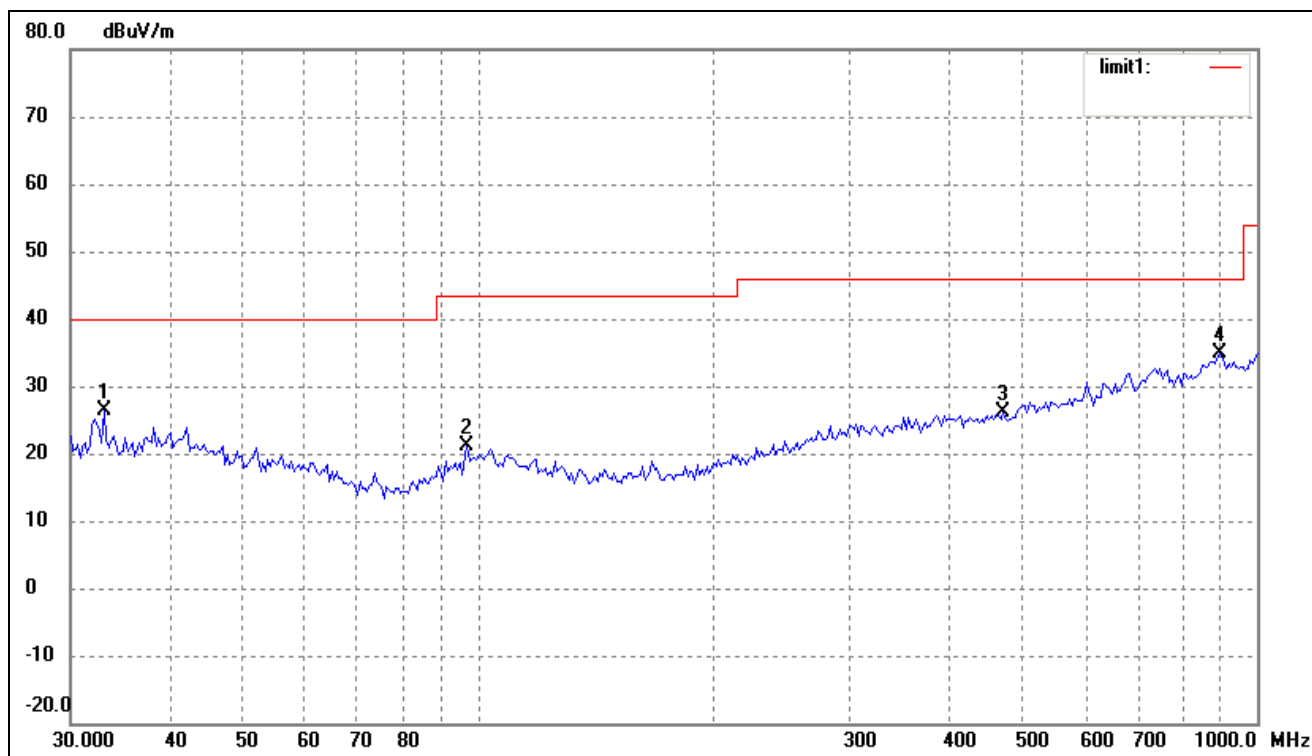

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	33.0950	17.92	8.56	26.48	40.00	-13.52	12	100	peak
2	96.7749	14.97	6.04	21.01	43.50	-22.49	12	100	peak
3	472.1760	14.50	11.55	26.05	46.00	-19.95	12	100	peak
4	893.8567	15.72	19.27	34.99	46.00	-11.01	12	100	peak

Test Specification: Vertical

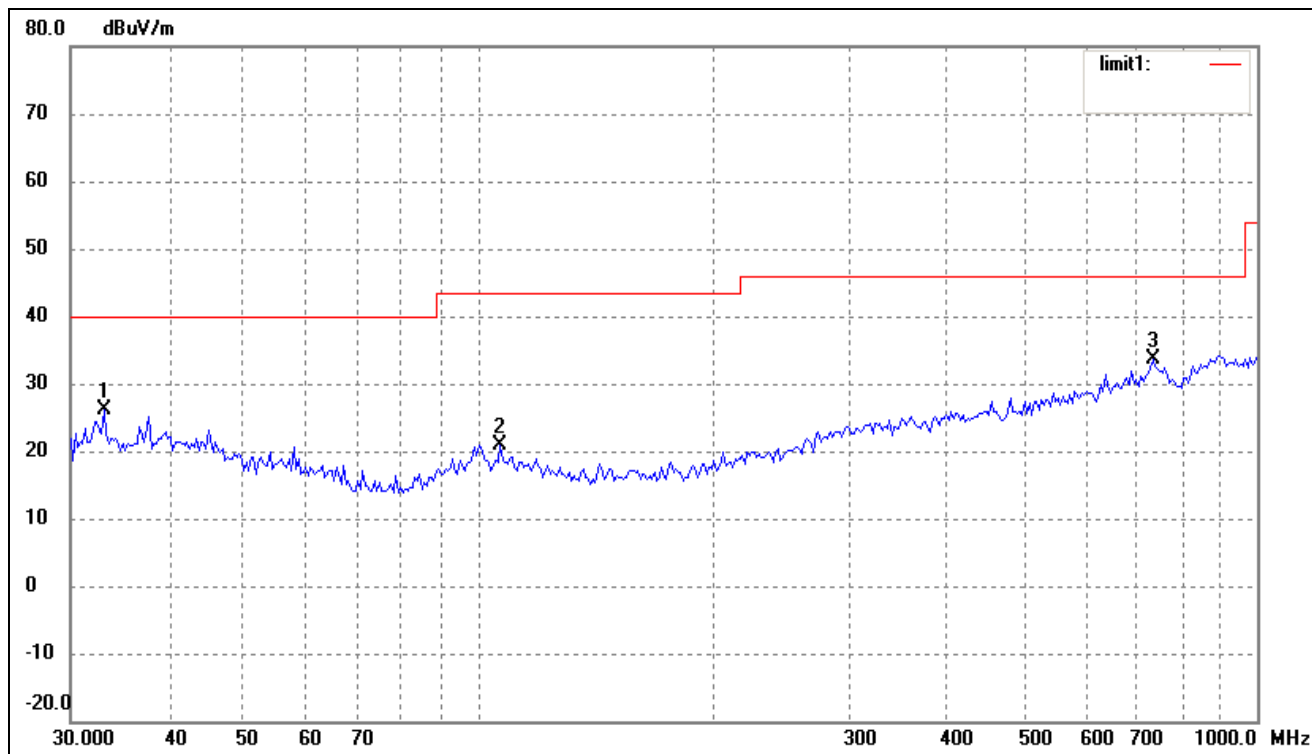


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	17.53	8.56	26.09	40.00	-13.91	0	100	peak
2	106.7587	14.79	6.18	20.97	43.50	-22.53	0	100	peak
3	734.4913	15.85	17.68	33.53	46.00	-12.47	0	100	peak
1	33.0950	17.53	8.56	26.09	40.00	-13.91	0	100	peak

Operating Condition: 802.11g Transmitting Channel 12-2467MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

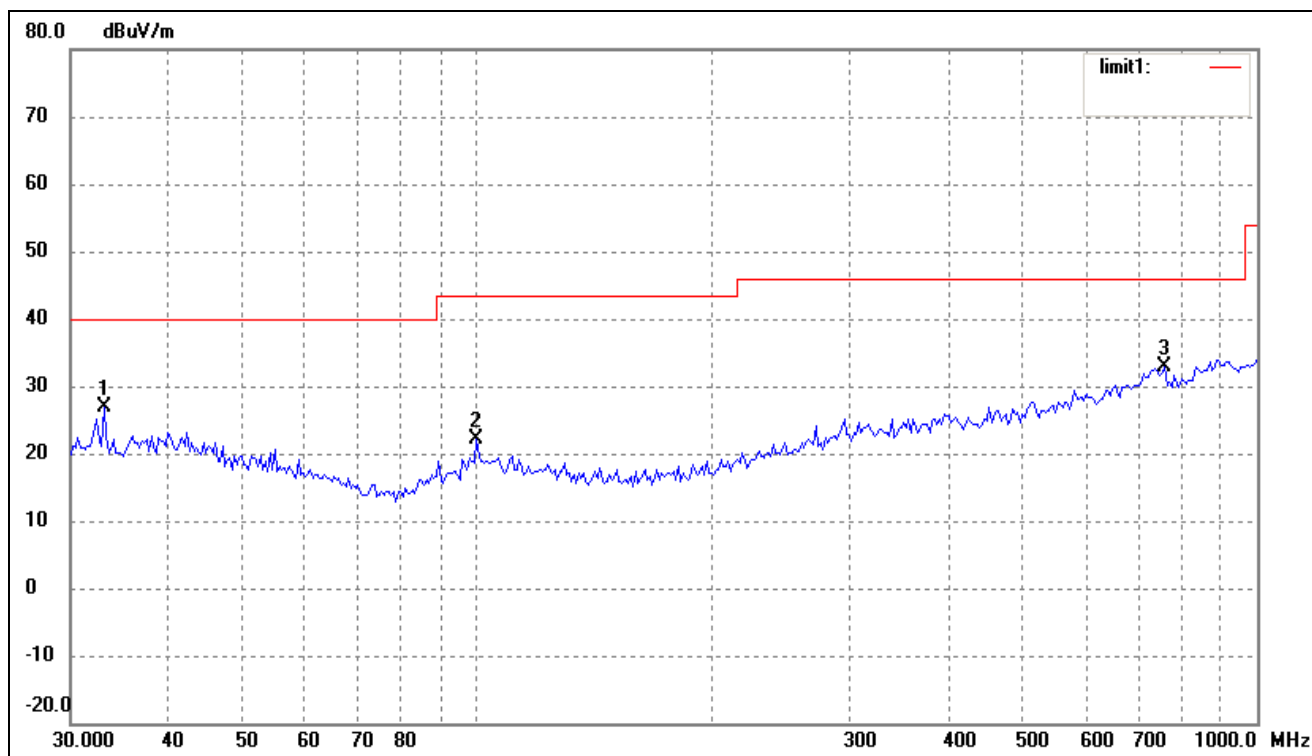

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	18.33	8.56	26.89	40.00	-13.11	0	100	peak
2	99.5281	15.30	6.72	22.02	43.50	-21.48	0	100	peak
3	760.7036	15.64	17.15	32.79	46.00	-13.21	0	100	peak

Test Specification: Vertical

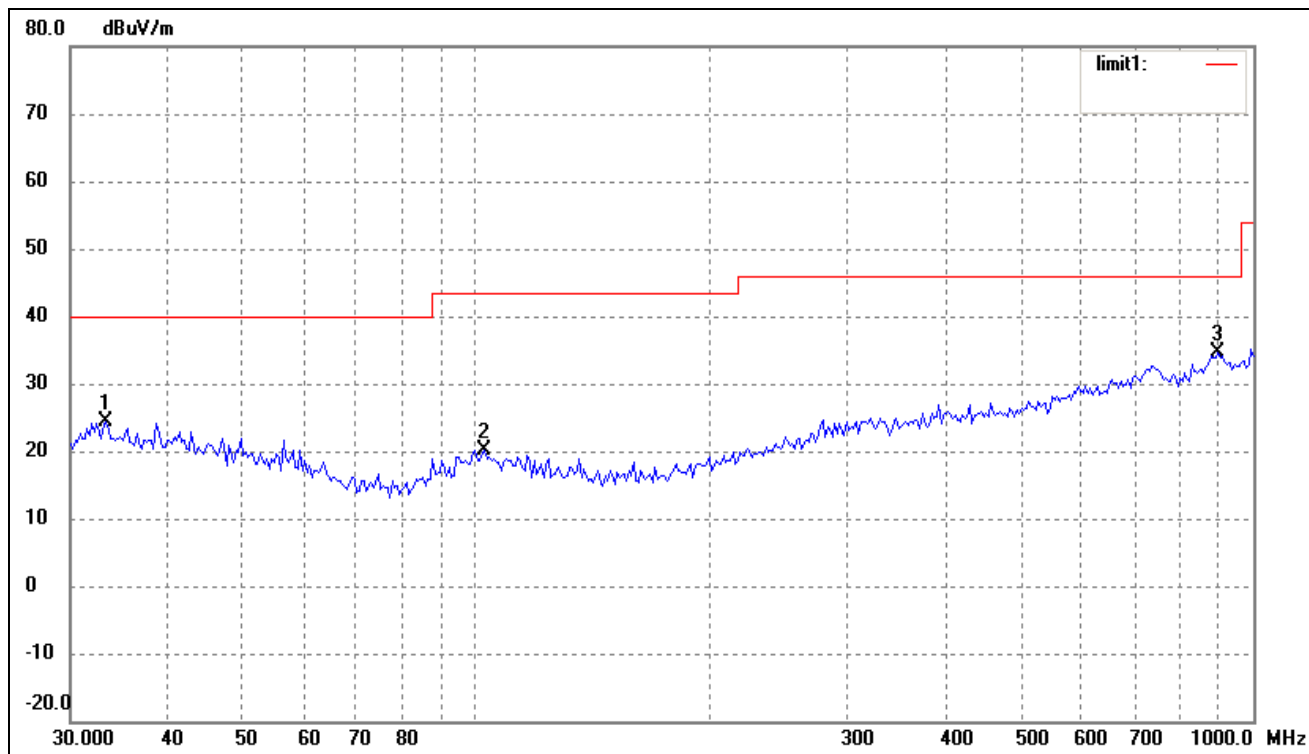


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.3279	15.88	8.60	24.48	40.00	-15.52	12	100	peak
2	102.3597	13.62	6.61	20.23	43.50	-23.27	12	100	peak
3	900.1474	15.29	19.38	34.67	46.00	-11.33	12	100	peak

Operating Condition: 802.11g Transmitting Channel 13-2472MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

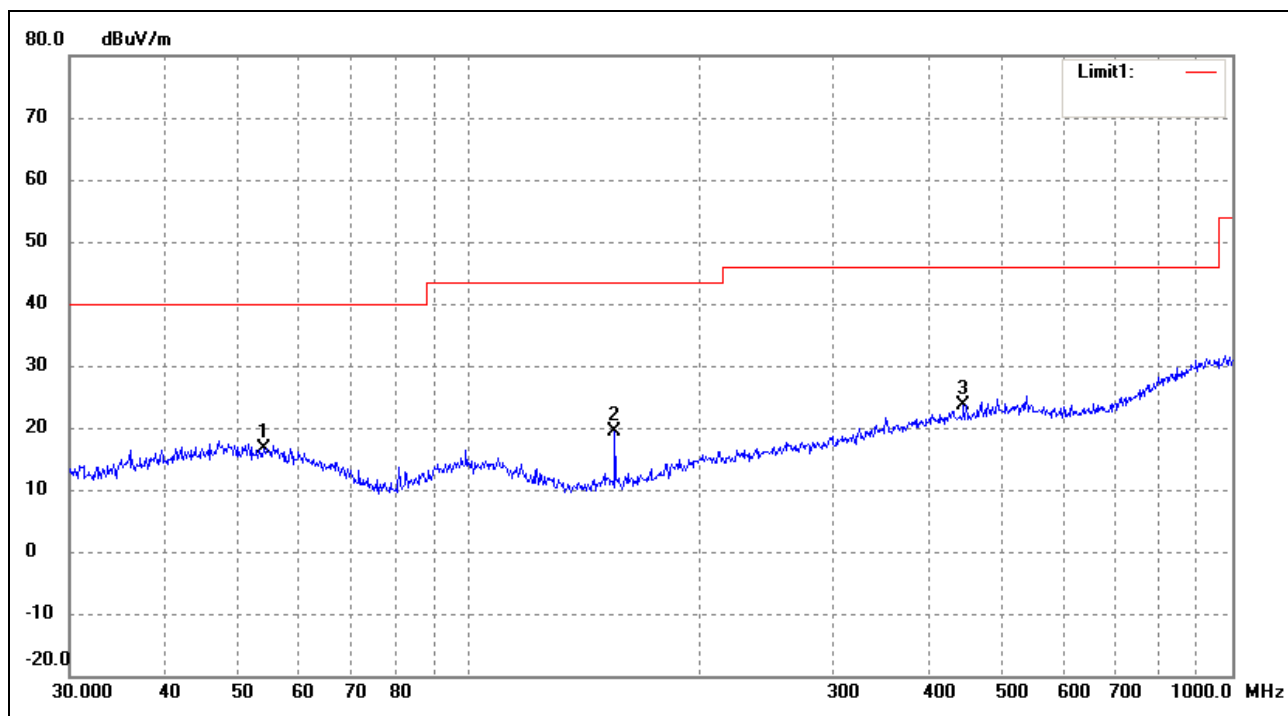


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	53.8818	24.35	-7.83	16.52	40.00	-23.48	0	100	peak
2	155.3644	31.92	-12.62	19.30	43.50	-24.20	270	100	peak
3	444.8514	25.97	-2.23	23.74	46.00	-22.26	360	100	peak

Test Specification: Vertical

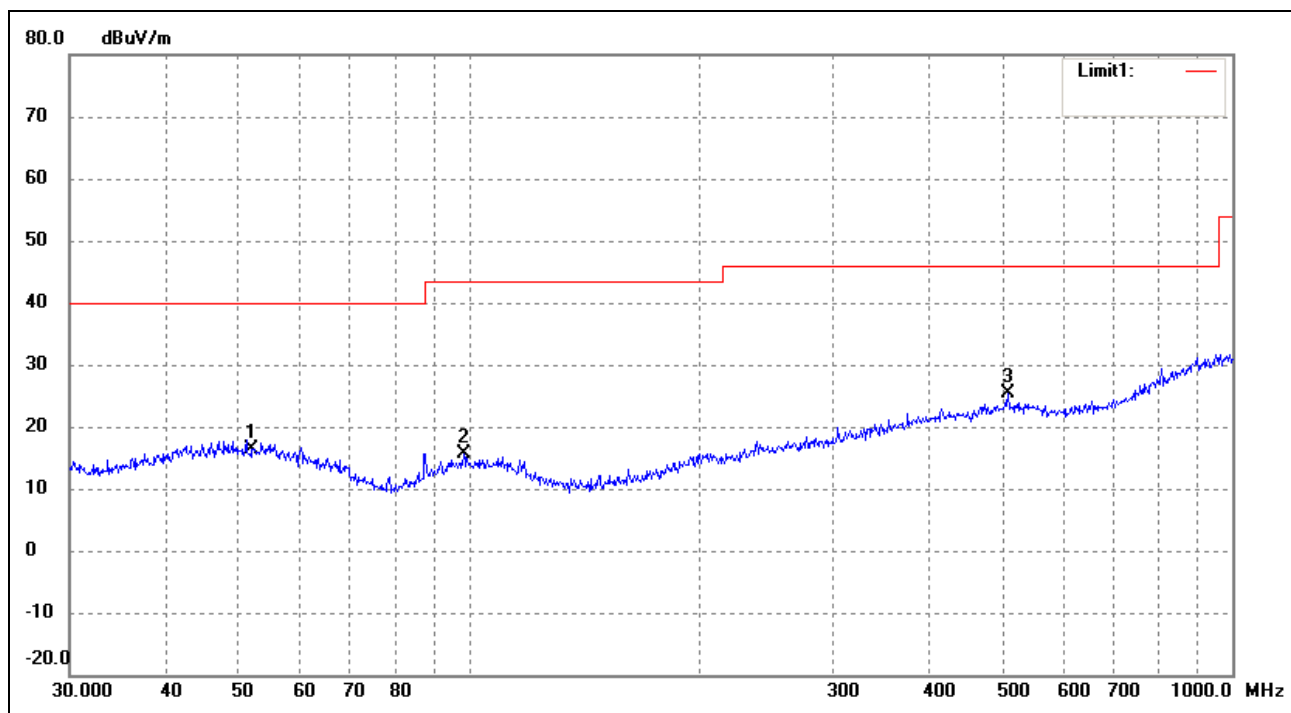


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	52.0251	24.08	-7.65	16.43	40.00	-23.57	0	100	peak
2	98.4866	25.44	-9.75	15.69	43.50	-27.81	360	100	peak
3	508.2582	26.59	-1.17	25.42	46.00	-20.58	360	100	peak

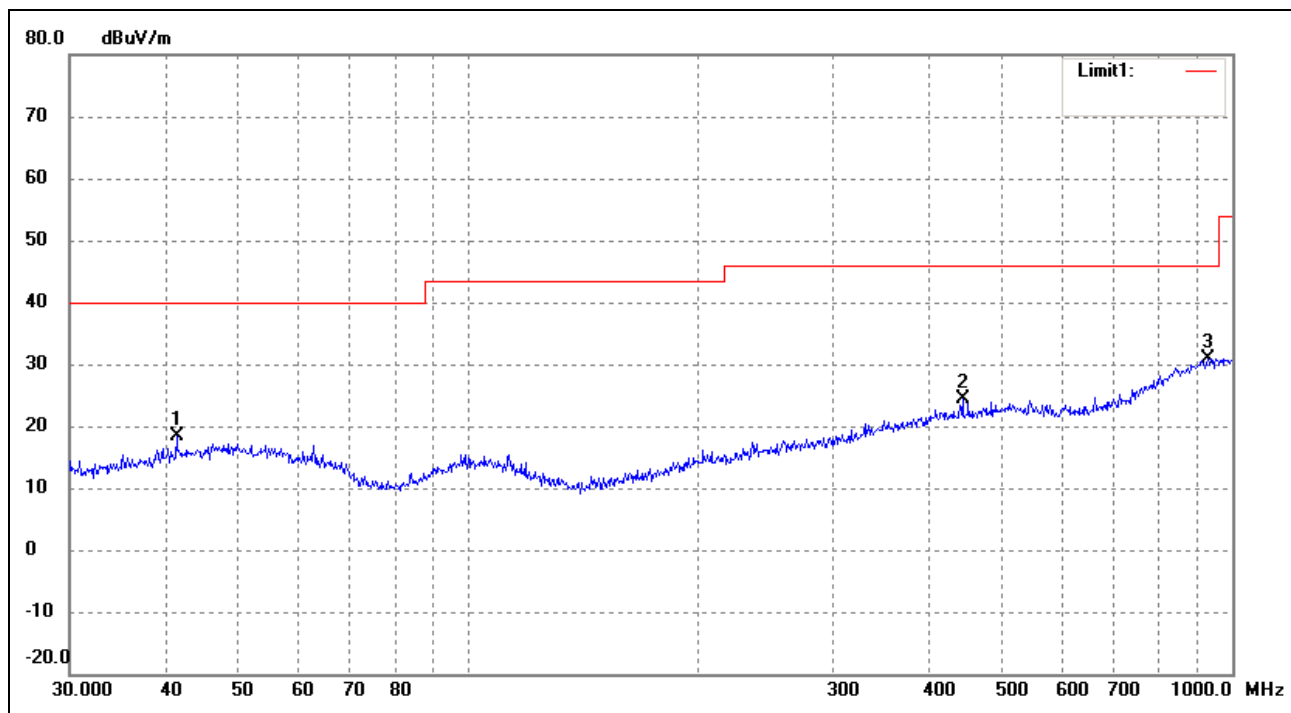**Plot of Radiated Emissions Test Data (30MHz to 1GHz)***EUT:* Tablet PC*Tested Model:* LIFE 7*Operating Condition:* 802.11n-HT20 Transmitting Channel 1-2412MHz*Comment:* Battery: DC3.7V*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	41.4215	26.49	-8.17	18.32	40.00	-21.68	0	100	peak
2	443.2943	26.72	-2.23	24.49	46.00	-21.51	0	100	peak
3	929.0082	25.29	5.70	30.99	46.00	-15.01	0	100	peak

Test Specification: Vertical

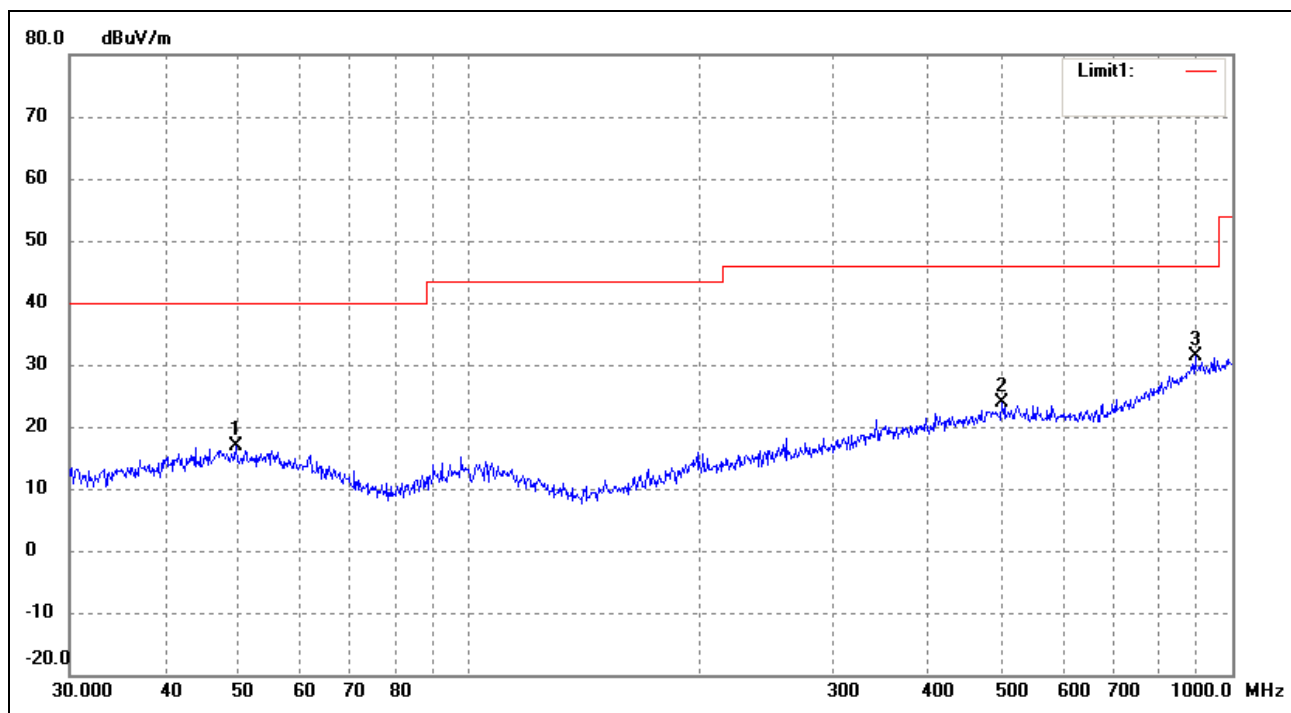


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.5328	24.29	-7.45	16.84	40.00	-23.16	360	100	peak
2	499.4247	25.10	-1.14	23.96	46.00	-22.04	360	100	peak
3	893.8567	26.12	5.26	31.38	46.00	-14.62	0	100	peak



Operating Condition: 802.11n-HT20 Transmitting Channel 7-2442MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

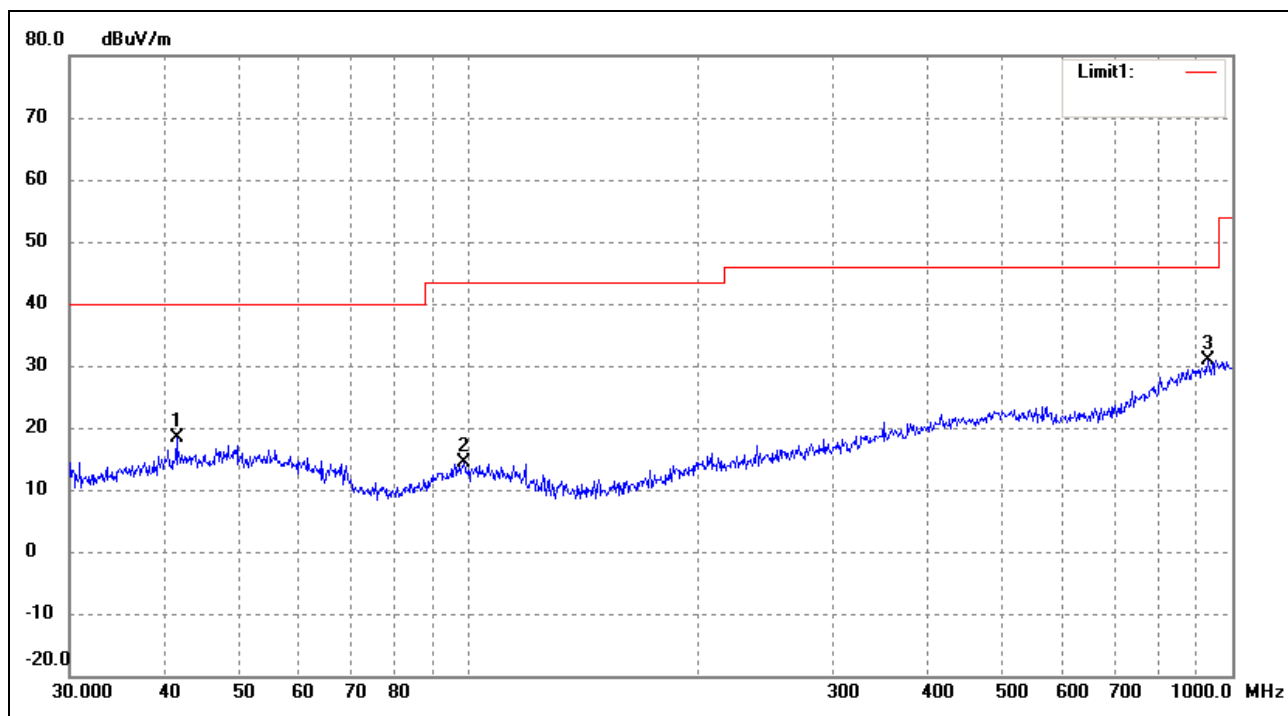

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	41.4215	26.49	-8.17	18.32	40.00	-21.68	360	100	peak
2	98.4866	24.04	-9.75	14.29	43.50	-29.21	0	100	peak
3	929.0082	25.29	5.70	30.99	46.00	-15.01	360	100	peak

Test Specification: Vertical

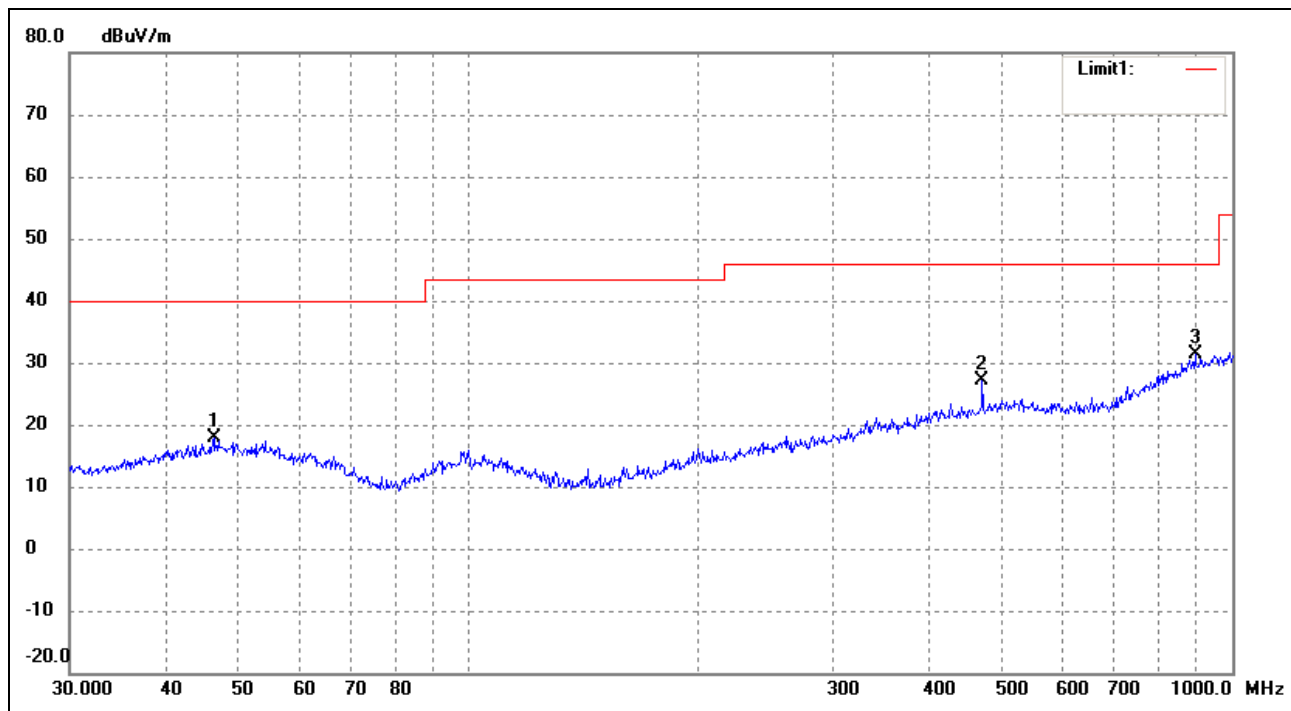


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.3402	25.42	-7.46	17.96	40.00	-22.04	0	100	peak
2	470.5232	28.86	-1.80	27.06	46.00	-18.94	0	100	peak
3	893.8567	26.12	5.26	31.38	46.00	-14.62	0	100	peak

Operating Condition: 802.11n-HT20 Transmitting Channel 11-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

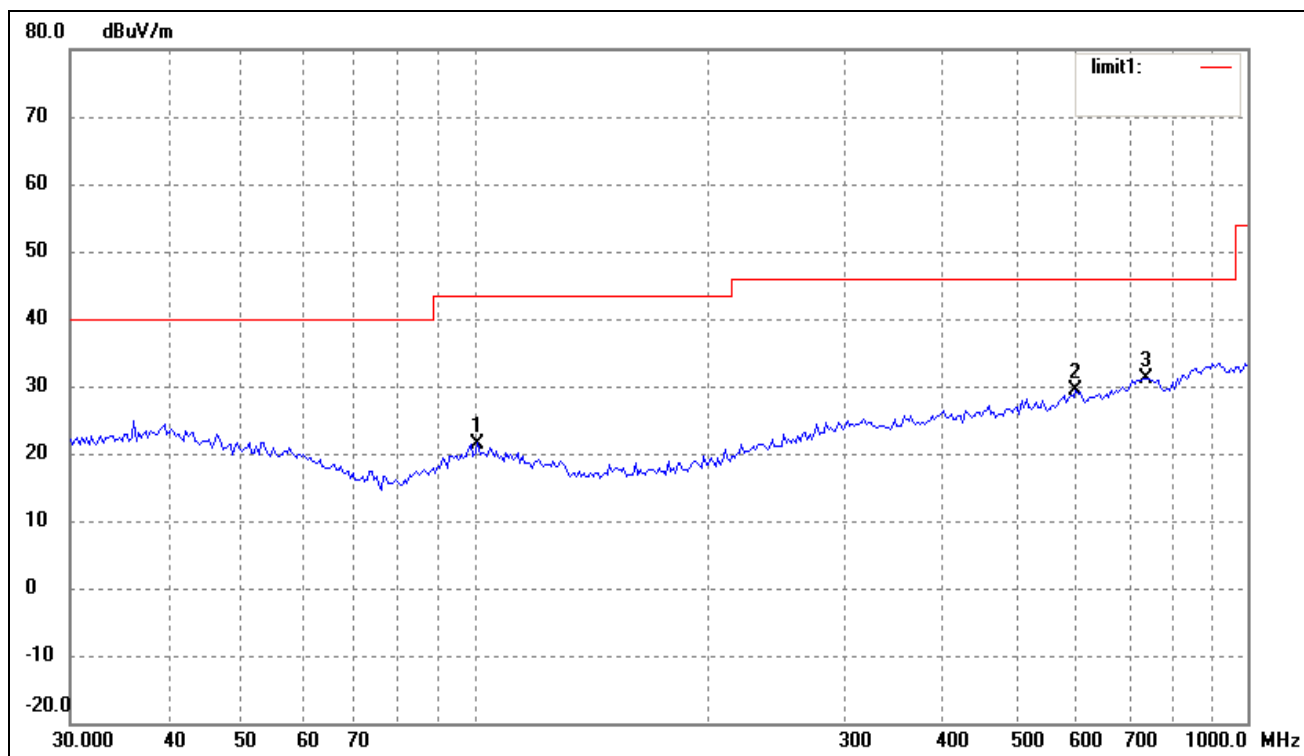

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	100.9340	15.47	6.03	21.50	43.50	-22.00	360	100	peak
2	599.3213	15.99	13.30	29.29	46.00	-16.71	360	100	peak
3	739.6605	15.71	15.53	31.24	46.00	-14.76	360	100	peak

Test Specification: Vertical

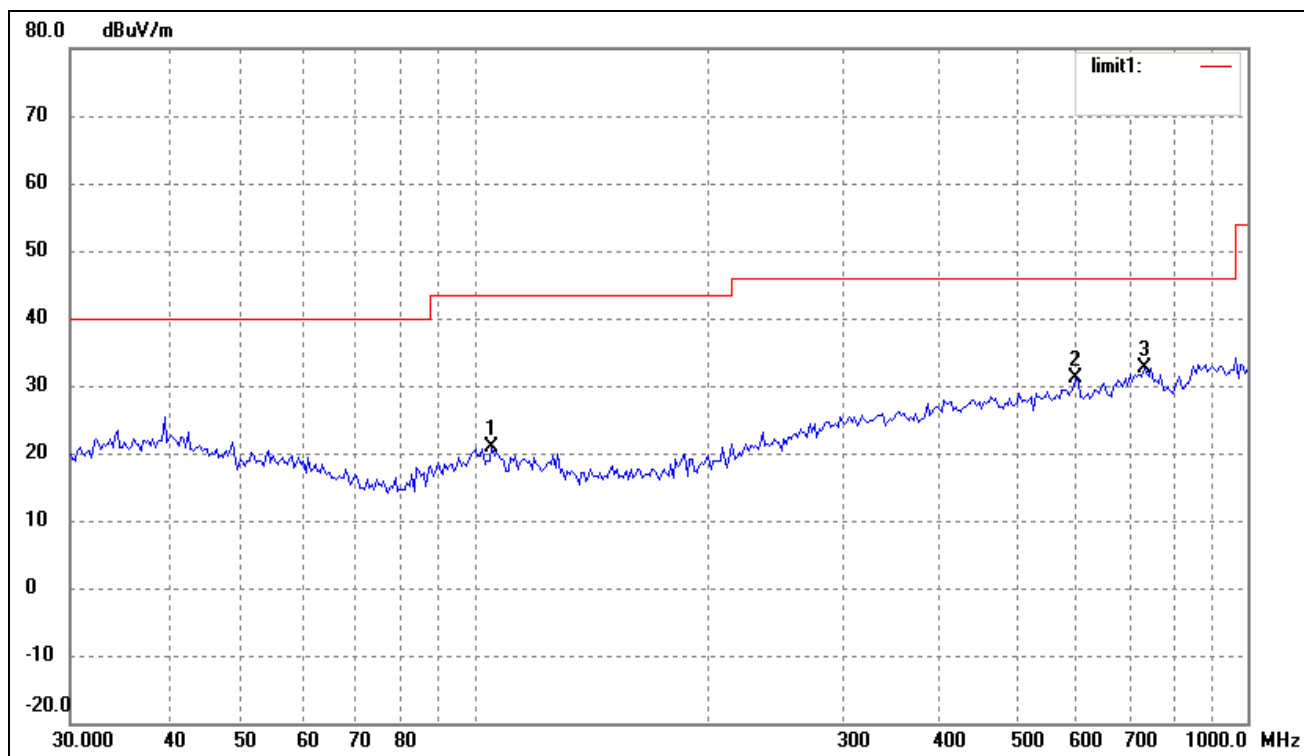


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	105.2718	15.41	5.57	20.98	43.50	-22.52	360	100	peak
2	599.3213	17.73	13.30	31.03	46.00	-14.97	360	100	peak
3	734.4913	17.53	15.22	32.75	46.00	-13.25	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting Channel 12-2467MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

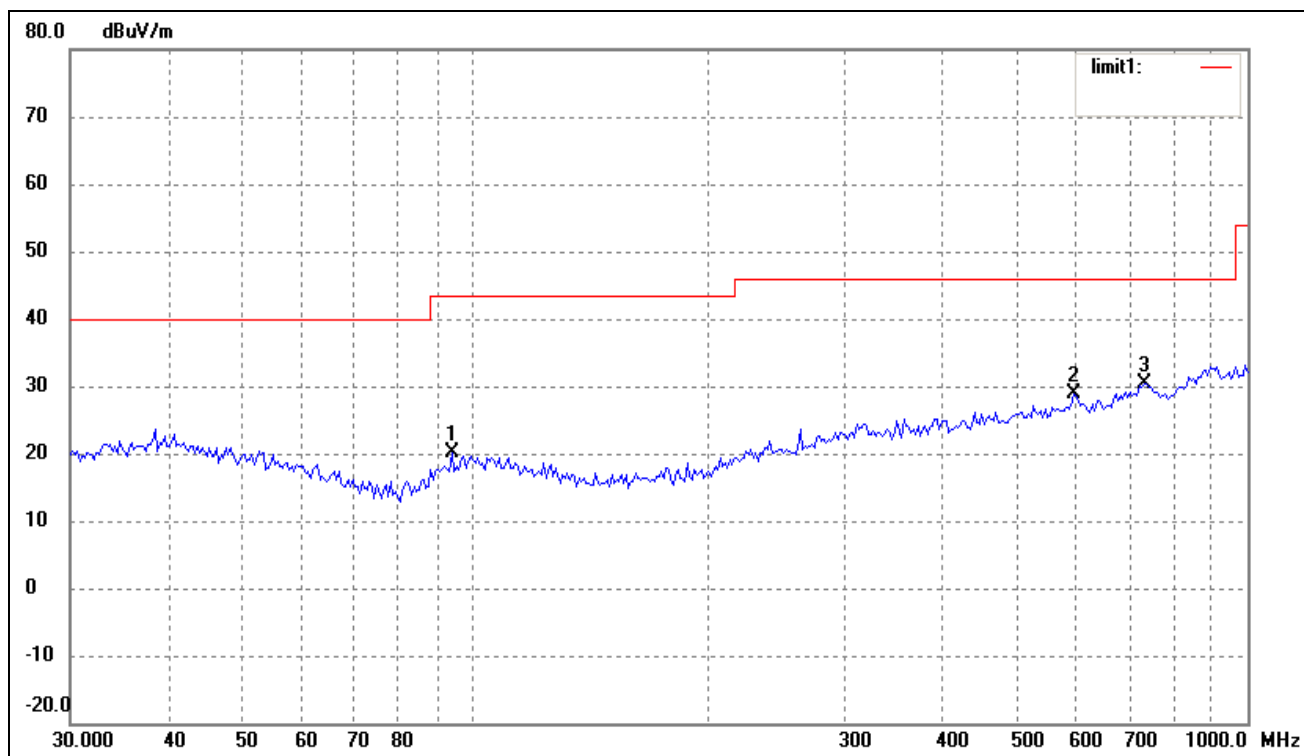

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	93.4402	15.56	4.48	20.04	43.50	-23.46	360	100	peak
2	595.1329	15.79	13.14	28.93	46.00	-17.07	360	100	peak
3	734.4913	15.23	15.22	30.45	46.00	-15.55	360	100	peak

Test Specification: Vertical

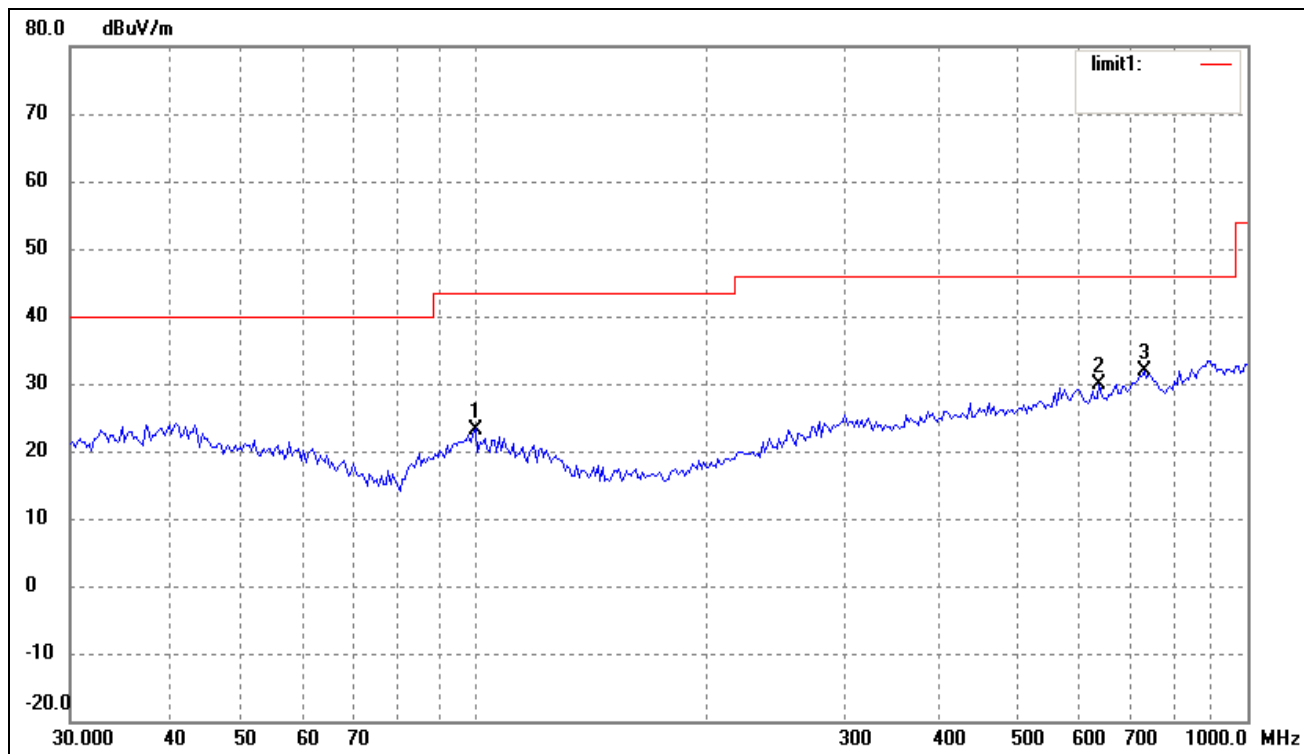


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	100.2286	17.15	6.10	23.25	43.50	-20.25	360	100	peak
2	642.8613	17.34	12.55	29.89	46.00	-16.11	360	100	peak
3	734.4913	16.67	15.22	31.89	46.00	-14.11	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting Channel 13-2472MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

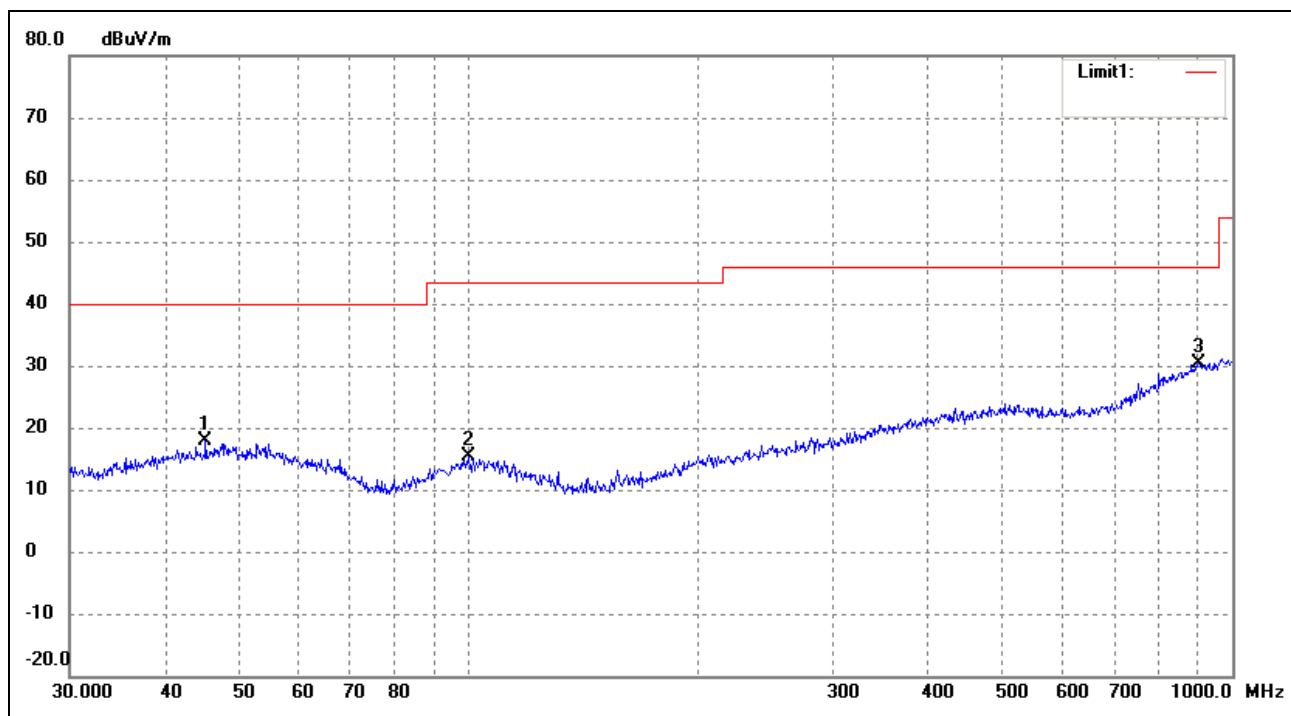

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	45.2166	25.24	-7.47	17.77	40.00	-22.23	0	100	peak
2	99.8777	24.98	-9.58	15.40	43.50	-28.10	360	100	peak
3	903.3094	25.04	5.42	30.46	46.00	-15.54	360	100	peak

Test Specification: Vertical

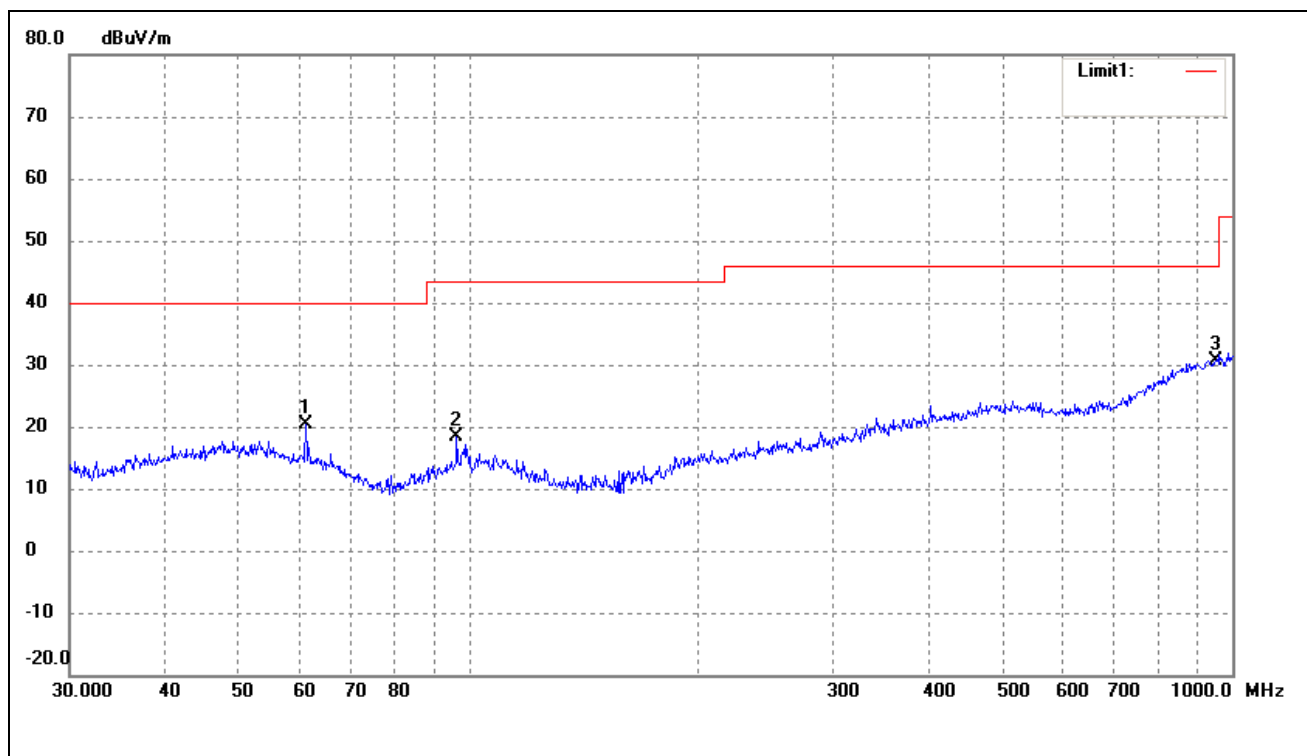

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	61.1315	29.58	-9.22	20.36	40.00	-19.64	0	100	peak
2	96.4361	28.37	-9.99	18.38	43.50	-25.12	0	100	peak
3	952.0937	24.60	5.96	30.56	46.00	-15.44	0	100	peak



*Spurious Emissions Above 1GHz**Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Channel 1-2412MHz							
4824.000	48.61	12.37	60.98	74.00	-13.02	H	PK
4824.000	36.31	12.37	48.68	54.00	-5.32	H	AV
7236.000	34.59	15.49	50.08	74.00	-23.92	H	PK
7236.000	22.71	15.49	38.20	54.00	-15.80	H	AV
4824.000	43.52	12.37	55.89	74.00	-18.11	V	PK
4824.000	32.71	12.37	45.08	54.00	-8.92	V	AV
7236.000	34.93	15.49	50.42	74.00	-23.58	V	PK
7236.000	21.28	15.49	36.77	54.00	-17.23	V	AV
Channel 7-2442MHz							
4884.000	43.28	12.46	55.74	74.00	-18.26	H	PK
4884.000	31.80	12.46	44.26	54.00	-9.74	H	AV
7326.000	37.27	15.56	52.83	74.00	-21.17	H	PK
7326.000	25.86	15.56	41.42	54.00	-12.58	H	AV
4884.000	43.68	12.46	56.14	74.00	-17.86	V	PK
4884.000	31.91	12.46	44.37	54.00	-9.63	V	AV
7326.000	37.41	15.56	52.97	74.00	-21.03	V	PK
7326.000	25.91	15.56	41.47	54.00	-12.53	V	AV
Channel 11-2462MHz							
4924.000	41.16	12.49	53.65	74.00	-20.35	H	PK
4924.000	34.66	12.49	47.15	54.00	-6.85	H	AV
7386.000	35.55	15.58	51.13	74.00	-22.87	H	PK
7386.000	34.34	15.58	49.92	54.00	-4.08	H	AV
4924.000	42.75	12.49	55.24	74.00	-18.76	V	PK
4924.000	33.26	12.49	45.75	54.00	-8.25	V	AV
7386.000	40.98	15.58	56.56	74.00	-17.44	V	PK
7386.000	33.11	15.58	48.69	54.00	-5.31	V	AV
Channel 12-2467MHz							
4934.000	39.63	12.5	52.13	74.00	-21.87	H	PK
4934.000	35.17	12.5	47.67	54.00	-6.33	H	AV
7401.000	34.94	15.58	50.52	74.00	-23.48	H	PK
7401.000	29.92	15.58	45.5	54.00	-8.50	H	AV
4934.000	34.60	12.5	47.1	74.00	-26.90	V	PK
4934.000	28.73	12.5	41.23	54.00	-12.77	V	AV
7401.000	31.38	15.58	46.96	74.00	-27.04	V	PK
7401.000	21.95	15.58	37.53	54.00	-16.47	V	AV

High Channel-2472MHz							
4944.000	43.05	12.55	55.60	74.00	-18.40	H	PK
4944.000	31.55	12.55	44.10	54.00	-9.90	H	AV
7416.000	38.34	15.64	53.98	74.00	-20.02	H	PK
7416.000	26.30	15.64	41.94	54.00	-12.06	H	AV
4944.000	42.93	12.55	55.48	74.00	-18.52	V	PK
4944.000	31.62	12.55	44.17	54.00	-9.83	V	AV
7416.000	37.53	15.64	53.17	74.00	-20.83	V	PK
7416.000	26.35	15.64	41.99	54.00	-12.01	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Channel 1-2412MHz							
4824.000	43.42	12.37	55.79	74.00	-18.21	H	PK
4824.000	31.69	12.37	44.06	54.00	-9.94	H	AV
7236.000	33.68	15.49	49.17	74.00	-24.83	H	PK
7236.000	22.70	15.49	38.19	54.00	-15.81	H	AV
4824.000	42.50	12.37	54.87	74.00	-19.13	V	PK
4824.000	31.54	12.37	43.91	54.00	-10.09	V	AV
7236.000	34.15	15.49	49.64	74.00	-24.36	V	PK
7236.000	22.63	15.49	38.12	54.00	-15.88	V	AV
Channel 7-2442MHz							
4884.000	45.10	12.46	57.56	74.00	-16.44	H	PK
4884.000	35.40	12.46	47.86	54.00	-6.14	H	AV
7326.000	38.26	15.56	53.82	74.00	-20.18	H	PK
7326.000	25.92	15.56	41.48	54.00	-12.52	H	AV
4884.000	37.00	12.46	49.46	74.00	-24.54	V	PK
4884.000	48.77	12.46	61.23	54.00	7.23	V	AV
7326.000	36.78	15.56	52.34	74.00	-21.66	V	PK
7326.000	26.02	15.56	41.58	54.00	-12.42	V	AV
Channel 11-2462MHz							
4924.000	48.91	12.49	61.4	74.00	-12.60	H	PK
4924.000	38.93	12.49	51.42	54.00	-2.58	H	AV
7386.000	37.09	15.58	52.67	74.00	-21.33	H	PK
7386.000	28.48	15.58	44.06	54.00	-9.94	H	AV
4924.000	40.63	12.49	53.12	74.00	-20.88	V	PK
4924.000	31.77	12.49	44.26	54.00	-9.74	V	AV
7386.000	33.40	15.58	48.98	74.00	-25.02	V	PK
7386.000	24.09	15.58	39.67	54.00	-14.33	V	AV

Channel 12-2467MHz							
4934.000	39.63	12.5	52.13	74.00	-21.87	H	PK
4934.000	35.17	12.5	47.67	54.00	-6.33	H	AV
7401.000	34.94	15.58	50.52	74.00	-23.48	H	PK
7401.000	29.92	15.58	45.5	54.00	-8.50	H	AV
4934.000	34.60	12.5	47.1	74.00	-26.90	V	PK
4934.000	28.73	12.5	41.23	54.00	-12.77	V	AV
7401.000	31.38	15.58	46.96	74.00	-27.04	V	PK
7401.000	21.95	15.58	37.53	54.00	-16.47	V	AV
Channel 13-2472MHz							
4944.000	42.24	12.55	54.79	74.00	-19.21	H	PK
4944.000	31.42	12.55	43.97	54.00	-10.03	H	AV
7416.000	37.67	15.64	53.31	74.00	-20.69	H	PK
7416.000	26.15	15.64	41.79	54.00	-12.21	H	AV
4944.000	42.53	12.55	55.08	74.00	-18.92	V	PK
4944.000	31.63	12.55	44.18	54.00	-9.82	V	AV
7416.000	37.16	15.64	52.80	74.00	-21.20	V	PK
7416.000	26.11	15.64	41.75	54.00	-12.25	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Channel 1-2412MHz							
4824.000	42.23	12.37	54.60	74.00	-19.40	H	PK
4824.000	31.60	12.37	43.97	54.00	-10.03	H	AV
7236.000	34.01	15.49	49.50	74.00	-24.50	H	PK
7236.000	25.20	15.49	40.69	54.00	-13.31	H	AV
4824.000	42.85	12.37	55.22	74.00	-18.78	V	PK
4824.000	31.59	12.37	43.96	54.00	-10.04	V	AV
7236.000	33.99	15.49	49.48	74.00	-24.52	V	PK
7236.000	24.34	15.49	39.83	54.00	-14.17	V	AV
Channel 7-2442MHz							
4884.000	42.68	12.46	55.14	74.00	-18.86	H	PK
4884.000	31.62	12.46	44.08	54.00	-9.92	H	AV
7326.000	37.32	15.56	52.88	74.00	-21.12	H	PK
7326.000	24.39	15.56	39.95	54.00	-14.05	H	AV
4884.000	43.57	12.46	56.03	74.00	-17.97	V	PK
4884.000	31.62	12.46	44.08	54.00	-9.92	V	AV
7326.000	36.39	15.56	51.95	74.00	-22.05	V	PK
7326.000	25.78	15.56	41.34	54.00	-12.66	V	AV

Channel 11-2462MHz							
4924.000	46.68	12.49	59.17	74.00	-14.83	H	PK
4924.000	33.19	12.49	45.68	54.00	-8.32	H	AV
7386.000	36.43	15.58	52.01	74.00	-21.99	H	PK
7386.000	22.67	15.58	38.25	54.00	-15.75	H	AV
4924.000	48.72	12.49	61.21	74.00	-12.79	V	PK
4924.000	35.26	12.49	47.75	54.00	-6.25	V	AV
7386.000	39.14	15.58	54.72	74.00	-19.28	V	PK
7386.000	24.43	15.58	40.01	54.00	-13.99	V	AV
Channel 12-2467MHz							
4934.000	47.20	12.5	59.7	74.00	-14.30	H	PK
4934.000	33.01	12.5	45.51	54.00	-8.49	H	AV
7401.000	34.46	15.58	50.04	74.00	-23.96	H	PK
7401.000	22.63	15.58	38.21	54.00	-15.79	H	AV
4934.000	44.91	12.5	57.41	74.00	-16.59	V	PK
4934.000	31.90	12.5	44.4	54.00	-9.60	V	AV
7401.000	35.24	15.58	50.82	74.00	-23.18	V	PK
7401.000	23.25	15.58	38.83	54.00	-15.17	V	AV
High Channel-2472MHz							
4944.000	46.69	12.55	59.24	74.00	-14.76	H	PK
4944.000	33.48	12.55	46.03	54.00	-7.97	H	AV
7416.000	37.06	15.64	52.70	74.00	-21.30	H	PK
7416.000	26.20	15.64	41.84	54.00	-12.16	H	AV
4944.000	48.73	12.55	61.28	74.00	-12.72	V	PK
4944.000	34.75	12.55	47.30	54.00	-6.70	V	AV
7416.000	37.23	15.64	52.87	74.00	-21.13	V	PK
7416.000	26.33	15.64	41.97	54.00	-12.03	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz.*

## 9. Out of Band Emissions

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23

### 9.3 Test Procedure

According to the KDB 558074D01 v03r02, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r02, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

#### 9.4 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 9.5 Summary of Test Results/Plots

Please refer to the test plots as below.

## 802.11b-Lowest Bandedge


Vertical (Worst case)

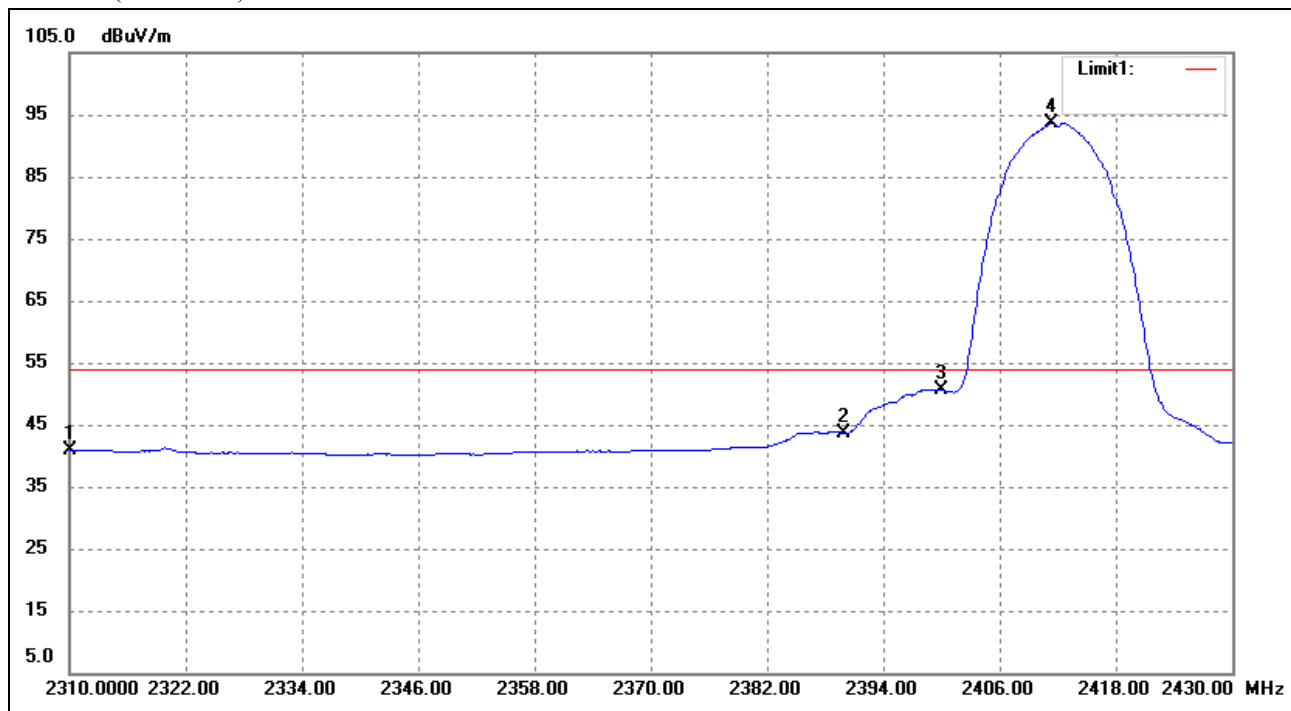

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	24.42	16.34	40.76	54.00	-13.24	Average Detector
	2310.000	35.54	16.34	51.88	74.00	-22.12	Peak Detector
2	2390.000	26.67	17.03	43.70	54.00	-10.30	Average Detector
	2390.000	38.54	17.03	55.57	74.00	-18.43	Peak Detector
3	2400.000	33.53	17.11	50.64	Delta =43.03dBc		Average Detector
4	2411.400	76.48	17.19	93.67			Average Detector

## 802.11b-Highest Bandedge

Vertical (Worst case)

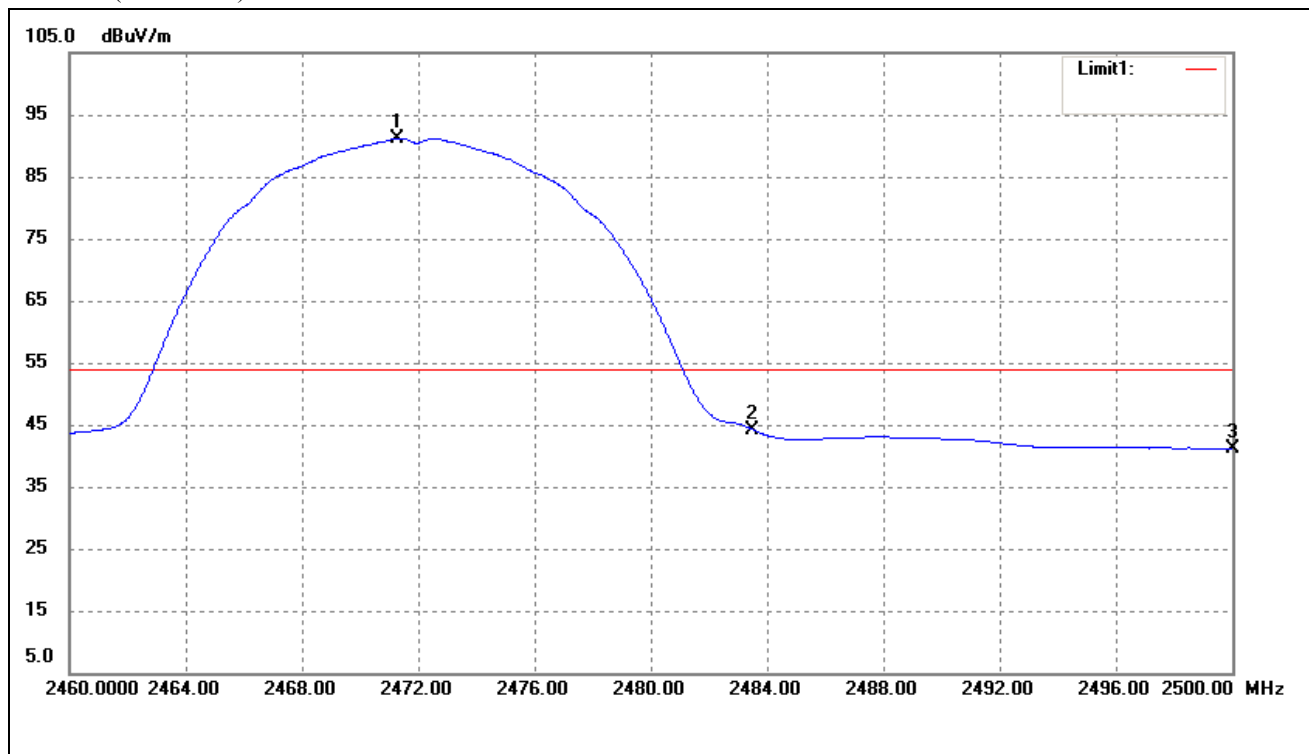


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2471.280	73.57	17.65	91.22	/	/	Average Detector
	2472.360	84.07	17.66	101.73	/	/	Peak Detector
2	2483.500	Delta = 47.02dBc		44.20	54.00	-9.80	Average Detector
	2483.500			55.99	74.00	-18.01	Peak Detector
3	2500.000	23.19	17.86	41.05	54.00	-12.95	Average Detector
	2500.000	35.51	17.86	53.37	74.00	-20.63	Peak Detector



## 802.11g-Lowest Bandedge


Vertical (Worst case)

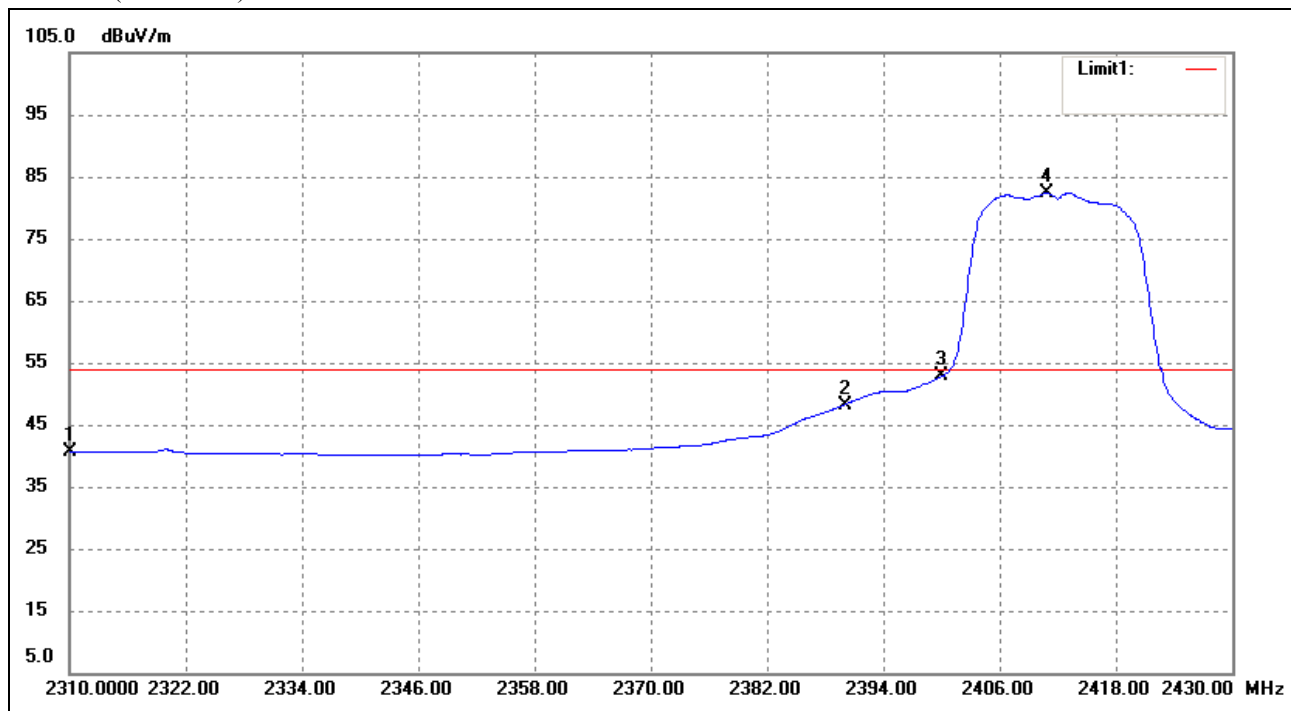

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	24.27	16.34	40.61	54.00	-13.39	Average Detector
	2310.000	35.90	16.34	52.24	74.00	-21.76	Peak Detector
2	2390.000	31.22	17.03	48.25	54.00	-5.75	Average Detector
	2390.000	50.13	17.03	67.16	74.00	-6.84	Peak Detector
3	2400.000	35.70	17.11	52.81	Delta =29.52dBc		Average Detector
4	2410.800	65.14	17.19	82.33			Average Detector

802.11g-Highest Bandedge


Vertical (Worst case)

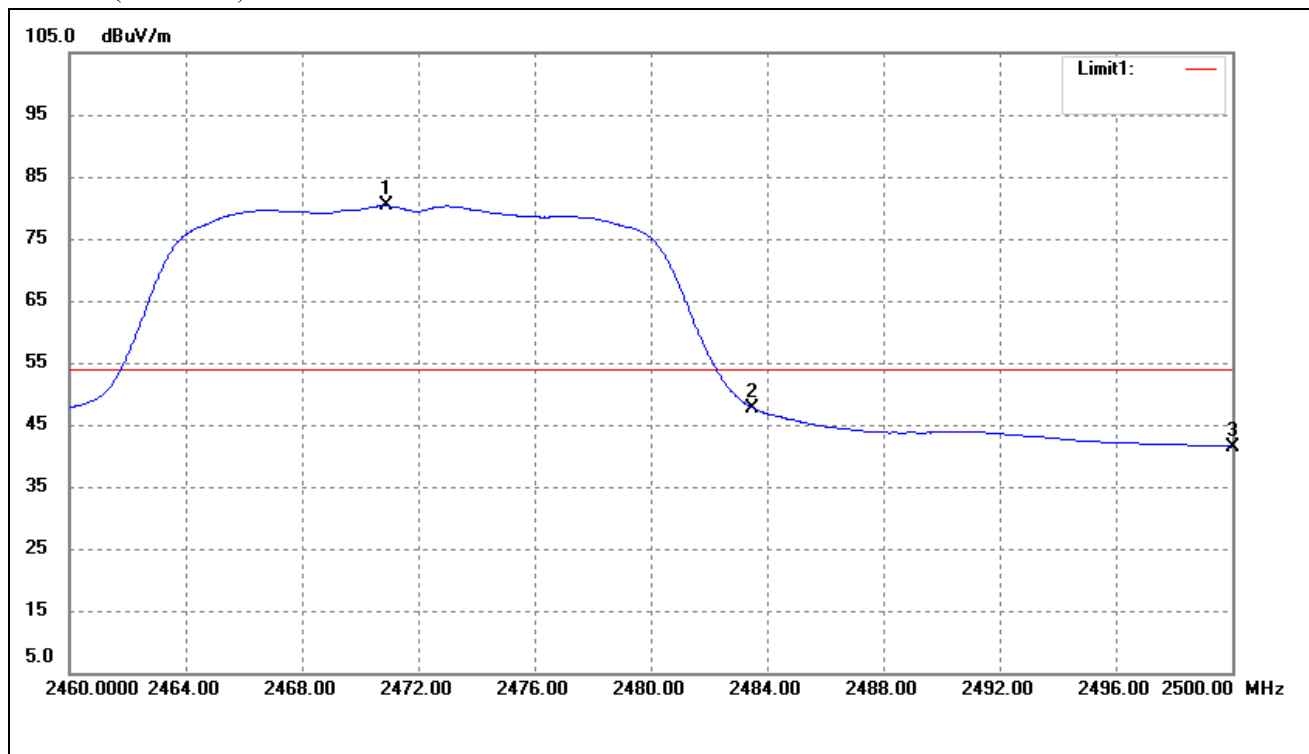

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.920	62.69	17.64	80.33	/	/	Average Detector
	2471.200	83.54	17.65	101.19	/	/	Peak Detector
2	2483.500	Delta = 32.61dBc		47.72	54.00	-6.28	Average Detector
	2483.500			70.64	74.00	-3.36	Peak Detector
3	2500.000	23.61	17.86	41.47	54.00	-12.53	Average Detector
	2500.000	36.23	17.86	54.09	74.00	-19.91	Peak Detector

## 802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

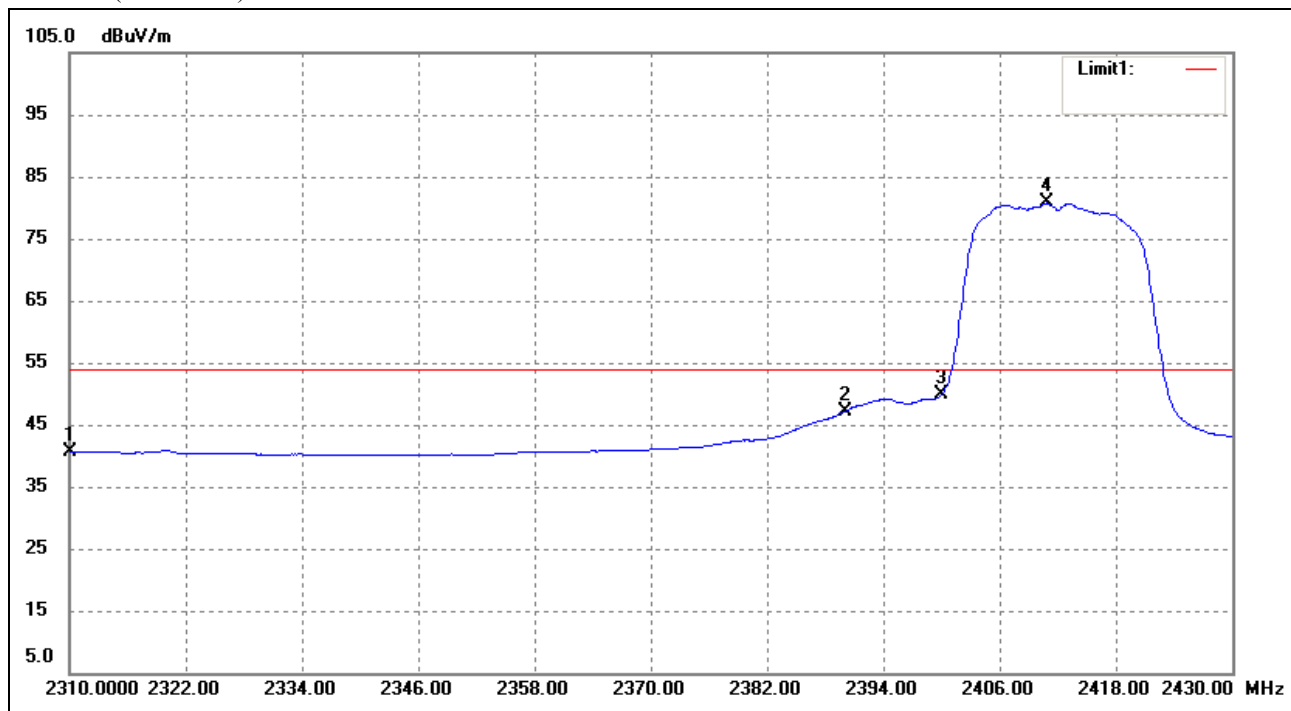

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	24.18	16.34	40.52	54.00	-13.48	Average Detector
	2310.000	36.45	16.34	52.79	74.00	-21.21	Peak Detector
2	2390.000	30.14	17.03	47.17	54.00	-6.83	Average Detector
	2390.000	47.20	17.03	64.23	74.00	-9.77	Peak Detector
3	2400.000	32.75	17.11	49.86	Delta =30.90dBc		Average Detector
	2410.920	63.57	17.19	80.76			Average Detector

## 802.11n-HT20-Highest Bandedge

Vertical (Worst case)

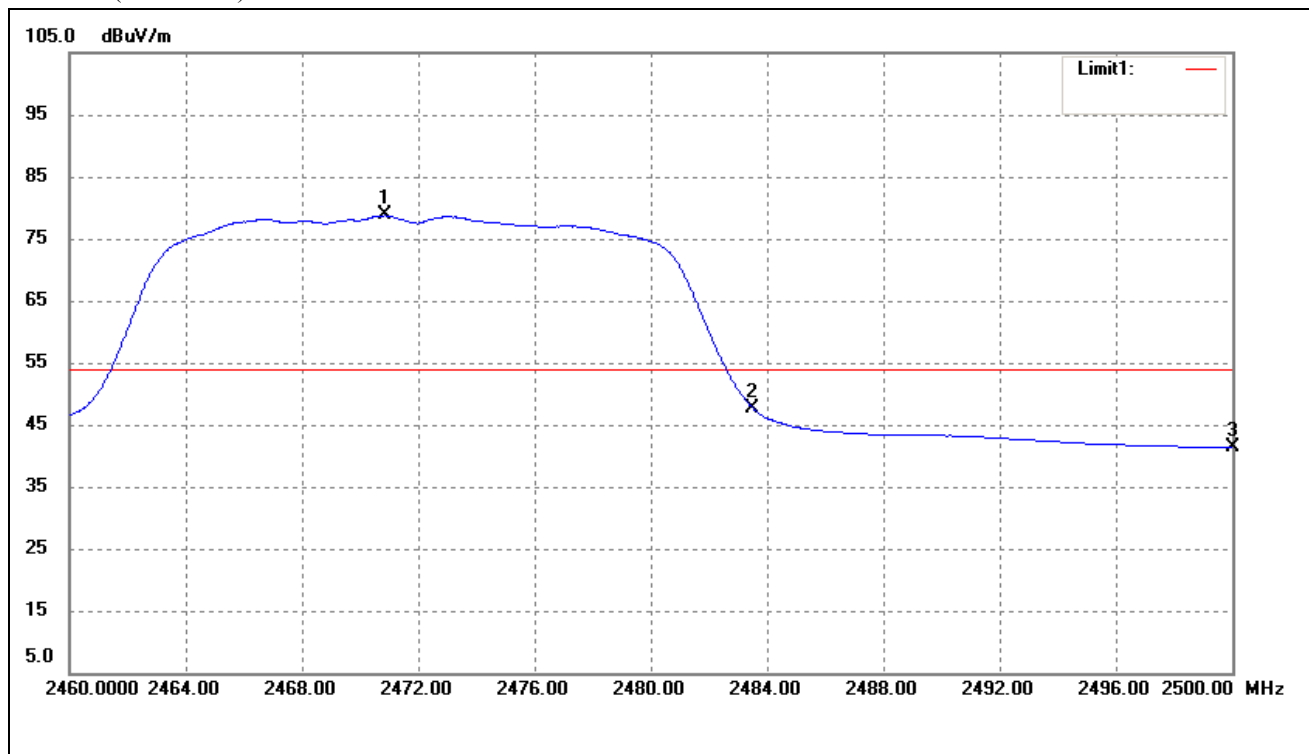

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.840	61.12	17.64	78.76	/	/	Average Detector
	2469.800	82.63	17.62	100.25	/	/	Peak Detector
2	2483.500	Delta = 31.11dBc		47.65	54.00	-6.35	Average Detector
	2483.500			68.49	74.00	-5.51	Peak Detector
3	2500.000	23.45	17.86	41.31	54.00	-12.69	Average Detector
	2500.000	34.68	17.86	52.54	74.00	-21.46	Peak Detector

## 10. Conducted Emissions

## 10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is + 2.88 dB.

## 10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27


### 10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## 10.4 Basic Test Setup Block Diagram

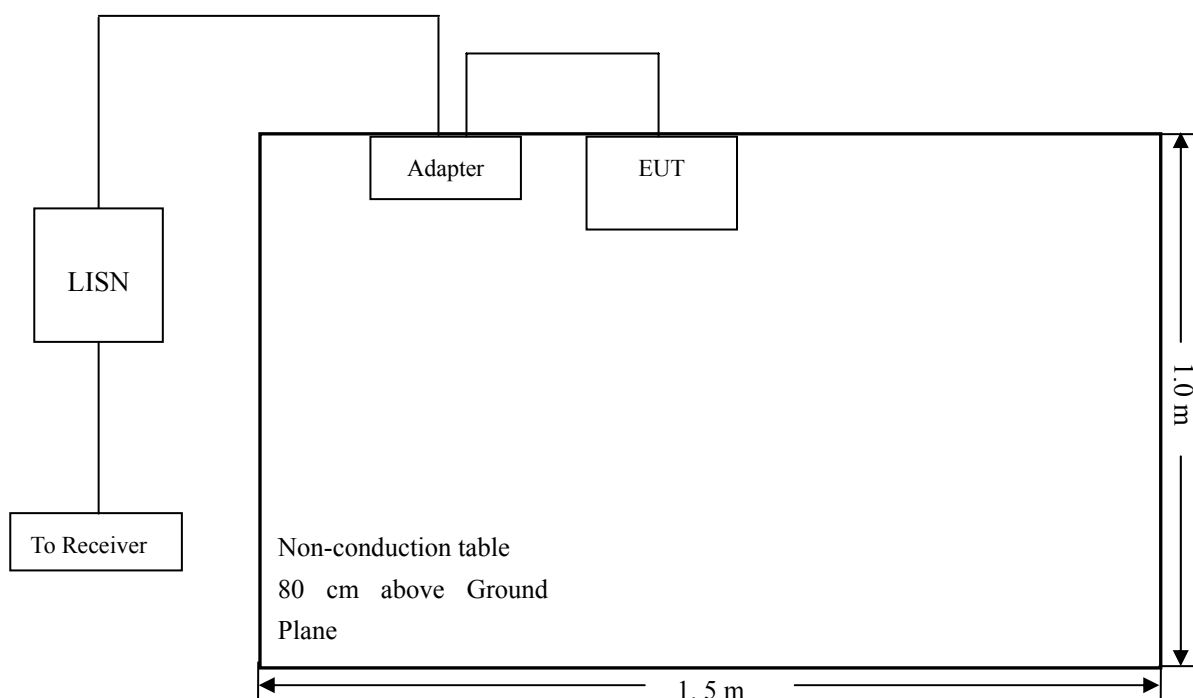

## 10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:


Start Frequency ..... 150 kHz  
Stop Frequency..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

## 10.7 Summary of Test Results/Plots

According to the data in section 9.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


**-1.95 dB at 0.1500 MHz in the Neutral, Peak detector, 0.15-30MHz**

## 10.8 Conducted Emissions Test Data

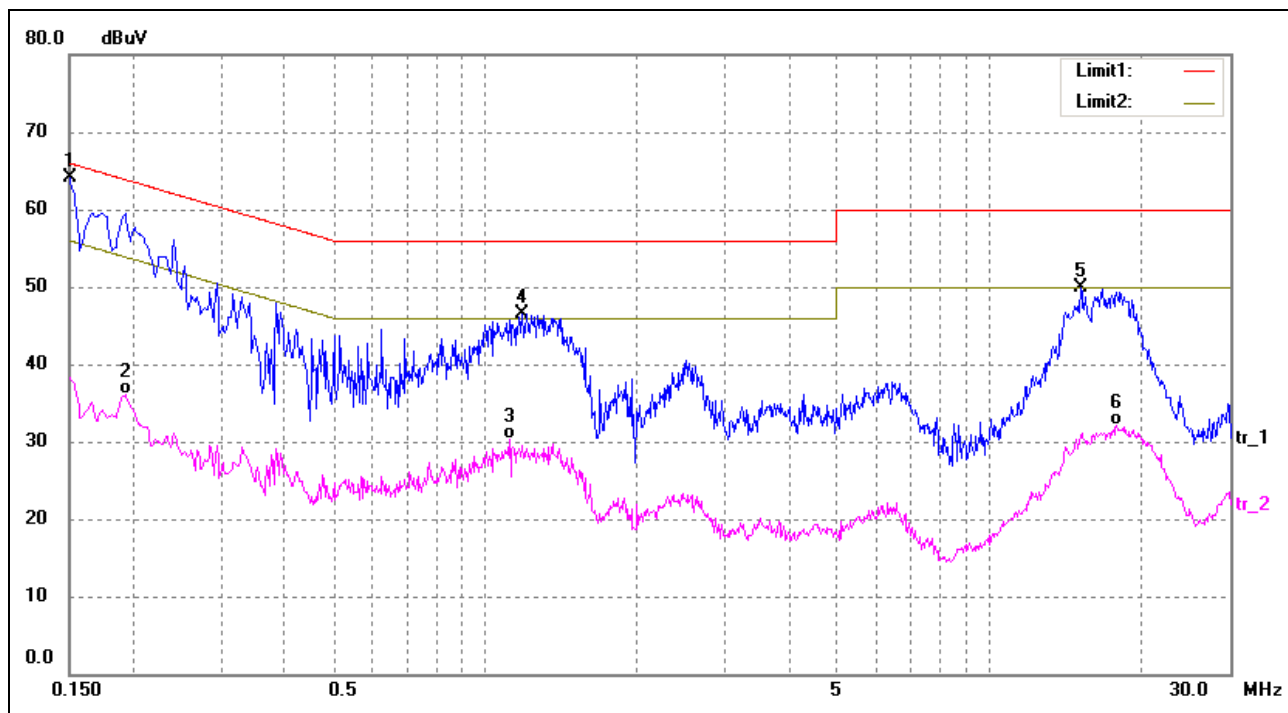**Plot of Conducted Emissions Test Data***EUT:* Tablet PC*Tested Model:* LIFE 7*Operating Condition:* WIFI Transmitting*Comment:* AC 120V/60Hz*Test Specification:* Neutral

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	54.55	9.50	64.05	66.00	-1.95	peak
2	0.1940	26.51	9.50	36.01	53.86	-17.85	AVG
3	1.1220	20.25	10.00	30.25	46.00	-15.75	AVG
4	1.1860	36.58	10.00	46.58	56.00	-9.42	peak
5	15.2220	38.95	11.04	49.99	60.00	-10.01	peak
6	17.8940	20.45	11.58	32.03	50.00	-17.97	AVG

Test Specification: Line

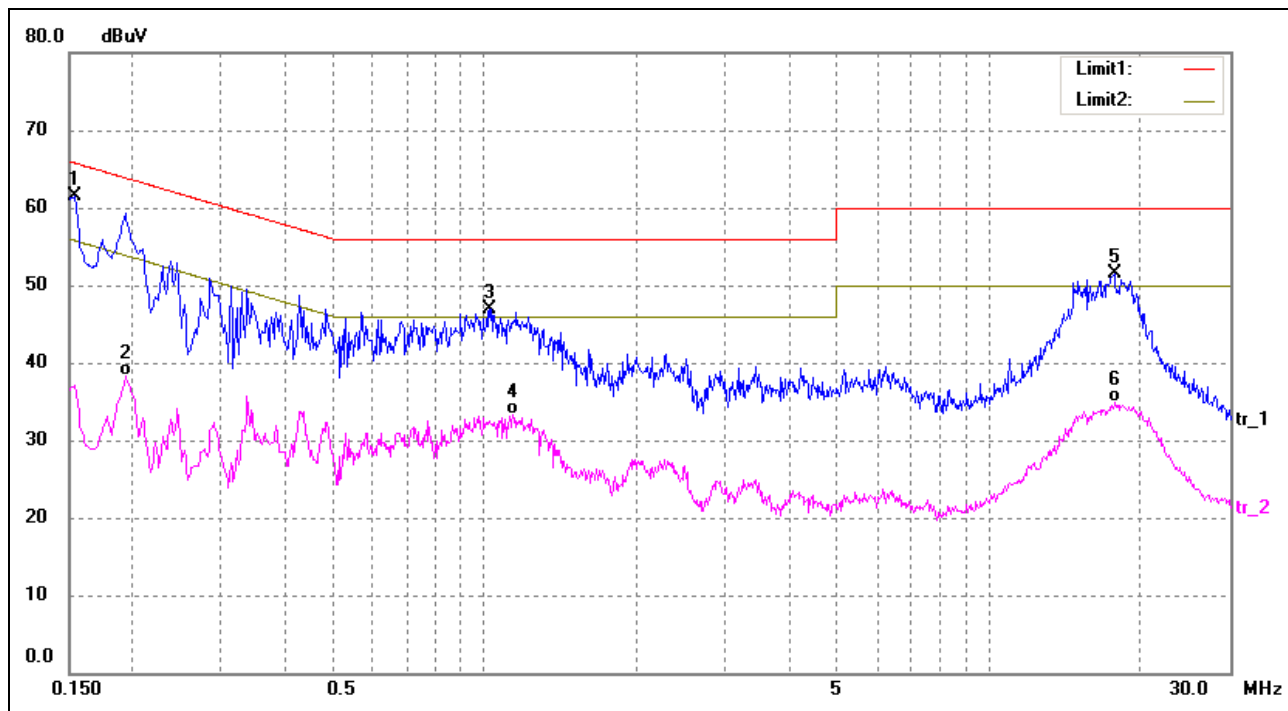

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	52.06	9.50	61.56	65.78	-4.22	peak
2	0.1940	28.75	9.50	38.25	53.86	-15.61	AVG
3	1.0260	36.98	10.00	46.98	56.00	-9.02	peak
4	1.1380	23.22	10.00	33.22	46.00	-12.78	AVG
5	17.7300	40.04	11.55	51.59	60.00	-8.41	peak
6	17.7980	23.37	11.56	34.93	50.00	-15.07	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*