

RF EXPOSURE **EVALUATION REPORT**

APPLICANT

Shenzhen guogee Intelligent Technology Co., Ltd.

PRODUCT NAME

zigbee module

MODEL NAME

Ismart zigbee Module V2.01

TRADE NAME

GUOGEE

BRAND NAME

GUOGEE

FCC ID

2ADKR-F1RV0210

47CFR 2.1091

STANDARD(S)

KDB 447498 D01 General RF Exposure Guidance

ISSUE DATE

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

| TEST REPORT DECLARATION | 3 |
|--|----------|
| | |
| 1. TECHNICAL INFORMATION | 4 |
| | |
| 1.1. IDENTIFICATION OF APPLICANT | 4 |
| 1.2. IDENTIFICATION OF MANUFACTURER | 4 |
| 1.3. 1. Photographs of the EUT···································· | 4 |
| 1.3.1. PHOTOGRAPHS OF THE EUT······ | 5 |
| 1.3.2. IDENTIFICATION OF ALL USED EUT | 6 |
| 1.4. APPLIED REFERENCE DOCUMENTS | 6 |
| 2. DEVICE CATEGORY AND RF EXPOSURE LIMIT | 7 |
| 3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER | 8 |
| | |
| 4. RF EXPOSURE EVALUATION | <u>9</u> |
| | |
| ANNEX C GENERAL INFORMATION | 10 |

| | | Change History |
|-------|------------|-----------------------------|
| Issue | Date | Reason for change |
| 1.0 | 2014-12-10 | First edition |
| MORE | Will be | E RLAT MORE ME AE RLAT MORE |



TEST REPORT DECLARATION

| Shenzhen guogee Intelligent Technology Co., Ltd. |
|--|
| Room 416, Block 1,Building B,Shenzhen Mingyou Industrial Products Exhibition & Procurement Center,Baoyuan Road, Xixing Sub-district, Bao'an District,518102, Shenzhen, P.R.China |
| Shenzhen guogee Intelligent Technology Co., Ltd. |
| Room 416, Block 1,Building B,Shenzhen Mingyou Industrial Products Exhibition & Procurement Center,Baoyuan Road, Xixing Sub-district, Bao'an District,518102, Shenzhen, P.R.China |
| zigbee module |
| Ismart zigbee Module V2.01 |
| GUOGEE |
| N/A |
| N/A |
| 47CFR 2.1091; KDB 447498 D01 General RF Exposure Guidance v05r02 |
| 2014-12-10 |
| |

| Tested by | : <u> </u> | Liu Jun |
|-------------|------------|-------------|
| | | Liu Jun |
| Reviewed by | | Fe g A. |
| 300 | | Peng Huarui |
| Approved by | | Zeng Dexin |

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

Zeng Dexin



1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

1.1. Identification of Applicant

| Company Name: | Shenzhen guogee Intelligent Technology Co., Ltd. |
|---------------|---|
| Address: | Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products |
| MORIE MO | Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, |
| AE RLAD | Bao'an District,518102, Shenzhen, P.R.China |

1.2. Identification of Manufacturer

| Company Name: | Shenzhen guogee Intelligent Technology Co., Ltd. | |
|---------------|---|--|
| Address: | Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products | |
| S ME LAB | Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, | |
| SELAL MORL | Bao'an District,518102, Shenzhen, P.R.China | |

1.3. Equipment Under Test (EUT)

| Model Name: | Ismart zigbee Module V2.01 |
|--------------------|----------------------------|
| Trade Name: | GUOGEE |
| Brand Name: | GUOGEE |
| Hardware Version: | N/A |
| Software Version: | N/A |
| Frequency Bands: | 2405-2475MHz |
| Modulation Mode: | GFSK |
| Antenna type: | Fixed Internal Antenna |
| Development Stage: | Identical prototype |


Note:

The EUT is zigbee module, it contain zigbee module operating at 2.4GHz ISM band.




1.3.1. Photographs of the EUT

EUT front view

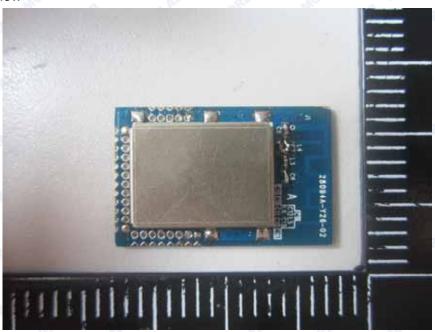

2. EUT rear view

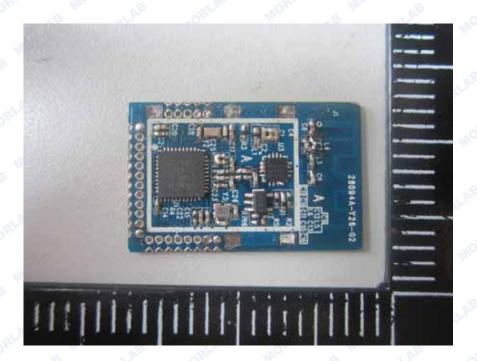



1.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

| EUT Identity Hardware Version | | Software Version | |
|-------------------------------|-----|------------------|--|
| 1# | N/A | N/A | |

1.4. Applied Reference Documents

Leading reference documents for testing:

| No. | Identity | Document Title |
|------------|----------------------|--|
| 1 OPLAB | 47 CFR§2.1091 | Radiofrequency Radiation Exposure Evaluation: mobile devices |
| 2 | KDB 447498 D01v05r02 | General RF Exposure Guidance |



2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, this device is a zigbee module. Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm²) | Averaging time (minutes) |
|-----------------------------|-------------------------------------|-------------------------------------|------------------------|--------------------------|
| (i | B) Limits for General | Population/Uncontro | lled Exposure | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | - | - | f/1500 | 30 |
| 1500-100,000 | - | - | 1.0 | 30 |

f = frequency in MHz



^{* =} Plane-wave equivalent power density



3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. zigbee module Conducted Average Output Power

| Pand | Channal | Frequency | Output Power(dBm) | |
|------|---------|-----------|-------------------|--|
| Band | Channel | (MHz) | GFSK | |
| ORL | 0 | 2405 | 14.91 | |
| 2.4G | 8 | 2440 | 14.36 | |
| MOL | 15 | 2475 | 13.47 | |



4. RF EXPOSURE EVALUATION

Standalone transmission MPE evaluation

| Bands | Frequency (MHz) | Antenna Gain (dBi) | Conducted Average Power (dBm) | Time-averaging EIRP (mW) | Power density (mW/cm²) | Limit for MPE (mW/cm²) |
|-------|--------------------|--------------------------|-------------------------------|--------------------------------|------------------------|------------------------------|
| 2.4G | 2405 | ,¢1 | 14.91 | 38.99 | 0.008 | 1.0 |

Note:

1. MPE calculation method

Power Density = EIRP/ 4π R²

Where: EIRP = P·G

P = Peak out power G = Antenna gain

R = Separation distance (20cm)



ANNEX C GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

| Company Name: | Shenzhen Morlab Communications Technology Co., Ltd. |
|-------------------------------|--|
| Department: | Morlab Laboratory |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Responsible Test Lab Manager: | Mr. Su Feng |
| Telephone: | +86 755 36698555 |
| Facsimile: | +86 755 36698525 |

2. Identification of the Responsible Testing Location

| Name: | Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory |
|----------|---|
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang |
| | Road, Block 67, BaoAn District, ShenZhen, GuangDong |
| | Province, P. R. China |

3. Accreditation Certificate

Accredited Testing Laboratory: CNAS No. L3572

(Shenzhen Morlab Communications Technology Co., Ltd.)

***** END OF REPORT *****

