



FCC PART 15.247 TEST REPORT

For

Zeeva International Limited

Suite 1007B,10th Floor, Exchange Tower 33 Wang Chiu Road, Kowloon Bay, HongKong, China

FCC ID:2ADM5-SP-0700

Report Type: **Product Type:** BT METAL LED CIRCLE SPKR Original Report **Report Number:** RSZ190821836-00 **Report Date:** 2019-09-06 Namy Wang Nancy Wang **Reviewed By:** RF Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) **Prepared By:** 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

| GENERAL INFORMATION | 4 |
|---|----|
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | |
| Objective | |
| RELATED SUBMITTAL(S)/GRANT(S) | |
| TEST METHODOLOGY | |
| MEASUREMENT UNCERTAINTY | |
| TEST FACILITY | |
| SYSTEM TEST CONFIGURATION | |
| DESCRIPTION OF TEST CONFIGURATION | |
| EUT Exercise Software | |
| SPECIAL ACCESSORIES | |
| EQUIPMENT MODIFICATIONS | |
| SUPPORT EQUIPMENT LIST AND DETAILS | |
| EXTERNAL I/O CABLE | |
| BLOCK DIAGRAM OF TEST SETUP | |
| SUMMARY OF TEST RESULTS | 8 |
| TEST EQUIPMENT LIST | 9 |
| FCC §15.247 (i), §1.1307 (b) (1) & \$2.1093 – RF EXPOSURE | 11 |
| APPLICABLE STANDARD | |
| FCC §15.203 – ANTENNA REQUIREMENT | 12 |
| APPLICABLE STANDARD | |
| ANTENNA CONNECTOR CONSTRUCTION | |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 13 |
| APPLICABLE STANDARD | |
| EUT SETUP | |
| EMI TEST RECEIVER SETUP. | |
| TEST PROCEDURE | |
| CORRECTED FACTOR & MARGIN CALCULATION | |
| TEST RESULTS SUMMARY | |
| TEST DATA | 14 |
| FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS | 17 |
| APPLICABLE STANDARD | 17 |
| EUT SETUP | 17 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 18 |
| TEST PROCEDURE | |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | |
| TEST RESULTS SUMMARY | - |
| TEST DATA | 19 |
| FCC §15.247(a) (1)-CHANNEL SEPARATION TEST | 25 |
| APPLICABLE STANDARD | |
| TEST PROCEDURE | |
| TEST DATA | 25 |

| FCC §1.247(a) (1) – 20 dB EMISSION BANDWIDTH | 32 |
|---|----|
| APPLICABLE STANDARD | 32 |
| TEST PROCEDURE | |
| TEST DATA | 32 |
| FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST | 38 |
| APPLICABLE STANDARD | 38 |
| TEST PROCEDURE | |
| TEST DATA | 38 |
| FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME) | 41 |
| APPLICABLE STANDARD | 41 |
| TEST PROCEDURE | 41 |
| TEST DATA | 41 |
| FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT | 57 |
| APPLICABLE STANDARD | 57 |
| TEST PROCEDURE | |
| TEST DATA | 57 |
| FCC §15.247(d) - BAND EDGES TESTING | 58 |
| APPLICABLE STANDARD | 58 |
| TEST PROCEDURE | |
| Test Data | 58 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| Product | BT METAL LED CIRCLE SPKR |
|-----------------------|----------------------------------|
| Tested Model | SP-0700 |
| UPC Number | 192234031650 |
| SKU Number | 3189982 |
| Frequency Range | Bluetooth: 2402~2480MHz |
| Transmit Power | Bluetooth: 3.07dBm |
| Modulation Technique | Bluetooth: GFSK, π/4-DQPSK,8DPSK |
| Antenna Specification | 0.6dBi |
| Voltage Range | DC 3.7 V from battery |
| Date of Test | 2019-08-28 to 2019-09-05 |
| Sample serial number | 190821836 |
| Received date | 2019-08-21 |
| Sample/EUT Status | Good condition |

Objective

This test report is prepared on behalf of *Zeeva International Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 64

Measurement Uncertainty

| Para | meter | Uncertainty | |
|------------------------------------|-------------------|-------------|--|
| Occupied Char | nnel Bandwidth | ±5% | |
| RF Output Power | with Power meter | ±0.73dB | |
| RF conducted to | est with spectrum | ±1.6dB | |
| AC Power Lines Conducted Emissions | | ±1.95dB | |
| Emissions, | Below 1GHz | ±4.75dB | |
| Radiated | Above 1GHz | ±4.88dB | |
| Temperature | | ±1 ℃ | |
| Humidity | | ±6% | |
| Supply | voltages | ±0.4% | |

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15.247 Page 5 of 64

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

"BT_Tool.exe" software was made to the EUT tested and the power level is 7.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------------|---------------|
| / | Adapter | RH-050100JP | / |


External I/O Cable

| Cable Description | Length (m) | From Port | То |
|-----------------------------------|------------|-----------|---------|
| Un-shielding detachable USB Cable | 0.5 | EUT | Adapter |

FCC Part 15.247 Page 6 of 64

Block Diagram of Test Setup

For conducted emission:

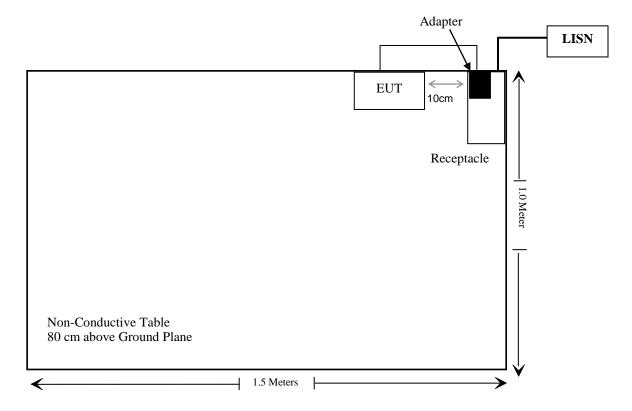

FCC Part 15.247 Page 7 of 64

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------------|----------------------------------|------------|
| §15.247 (i), §1.1307 (b) (1)& §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | AC Line Conducted Emissions | Compliance |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions | Compliance |
| §15.247(a)(1) | 20 dB Emission Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation Test | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band edges | Compliance |

FCC Part 15.247 Page 8 of 64

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------|-----------------------------|---------------------------------|----------------------------|---------------------|-------------------------|
| | Cond | ucted Emissions | Test | | |
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2019-07-11 | 2020-07-11 |
| Rohde & Schwarz | LISN | ENV216 | 3560.6650.12- 101613-Yb | 2019-01-25 | 2020-01-25 |
| Rohde & Schwarz | Transient Limiter | ESH3Z2 | DE25985 | 2019-03-02 | 2020-03-01 |
| Rohde & Schwarz | CE Test software | EMC 32 | V8.53.0 | NCR | NCR |
| Unknown | Conducted Emission Cable | 78652 | UF A210B-1- 0720-504504 | 2018-11-12 | 2019-11-12 |
| | Rad | iated Emission T | est | | |
| A.H. System | Horn Antenna | SAS-200/571 | 135 | 2018-09-01 | 2021-08-31 |
| Rohde & Schwarz | Spectrum Analyzer | FSV40-N | 102259 | 2019-07-22 | 2020-07-21 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-1 | 2017-12-22 | 2020-12-21 |
| COM-POWER | Pre-amplifier | PA-122 | 181919 | 2018-11-12 | 2019-11-12 |
| Sonoma Instrument | Amplifier | 310N | 186238 | 2018-11-12 | 2019-11-12 |
| Rohde & Schwarz | EMI Test Receiver | ESR3 | 102455 | 2019-07-09 | 2020-07-08 |
| UTiFLEX MICRO- C0AX | RF Cable | UFA147A- 2362-100100 | MFR64639 231029-003 | 2018-11-12 | 2019-11-12 |
| Ducommun Technologies | RF Cable | 104PEA | 218124002 | 2018-11-12 | 2019-11-12 |
| Ducommun Technologies | RF Cable | RG-214 | 1 | 2019-05-21 | 2019-11-19 |
| Ducommun Technologies | RF Cable | RG-214 | 2 | 2018-11-12 | 2019-11-12 |
| Ducommun Technologies | Horn Antenna | ARH-4223-02 | 1007726-04 | 2017-12-29 | 2020-12-28 |
| Sinoscite | Band Reject Filter | BSF2402- 2480MN- 0898-001 | 99632 | 2018-11-12 | 2019-11-12 |
| Rohde & Schwarz | Auto test software | EMC 32 | V9.10 | NCR | NCR |

FCC Part 15.247 Page 9 of 64

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------|--------------------------|----------------------|------------------|---------------------|-------------------------|
| | RF | Conducted Tes | t | | |
| Agilent | USB wideband power meter | U2021XA | MY54250003 | 2019-07-10 | 2020-07-09 |
| WEINSCHEL | 3dB Attenuator | 6231 | 666 | Each Time | |
| Rohde & Schwarz | Spectrum Analyzer | FSU26 | 200120 | 2019-03-02 | 2020-03-01 |
| Ducommun Technologies | RF Cable | RG-214 | 3 | Each | Time |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 10 of 64

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

| Frequency | Maximum pov | n Tune-up ver | Calculated Distance | Calculated | Threshold | SAR Test |
|-----------|----------------|------------------|------------------------|------------|-----------|-----------|
| (MHz) | (dBm) | (mW) | (mm) | Value | (1-g SAR) | Exclusion |
| 2480 | 3.5 | 2.24 | 5 | 0.71 | 3.0 | Yes |

Result: No Standalone SAR test is required

FCC Part 15.247 Page 11 of 64

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 0.6dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.


FCC Part 15.247 Page 12 of 64

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

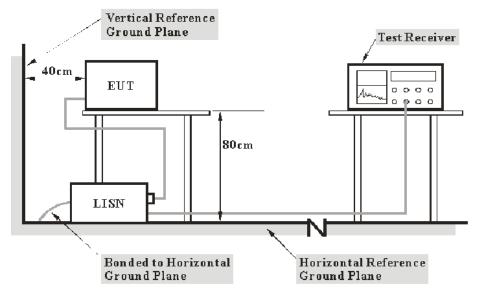

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 13 of 64

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


| Temperature: | 25 °C |
|--------------------|-----------|
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Kiki Geng on 2019-08-28.

EUT operation mode: Transmitting & charging (the worst case is GFSK Mode, middle channel)

FCC Part 15.247 Page 14 of 64


AC 120V/60 Hz, Line

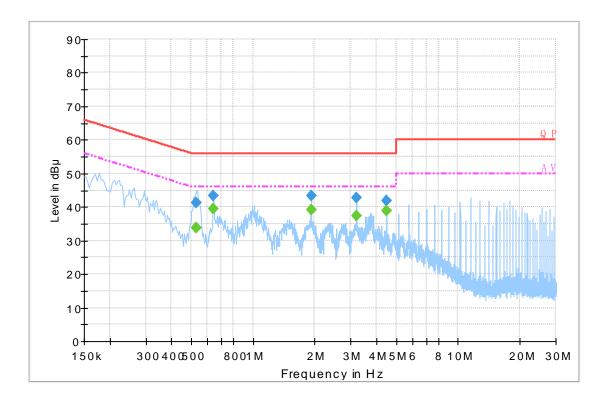

| Frequency (MHz) | Corrected Amplitude (dBµV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|--------------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.529930 | 41.2 | 19.8 | 56.0 | 14.8 | QP |
| 0.529990 | 41.2 | 19.8 | 56.0 | 14.8 | QP |
| 0.640370 | 43.3 | 19.8 | 56.0 | 12.7 | QP |
| 1.921170 | 43.2 | 19.9 | 56.0 | 12.8 | QP |
| 3.201970 | 42.7 | 19.9 | 56.0 | 13.3 | QP |
| 4.482770 | 41.8 | 19.9 | 56.0 | 14.2 | QP |
| 0.529930 | 33.8 | 19.8 | 46.0 | 12.2 | Ave. |
| 0.529990 | 33.7 | 19.8 | 46.0 | 12.3 | Ave. |
| 0.640370 | 39.3 | 19.8 | 46.0 | 6.7 | Ave. |
| 1.921170 | 39.2 | 19.9 | 46.0 | 6.8 | Ave. |
| 3.201970 | 37.4 | 19.9 | 46.0 | 8.6 | Ave. |
| 4.482770 | 38.7 | 19.9 | 46.0 | 7.3 | Ave. |

FCC Part 15.247 Page 15 of 64

AC 120V/60 Hz, Neutral

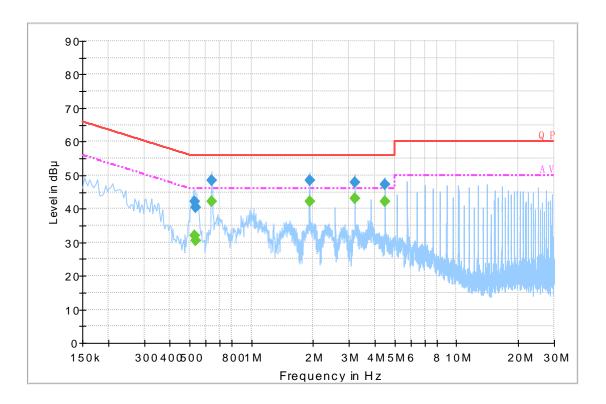

| Frequency (MHz) | Corrected Amplitude (dBµV) | Correction Factor (dB) | Limit (dBµV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.530110 | 42.1 | 19.8 | 56.0 | 13.9 | QP |
| 0.533930 | 40.5 | 19.8 | 56.0 | 15.5 | QP |
| 0.640370 | 48.5 | 19.8 | 56.0 | 7.5 | QP |
| 1.921170 | 48.4 | 19.9 | 56.0 | 7.6 | QP |
| 3.201970 | 47.9 | 19.9 | 56.0 | 8.1 | QP |
| 4.482770 | 47.3 | 19.9 | 56.0 | 8.7 | QP |
| 0.530110 | 31.9 | 19.8 | 46.0 | 14.1 | Ave. |
| 0.533930 | 30.5 | 19.8 | 46.0 | 15.5 | Ave. |
| 0.640370 | 42.2 | 19.8 | 46.0 | 3.8 | Ave. |
| 1.921170 | 42.3 | 19.9 | 46.0 | 3.7 | Ave. |
| 3.201970 | 42.9 | 19.9 | 46.0 | 3.1 | Ave. |
| 4.482770 | 42.2 | 19.9 | 46.0 | 3.8 | Ave. |

Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 16 of 64


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

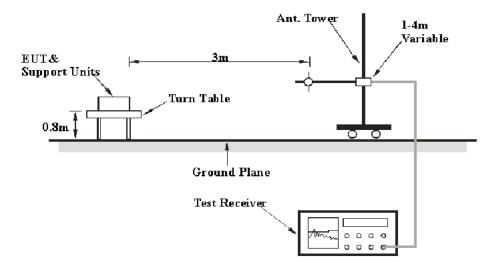

Above 1GHz:

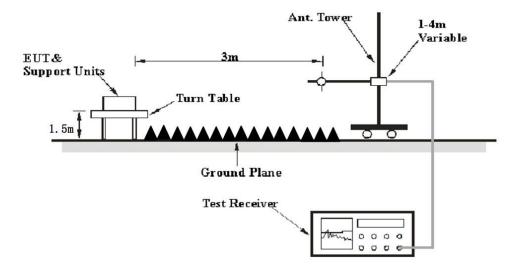

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

FCC Part 15.247 Page 17 of 64

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | PK |
| Above I GHZ | 1 MHz | 10 Hz | / | Average |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C</u>, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \le L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

FCC Part 15.247 Page 18 of 64

Test Data


Environmental Conditions

| Temperature: | 25 ℃ | |
|--------------------|-----------|--|
| Relative Humidity: | 56 % | |
| ATM Pressure: | 101.0 kPa | |

The testing was performed by Charlie Zha on 2019-08-28 and Curry Xiang on 2019-09-05.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK mode, 8DPSK mode, the worst case is GFSK Mode)

30 MHz~1 GHz: (the worst case is GFSK Mode, High channel)

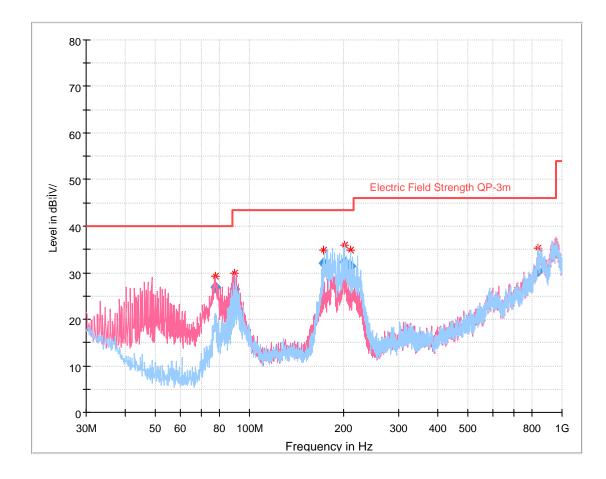

FCC Part 15.247 Page 19 of 64

| Frequency (MHz) | Corrected Amplitude (dBµV/m) | Antenna height (cm) | Antenna Polarity | Turntable position (degree) | Correction Factor (dB/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|------------------------------------|---------------------------|---------------------|-----------------------------|--------------------------------|-------------------|-------------|
| 77.466125 | 26.85 | 116.0 | V | 33.0 | -20.1 | 40.00 | 13.15 |
| 89.310000 | 26.35 | 125.0 | V | 103.0 | -19.1 | 43.50 | 17.15 |
| 173.043250 | 32.15 | 231.0 | Н | 264.0 | -15.0 | 43.50 | 11.35 |
| 201.245000 | 32.25 | 148.0 | Н | 45.0 | -13.8 | 43.50 | 11.25 |
| 210.040000 | 31.50 | 143.0 | Н | 55.0 | -13.9 | 43.50 | 12.00 |
| 837.777625 | 30.29 | 329.0 | Н | 0.0 | 5.7 | 46.00 | 15.71 |

1 GHz - 25 GHz:

| _ | Re | eceiver | | Rx An | tenna | Corrected | Corrected | | |
|--------------------|----------------|------------|---------------------|------------|---------|---------------|-----------------------|----|----------------|
| Frequency (MHz) | Reading (dBµV) | PK/QP/Ave. | Turntable Degree | Height (m) | | Factor (dB/m) | Amplitude (dBµV/m) | | Margin (dB) |
| | | | Low Ch | annel (2 | 2402 M | Hz) | | | |
| 2389.25 | 28.03 | PK | 244 | 2.3 | Н | 31.87 | 59.90 | 74 | 14.10 |
| 2389.25 | 13.97 | Ave. | 244 | 2.3 | Н | 31.87 | 45.84 | 54 | 8.16 |
| 2486.73 | 28.10 | PK | 239 | 2.3 | Н | 32.13 | 60.23 | 74 | 13.77 |
| 2486.73 | 14.16 | Ave. | 239 | 2.3 | Н | 32.13 | 46.29 | 54 | 7.71 |
| 4804.00 | 46.06 | PK | 127 | 1.5 | Н | 6.28 | 52.34 | 74 | 21.66 |
| 4804.00 | 34.48 | Ave. | 127 | 1.5 | Н | 6.28 | 40.76 | 54 | 13.24 |
| | | | Middle C | hannel | (2441 N | MHz) | | | |
| 4882.00 | 44.97 | PK | 224 | 1.8 | Н | 6.76 | 51.73 | 74 | 22.27 |
| 4882.00 | 33.49 | Ave. | 224 | 1.8 | Н | 6.76 | 40.25 | 54 | 13.75 |
| | | | High Ch | annel (| 2480 M | Hz) | | | |
| 2316.08 | 28.09 | PK | 330 | 2.0 | Н | 31.64 | 59.73 | 74 | 14.27 |
| 2316.08 | 13.64 | Ave. | 330 | 2.0 | Н | 31.64 | 45.28 | 54 | 8.72 |
| 2492.23 | 28.12 | PK | 91 | 1.3 | Н | 32.13 | 60.25 | 74 | 13.75 |
| 2492.23 | 13.73 | Ave. | 91 | 1.3 | Н | 32.13 | 45.86 | 54 | 8.14 |
| 4960.00 | 45.93 | PK | 122 | 2.2 | Н | 6.80 | 52.73 | 74 | 21.27 |
| 4960.00 | 35.52 | Ave. | 122 | 2.2 | Н | 6.80 | 42.32 | 54 | 11.68 |

Note:


 $\label{eq:Corrected} \begin{aligned} & Corrected\ Factor = Antenna\ factor\ (RX) + Cable\ Loss - Amplifier\ Factor \\ & Corrected\ Amplitude = Corrected\ Factor + Reading \end{aligned}$

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded. And for the pre-scan is performed with the 2400-2483.5MHz band filter.

FCC Part 15.247 Page 20 of 64

Pre-scan with High Channel Peak Horizontal

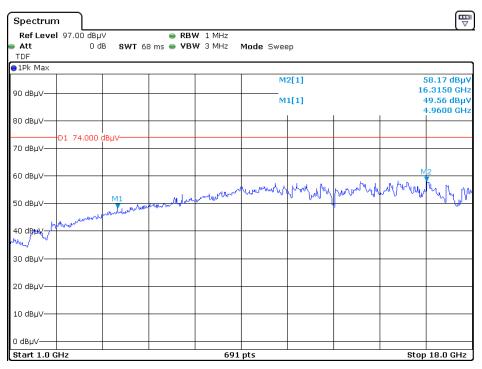


Date: 5.SEP.2019 13:35:01

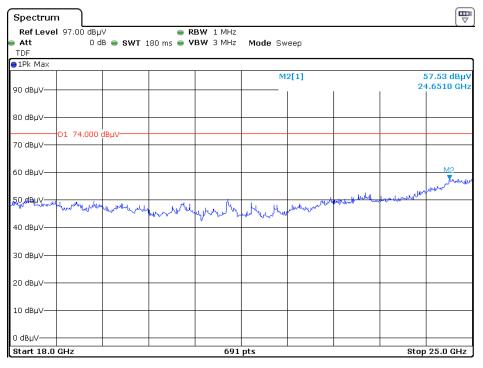


Date: 5.SEP.2019 14:25:55

FCC Part 15.247 Page 21 of 64

Vertical

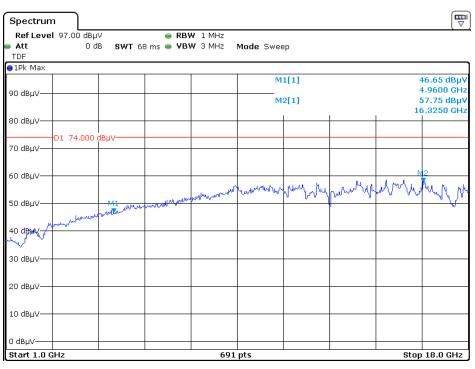


Date: 5.SEP.2019 13:47:39

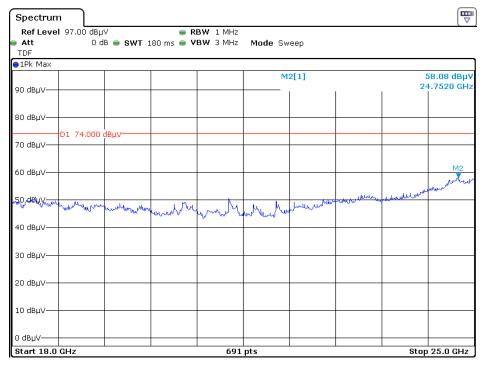


Date: 5.SEP.2019 14:38:10

FCC Part 15.247 Page 22 of 64

Pre-scan for Average Horizontal

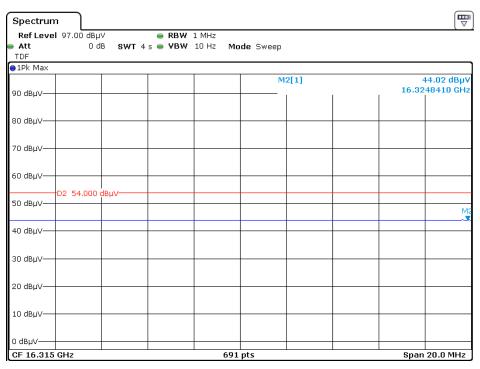


Date: 5.SEP.2019 13:41:29

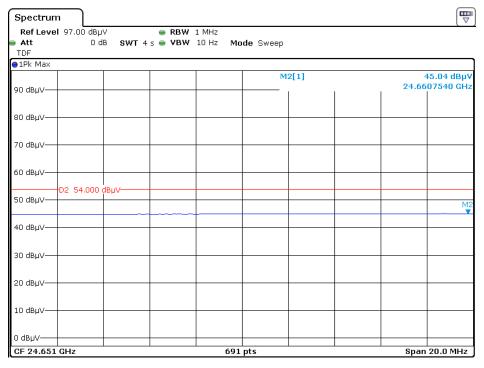


Date: 5.SEP.2019 14:32:26

FCC Part 15.247 Page 23 of 64

Vertical

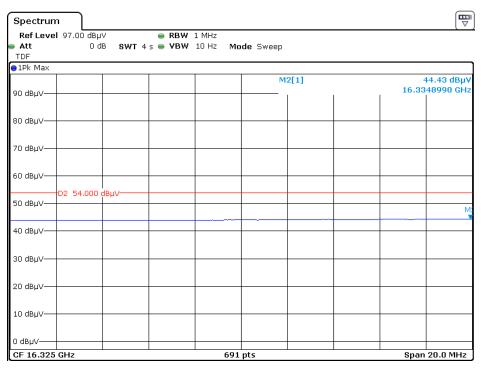

Date: 5.SEP.2019 13:54:06

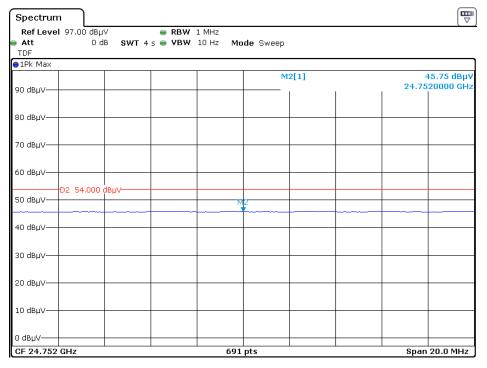

Date: 5.SEP.2019 14:44:44

FCC Part 15.247 Page 24 of 64

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

Test Data

Environmental Conditions

| Temperature: | 25 ℃ |
|--------------------|-----------|
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Geogre Zhong on 2019-08-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


FCC Part 15.247 Page 25 of 64

| Channel | Channel Separation (MHz) | 20 dBc BW (MHz) | Two-thirds of the 20 dB bandwidth (MHz) | Channel Separation Limit | Result | | | | |
|---------|--------------------------------|--------------------|--|-------------------------------------|------------|--|--|--|--|
| | BDR(GFSK) | | | | | | | | |
| Low | 1.000 | 0.890 | 0.593 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| Middle | 1.000 | 0.888 | 0.592 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| High | 1.003 | 0.890 | 0.593 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| | EDR(π/4-DQPSK) | | | | | | | | |
| Low | 1.006 | 1.248 | 0.832 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| Middle | 0.994 | 1.250 | 0.833 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| High | 1.003 | 1.248 | 0.832 | > two-thirds of the 20 dB bandwidth | Compliance | | | | |
| | | ED | R MODE(8 DPSK) | | | | | | |
| Low | 1.000 | 1.248 | 0.832 | >Two-thrids of the 20 dB bandwidth | Compliance | | | | |
| Middle | 1.006 | 1.220 | 0.813 | >Two-thrids of the 20 dB bandwidth | Compliance | | | | |
| High | 1.003 | 1.229 | 0.819 | >Two-thrids of the 20 dB bandwidth | Compliance | | | | |

Please refer to the following plots.


FCC Part 15.247 Page 26 of 64

BDR (GFSK): Low Channel

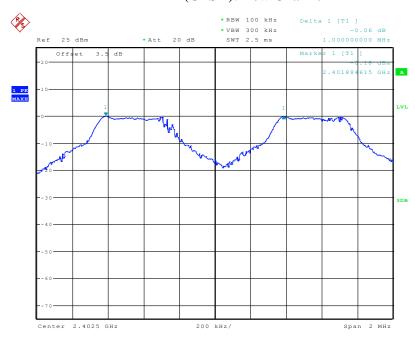

Date: 28.AUG.2019 21:09:32


BDR (GFSK): Middle Channel

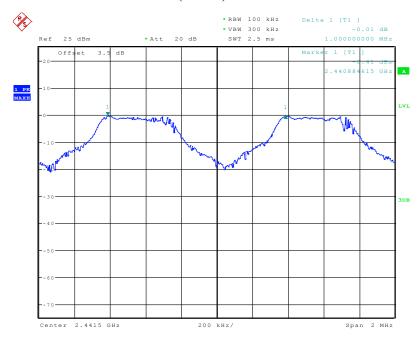

Date: 28.AUG.2019 21:14:10


FCC Part 15.247 Page 27 of 64

BDR (GFSK): High Channel

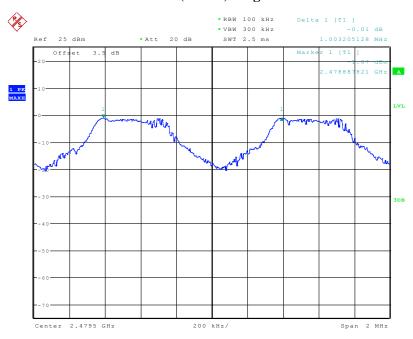

Date: 28.AUG.2019 21:17:57


EDR ($\pi/4$ -DQPSK): Low Channel

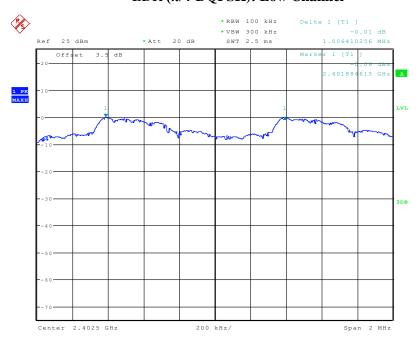

Date: 28.AUG.2019 21:49:00


FCC Part 15.247 Page 28 of 64

EDR ($\pi/4$ -DQPSK): Middle Channel

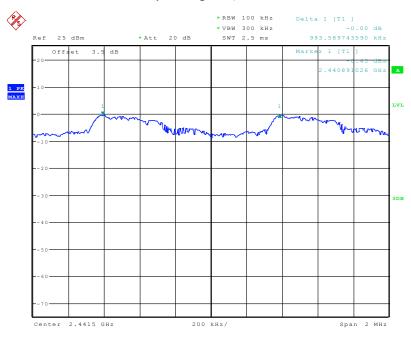

Date: 28.AUG.2019 21:41:41


EDR ($\pi/4$ -DQPSK): High Channel

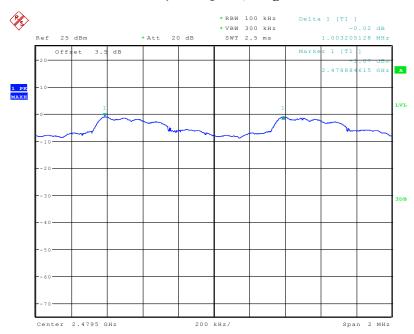

Date: 28.AUG.2019 21:35:09


FCC Part 15.247 Page 29 of 64

EDR (8DPSK): Low Channel

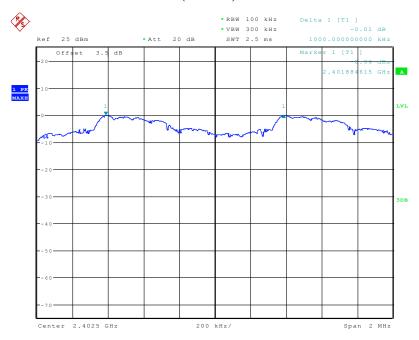

Date: 28.AUG.2019 21:52:44


EDR (8DPSK): Middle Channel

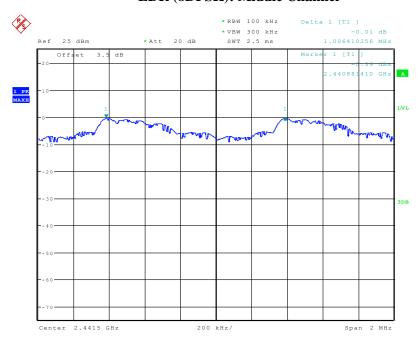

Date: 28.AUG.2019 22:01:07

FCC Part 15.247 Page 30 of 64

EDR (8DPSK): High Channel

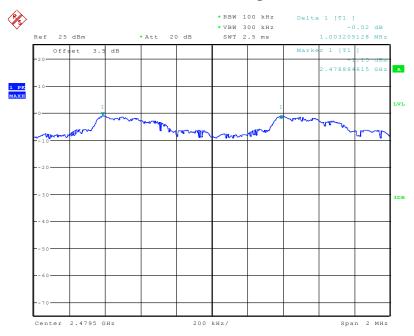

Date: 28.AUG.2019 22:08:53

FCC Part 15.247 Page 31 of 64

FCC $\S1.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

| Temperature: | 25 ℃ | |
|--------------------|-----------|--|
| Relative Humidity: | 55 % | |
| ATM Pressure: | 101.0 kPa | |

The testing was performed by Geogre Zhong on 2019-08-28.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

| Mode Channel | | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) | |
|--------------------|--------|--------------------|--------------------------------------|--|
| | Low | 2402 | 0.890 | |
| BDR (GFSK) | Middle | 2441 | 0.888 | |
| (31511) | High | 2480 | 0.890 | |
| | Low | 2402 | 1.248 | |
| EDR (π/4-DQPSK) | Middle | 2441 | 1.250 | |
| (2 (2 222) | High | 2480 | 1.248 | |
| | Low | 2402 | 1.248 | |
| EDR (8DPSK) | Middle | 2441 | 1.220 | |
| (ODI SII) | High | 2480 | 1.229 | |


FCC Part 15.247 Page 32 of 64

20 dB Emission Bandwidth, BDR (GFSK): Low Channel

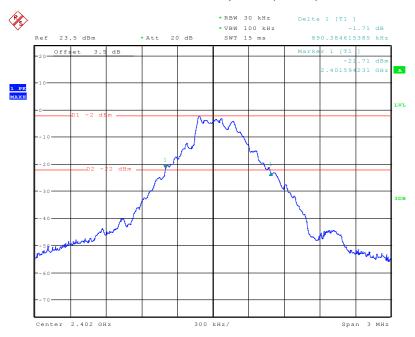

Date: 28.AUG.2019 19:41:46


20 dB Emission Bandwidth, BDR (GFSK): Middle Channel

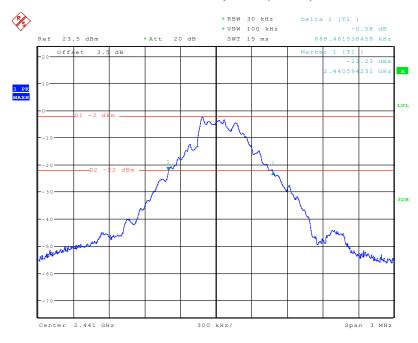

Date: 28.AUG.2019 19:42:44


FCC Part 15.247 Page 33 of 64

20 dB Emission Bandwidth, BDR (GFSK): High Channel

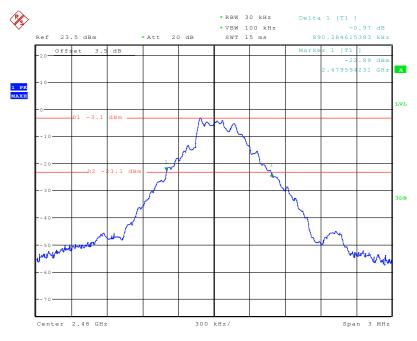

Date: 28.AUG.2019 19:43:31


20 dB Emission Bandwidth, EDR ($\pi/4$ -DQPSK): Low Channel

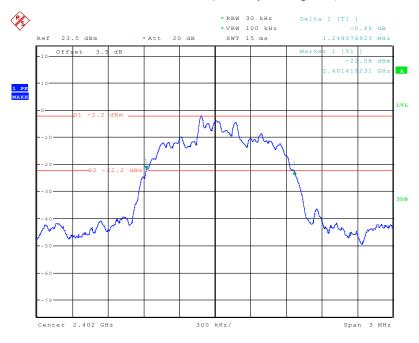

Date: 28.AUG.2019 19:46:39


FCC Part 15.247 Page 34 of 64

20 dB Emission Bandwidth, EDR ($\pi/4$ -DQPSK): Middle Channel

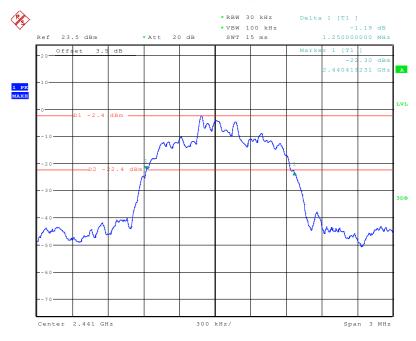

Date: 28.AUG.2019 19:45:37


20 dB Emission Bandwidth, EDR ($\pi/4$ -DQPSK): High Channel

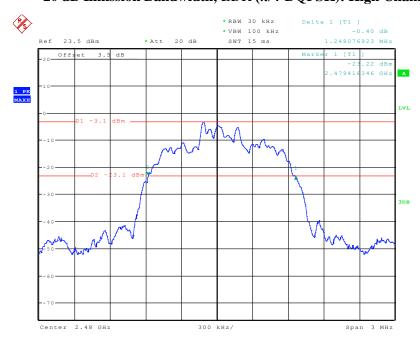

Date: 28.AUG.2019 19:44:27


FCC Part 15.247 Page 35 of 64

20 dB Emission Bandwidth, EDR (8DPSK): Low Channel

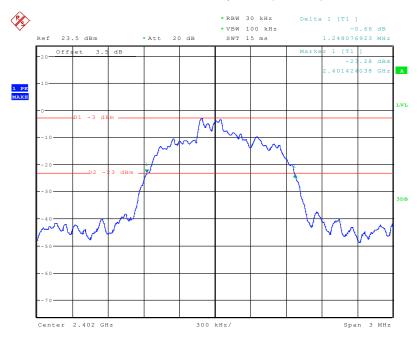

Date: 28.AUG.2019 19:47:57


20 dB Emission Bandwidth, EDR (8DPSK): Middle Channel

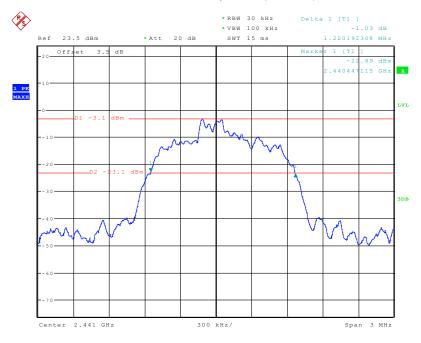

Date: 28.AUG.2019 19:48:46

FCC Part 15.247 Page 36 of 64

20 dB Emission Bandwidth, EDR (8DPSK): High Channel

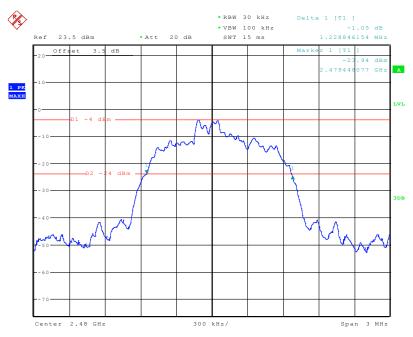

Date: 28.AUG.2019 19:50:11

FCC Part 15.247 Page 37 of 64

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

| Temperature: | 25 ℃ |
|--------------------|-----------|
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Geogre Zhong on 2019-08-28.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

| Mode | Frequency Range (MHz) | Number of Hopping Channel (CH) | Limit (CH) |
|--------------------|--------------------------|--------------------------------------|---------------|
| BDR (GFSK) | 2400-2483.5 | 79 | ≥15 |
| EDR (π/4-DQPSK) | 2400-2483.5 | 79 | ≥15 |
| EDR (8-DPSK) | 2400-2483.5 | 79 | ≥15 |


FCC Part 15.247 Page 38 of 64

BDR (GFSK): Number of Hopping Channels

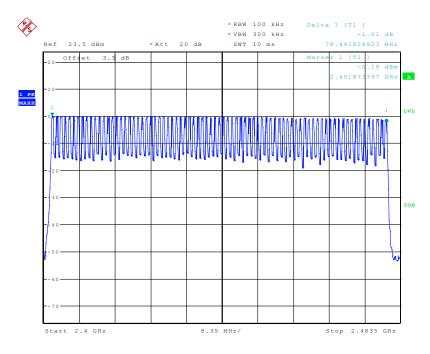

Date: 28.AUG.2019 20:20:24


EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

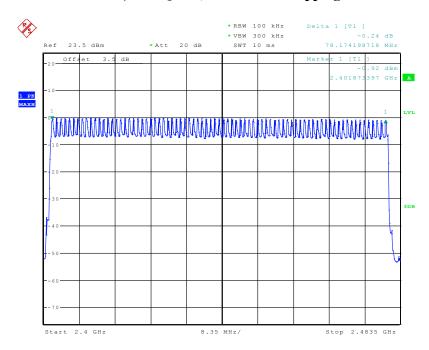

Date: 28.AUG.2019 20:12:35

FCC Part 15.247 Page 39 of 64

EDR (8DPSK): Number of Hopping Channels

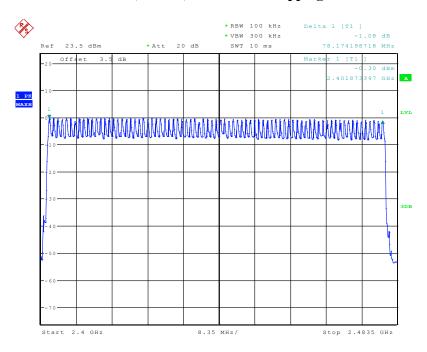

Date: 28.AUG.2019 20:00:00

FCC Part 15.247 Page 40 of 64

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

- 1. The EUT was worked in channel hopping.
- 2. Set the RBW to: 1MHz.
- 3. Set the VBW \geq 3×RBW.
- 4. Set the span to 0Hz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Recorded the time of single pulses

Test Data

Environmental Conditions

| Temperature: | 25 ℃ |
|--------------------|-----------|
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Geogre Zhong on 2019-08-28.

EUT operation mode: Transmitting

FCC Part 15.247 Page 41 of 64


Test Result: Compliance. Please refer to following table and plots

| Mode | | Channel | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Result | |
|------------------------|-------|---|--------------------|-------------------|-------------|--------|--|
| | | Low | 0.408 | 0.131 | 0.4 | Pass | |
| | DH 1 | Middle | 0.408 | 0.131 | 0.4 | Pass | |
| | חם ו | High | 0.408 | 0.131 | 0.4 | Pass | |
| | | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s | | | | | |
| | | Low | 1.679 | 0.269 | 0.4 | Pass | |
| BDR | DH 2 | Middle | 1.679 | 0.269 | 0.4 | Pass | |
| (GFSK) | DH 3 | High | 1.679 | 0.269 | 0.4 | Pass | |
| | | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s | | | | | |
| | | Low | 2.928 | 0.312 | 0.4 | Pass | |
| | DH 5 | Middle | 2.928 | 0.312 | 0.4 | Pass | |
| | טח ט | High | 2.928 | 0.312 | 0.4 | Pass | |
| | | Note: | DH5:Dwell time = F | Pulse time*(1600/ | 6/79)*31.6s | | |
| | | Low | 0.418 | 0.134 | 0.4 | Pass | |
| | 2DH 1 | Middle | 0.418 | 0.134 | 0.4 | Pass | |
| | 2DH 1 | High | 0.418 | 0.134 | 0.4 | Pass | |
| | | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s | | | | | |
| | 2DH 3 | Low | 1.684 | 0.269 | 0.4 | Pass | |
| EDR | | Middle | 1.684 | 0.269 | 0.4 | Pass | |
| $(\pi/4\text{-DQPSK})$ | | High | 1.684 | 0.269 | 0.4 | Pass | |
| | | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s | | | | | |
| | 2DH 5 | Low | 2.928 | 0.312 | 0.4 | Pass | |
| | | Middle | 2.928 | 0.312 | 0.4 | Pass | |
| | | High | 2.928 | 0.312 | 0.4 | Pass | |
| | | Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s | | | | | |
| | 3DH 1 | Low | 0.421 | 0.135 | 0.4 | Pass | |
| | | Middle | 0.421 | 0.135 | 0.4 | Pass | |
| EDR (8DPSK) | | High | 0.421 | 0.135 | 0.4 | Pass | |
| | | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s | | | | | |
| | 3DH 3 | Low | 1.684 | 0.269 | 0.4 | Pass | |
| | | Middle | 1.684 | 0.269 | 0.4 | Pass | |
| | | High | 1.684 | 0.269 | 0.4 | Pass | |
| | | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s | | | | | |
| | 3DH 5 | Low | 2.928 | 0.312 | 0.4 | Pass | |
| | | Middle | 2.928 | 0.312 | 0.4 | Pass | |
| | | High | 2.928 | 0.312 | 0.4 | Pass | |
| | | Note: | DH5:Dwell time = F | Pulse time*(1600/ | 6/79)*31.6s | | |

FCC Part 15.247 Page 42 of 64


BDR (GFSK):

Pulse time, Low Channel, DH1

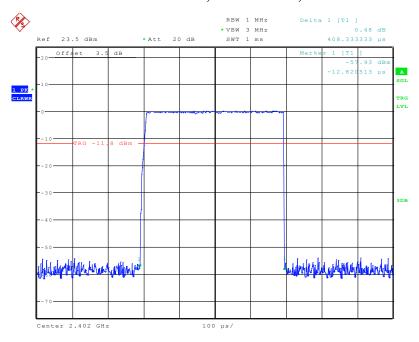

Date: 28.AUG.2019 20:55:27


Pulse time, Middle Channel, DH1

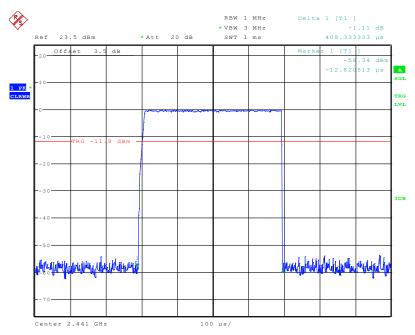

Date: 28.AUG.2019 20:55:43


FCC Part 15.247 Page 43 of 64

Pulse time, High Channel, DH1

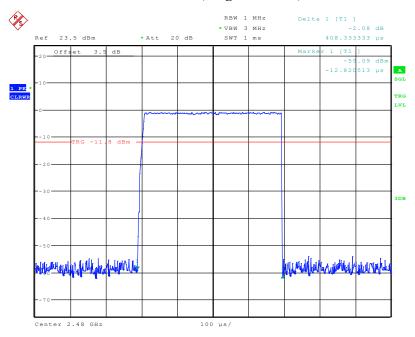

Date: 28.AUG.2019 20:55:57


Pulse time, Low Channel, DH3

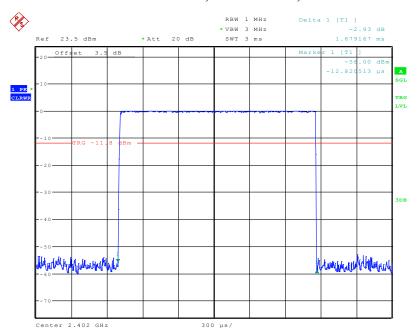

Date: 28.AUG.2019 20:58:46


FCC Part 15.247 Page 44 of 64

Pulse time, Middle Channel, DH3

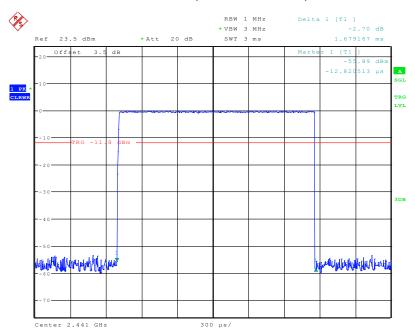

Date: 28.AUG.2019 20:58:36


Pulse time, High Channel, DH3

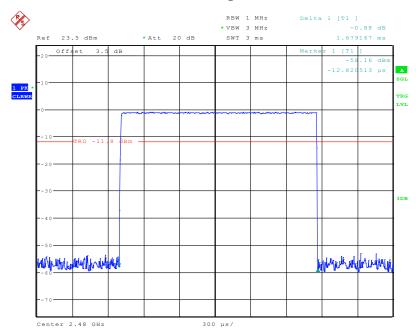

Date: 28.AUG.2019 20:58:25


FCC Part 15.247 Page 45 of 64

Pulse time, Low Channel, DH5

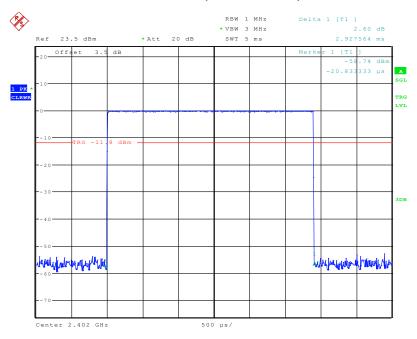

Date: 28.AUG.2019 21:02:20


Pulse time, Middle Channel, DH5

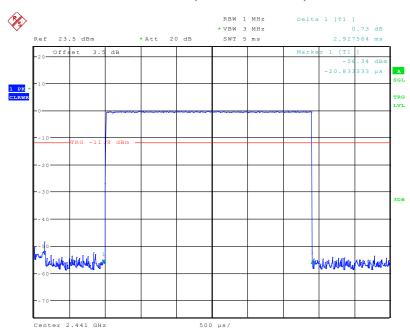

Date: 28.AUG.2019 21:02:36

FCC Part 15.247 Page 46 of 64


Pulse time, High Channel, DH5

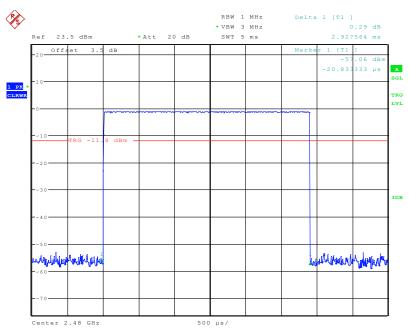

Date: 28.AUG.2019 21:02:49

EDR ($\pi/4$ -DQPSK):


Pulse time, Low Channel, 2DH1

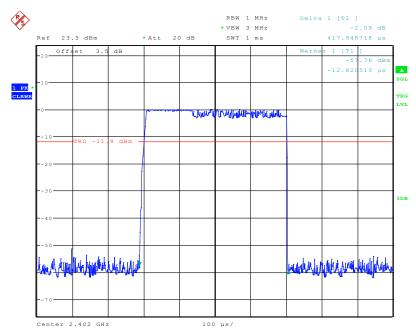

Date: 28.AUG.2019 20:56:53


FCC Part 15.247 Page 47 of 64

Pulse time, Middle Channel, 2DH1

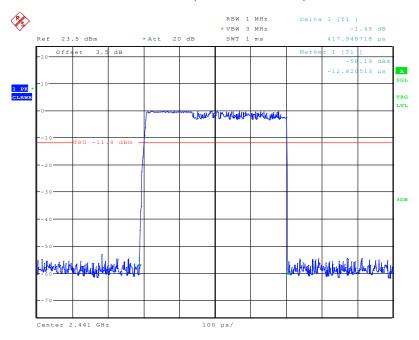

Date: 28.AUG.2019 20:56:32


Pulse time, High Channel, 2DH1

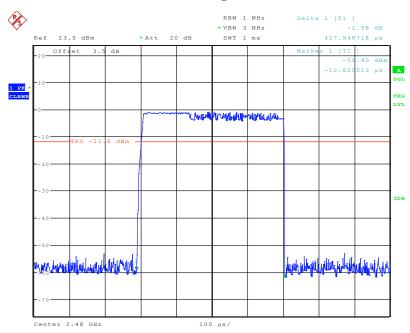

Date: 28.AUG.2019 20:56:19


FCC Part 15.247 Page 48 of 64

Pulse time, Low Channel, 2DH3

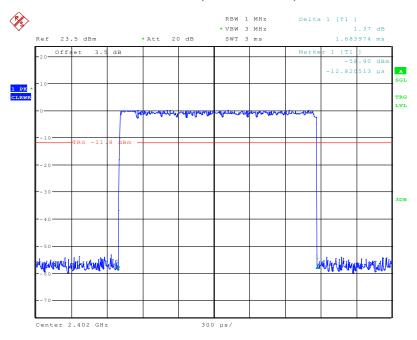

Date: 28.AUG.2019 20:59:37


Pulse time, Middle Channel, 2DH3

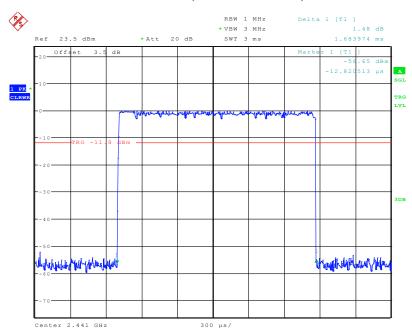

Date: 28.AUG.2019 20:59:47


FCC Part 15.247 Page 49 of 64

Pulse time, High Channel, 2DH3

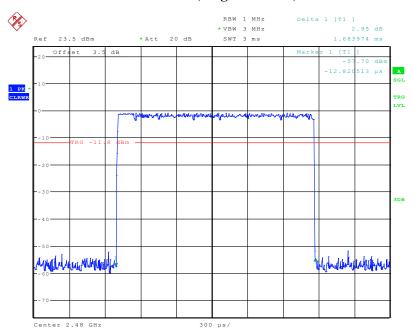

Date: 28.AUG.2019 20:59:56


Pulse time, Low Channel, 2DH5

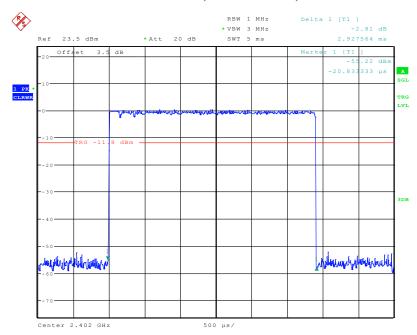

Date: 28.AUG.2019 21:03:24


FCC Part 15.247 Page 50 of 64

Pulse time, Middle Channel, 2DH5

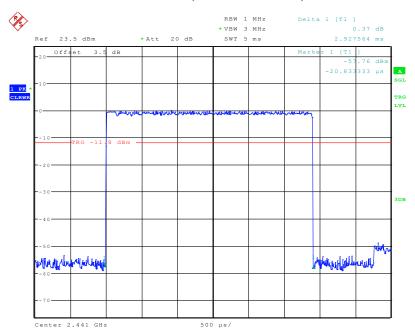

Date: 28.AUG.2019 21:03:14


Pulse time, High Channel, 2DH5

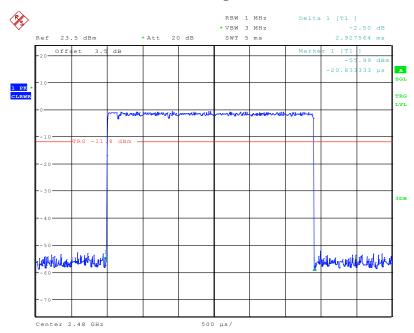

Date: 28.AUG.2019 21:03:03


FCC Part 15.247 Page 51 of 64

EDR (8DPSK): Pulse time, Low Channel, 3DH1

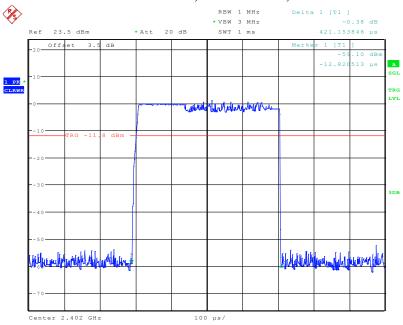

Date: 28.AUG.2019 20:57:24


Pulse time, Middle Channel, 3DH1

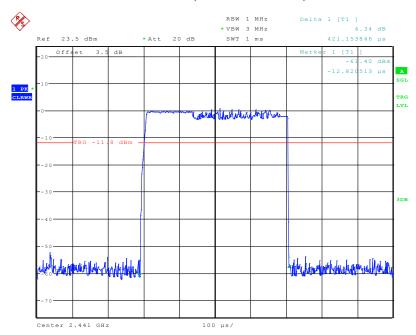

Date: 28.AUG.2019 20:57:34


FCC Part 15.247 Page 52 of 64

Pulse time, High Channel, 3DH1

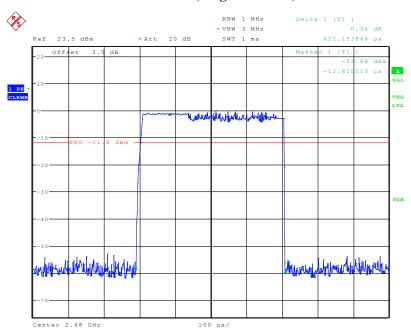

Date: 28.AUG.2019 20:57:44


Pulse time, Low Channel, 3DH3

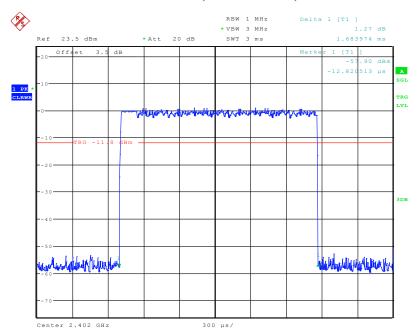

Date: 28.AUG.2019 21:01:09


FCC Part 15.247 Page 53 of 64

Pulse time, Middle Channel, 3DH3

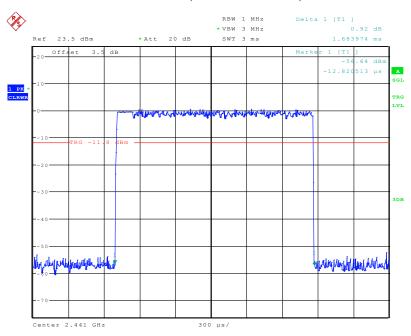

Date: 28.AUG.2019 21:00:35


Plse time, High Channel, 3DH3

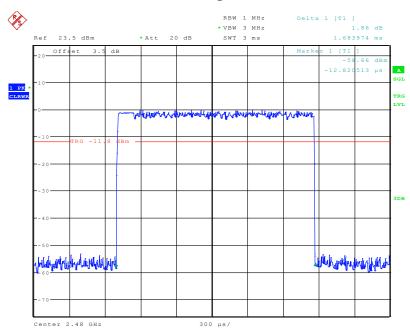

Date: 28.AUG.2019 21:00:21


FCC Part 15.247 Page 54 of 64

Pulse time, Low Channel, 3DH5

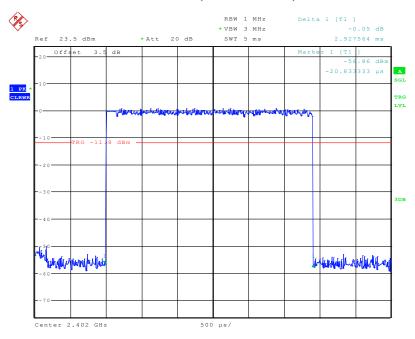

Date: 28.AUG.2019 21:03:53


Pulse time, Middle Channel, 3DH5

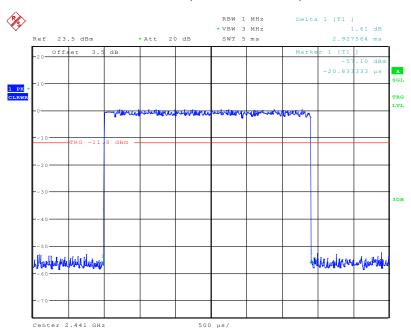

Date: 28.AUG.2019 21:04:12

FCC Part 15.247 Page 55 of 64

Pulse time, High Channel, 3DH5

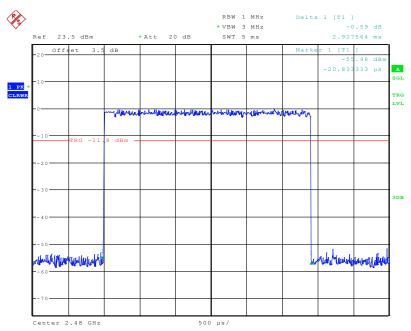

Date: 28.AUG.2019 21:04:25

FCC Part 15.247 Page 56 of 64

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

Test Data

Environmental Conditions

| Temperature: | 25 ℃ |
|--------------------|-----------|
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Geogre Zhong on 2019-08-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

| Mode | Channel | Frequency (MHz) | Peak Output Power | | Limit |
|--------------------|---------|-----------------|-------------------|------|-------|
| | | | (dBm) | (mW) | (mW) |
| BDR (GFSK) | Low | 2402 | 1.33 | 1.36 | 125 |
| | Middle | 2441 | 1.43 | 1.39 | 125 |
| | High | 2480 | 0.42 | 1.10 | 125 |
| EDR (π/4-DQPSK) | Low | 2402 | 2.28 | 1.69 | 125 |
| | Middle | 2441 | 2.29 | 1.69 | 125 |
| | High | 2480 | 1.21 | 1.32 | 125 |
| EDR (8DPSK) | Low | 2402 | 3.07 | 2.03 | 125 |
| | Middle | 2441 | 3.03 | 2.01 | 125 |
| | High | 2480 | 1.85 | 1.53 | 125 |

FCC Part 15.247 Page 57 of 64

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

| Temperature: | 25 ℃ |
|--------------------|-----------|
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Geogre Zhong on 2019-08-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


FCC Part 15.247 Page 58 of 64

BDR (GFSK): Band Edge-Left Side Hopping

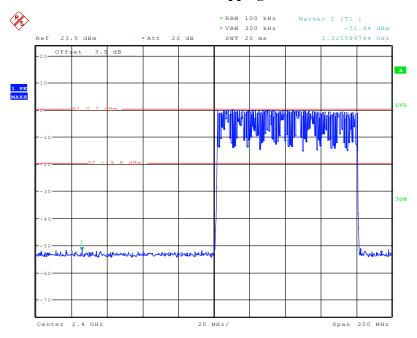

Date: 28.AUG.2019 20:26:06


Single

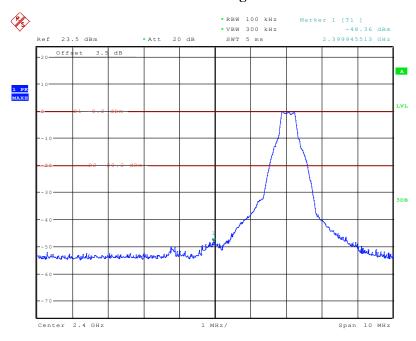

Date: 28.AUG.2019 20:50:44


FCC Part 15.247 Page 59 of 64

BDR (GFSK): Band Edge-Right Side Hopping

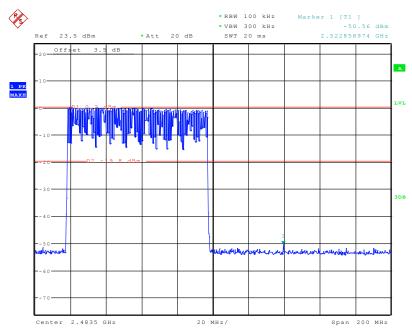

Date: 28.AUG.2019 20:28:25


Single

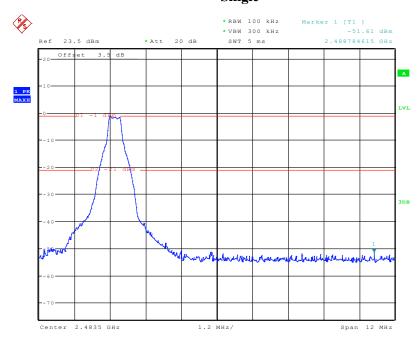

Date: 28.AUG.2019 20:48:44


FCC Part 15.247 Page 60 of 64

EDR (π /4-DQPSK): Band Edge-Left Side Hopping

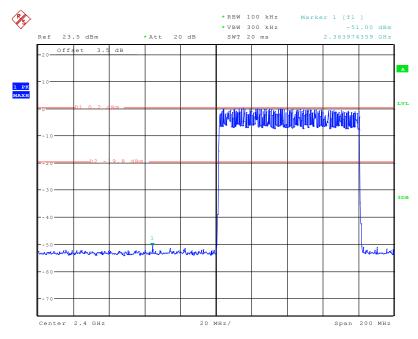

Date: 28.AUG.2019 20:35:55


Single

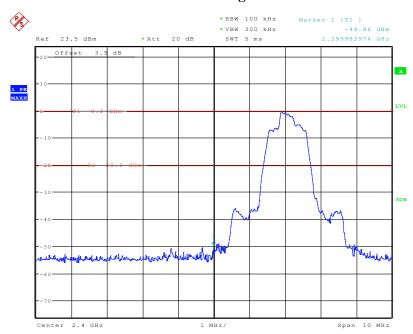

Date: 28.AUG.2019 20:51:24


FCC Part 15.247 Page 61 of 64

EDR (π /4-DQPSK): Band Edge-Right Side Hopping

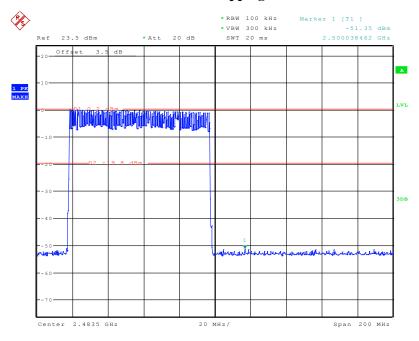

Date: 28.AUG.2019 20:32:59


Single

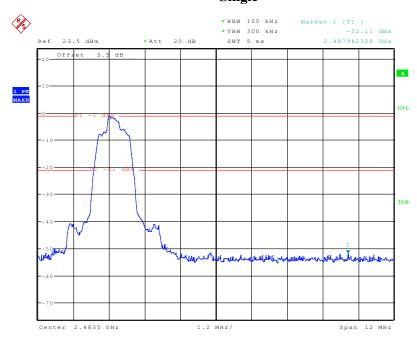

Date: 28.AUG.2019 20:46:53


FCC Part 15.247 Page 62 of 64

EDR (8DPSK): Band Edge-Left Side Hopping

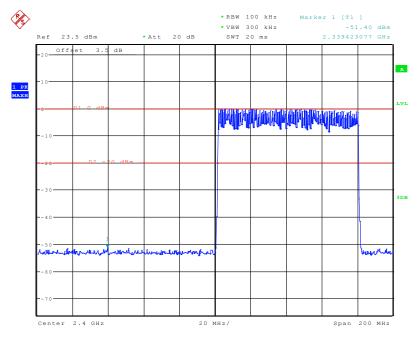

Date: 28.AUG.2019 20:39:48


Single

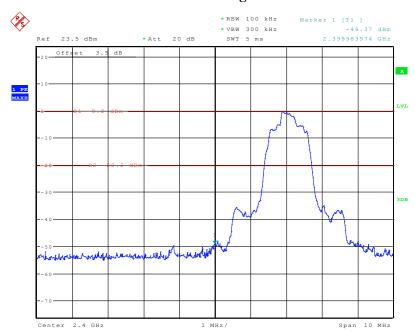

Date: 28.AUG.2019 20:52:57


FCC Part 15.247 Page 63 of 64

EDR (8DPSK): Band Edge-Right Side Hopping

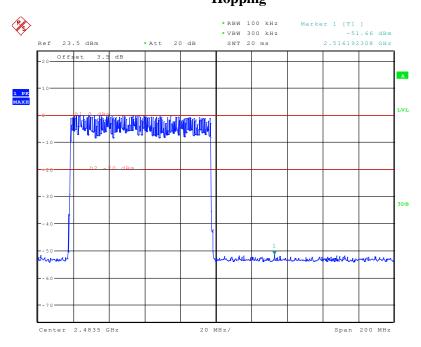

Date: 28.AUG.2019 20:42:11

Single

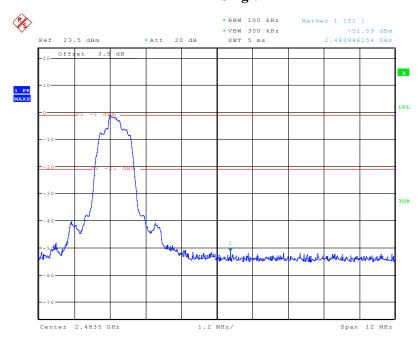

Date: 28.AUG.2019 20:44:52

***** END OF REPORT *****

FCC Part 15.247 Page 64 of 64