

Test of: Athos Hub

To: FCC 15.247 & IC RSS-247 (FHSS)

Report No.: ATHO11-U4 Rev A

COMPLETE TEST REPORT



COMPLETE TEST REPORT



Test of: Athos Hub

to

To: FCC 15.247 & IC RSS-247 (FHSS)

Test Report Serial No.: ATHO11-U4 Rev A

This report supersedes: NONE

Applicant: Athos Inc.
201 Arch Street
Redwood City, CA 94062
USA

Product Function Hub for downloading Athos Cores

Issue Date: 6th December 2018

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 3 of 74

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	5
1.1. TESTING ACCREDITATION.....	5
1.2. RECOGNITION	6
1.3. PRODUCT CERTIFICATION	7
2. DOCUMENT HISTORY	8
3. TEST RESULT CERTIFICATE.....	9
4. REFERENCES AND MEASUREMENT UNCERTAINTY	10
4.1. Normative References	10
4.2. Test and Uncertainty Procedure	11
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	12
5.1. Technical Details	12
5.2. Scope Of Test Program	13
5.3. Equipment Model(s) and Serial Number(s)	14
5.4. Antenna Details	14
5.5. Cabling and I/O Ports	14
5.6. Test Configurations.....	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Conducted	16
7.2. Radiated Emissions - 3m Chamber.....	18
8. MEASUREMENT AND PRESENTATION OF TEST DATA	21
9. TEST RESULTS	22
20 dB & 99% Bandwidth	22
9.1. Frequency Hopping Tests	24
9.1.1. <i>Number of Hopping Channels</i>	25
9.1.2. <i>Channel Separation</i>	26
9.1.3. <i>Dwell Time & Channel Occupancy</i>	27
9.2. Output Power	28
9.3. Emissions	31
9.3.1. <i>Conducted Emissions</i>	31
9.3.1.1. Conducted Unwanted Spurious Emissions	32
9.3.1.2. Conducted Band-Edge Emissions	33
9.3.2. <i>TX Spurious & Restricted Band Emissions</i>	37
9.3.2.1. TX Spurious & Restricted Band Emissions	40
9.3.2.2. Restricted Edge & Band-Edge Emissions.....	44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 4 of 74

A. APPENDIX - GRAPHICAL IMAGES	49
A.1. 20 dB & 99% Bandwidth	50
A.2. Frequency Hopping Tests	53
A.2.1. Number of Hopping Channels	53
A.2.2. Channel Separation	56
A.2.3. Dwell Time	57
A.2.4. Channel Occupancy	58
A.3. Emissions	59
A.3.1. Conducted Emissions	59
A.3.1.1. Conducted Unwanted Spurious Emissions.....	59
A.3.1.2. Conducted Band-Edge Emissions	62
A.3.2. Radiated Emissions	66
A.3.2.1. TX Spurious & Restricted Band Emissions.....	66
A.3.2.2. Restricted Band Edge Emissions	70

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 8 of 74

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	12 th November 2018	
Rev A	6 th December 2018	Initial Release

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 9 of 74

3. TEST RESULT CERTIFICATE

Manufacturer: Athos Inc. 201 Arch Street Redwood City, CA 94062 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: H101	Telephone: +1 925 462 0304 Fax: +1 925 462 0306
Type of Equipment: Hub for downloading Athos Cores	
S/N's: 042	
Test Date(s): 30 th – 31 st Oct. 2018	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 15.247 & IC RSS-247 (FHSS)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	A2LA	August 2017	R105 - Requirement's When Making Reference to A2LA Accreditation Status
II	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
III	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IV	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	FCC 47 CFR Part 15, Subpart B	2014	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
VII	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	FCC Public Notice DA 00-705	March 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
IX	ICES-003	Issue 6 Jan 2016; Updated April 2017	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
X	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XIII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 12 of 74

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Athos Hub H101 to FCC 15.247 & IC RSS-247 (FHSS).
Applicant:	Athos Inc. 201 Arch Street, Redwood City, California 94062 USA
Manufacturer:	Athos Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ATHO11-U4
Date EUT received:	30th Oct. 2018
Standard(s) applied:	FCC 15.247 & IC RSS-247 (FHSS)
Dates of test (from - to):	30 th to 31 st October 2018
No of Units Tested:	1
Product Family Name:	Athos Hub
Model(s):	H101
Location for use:	Indoors
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	Bluetooth - FHSS
EUT Modes of Operation:	2400 - 2483.5 MHz: DH1
Declared Nominal Output Power:	4 dBm
Transmit/Receive Operation:	Half Duplex
Rated Input Voltage and Current:	100 VAC to 240 VAC, 50-60 Hz, 0.5A (max)
Operating Temperature Range:	10C to 40C
ITU Emission Designator:	1M00F1DXN
Equipment Dimensions:	14 x 7 x 3 inches
Weight:	3 lbs
Hardware Rev:	4.0
Software Rev:	042

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 13 of 74

5.2. Scope Of Test Program

Athos Inc. H101

The scope of the test program was to test the Athos Hub H101 Bluetooth Radio in FHSS mode in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

FCC 15.247 & IC RSS-247 (FHSS)

Radio Frequency Devices; Subpart C – Intentional Radiators

Industry Canada RSS-247

Frequency Hopping System (FHSS)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 14 of 74

5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manufacturer	Model	Serial no.	Delivery Date
EUT	2.4G BT/BLE	Athos Inc.	H101	042	30th Oct. 2018
Support	Apple Laptop	Apple	MacBook Pro A1398	-	-

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Athos Inc.	Integral	5	1.8	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Description
DC	3ft	1	Unshielded	DC Port	DC	-	DC Input
ENET	10m	1	Unshielded	RJ45	Digital	10/100	Cat 5e LAN cable
USB	3 ft	1	Shielded	USB	Digital		

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
DH1	1	2,402.00	2,440.00	2,480.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 15 of 74

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	View Data
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	View Data
Channel Separation	Complies	View Data
Dwell Time	Complies	View Data
Channel Occupancy	Complies	View Data
Output Power	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) Restricted Edge & Band-Edge Emissions	Complies	View Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted

Conducted RF Emission Test Set-up(s) The following tests were performed using the conducted test set-up shown in the diagram below.

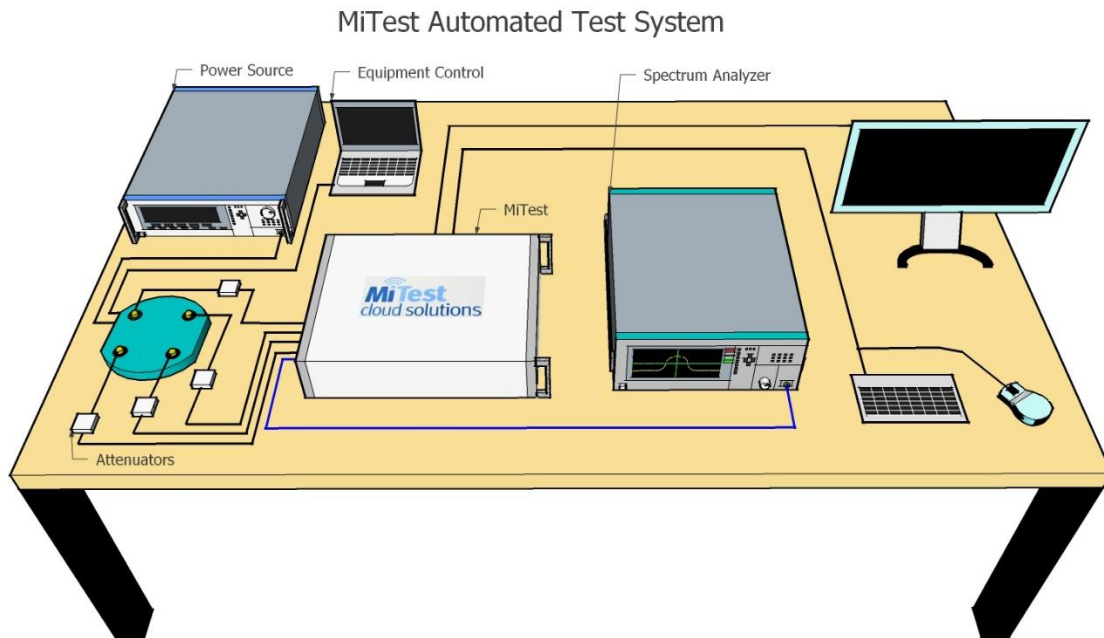

A full system calibration was performed on the test station and any resulting system losses (or gains) was considered in the production of all final measurement data.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 17 of 74


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	20 Jan 2019
#3 P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	20 Jan 2019
#3 P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	20 Jan 2019
#3 P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	20 Jan 2019
#3 P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	20 Jan 2019
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2019
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
436	USB Wideband Power Sensor	Boonton	55006	8731	14 Sep 2019
440	USB Wideband Power Sensor	Boonton	55006	9178	22 Sep 2019
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2019
442	USB Wideband Power Sensor	Boonton	55006	9181	6 Oct 2019
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	20 Sep 2019
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2018
515	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	515	20 Jan 2019
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	24 Dec 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.
Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

Radiated Emissions Below 1GHz Test Setup

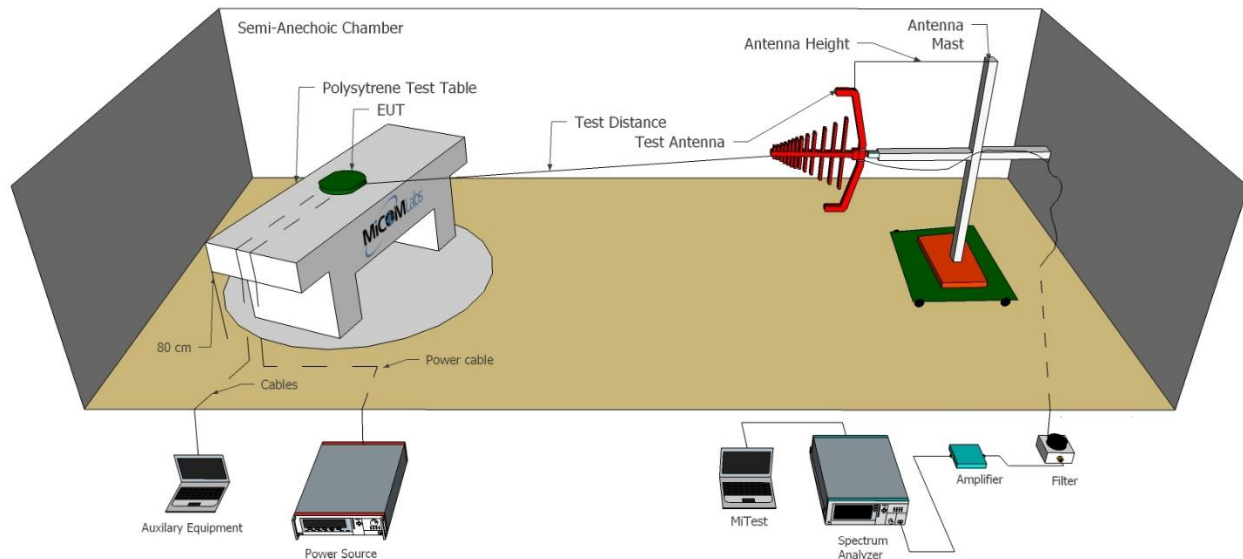

Radiated Emissions Above 1GHz Test Setup

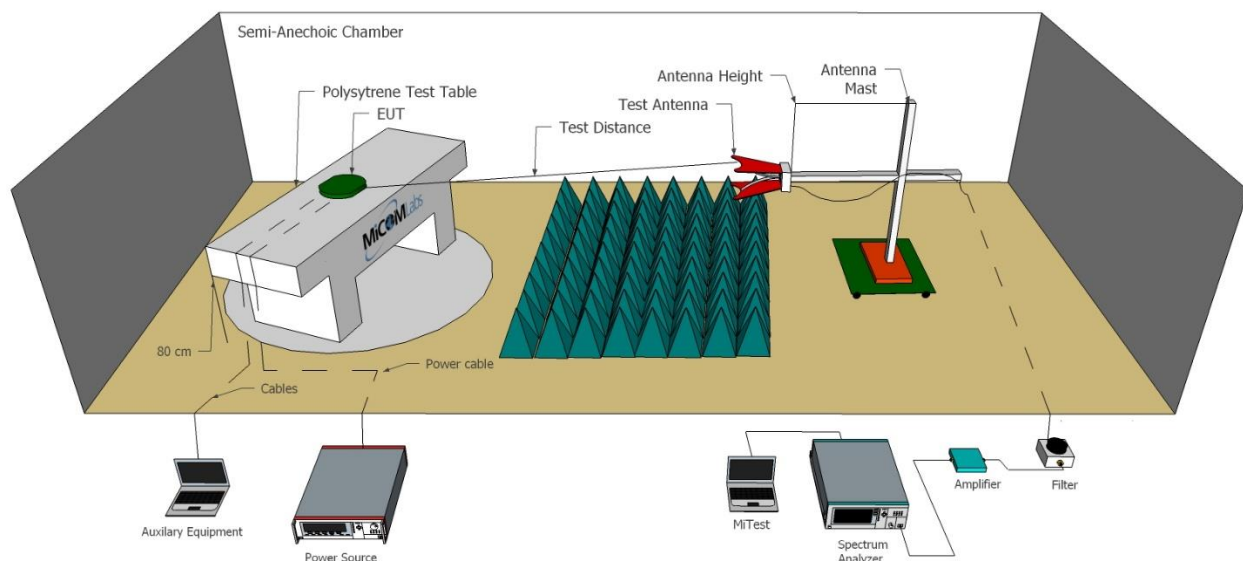

A full system calibration was performed on the test station and any resulting system losses (or gains) was considered in the production of all final measurement data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 19 of 74

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	21 Jan 2019
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	4 Apr 2019
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	21 Sep 2019
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	8 Oct 2019
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	12 Dec 2018
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Dec 2018
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Dec 2018
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	9 Oct 2019
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	9 Oct 2019
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	9 Oct 2019
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	9 Oct 2019
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	24 Aug 2019

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 20 of 74

481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	24 Aug 2019
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2018
518	Cable - Amp to Antenna	SRC Haverhill	157-3051574	518	24 Aug 2019
CC05	Confidence Check	MiCOM	CC05	None	21 Jan 2019
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	8 Oct 2019

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9. TEST RESULTS

20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	20 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 23 of 74

Equipment Configuration for 20 dB, 99% Bandwidth

Variant:	FHSS	Duty Cycle (%):	67
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.8
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
2402.0	1.198	--	--	--	1.198	1.198	--	--
2446.0	1.206	--	--	--	1.206	1.206	--	--
2480.0	0.593	--	--	--	0.593	0.593	--	--

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2402.0	1.094	--	--	--	1.094		
2446.0	1.098	--	--	--	1.098		
2480.0	1.094	--	--	--	1.094		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.1. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Frequency Hopping Tests	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References, FCC Public Notice DA 00-705		

Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 25 of 74

9.1.1. Number of Hopping Channels

Equipment Configuration for Number of Hopping Channels			
--	--	--	--

Variant:	FHSS	Antenna:	Not Applicable
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	67.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
2400.0-2428.0	13	--	--
2428.0-2456.0	15	--	--
2456.0-2483.5	12	--	--
Total number of Hops	40	15	Pass

Traceability to Industry Recognized Test Methodologies	
--	--

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 26 of 74

9.1.2. Channel Separation

Equipment Configuration for Channel Separation

Variant:	FHSS	Antenna:	Integral
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	67.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
2446.0	0.800	>800KHz	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 27 of 74

9.1.3. Dwell Time & Channel Occupancy

Equipment Configuration for Dwell Time & Channel Occupancy

Variant:	FHSS	Antenna:	Not Applicable
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	67.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (uS)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
2446	148.722	1.041	20	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	
Measurement Uncertainty:	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.2. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1), (b)(1)/(2)/(3)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 29 of 74

antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 30 of 74

Equipment Configuration for Output Power Peak

Variant:	FHSS	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2402.0	-0.96	--	--	--	-0.96	20.96	-21.92	
2446.0	-0.71	--	--	--	-0.71	20.96	-21.67	
2480.0	-0.13	--	--	--	-0.13	20.96	-21.09	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 31 of 74

9.3. Emissions

9.3.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Transmitter Conducted Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 32 of 74

9.3.1.1. Conducted Unwanted Spurious Emissions

Equipment Configuration for Unwanted Emissions Peak

Variant:	FHSS	Duty Cycle (%):	99
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2402.0	30.0 - 26000.0	-42.523	-22.37	--	--	--	--	--	--
2446.0	30.0 - 26000.0	-41.87	-21.73	--	--	--	--	--	--
2480.0	30.0 - 26000.0	-41.317	-21.32	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 33 of 74

9.3.1.2. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	FHSS	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2402.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2405.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-46.45	-21.19	2401.40			-1.400

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 34 of 74

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	FHSS	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2480.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2478.0 - 2534.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-48.74	-20.77	2480.50			-3.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 35 of 74

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	FHSS	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2402.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2405.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-48.30	-21.06	2401.40			-1.400

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 36 of 74

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	FHSS	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	1.80
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2480.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2478.0 - 2533.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-47.27	-20.57	2480.40			-3.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 37 of 74

9.3.2. TX Spurious & Restricted Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS)	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for [Restricted Bands](#)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 38 of 74

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 39 of 74

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 40 of 74

9.3.2.1. TX Spurious & Restricted Band Emissions

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	2402.00	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

Click here to view measurement data...
--

There are no emissions found within 6dB of the limit line.
--

Test Notes: AC/DC PS. EUT 2402

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 41 of 74

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	2446.00	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

Click here to view measurement data...
--

There are no emissions found within 6dB of the limit line.
--

Test Notes: AC/DC PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 42 of 74

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	2480.00	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

Click here to view measurement data...
--

There are no emissions found within 6dB of the limit line.
--

Test Notes: AC/DC PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 43 of 74

Colocation:

Equipment Configuration for TX Spurious & Restricted Band Emissions
--

Antenna:	Integral	Variant:	FHSS & 802.11b
Antenna Gain (dBi):	1.80	Modulation:	GFSK & CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	0.00	Data Rate:	1.00 MBit/s
Power Setting:	27 (of WiFi)	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2264.92	61.88	-1.71	-12.68	47.49	Max Peak	Vertical	190	182	74.0	-26.5	Pass
#2	2264.92	48.51	-1.71	-12.68	34.12	Max Avg	Vertical	190	182	54.0	-19.9	Pass
#3	3282.69	63.26	-2.04	-11.69	49.53	Peak (NRB)	Vertical	200	220	--	--	Pass
#4	4924.10	65.56	-2.56	-12.35	50.65	Max Peak	Vertical	165	133	74.0	-23.4	Pass
#5	4924.10	60.43	-2.56	-12.35	45.52	Max Avg	Vertical	165	133	54.0	-8.5	Pass
#6	14538.66	59.26	-4.54	-5.51	49.21	Peak (NRB)	Vertical	200	360	--	--	Pass

Test Notes: EUT powered by AC/DC PS. All radios on in 2.4 band, BLE Hopping

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 44 of 74

9.3.2.2. Restricted Edge & Band-Edge Emissions

Athos		Band-Edge Freq	Limit 74.0dBµV/m	Limit 54.0dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
FHSS	2402.00	2390.00	54.99	37.24	4
FHSS	2480.00	2483.50	57.52	37.56	4
FHSS	Hopping	2390.00	56.79	37.28	4
FHSS	Hopping	2483.50	56.74	37.17	4

Note: click the links in the above matrix to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 45 of 74

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	2402.00	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2338.06	7.23	-1.73	31.74	37.24	Max Avg	Vertical	189	342	54.0	-16.8	Pass
#2	2338.15	24.98	-1.73	31.74	54.99	Max Peak	Vertical	189	342	74.0	-19.0	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: AC/DC PS. EUT on 2402 MHz.												

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 46 of 74

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	2480.00	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.50	7.01	-1.78	32.33	37.56	Max Avg	Vertical	189	342	54.0	-16.4	Pass
#2	2483.50	26.97	-1.78	32.33	57.52	Max Peak	Vertical	189	342	74.0	-16.5	Pass
#3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: AC/DC PS. EUT on 2480 MHz.

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 47 of 74

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	Hopping	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2349.73	26.82	-1.78	31.75	56.79	Max Peak	Vertical	189	342	74.0	-17.2	Pass
#2	2356.01	7.27	-1.77	31.78	37.28	Max Avg	Vertical	189	342	54.0	-16.7	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: AC/DC PS. EUT Hopping

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 48 of 74

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Integral	Variant:	FHSS
Antenna Gain (dBi):	1.80	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	67
Channel Frequency (MHz):	Hopping	Data Rate:	1.00 MBit/s
Power Setting:	4	Tested By:	JMH

Test Measurement Results

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	2509.92	26.25	-1.83	32.32	56.74	Max Peak	Vertical	189	342	74.0	-17.3	Pass
#3	2514.14	6.67	-1.83	32.33	37.17	Max Avg	Vertical	189	342	54.0	-16.8	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: AC/DC PS. EUT Hopping												

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 49 of 74

A. APPENDIX - GRAPHICAL IMAGES


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.1. 20 dB & 99% Bandwidth

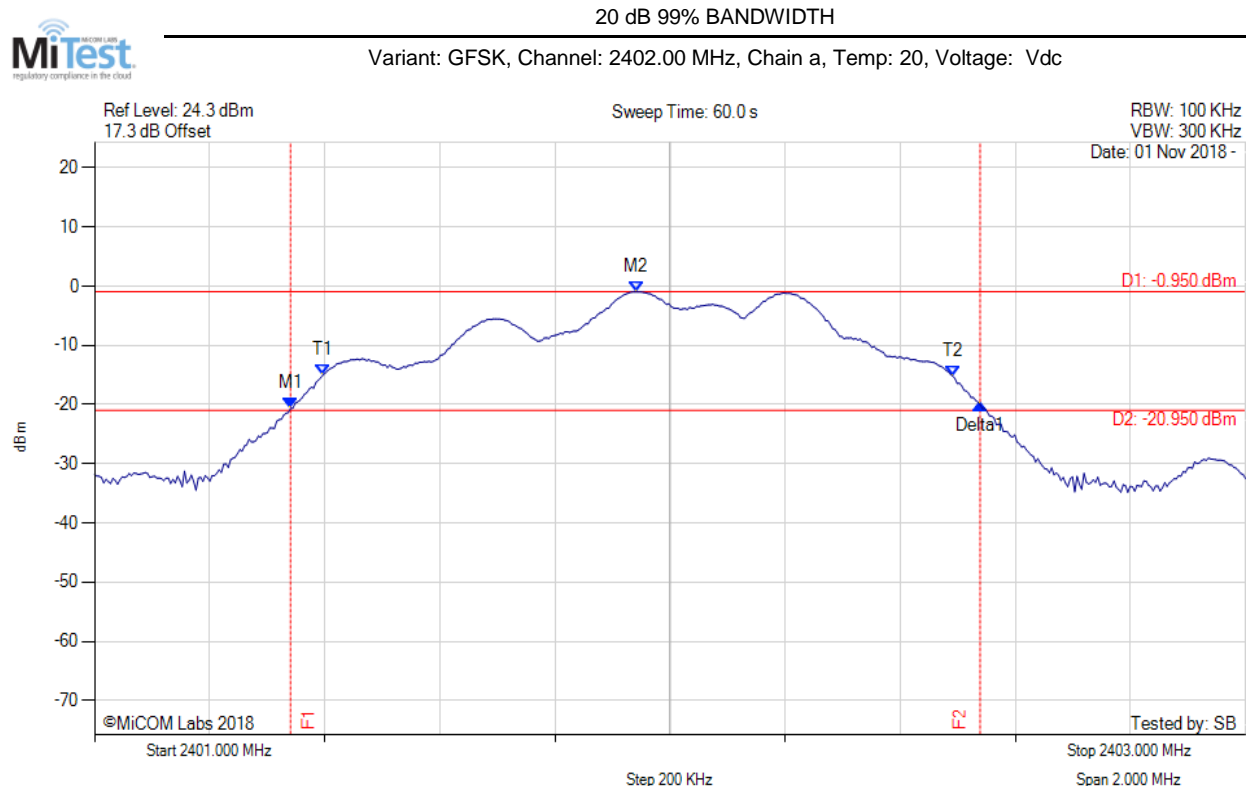


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2401.341 MHz : -20.654 dBm M2 : 2401.942 MHz : -0.951 dBm Delta1 : 1.198 MHz : 0.655 dB T1 : 2401.397 MHz : -15.025 dBm T2 : 2402.491 MHz : -15.157 dBm OBW : 1.094 MHz	Measured 20 dB Bandwidth: 1.198 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

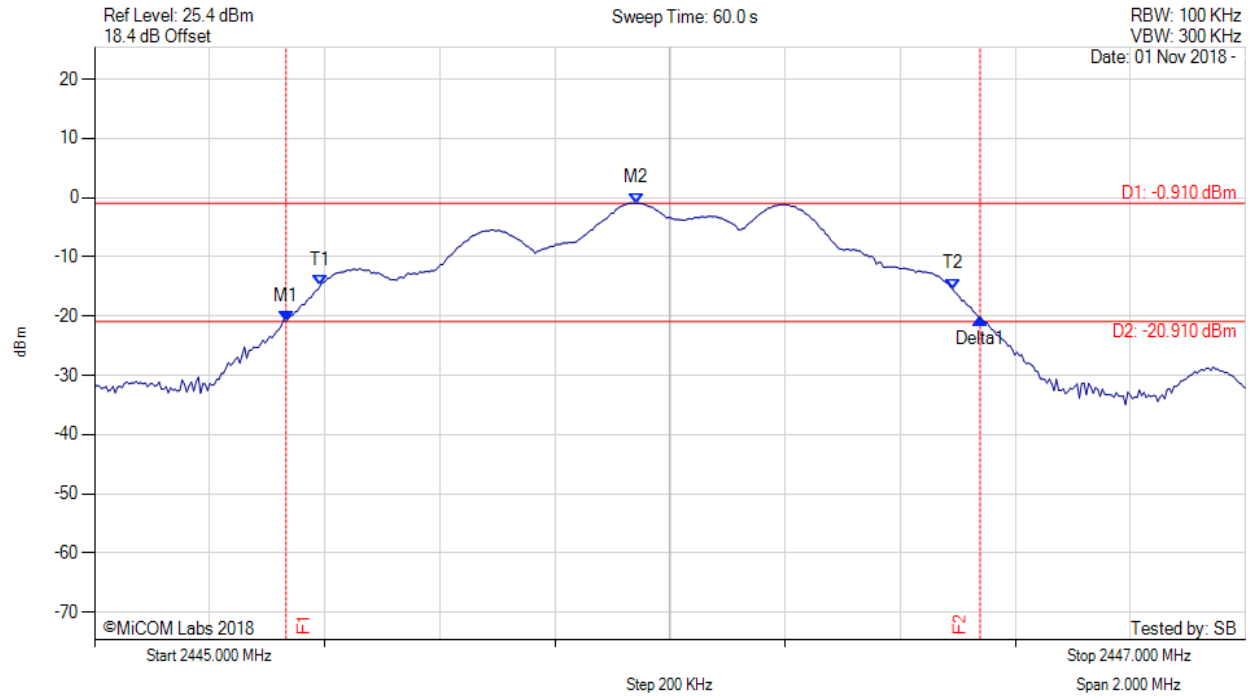

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2445.333 MHz : -20.884 dBm M2 : 2445.942 MHz : -0.911 dBm Delta1 : 1.206 MHz : 0.569 dB T1 : 2445.393 MHz : -14.746 dBm T2 : 2446.491 MHz : -15.401 dBm OBW : 1.098 MHz	Channel Frequency: 2446.00 MHz

[back to matrix](#)

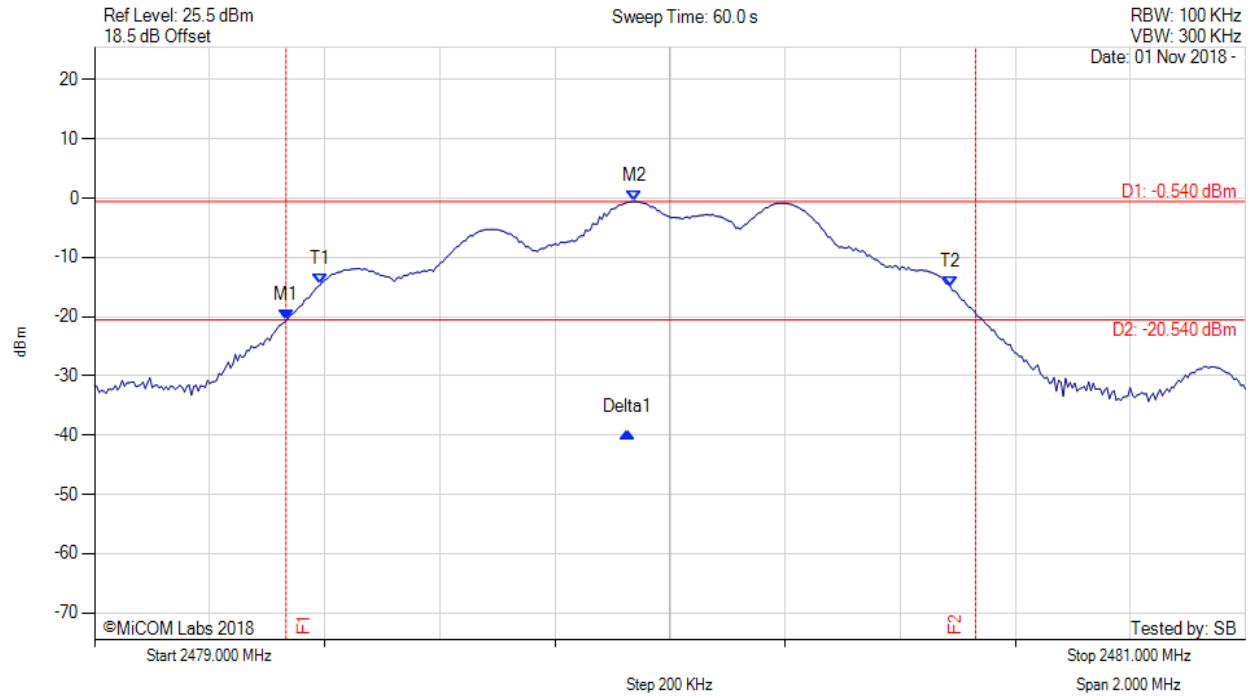


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2479.333 MHz : -20.666 dBm M2 : 2479.938 MHz : -0.542 dBm Delta1 : 593 KHz : -18.871 dB T1 : 2479.393 MHz : -14.579 dBm T2 : 2480.487 MHz : -14.864 dBm OBW : 1.094 MHz	Measured 20 dB Bandwidth: 0.593 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

A.2. Frequency Hopping Tests

A.2.1. Number of Hopping Channels

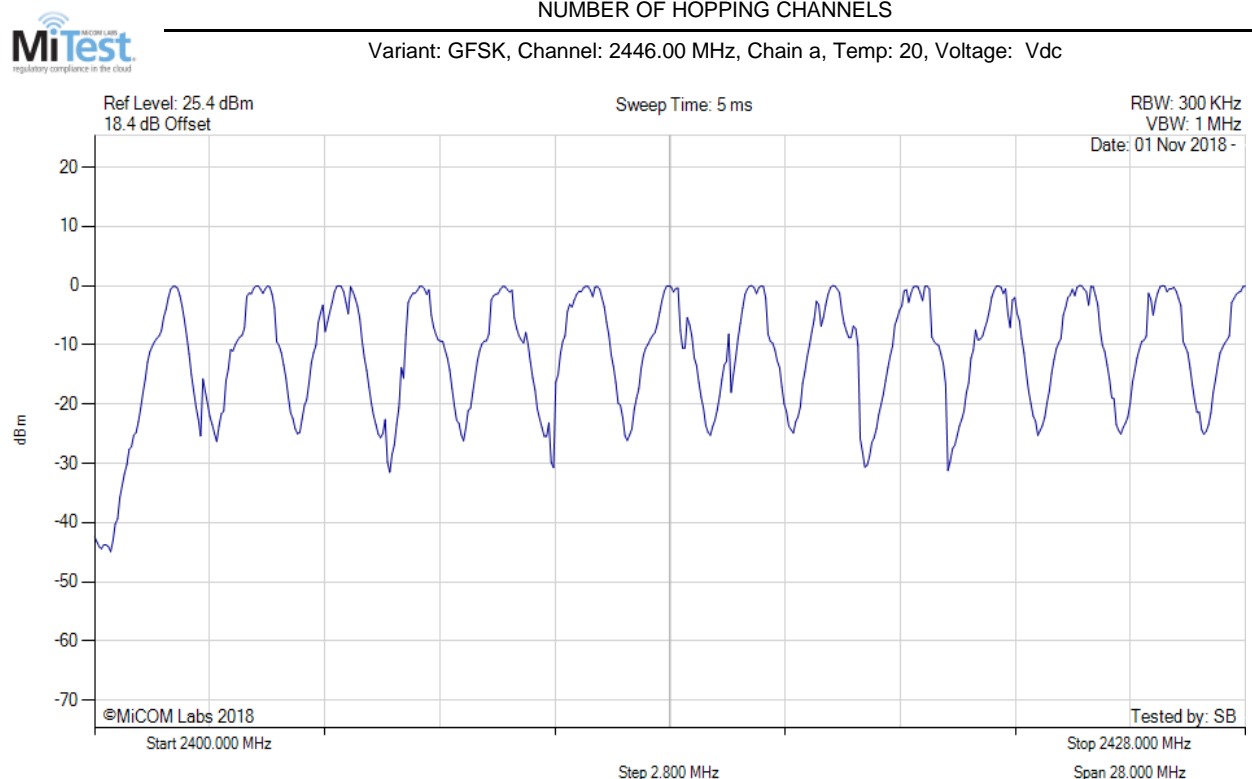

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2446.00 MHz

[back to matrix](#)




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 54 of 74



NUMBER OF HOPPING CHANNELS

Variant: GFSK, Channel: 2446.00 MHz, Chain a, Temp: 20, Voltage: Vdc

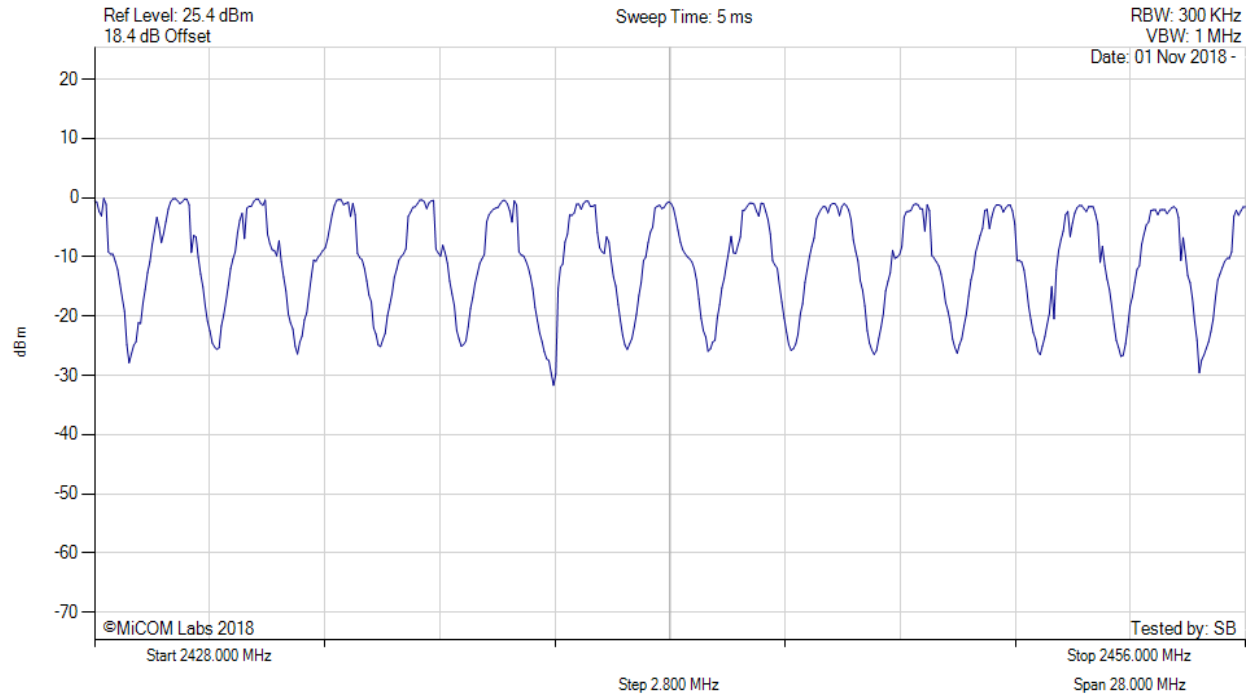

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2446.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 55 of 74



NUMBER OF HOPPING CHANNELS

Variant: GFSK, Channel: 2446.00 MHz, Chain a, Temp: 20, Voltage: Vdc

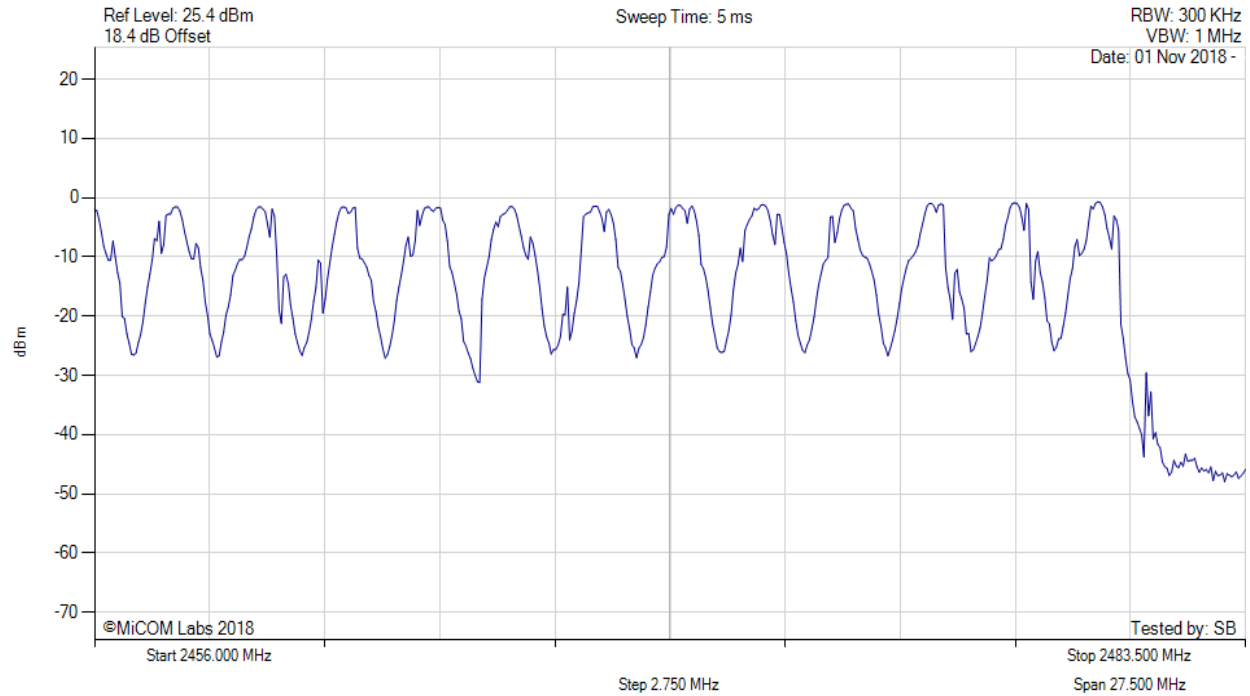

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2446.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.2.2. Channel Separation



CHANNEL SEPARATION

Variant: GFSK, Channel: 2446.00 MHz, Chain a, Temp: 20, Voltage: Vdc

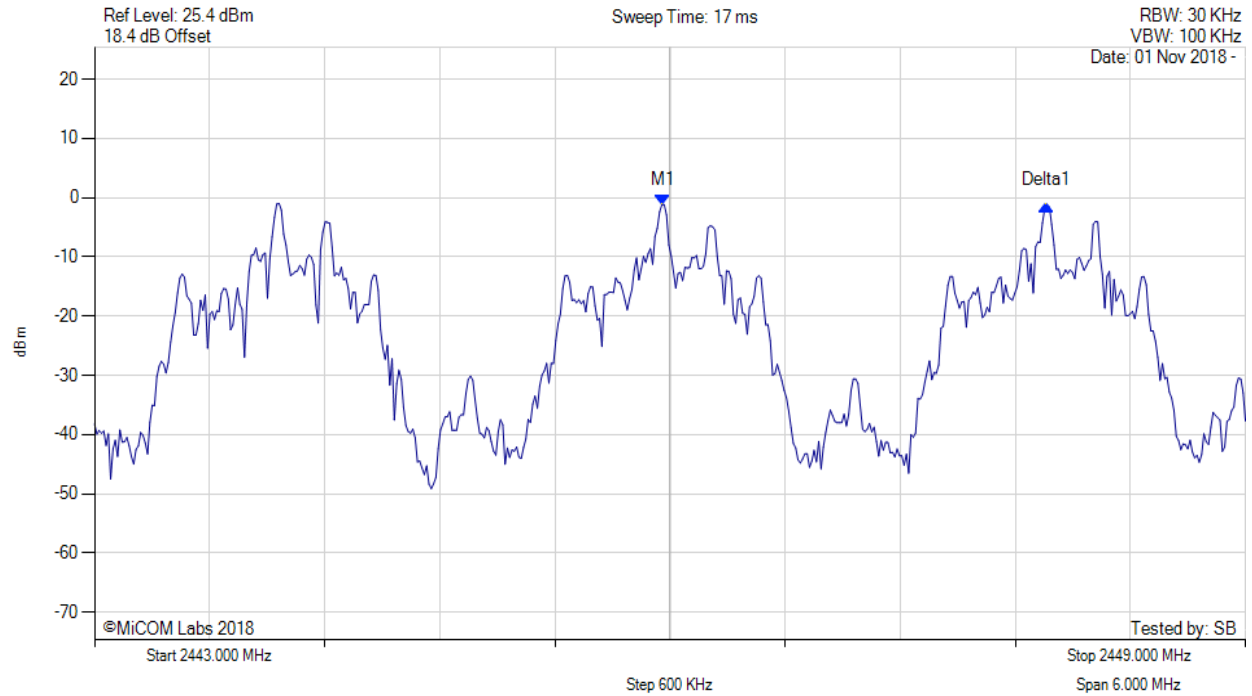

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2445.964 MHz : -1.181 dBm Delta1 : 1.998 MHz : -0.020 dB	Channel Frequency: 2446.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 57 of 74

A.2.3. Dwell Time



Dwell Time

Variant: FHSS, Channel: 2446.00 MHz

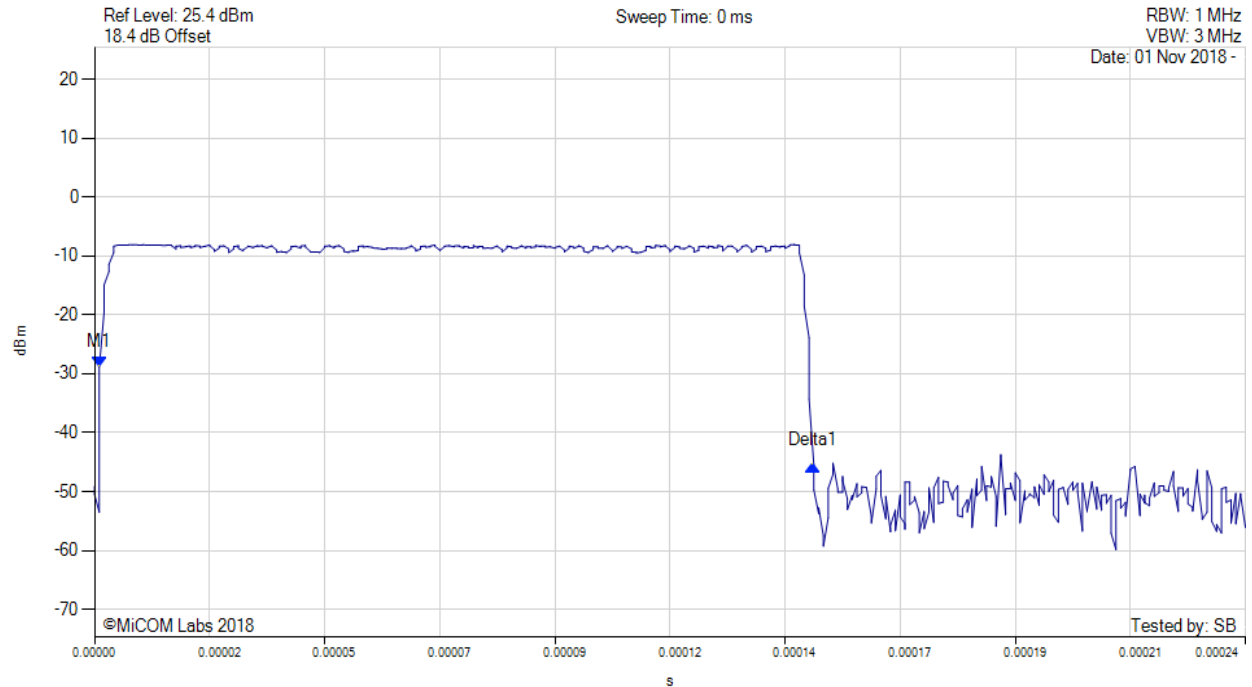

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1(2446.00 MHz) : 0.000 s : -28.787 dBm Delta1(2446.00 MHz) : 0.000148 s : -16.797 dB	Channel Frequency: 2446.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 58 of 74

A.2.4. Channel Occupancy

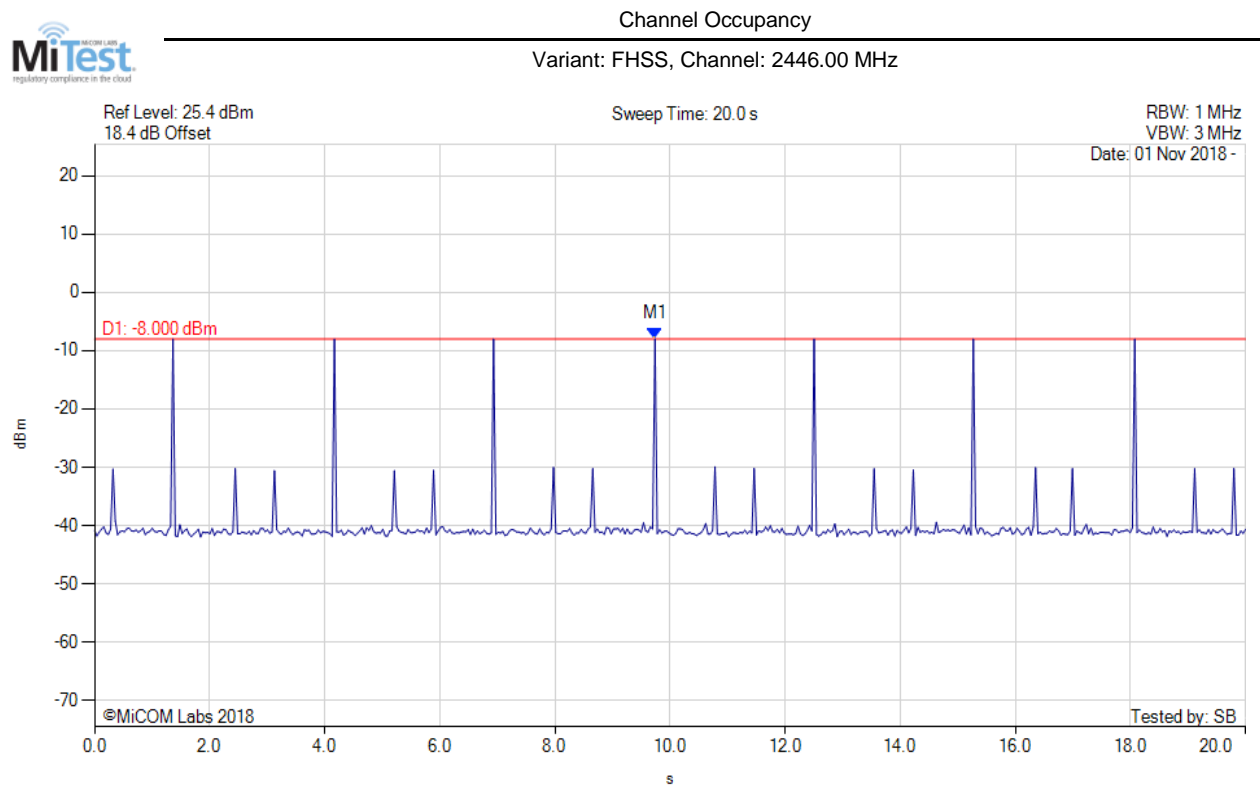

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1(2446.00 MHz) : 9.739 s : -8.004 dBm	Channel Frequency: 2446.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Unwanted Spurious Emissions

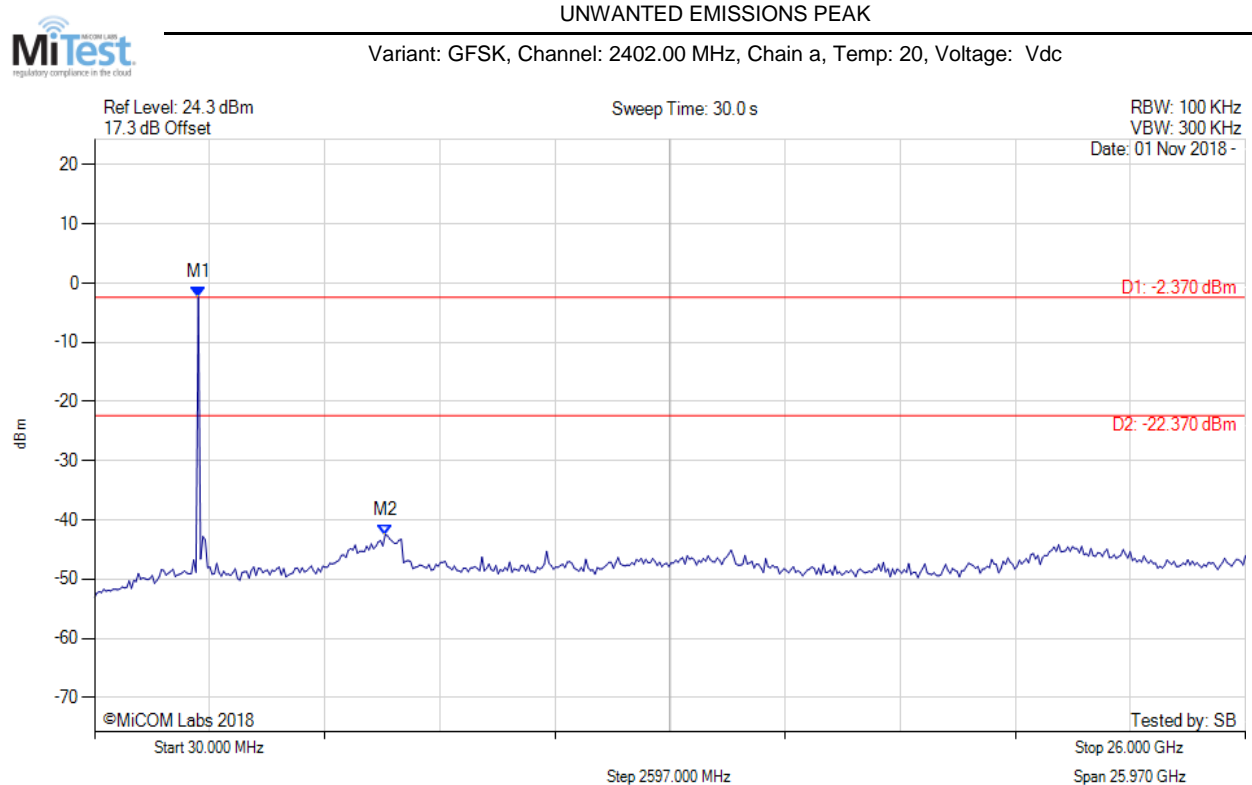


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = CLR/WRITE	M1 : 2371.984 MHz : -2.369 dBm M2 : 6587.555 MHz : -42.523 dBm	Limit: -22.37 dBm Margin: -20.15 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

UNWANTED EMISSIONS PEAK

Variant: GFSK, Channel: 2446.00 MHz, Chain a, Temp: 20, Voltage: Vdc

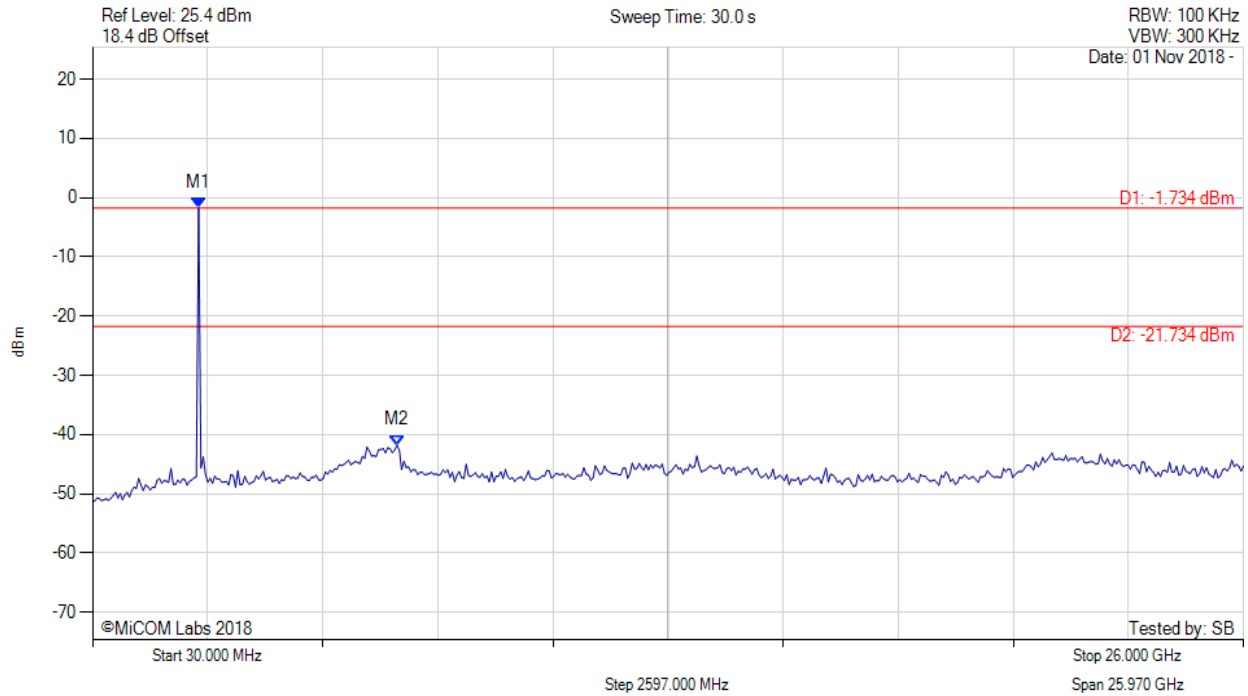


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -1.734 dBm M2 : 6899.820 MHz : -41.807 dBm	Channel Frequency: 2446.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

UNWANTED EMISSIONS PEAK

Variant: GFSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: Vdc

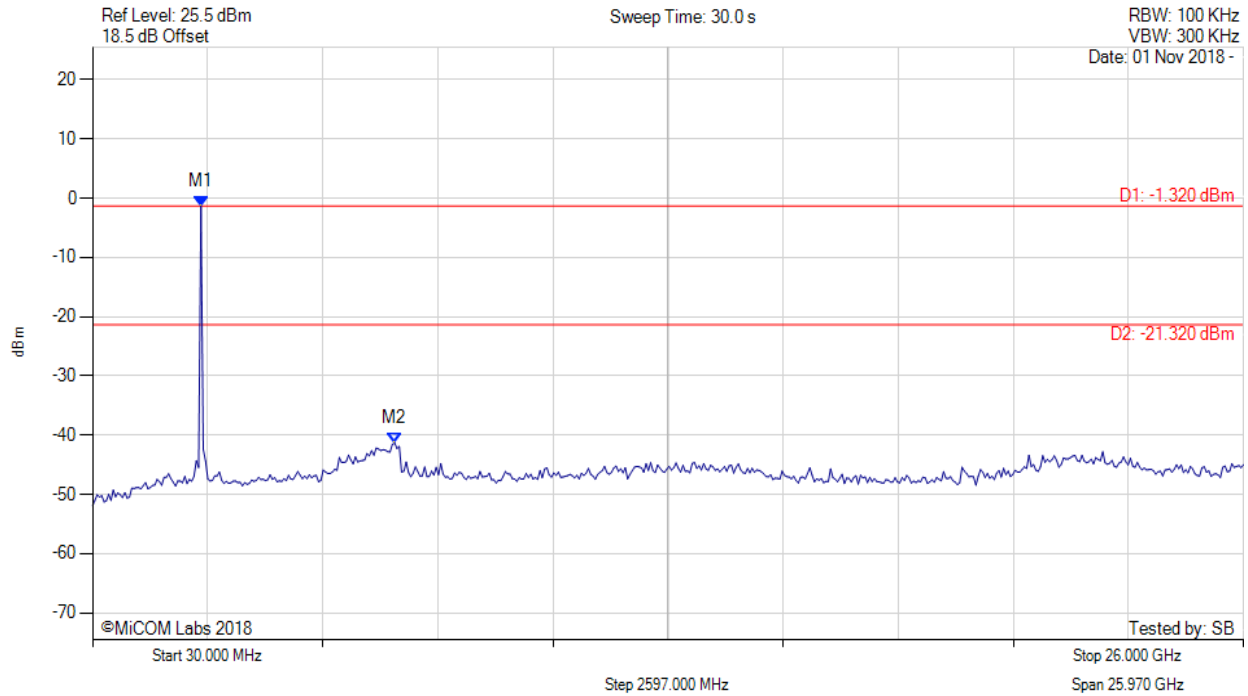

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2476.072 MHz : -1.323 dBm M2 : 6847.776 MHz : -41.317 dBm	Limit: -21.32 dBm Margin: -20.00 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 62 of 74

A.3.1.2. Conducted Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK

Variant: GFSK, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: Vdc

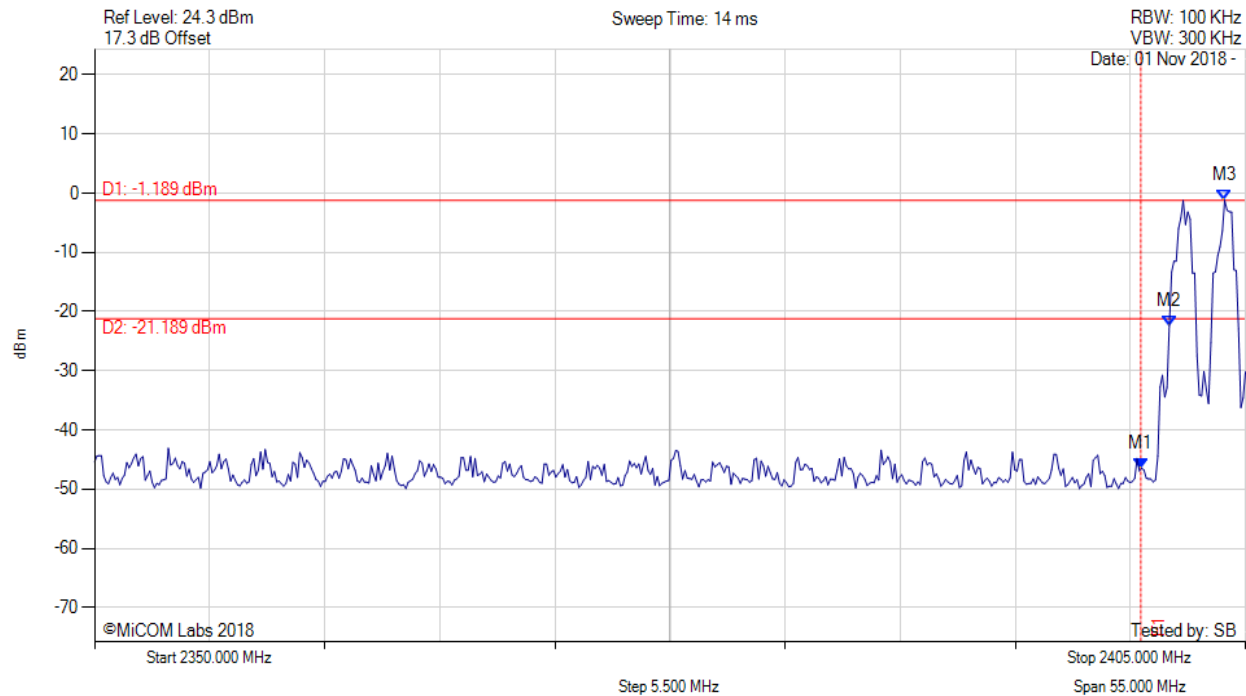


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -46.454 dBm M2 : 2401.363 MHz : -22.423 dBm M3 : 2404.008 MHz : -1.189 dBm	Channel Frequency: 2402.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK

Variant: GFSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: Vdc

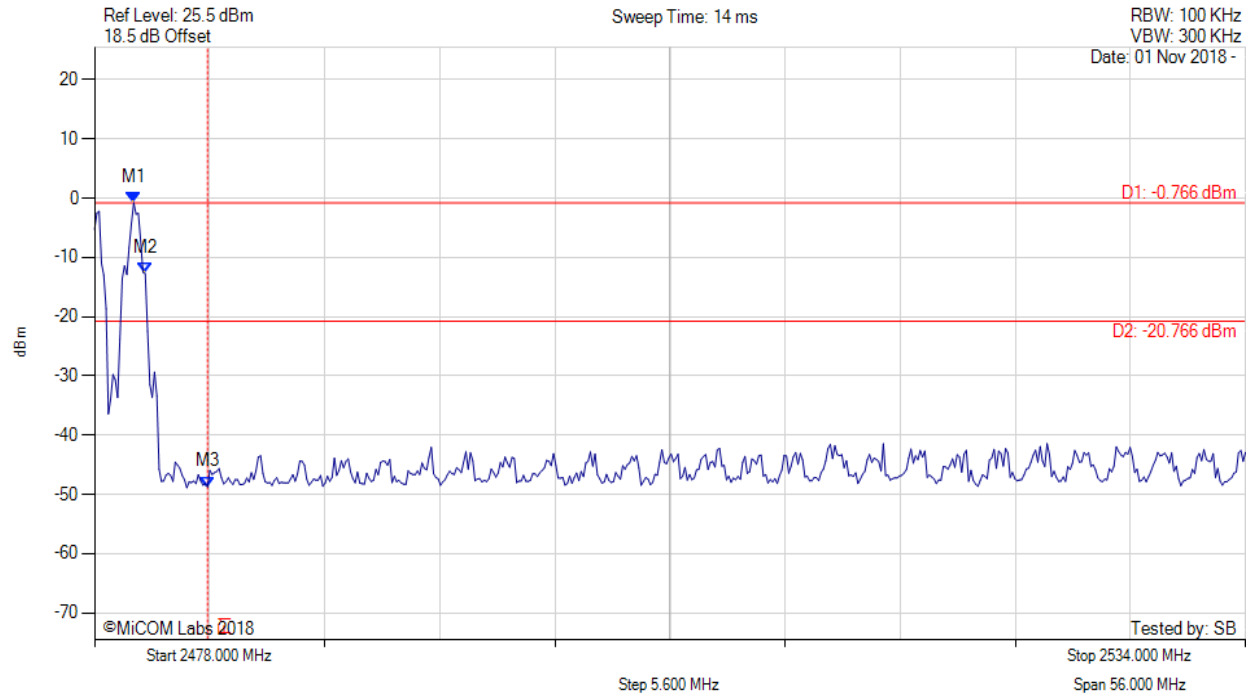

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2479.908 MHz : -0.766 dBm M2 : 2480.469 MHz : -12.722 dBm M3 : 2483.500 MHz : -48.742 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 64 of 74



CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: GFSK, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: Vdc

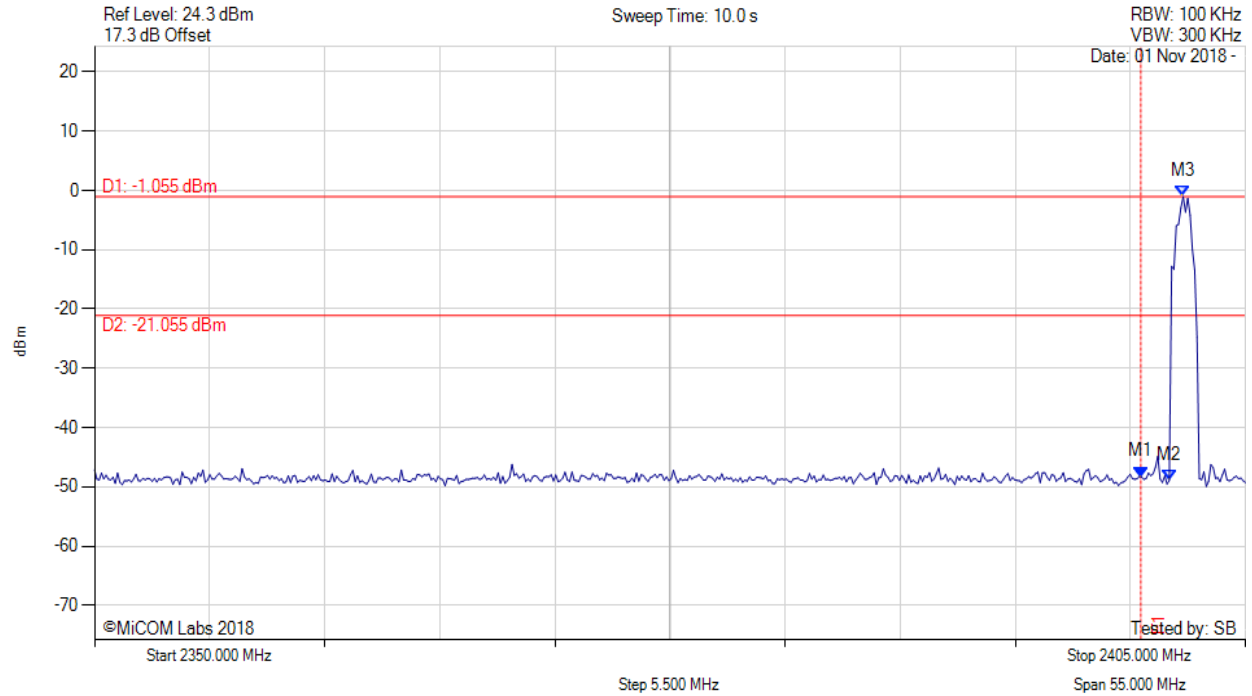

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -48.301 dBm M2 : 2401.363 MHz : -48.921 dBm M3 : 2402.024 MHz : -1.055 dBm	Channel Frequency: 2402.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: GFSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: Vdc

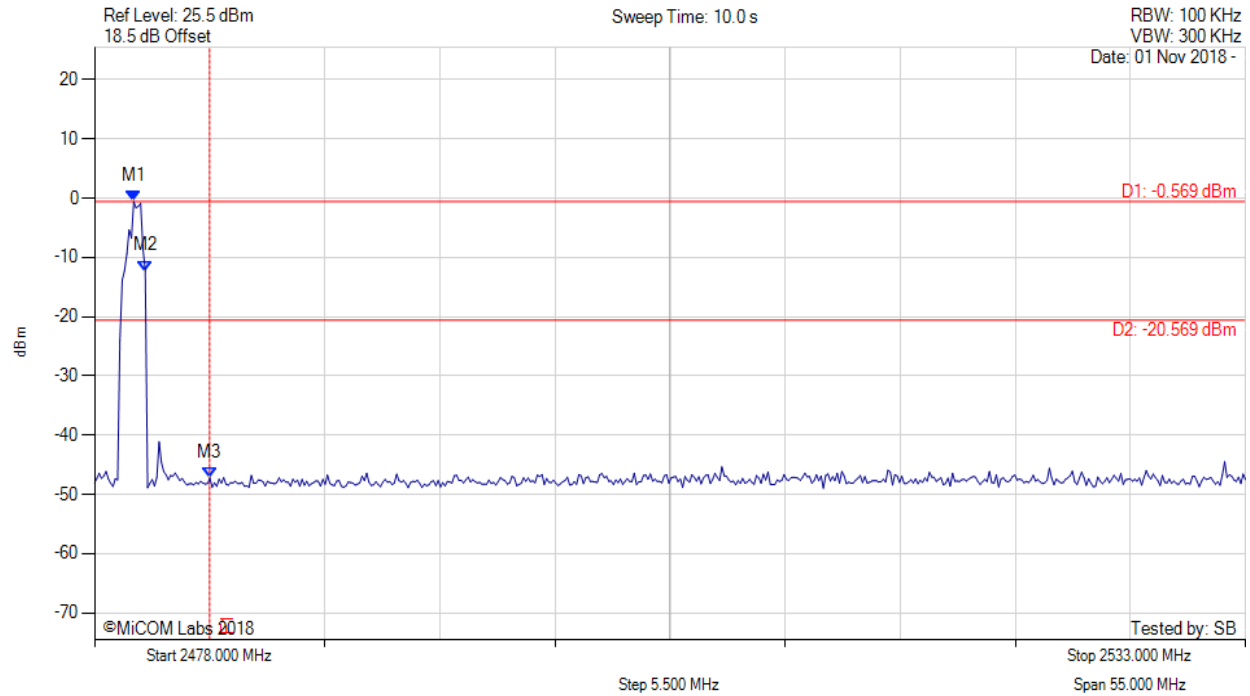

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2479.874 MHz : -0.569 dBm M2 : 2480.425 MHz : -12.285 dBm M3 : 2483.500 MHz : -47.265 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


A.3.2. Radiated Emissions

A.3.2.1. TX Spurious & Restricted Band Emissions



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2402.00 MHz, Antenna: Integral, Power Setting: 4

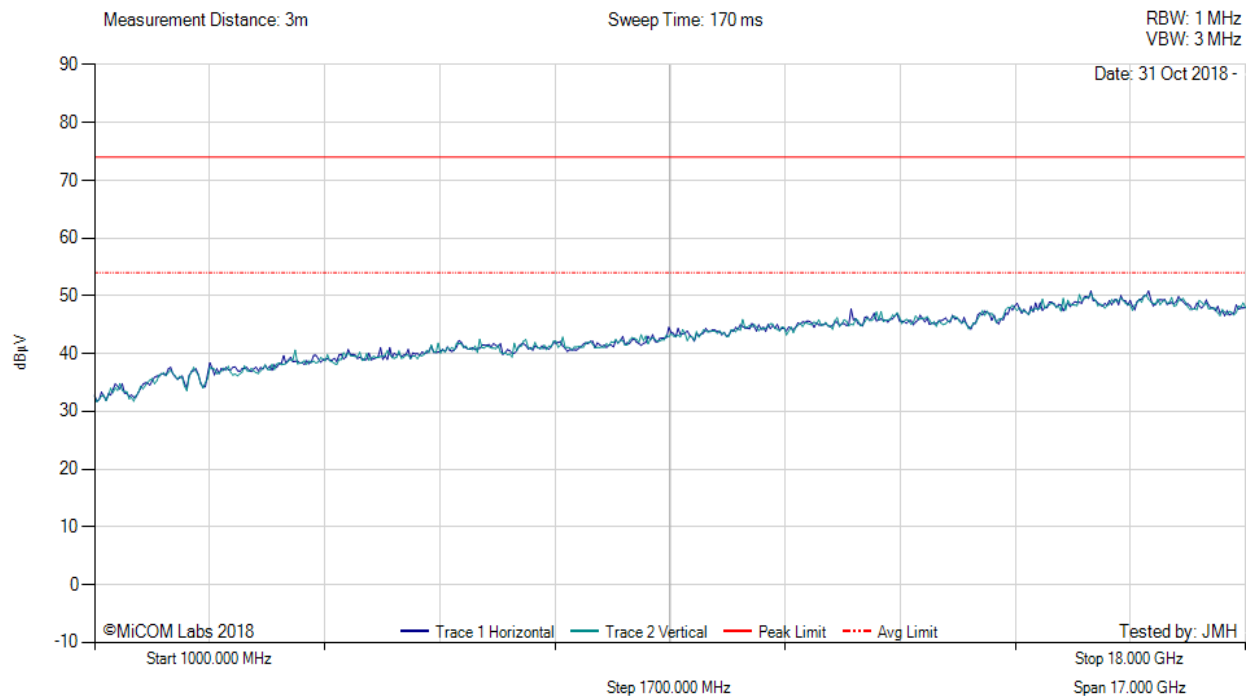

There are no emissions found within 6dB of the limit line.

Test Notes: AC/DC PS. EUT 2402

[back to matrix](#)




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 67 of 74



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2446.00 MHz, Antenna: Integral, Power Setting: 4

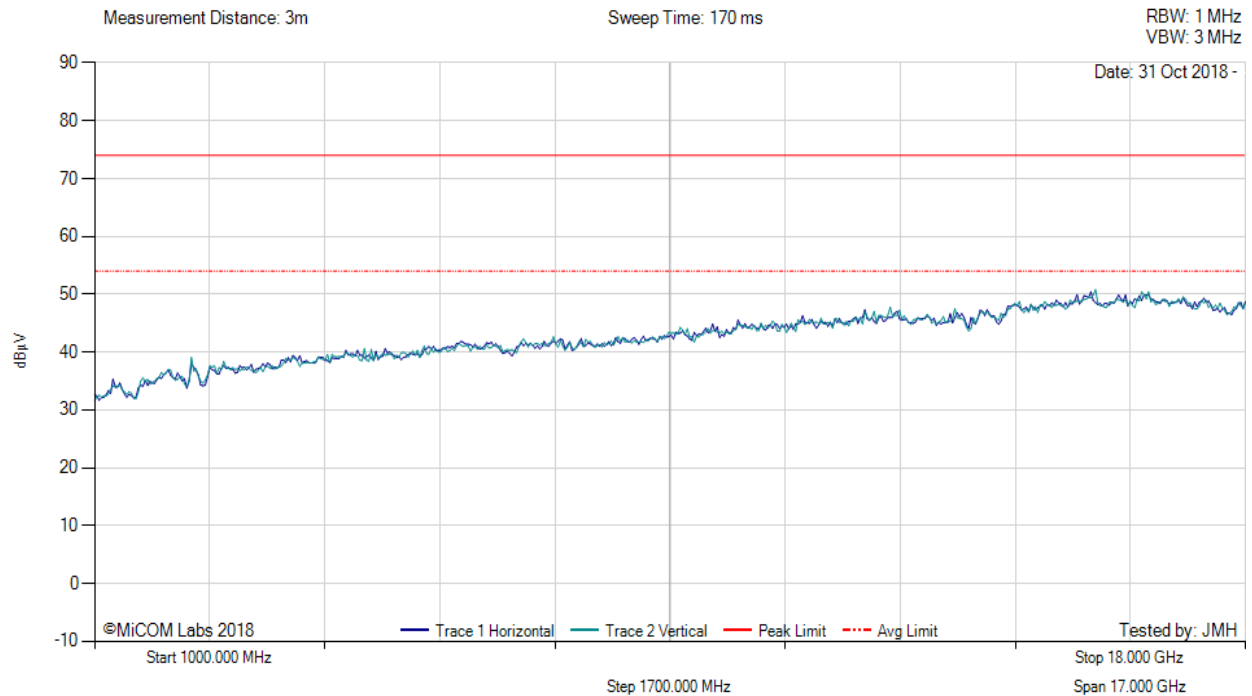

There are no emissions found within 6dB of the limit line.


Test Notes: AC/DC PS.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2480.00 MHz, Antenna: Integral, Power Setting: 4

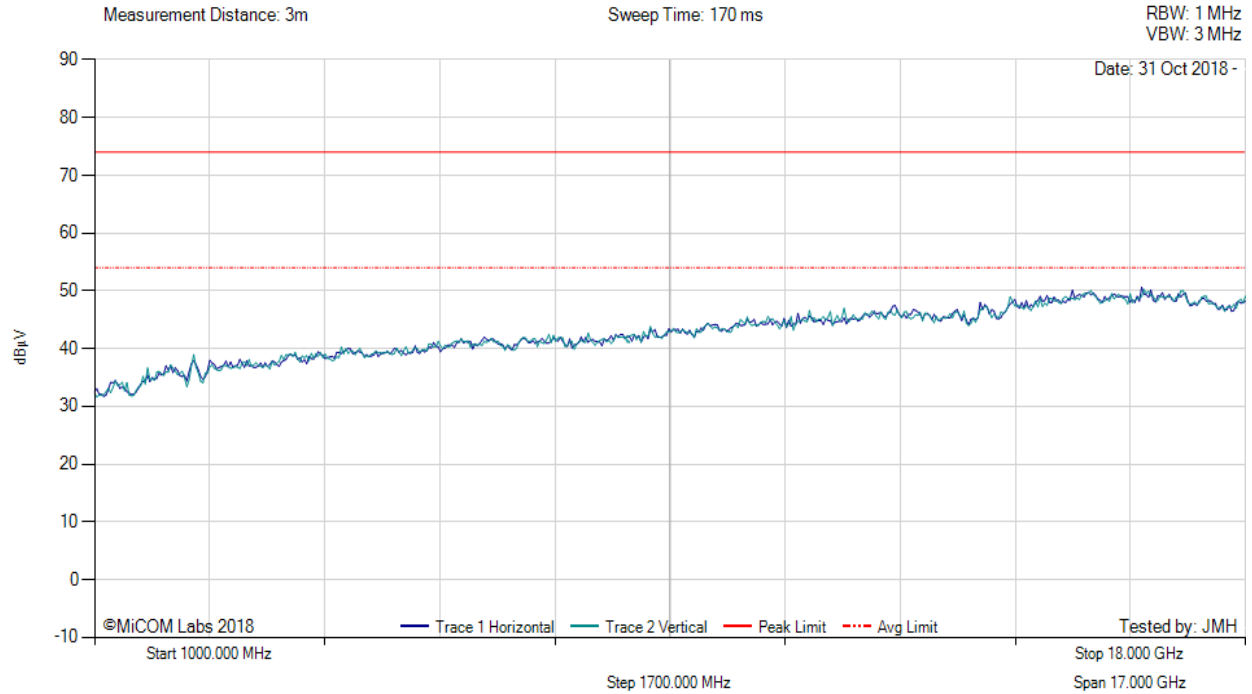

There are no emissions found within 6dB of the limit line.

Test Notes: AC/DC PS.

[back to matrix](#)




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 69 of 74

Colocation:



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: FHSS & 802.11b, Test Freq: Hopping, Antenna: Integral

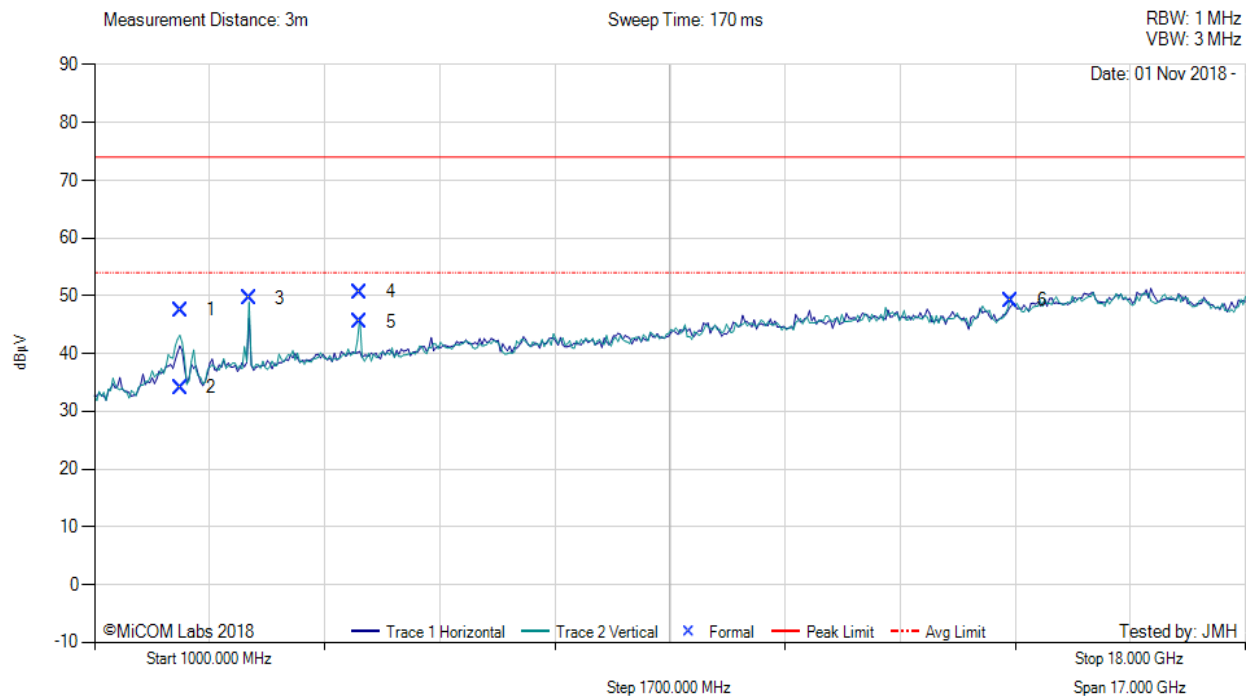

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2264.92	61.88	-1.71	-12.68	47.49	Max Peak	Vertical	190	182	74.0	-26.5	Pass
2	2264.92	48.51	-1.71	-12.68	34.12	Max Avg	Vertical	190	182	54.0	-19.9	Pass
3	3282.69	63.26	-2.04	-11.69	49.53	Peak (NRB)	Vertical	200	220	--	--	Pass
4	4924.10	65.56	-2.56	-12.35	50.65	Max Peak	Vertical	165	133	74.0	-23.4	Pass
5	4924.10	60.43	-2.56	-12.35	45.52	Max Avg	Vertical	165	133	54.0	-8.5	Pass
6	14538.66	59.26	-4.54	-5.51	49.21	Peak (NRB)	Vertical	200	360	--	--	Pass

Test Notes: EUT powered by AC/DC PS. All radios on in 2.4 band, BLE Hopping


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3.2.2. Restricted Band Edge Emissions

RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2402.00 MHz, Antenna: Integral, Power Setting: 4

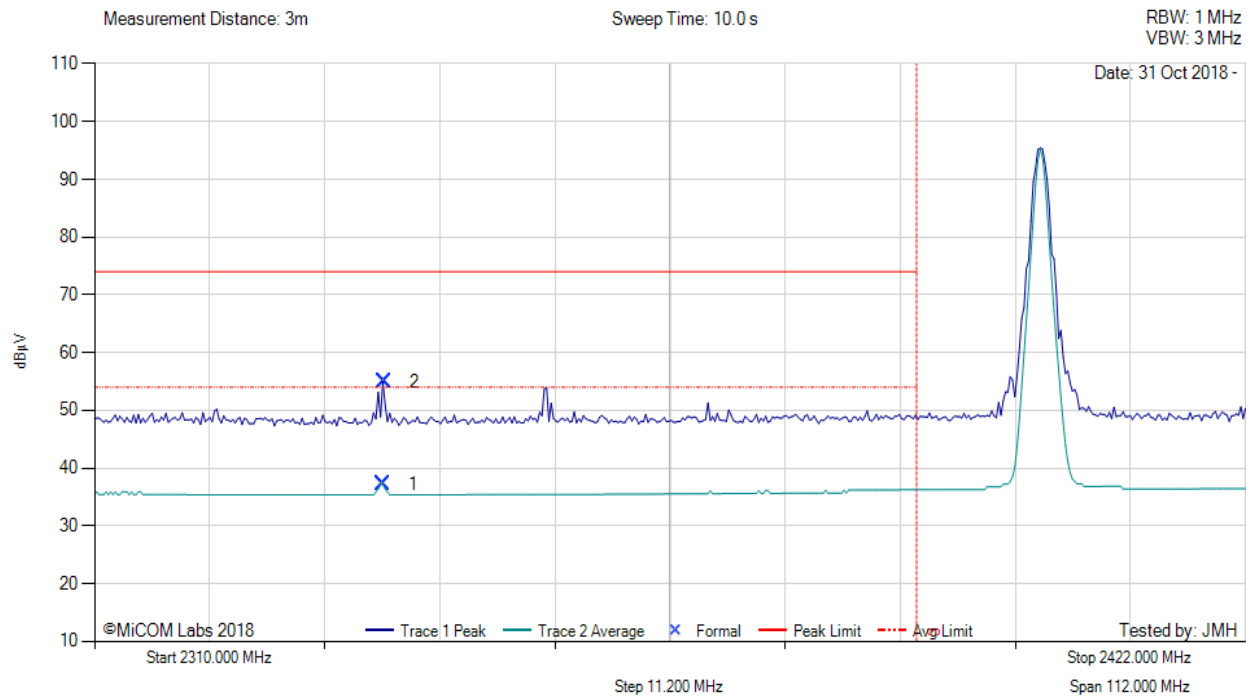


2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2338.06	7.23	-1.73	31.74	37.24	Max Avg	Vertical	189	342	54.0	-16.8	Pass
2	2338.15	24.98	-1.73	31.74	54.99	Max Peak	Vertical	189	342	74.0	-19.0	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: AC/DC PS. EUT on 2402 MHz.

[back to matrix](#)

RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2480.00 MHz, Antenna: Integral, Power Setting: 4

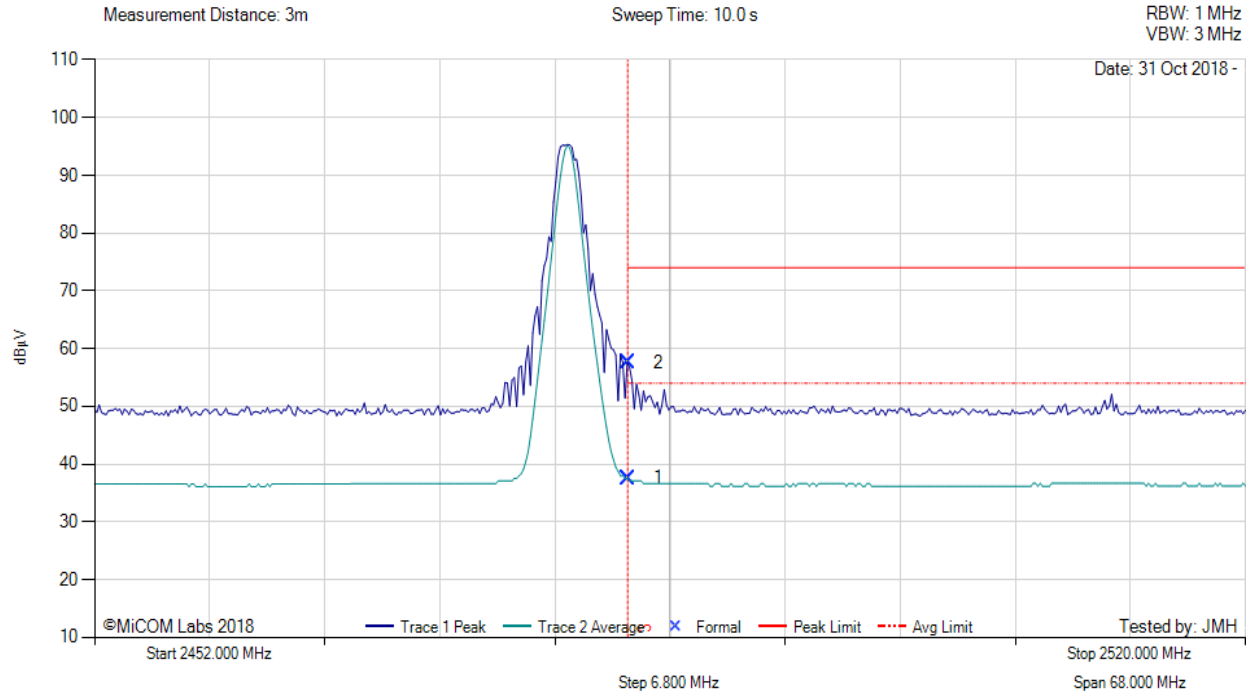


2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	7.01	-1.78	32.33	37.56	Max Avg	Vertical	189	342	54.0	-16.4	Pass
2	2483.50	26.97	-1.78	32.33	57.52	Max Peak	Vertical	189	342	74.0	-16.5	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: AC/DC PS. EUT on 2480 MHz.

[back to matrix](#)

RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 0.00 MHz, Antenna: Integral, Power Setting: 4

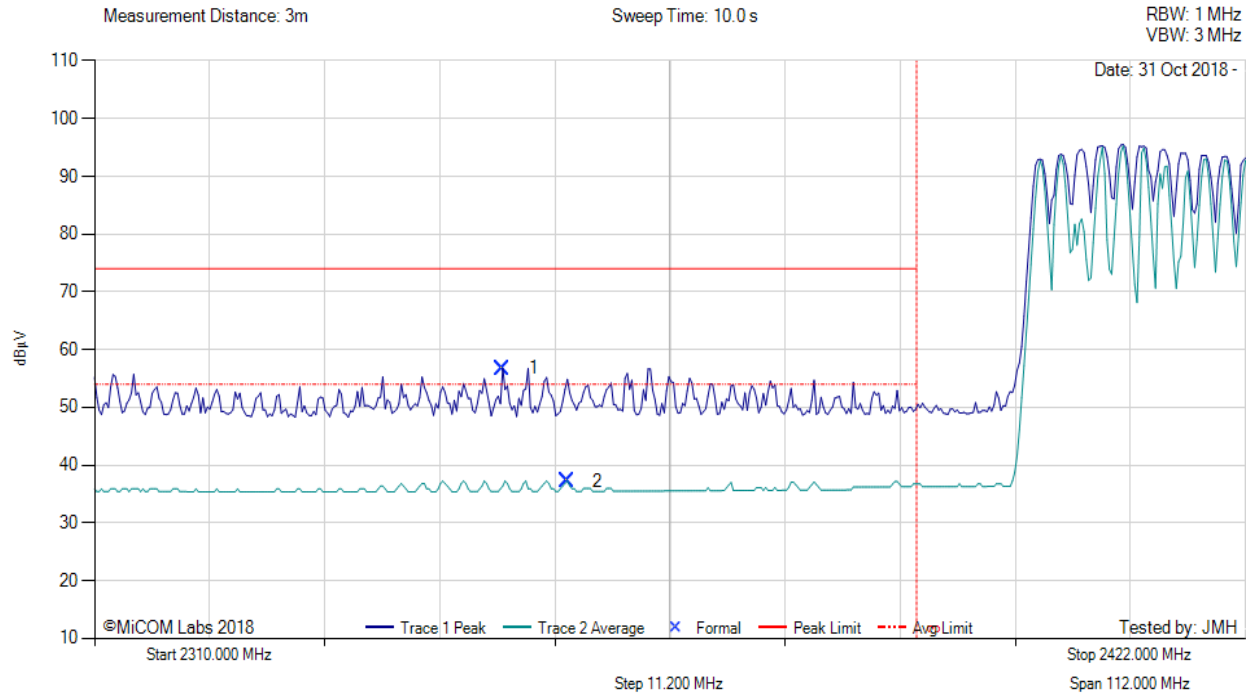

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2349.73	26.82	-1.78	31.75	56.79	Max Peak	Vertical	189	342	74.0	-17.2	Pass
2	2356.01	7.27	-1.77	31.78	37.28	Max Avg	Vertical	189	342	54.0	-16.7	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: AC/DC PS. EUT Hopping

[back to matrix](#)




Title: Athos Hub
To: FCC 15.247 & IC RSS-247 (FHSS)
Serial #: ATHO11-U4 Rev A
Issue Date: 6th December 2018
Page: 73 of 74



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 0.00 MHz, Antenna: Integral, Power Setting: 4

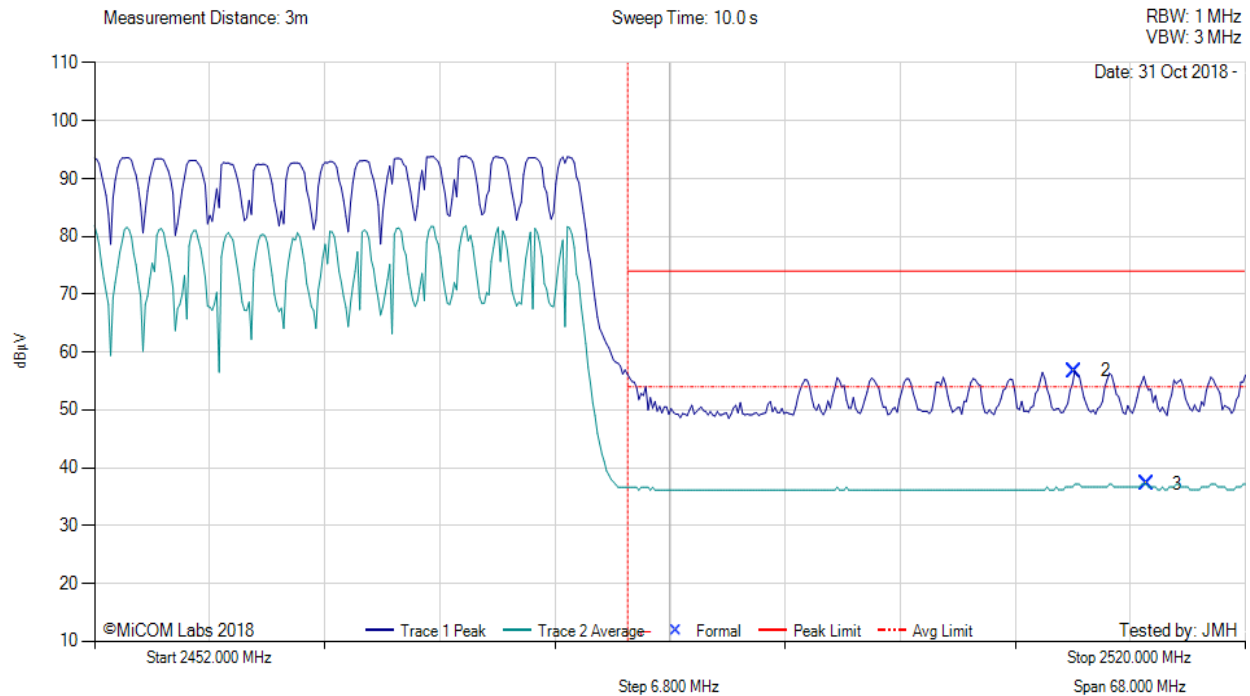

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
2	2509.92	26.25	-1.83	32.32	56.74	Max Peak	Vertical	189	342	74.0	-17.3	Pass
3	2514.14	6.67	-1.83	32.33	37.17	Max Avg	Vertical	189	342	54.0	-16.8	Pass
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: AC/DC PS. EUT Hopping												

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com