


## LTE band 7, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
2535.0	QPSK	16QAM
	19.231	19.231

## LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

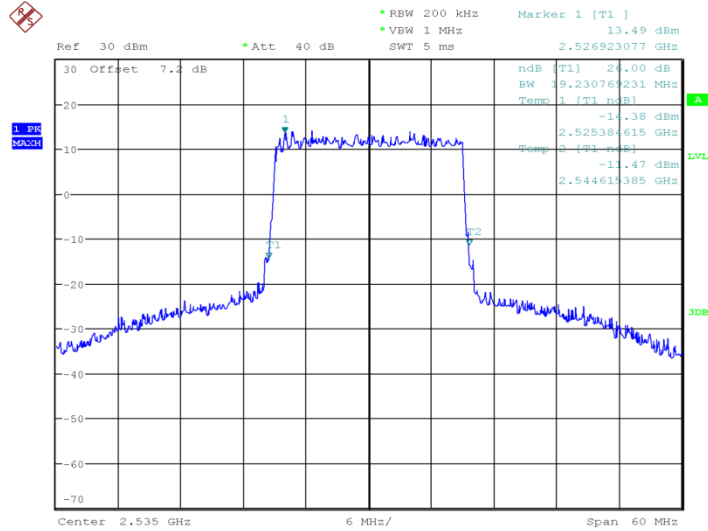

IF Overload  
Date: 9.JAN.2003 05:38:38

## LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

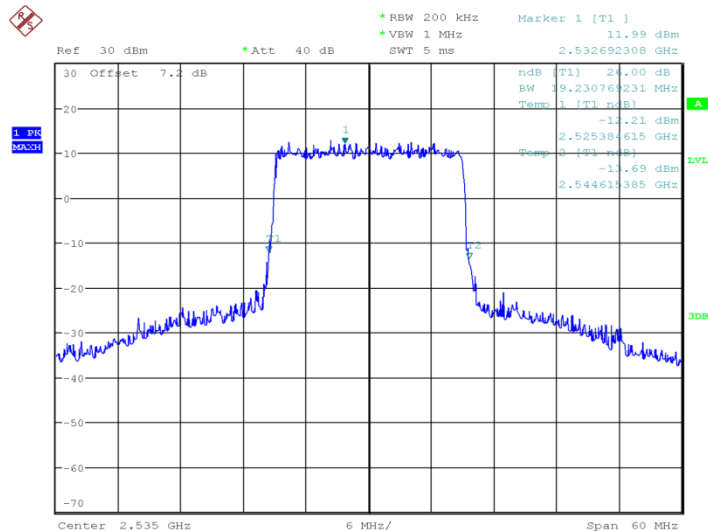


IF Overload  
Date: 9.JAN.2003 05:38:50

## LTE band 12, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
707.5	QPSK	16QAM
	1.322	1.388

## LTE band 12, 1.4MHz Bandwidth, QPSK (-26dBc BW)

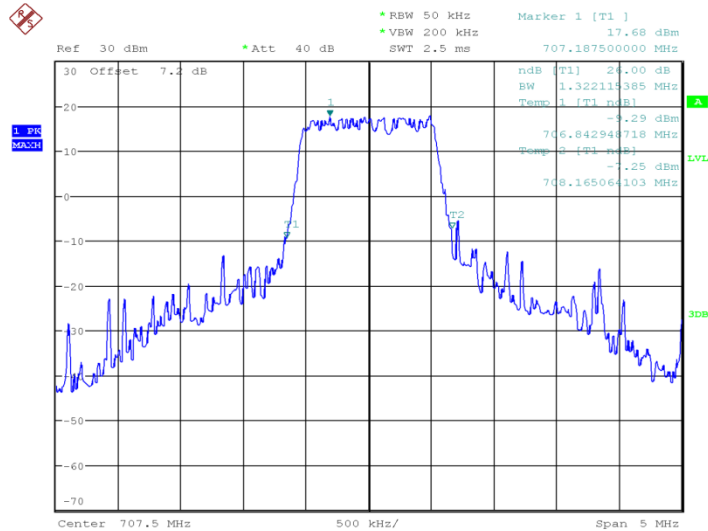


IF Overload  
Date: 2.JAN.2003 09:33:17

## LTE band 12, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

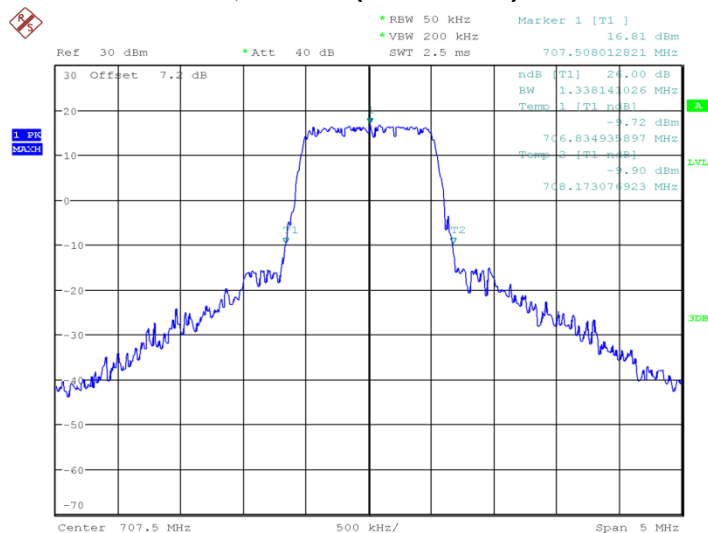


IF Overload  
Date: 2.JAN.2003 09:33:30

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
707.5	QPSK	16QAM
	2.885	2.885

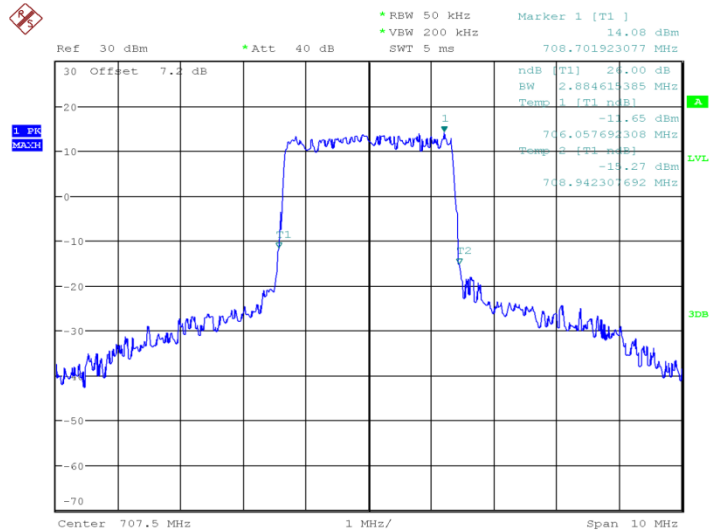

IF Overload  
Date: 2.JAN.2003 09:33:51

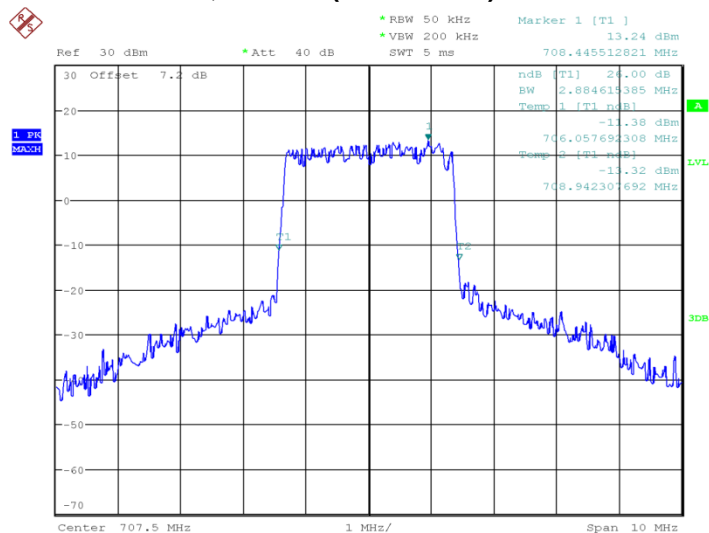


IF Overload  
Date: 2.JAN.2003 09:34:06

## LTE band 12, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
707.5	QPSK	16QAM
	4.928	4.880

## LTE band 12, 5MHz Bandwidth, QPSK (-26dBc BW)

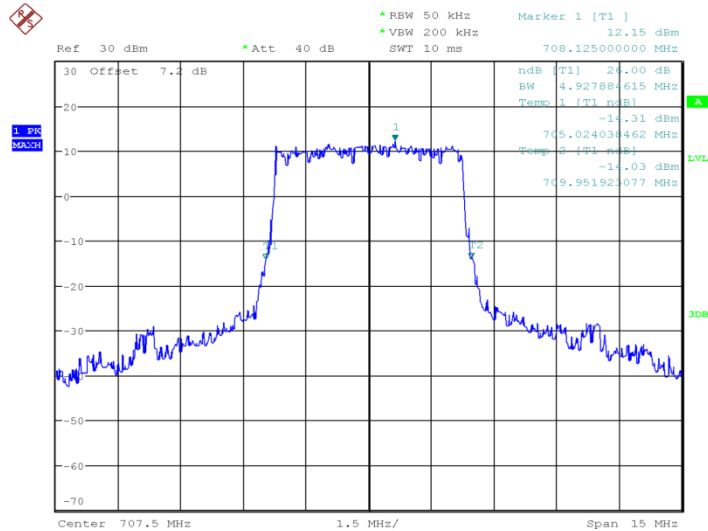

IF Overload  
Date: 2.JAN.2003 09:34:27

## LTE band 12, 5MHz Bandwidth,16QAM (-26dBc BW)

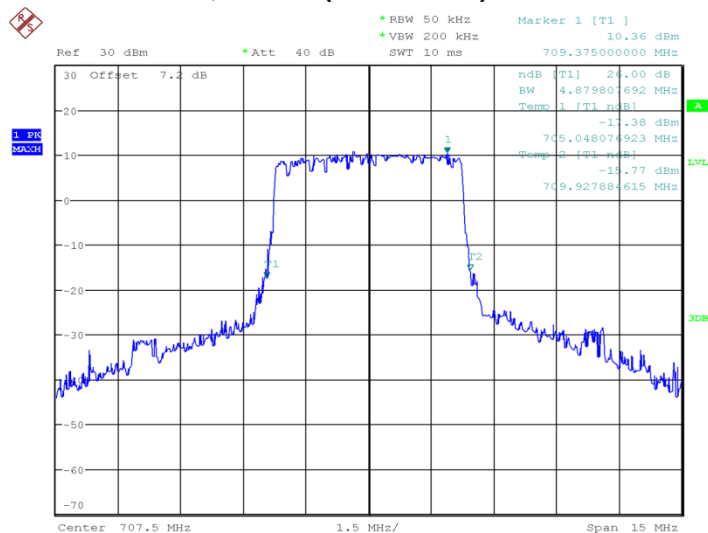


IF Overload  
Date: 2.JAN.2003 09:34:40

## LTE band 12, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
707.5	QPSK	16QAM
	9.615	9.615

## LTE band 12, 10MHz Bandwidth, QPSK (-26dBc BW)

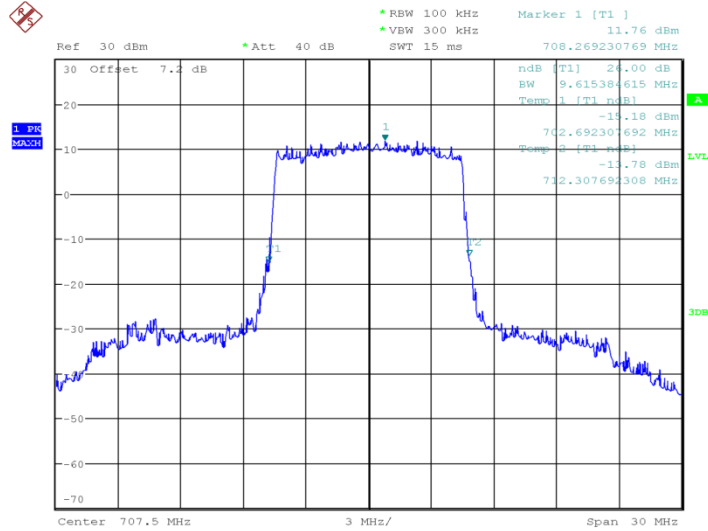

IF Overload  
Date: 2.JAN.2003 09:35:02

## LTE band 12, 10MHz Bandwidth, 16QAM (-26dBc BW)

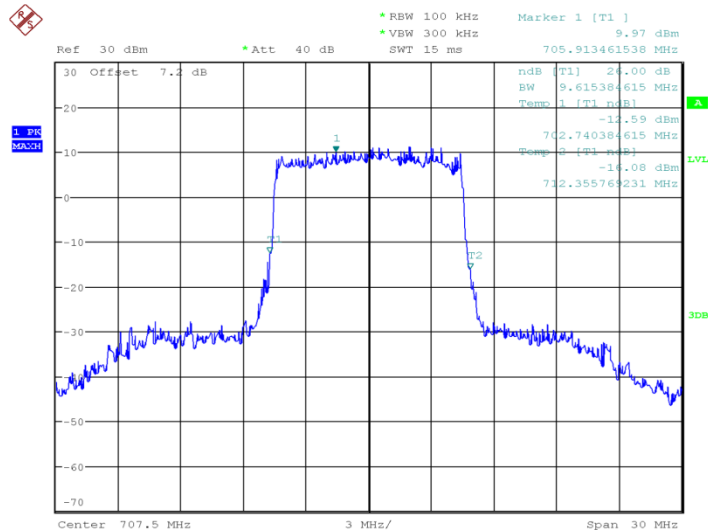

IF Overload  
Date: 2.JAN.2003 09:35:15

**ANNEX A.6. BAND EDGE COMPLIANCE****Reference**

FCC: CFR Part 22.917(b), 24.238(a), 27.53(g), 27.53(h), 27.53(m)

**A.6.1 Measurement limit**


Part 22.917(b), 24.238(a), 27.53(g), 27.53(h), 27.53(m) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.




## OBW: 1RB-high\_offset

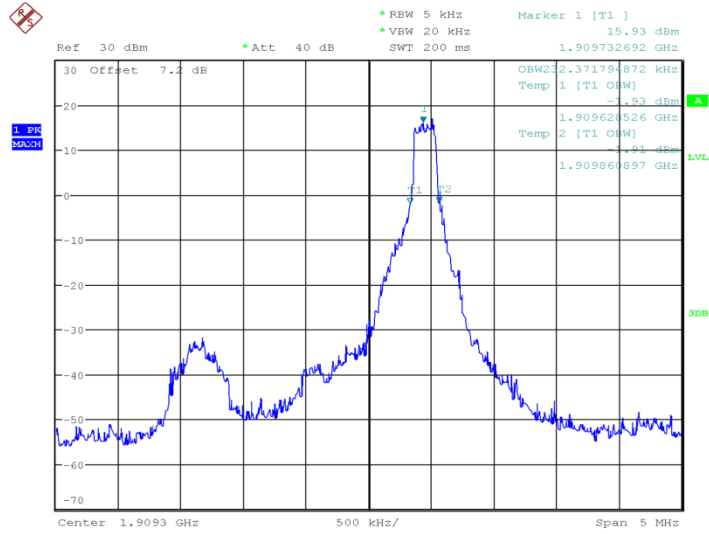

IF Overload  
Date: 2.JAN.2003 10:27:25


## HIGH BAND EDGE BLOCK-1RB-high\_offset

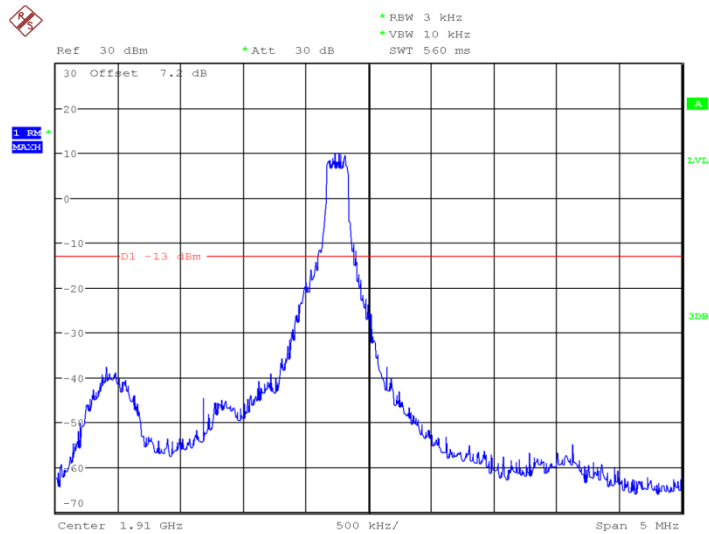

IF Overload  
Date: 2.JAN.2003 10:27:48




## LOW BAND EDGE BLOCK-20MHz-100%RB

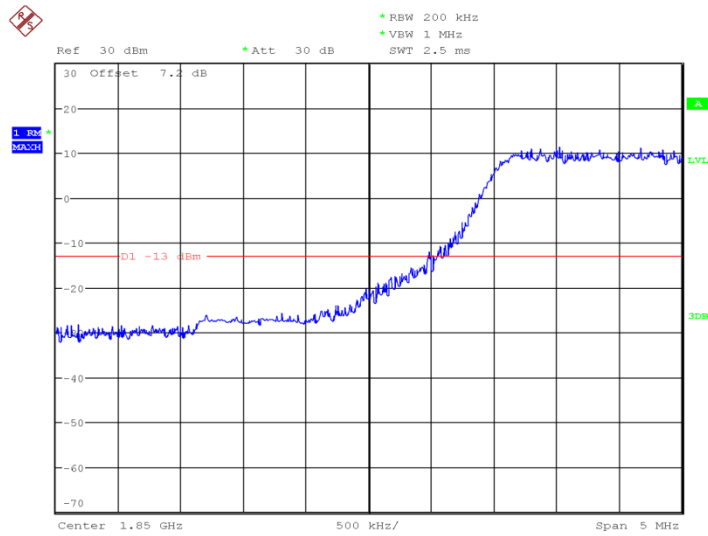

IF Overload  
Date: 2.JAN.2003 10:26:51


## HIGH BAND EDGE BLOCK-20MHz-100%RB

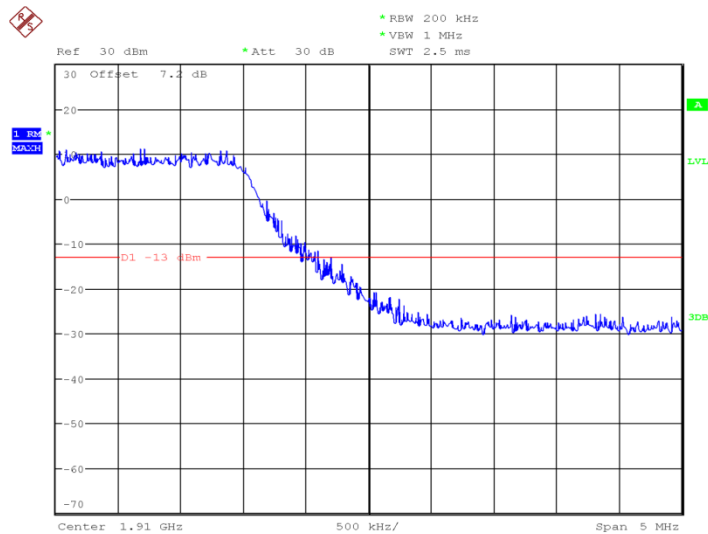

IF Overload  
Date: 2.JAN.2003 10:28:18




## OBW: 1RB-high\_offset

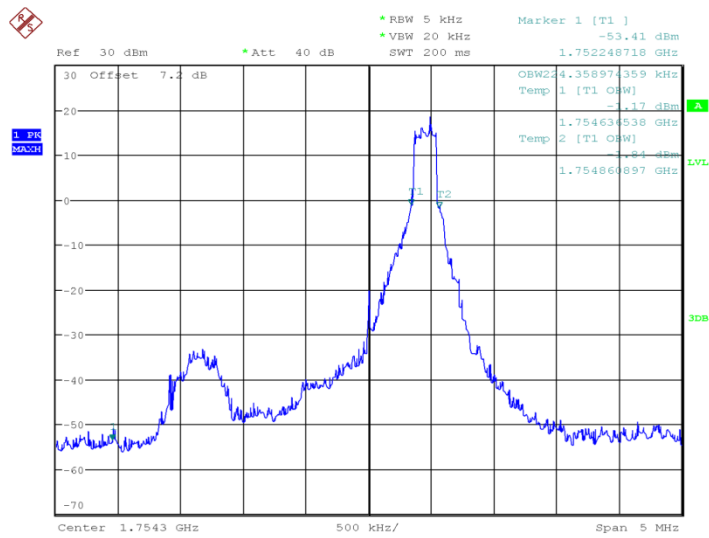


IF Overload  
Date: 2.JAN.2003 10:31:56

## HIGH BAND EDGE BLOCK-1RB-high\_offset

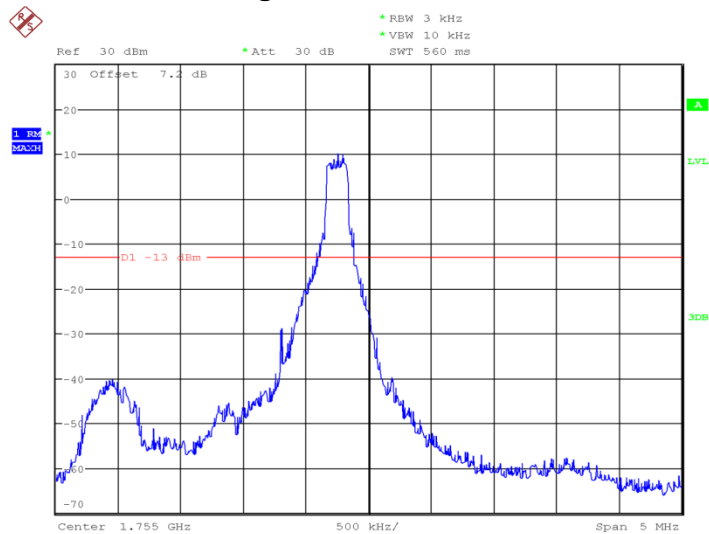


IF Overload  
Date: 2.JAN.2003 10:32:18

## LOW BAND EDGE BLOCK-20MHz-100%RB

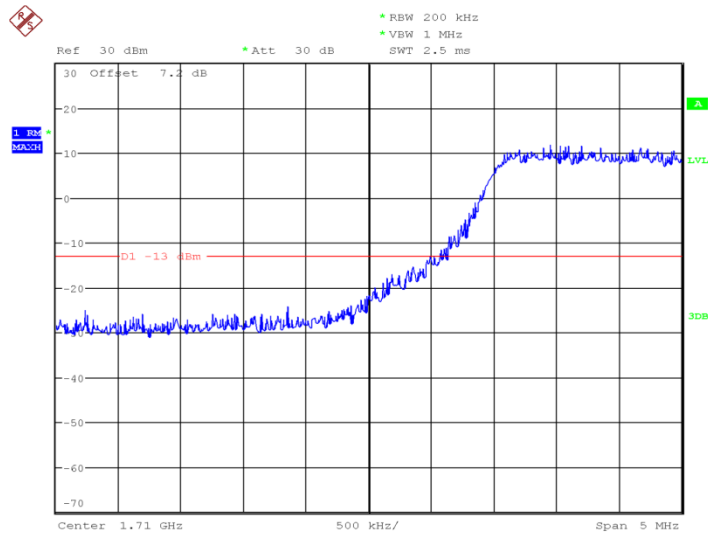

IF Overload  
Date: 2.JAN.2003 10:31:24


## HIGH BAND EDGE BLOCK-20MHz-100%RB

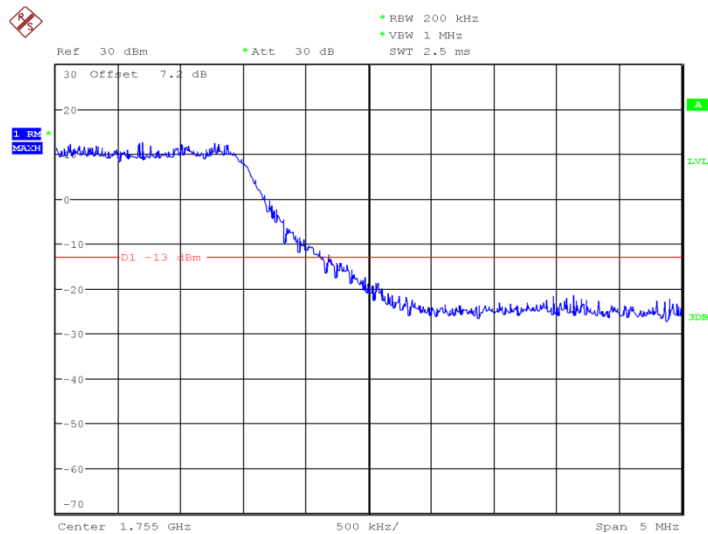

IF Overload  
Date: 2.JAN.2003 10:32:48


## LTE band 5

### OBW: 1RB-low\_offset

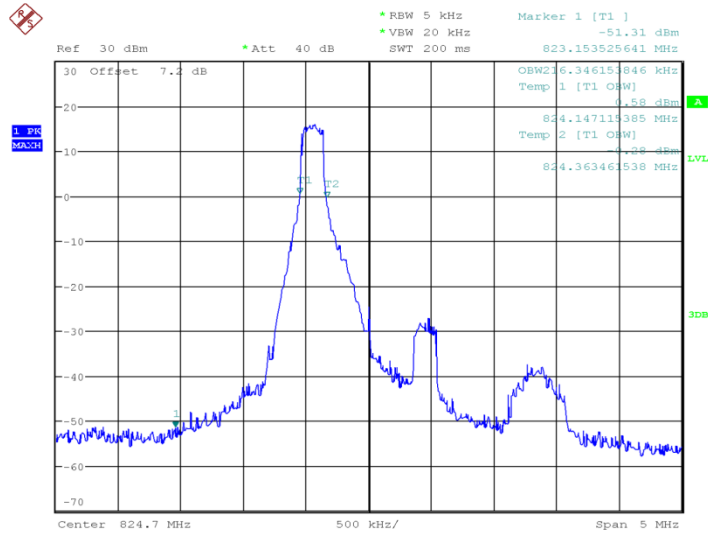


IF Overload  
Date: 2.JAN.2003 10:35:37

### LOW BAND EDGE BLOCK-1RB-low\_offset

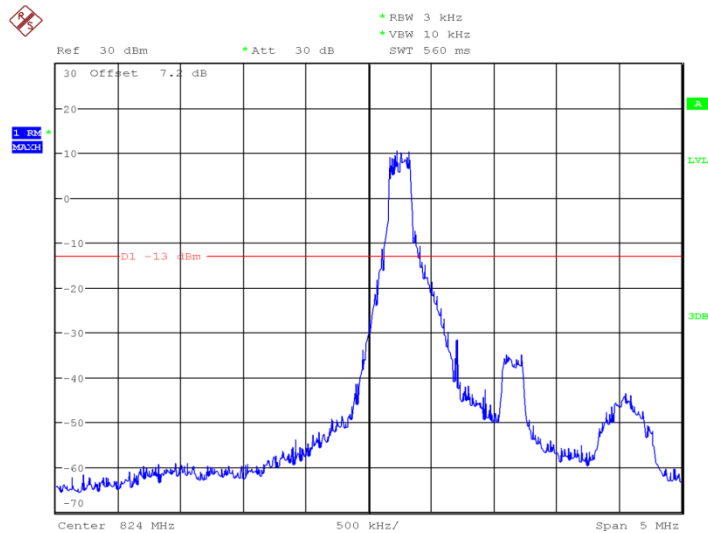


IF Overload  
Date: 2.JAN.2003 10:35:59

## OBW: 1RB-high\_offset

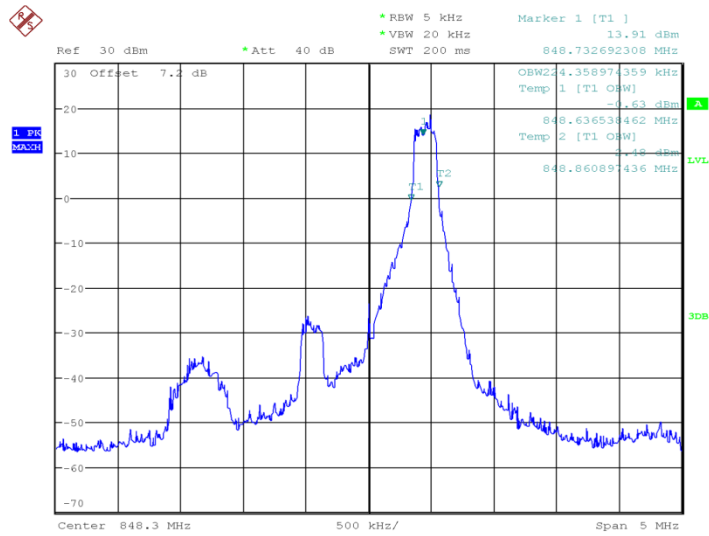


IF Overload  
Date: 2.JAN.2003 10:37:01

## HIGH BAND EDGE BLOCK-1RB-high\_offset

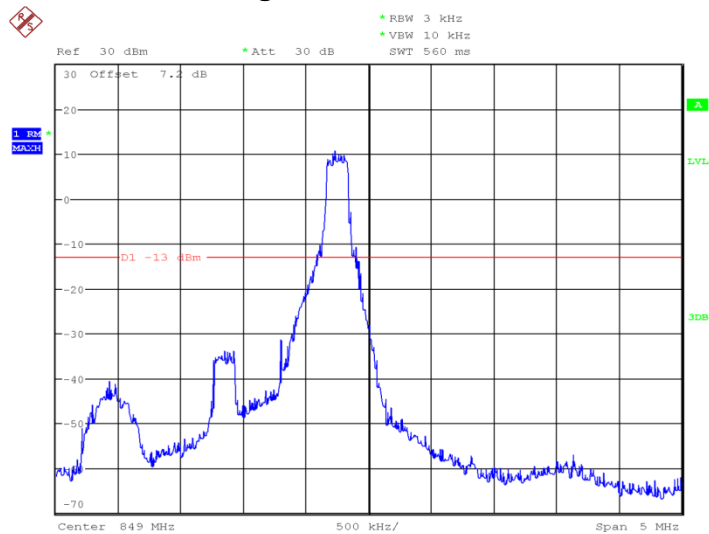


IF Overload  
Date: 2.JAN.2003 10:37:23

## LOW BAND EDGE BLOCK-QPSK-10MHz-100%RB

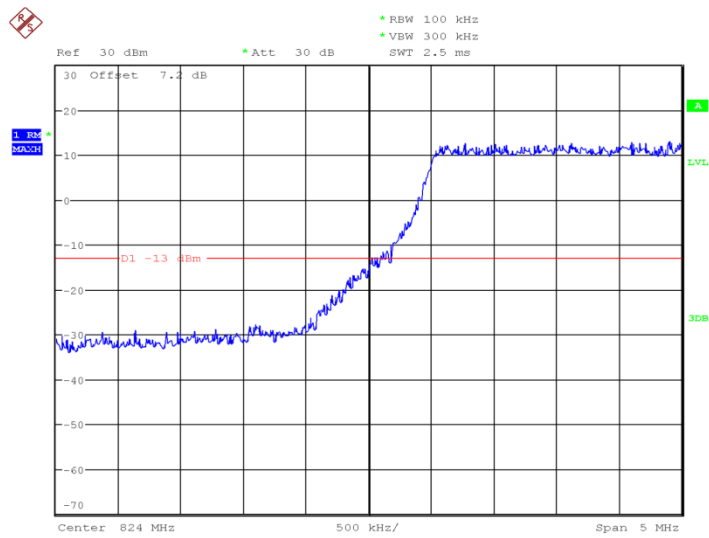

IF Overload  
Date: 2.JAN.2003 10:36:28


## HIGH BAND EDGE BLOCK-QPSK-10MHz-100%RB

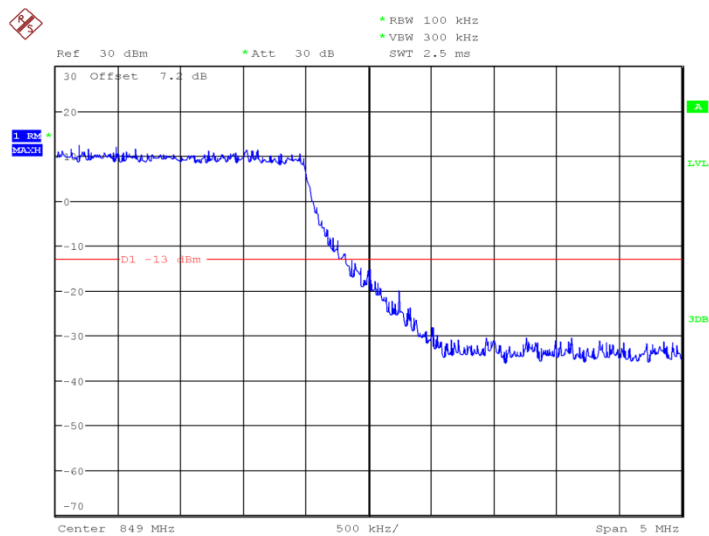

IF Overload  
Date: 2.JAN.2003 10:37:53


## LTE band 7

### OBW: 1RB-low\_offset

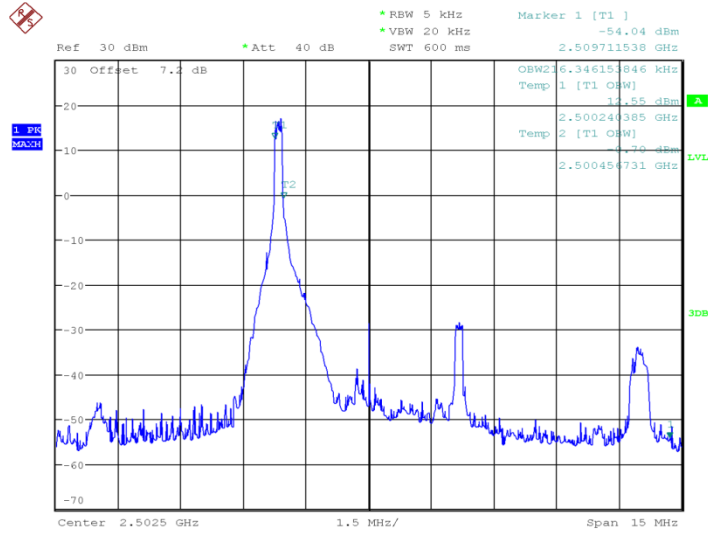

IF Overload  
Date: 2.JAN.2003 10:39:18


### LOW BAND EDGE BLOCK-1RB-low\_offset

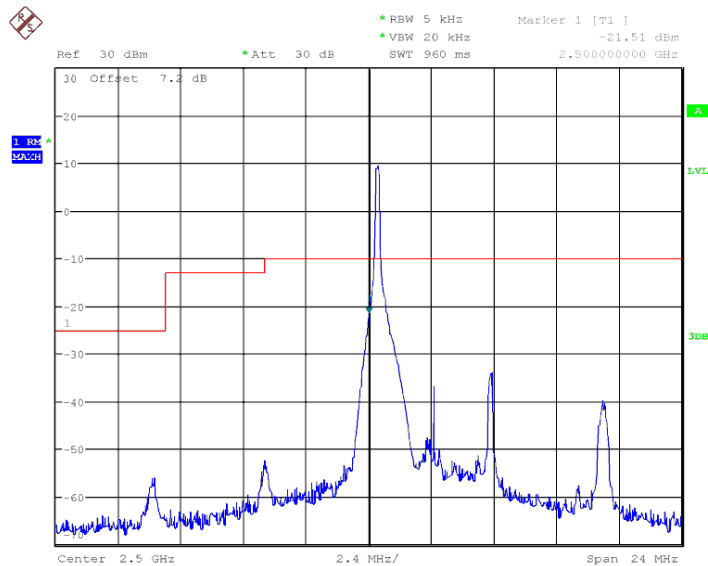

IF Overload  
Date: 2.JAN.2003 11:34:21




## OBW: 1RB-high\_offset

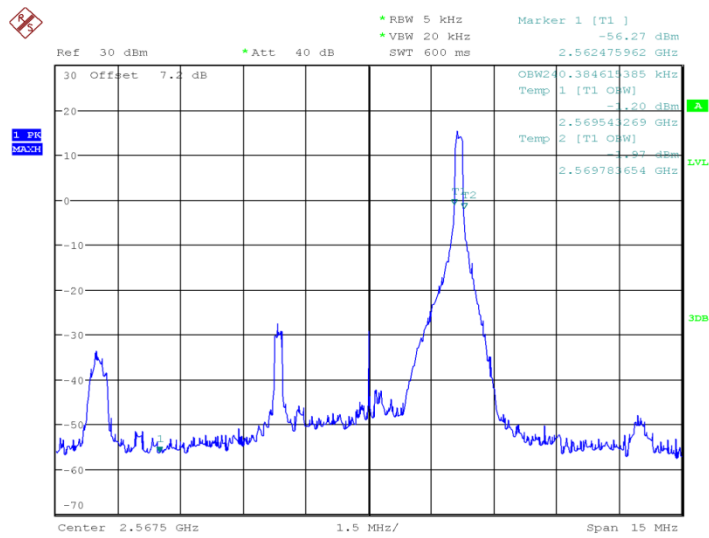


IF Overload  
Date: 2.JAN.2003 10:40:44

## HIGH BAND EDGE BLOCK-1RB-high\_offset

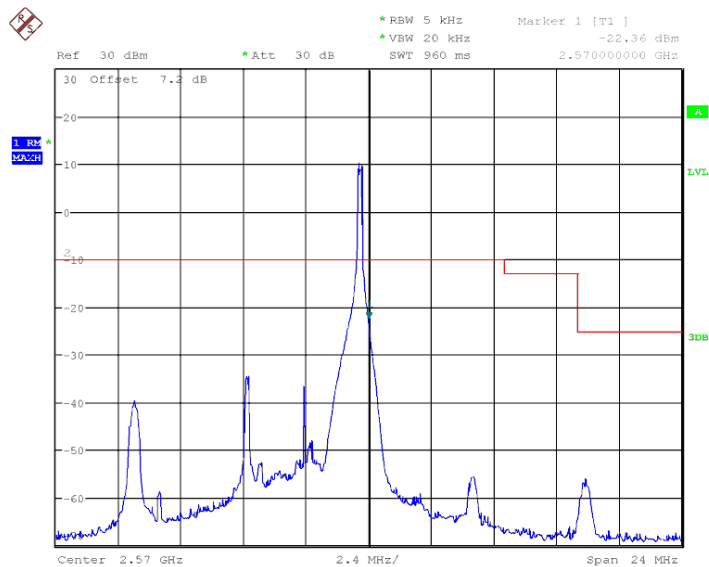

IF Overload  
Date: 2.JAN.2003 11:35:45


## LOW BAND EDGE BLOCK-20MHz-100%RB

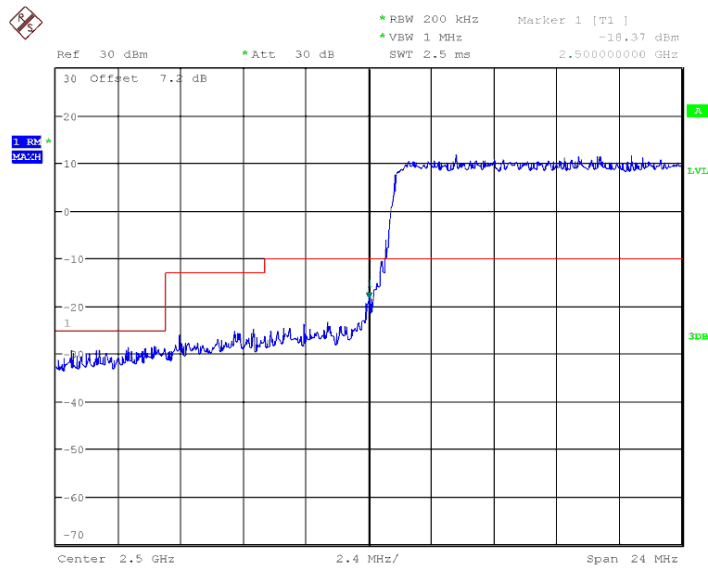

IF Overload

Date: 2.JAN.2003 11:32:33

## HIGH BAND EDGE BLOCK-20MHz-100%RB

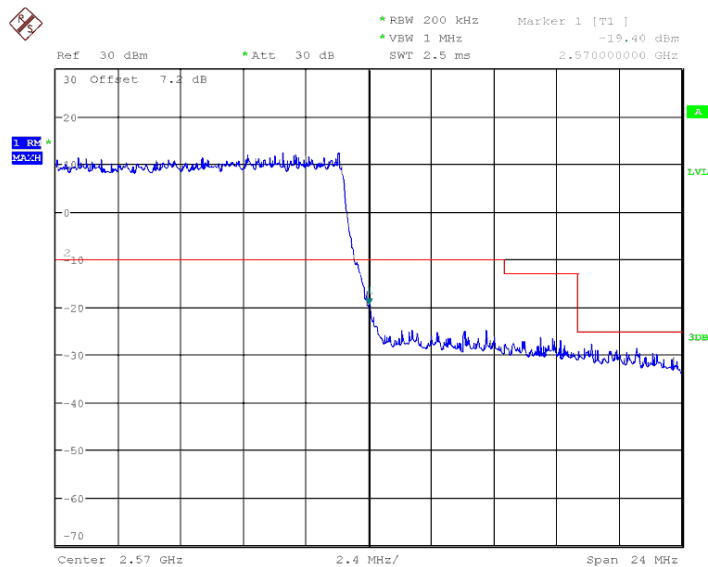


IF Overload

Date: 2.JAN.2003 11:31:08

## LTE band 12


### OBW: 1RB-low\_offset

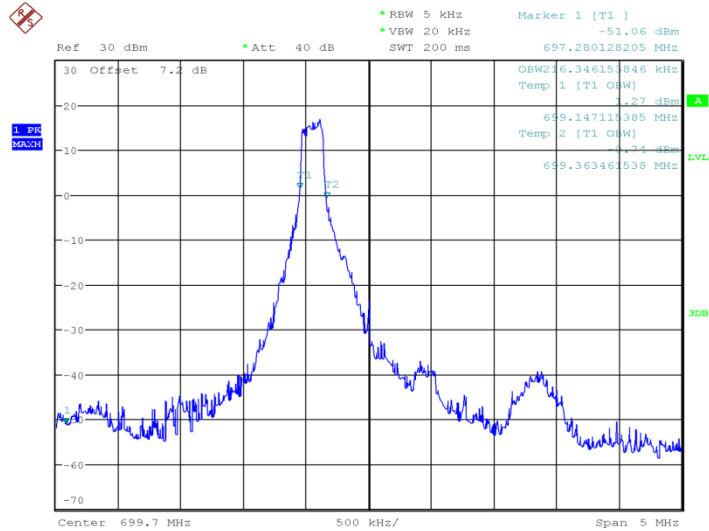

IF Overload

Date: 2.JAN.2003 10:42:36

### LOW BAND EDGE BLOCK-1RB-low\_offset

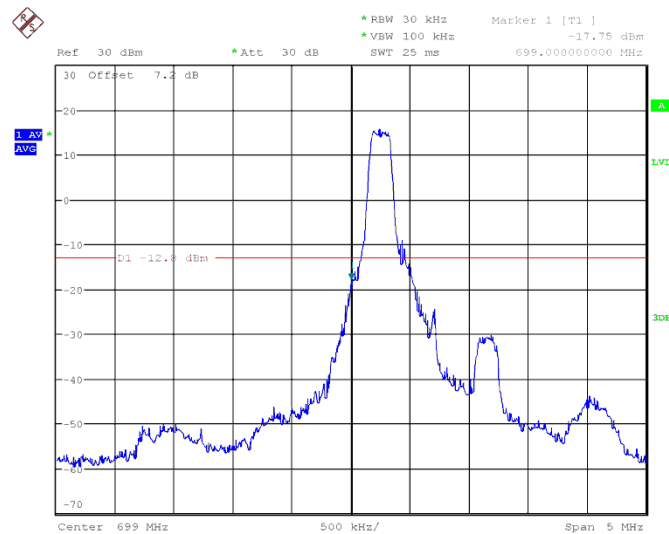


IF Overload

Date: 20.MAR.2018 15:17:05

IF Overload  
Date: 2.JAN.2003 10:44:03


IF Overload  
Date: 20.MAR.2018 15:16:12

## LOW BAND EDGE BLOCK-10MHz-100%RB

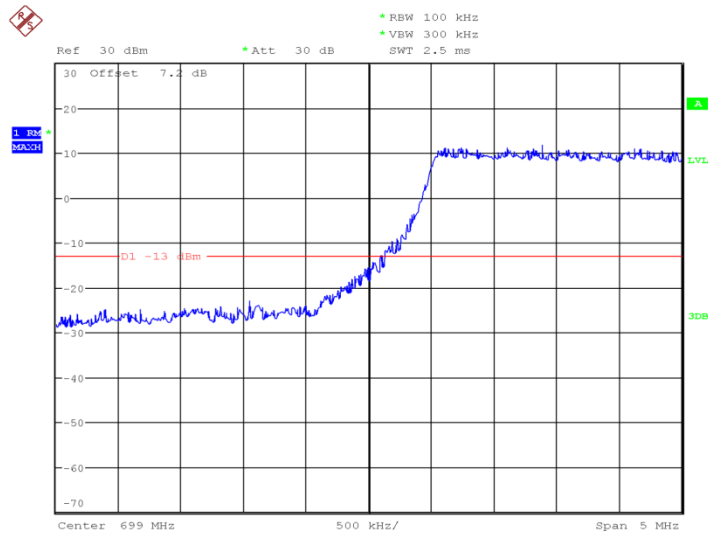

IF Overload  
Date: 2.JAN.2003 10:43:30

## HIGH BAND EDGE BLOCK-10MHz-100%RB

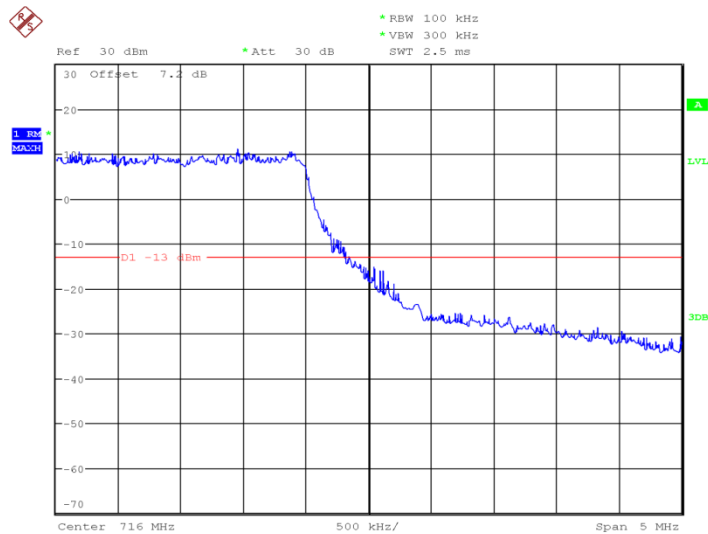

IF Overload  
Date: 2.JAN.2003 10:44:55

**ANNEX A.7. CONDUCTED SPURIOUS EMISSION****Reference**

FCC: CFR Part 22.917(b), 24.238(a), 27.53(g), 27.53(h), 27.53(m)

**A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

**A. 7.2 Measurement Limit**

Part 22.917(b), 24.238(a), 27.53(g), 27.53(h), 27.53(m) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## A. 7.3 Measurement result

Only worst case result is given below

### LTE band 2: 30MHz – 20GHz


Spurious emission limit –13dBm.

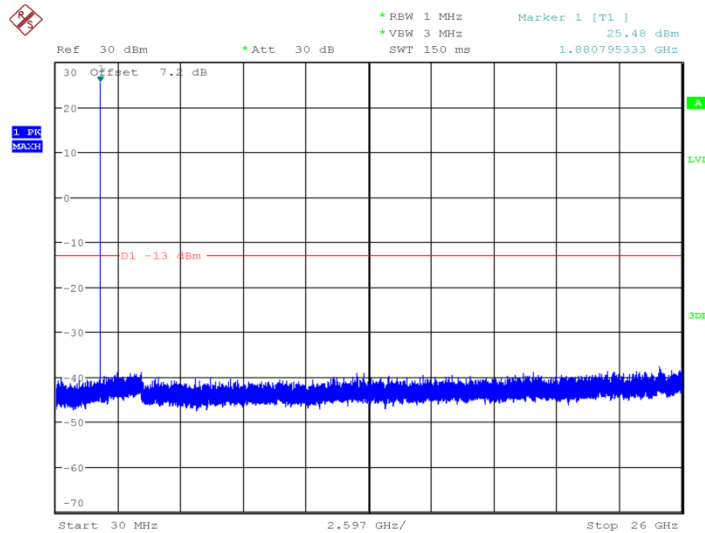

IF Overload  
Date: 2.JAN.2003 10:22:48

### LTE band 4: 30MHz – 20GHz


Spurious emission limit –13dBm.

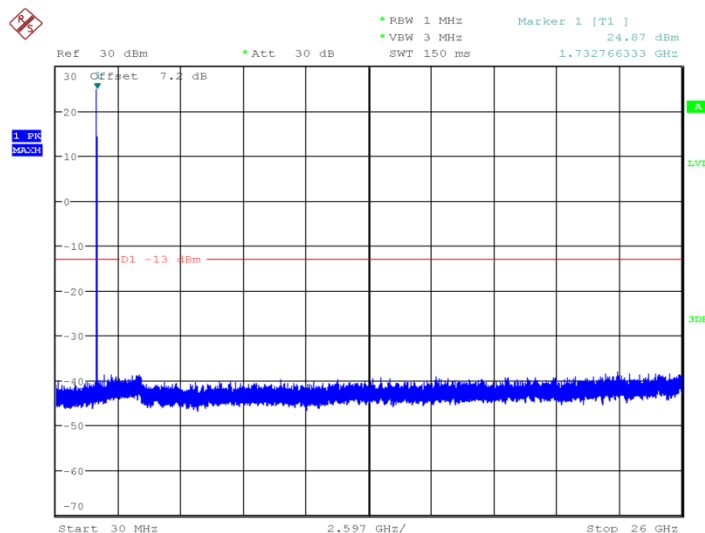

IF Overload  
Date: 2.JAN.2003 10:23:14

## LTE band 5: 30MHz – 10GHz


Spurious emission limit –13dBm.

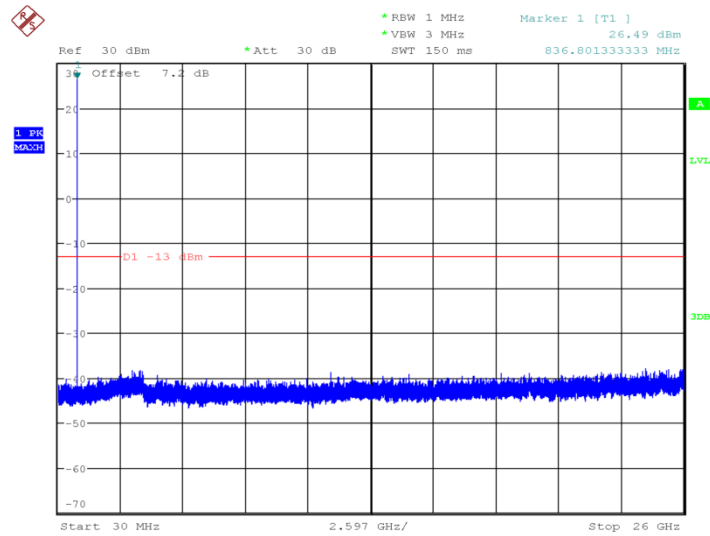

IF Overload  
Date: 2.JAN.2003 10:23:40

## LTE band 7: 30MHz – 26GHz

Spurious emission limit –13dBm.

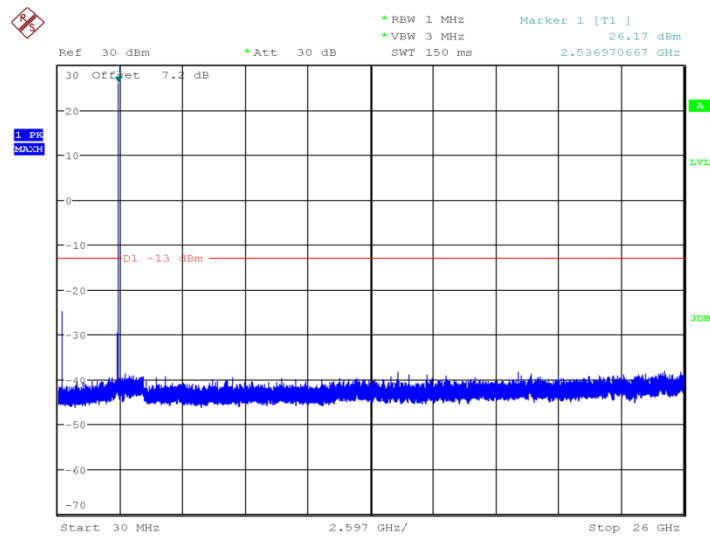


IF Overload  
Date: 2.JAN.2003 10:24:10



## LTE band 12: 30MHz – 10GHz

Spurious emission limit –13dBm.

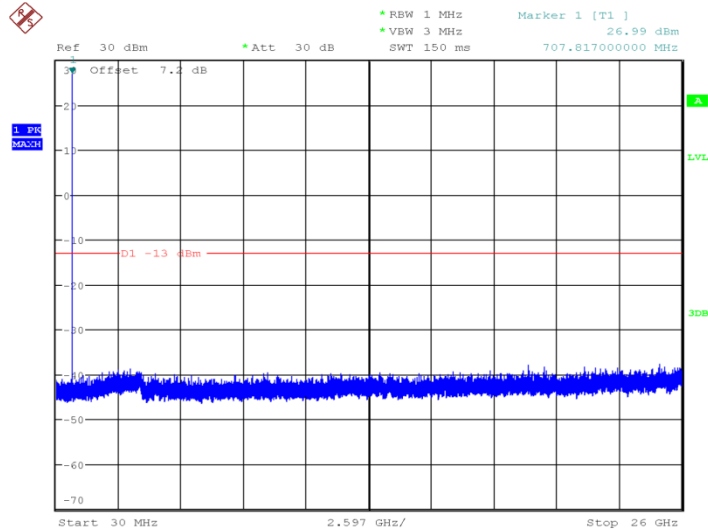

IF Overload  
Date: 2.JAN.2003 10:24:40

## ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO

### Reference

FCC: CFR Part 24.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7:

- Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Set the measurement interval to 1 ms
- Record the maximum PAPR level associated with a probability of 0.1%

**A.8.1 Measurement limit**

not exceed 13 dB

**A.8.2 Measurement results****LTE band 2, 20MHz**

Frequency(MHz)	PAPR(dB)	
1860.0	QPSK	16QAM
	4.9	6.31

**LTE band 4, 20MHz**

Frequency(MHz)	PAPR(dB)	
1745.0	QPSK	16QAM
	4.97	6.15

**LTE band 5, 10MHz**

Frequency(MHz)	PAPR(dB)	
824.7	QPSK	16QAM
	5.48	6.19

**LTE band 7, 20MHz**

Frequency(MHz)	PAPR(dB)	
2510.0	QPSK	16QAM
	4.94	6.15

**LTE band 12,10MHz**

Frequency(MHz)	PAPR(dB)	
707.5	QPSK	16QAM
	5.48	6.51

**ANNEX B. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

\*\*\*\*\*END OF REPORT\*\*\*\*\*