

# FCC PART 15.247 TEST REPORT

For

# UNNECTO HOLDING LIMITED

13/F HARBOUR COMMERCIAL BUILDING 122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK

**FCC ID: 2ADR3U613** 

Report Type: Product Type: **3G MOBILE PHONE** Original Report Sonia Zhon **Test Engineer:** Sonia Zhou **Report Number:** RSZ160530001-00B **Report Date:** 2016-06-15 Rocky Kang Rocky Kang Reviewed By: RF Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 **Prepared By:** www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

# **TABLE OF CONTENTS**

| GENERAL INFORMATION                                    | 4  |
|--|----|
| Objective  |    |
| RELATED SUBMITTAL(S)/GRANT(S)                          | 4  |
| TEST METHODOLOGY                                       |    |
| TEST FACILITY  | 5  |
| SYSTEM TEST CONFIGURATION                              | 6  |
| SUPPORT EQUIPMENT LIST AND DETAILS                     |    |
| EXTERNAL I/O CABLE                                     |    |
| BLOCK DIAGRAM OF TEST SETUP                            |    |
| SUMMARY OF TEST RESULTS                                | 8  |
| FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE | 9  |
| APPLICABLE STANDARD                                    |    |
| FCC §15.203 – ANTENNA REQUIREMENT                      | 10 |
| APPLICABLE STANDARD                                    |    |
| ANTENNA CONNECTOR CONSTRUCTION                         | 10 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS          | 11 |
| APPLICABLE STANDARD                                    | 11 |
| MEASUREMENT UNCERTAINTY                                |    |
| EUT SETUP  |    |
| EMI TEST RECEIVER SETUP                                |    |
| TEST PROCEDURE   |    |
| TEST EQUIPMENT LIST AND DETAILS                        | 12 |
| CORRECTED FACTOR & MARGIN CALCULATION                  | 12 |
| TEST RESULTS SUMMARY                                   |    |
| TEST DATA  |    |
| FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS |    |
| APPLICABLE STANDARD                                    |    |
| Measurement Uncertainty                                |    |
| EUT SETUP  |    |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP            |    |
| TEST PROCEDURE   |    |
| CORRECTED AMPLITUDE & MARGIN CALCULATION               |    |
| TEST EQUIPMENT LIST AND DETAILS                        |    |
| TEST RESULTS SUMMARY TEST DATA                         |    |
| FCC §15.247(a) (1)-CHANNEL SEPARATION TEST             |    |
|  |    |
| APPLICABLE STANDARD                                    |    |
| TEST PROCEDURE TEST EQUIPMENT LIST AND DETAILS         |    |
| TEST DATA  |    |
|  |    |
| FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH          |    |
| TEST PROCEDURE   |    |
| TEST PROCEDURE  TEST EQUIPMENT LIST AND DETAILS.       |    |
| LEGI EQUITIENT EIGI MID DETMED                         | 20 |

| TEST DATA   | 28 |
|---|----|
| FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST | 34 |
| APPLICABLE STANDARD                                       | 34 |
| TEST PROCEDURE  | 34 |
| TEST EQUIPMENT LIST AND DETAILS                           |    |
| Test Data   |    |
| FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME) | 37 |
| APPLICABLE STANDARD                                       | 37 |
| TEST PROCEDURE  |    |
| TEST EQUIPMENT LIST AND DETAILS                           |    |
| Test Data   |    |
| FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT        | 53 |
| APPLICABLE STANDARD                                       | 53 |
| TEST PROCEDURE  |    |
| TEST EQUIPMENT LIST AND DETAILS.                          |    |
| TEST DATA   | 53 |
| FCC §15.247(d) - BAND EDGES TESTING                       | 55 |
| APPLICABLE STANDARD                                       |    |
| TEST PROCEDURE  | 55 |
| TEST EQUIPMENT LIST AND DETAILS.                          |    |
| Test Data   | 56 |

## **GENERAL INFORMATION**

The *UNNECTO HOLDING LIMITED*'s product, model number: *U613 (FCC ID: 2ADR3U613)* or the "EUT" in this report was a 3G *MOBILE PHONE*, which was measured approximately: 12.5 cm (L)  $\times$  6.5 cm (W)  $\times$  1.1cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or 5.0V from adapter.

Report No.: RSZ160530001-00B

Adapter Information: Model No: CU-613

Input: AC 100-240V, 50/60Hz, 150mA

Output: DC 5.0V, 700mA

\*All measurement and test data in this report was gathered from production sample serial number: 1602377. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-06-01.

#### **Objective**

This test report is prepared on behalf of *UNNECTO HOLDING LIMITED* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### Related Submittal(s)/Grant(s)

Part 15.247 DTS, FCC Part 22H & 24E PCE and Part 15B JBP submissions with FCC ID: 2ADR3U613.

## **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz, and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

FCC Part 15.247 Page 4 of 59

#### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ160530001-00B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.247 Page 5 of 59

# SYSTEM TEST CONFIGURATION

### **Description of Test Configuration**

The system was configured for testing in an engineering mode.

#### **EUT Exercise Software**

No exercise software was used.

### **Special Accessories**

No special accessory.

# **Equipment Modifications**

No modification was made to the EUT tested.

# **Support Equipment List and Details**

| Manufacturer | Description      | Model    | Serial Number |
|--------------|------------------|----------|---------------|
| TESCOM       | Bluetooth Tester | TC-3000B | 3000B630010   |

Report No.: RSZ160530001-00B


# **External I/O Cable**

| Cable Description                      | Length (m) | From Port | То       |
|--|------------|-----------|----------|
| Un-Shielding Detachable Earphone Cable | 1.2        | EUT       | Earphone |
| Shielding Detachable USB Cable         | 1.2        | EUT       | Adapter  |

FCC Part 15.247 Page 6 of 59

# **Block Diagram of Test Setup**

For conducted emission:

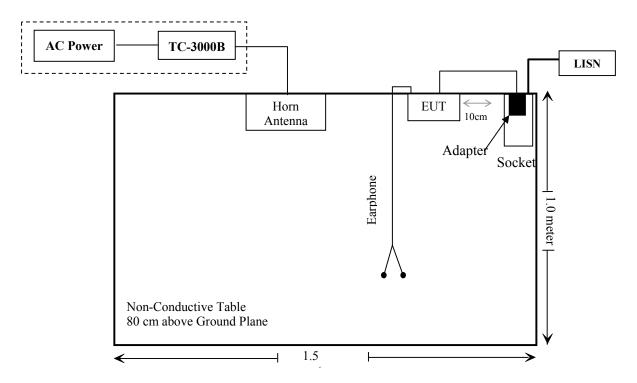

FCC Part 15.247 Page 7 of 59

# SUMMARY OF TEST RESULTS

| FCC Rules                           | Description of Test              | Result     |
|-------------------------------------|----------------------------------|------------|
| §15.247 (i), §2.1093                | RF Exposure                      | Compliance |
| §15.203                             | Antenna Requirement              | Compliance |
| §15.207(a)                          | AC Line Conducted Emissions      | Compliance |
| \$15.205, \$15.209 &<br>\$15.247(d) | Radiated Emissions               | Compliance |
| §15.247(a)(1)                       | 20 dB Emission Bandwidth         | Compliance |
| §15.247(a)(1)                       | Channel Separation Test          | Compliance |
| §15.247(a)(1)(iii)                  | Time of Occupancy (Dwell Time)   | Compliance |
| §15.247(a)(1)(iii)                  | Quantity of hopping channel Test | Compliance |
| §15.247(b)(1)                       | Peak Output Power Measurement    | Compliance |
| §15.247(d)                          | Band edges                       | Compliance |

Report No.: RSZ160530001-00B

FCC Part 15.247 Page 8 of 59

# FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

#### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ160530001-00B

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot$  [ $\sqrt{f(GHz)}$ ]  $\leq$  3.0 for 1-g SAR and  $\leq$  7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### For worst case:

| Frequency | Maximum couducted<br>Tune-up power |               | Calculated<br>Distance | Calculated | Threshold | SAR Test  |
|-----------|------------------------------------|---------------|------------------------|------------|-----------|-----------|
| (MHz)     | power<br>(dBm)                     | power<br>(mW) | (mm)                   | value      | (1-g SAR) | Exclusion |
| 2480      | 9.5                                | 8.91          | 5                      | 2.81       | 3.0       | Yes       |

Result: No SAR test is required

FCC Part 15.247 Page 9 of 59

# FCC §15.203 - ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ160530001-00B

#### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for bluetooth, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC Part 15.247 Page 10 of 59

#### **Applicable Standard**

FCC §15.207(a)

#### **Measurement Uncertainty**


Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Report No.: RSZ160530001-00B

| Port     | Expanded Measurement uncertainty       |
|----------|--|
| AC Mains | 3.34 dB (k=2, 95% level of confidence) |
| CAT 3    | 3.72 dB (k=2, 95% level of confidence) |
| CAT 5    | 3.74 dB (k=2, 95% level of confidence) |
| CAT 6    | 4.54 dB (k=2, 95% level of confidence) |

#### **EUT Setup**

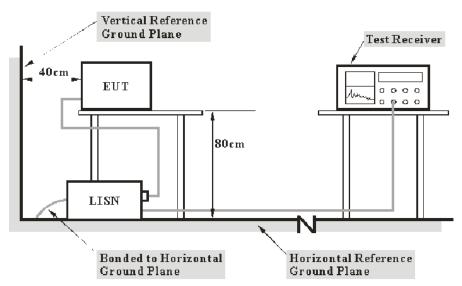

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

FCC Part 15.247 Page 11 of 59

# **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |  |
|------------------|--------|--|
| 150 kHz – 30 MHz | 9 kHz  |  |

Report No.: RSZ160530001-00B

#### **Test Procedure**

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

#### **Test Equipment List and Details**

| Manufacturer          | Description                 | Model  | Serial Number              | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------------------|--------|----------------------------|---------------------|-------------------------|
| Rohde & Schwarz       | EMI Test Receiver           | ESCS30 | 100176                     | 2016-06-01          | 2017-05-31              |
| Rohde & Schwarz       | LISN                        | ENV216 | 3560.6650.12-<br>101613-Yb | 2015-12-15          | 2016-12-14              |
| Rohde & Schwarz       | Transient Limiter           | ESH3Z2 | DE25985                    | 2016-05-14          | 2017-05-14              |
| Ducommun technologies | Conducted Emission<br>Cable | RG-214 | CB031                      | 2015-06-15          | 2016-06-15              |
| Rohde & Schwarz       | CE Test software            | EMC 32 | V8.53                      | NCR                 | NCR                     |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 12 of 59

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.207</u>, the worst margin reading as below:

Report No.: RSZ160530001-00B

#### 11.9 dB at 0.364450 MHz in the Line conducted mode.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25℃     |  |
|--------------------|---------|--|
| Relative Humidity: | 55 %    |  |
| ATM Pressure:      | 101 kPa |  |

The testing was performed by Sonia Zhou on 2016-06-01.


FCC Part 15.247 Page 13 of 59

Report No.: RSZ160530001-00B

EUT operation mode: Transmitting & Charging

# AC 120V/60 Hz, Line:

EMI Auto Test L

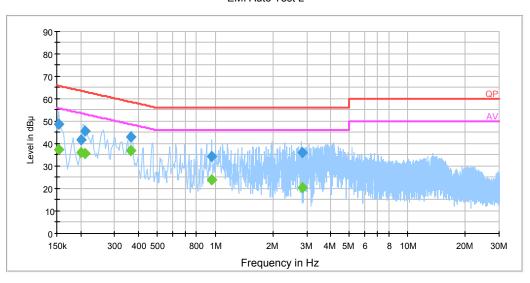


| Frequency<br>(MHz) | Corrected<br>Amplitude<br>(dBµV) | Correction<br>Factor<br>(dB) | Limit<br>(dBµV) | Margin<br>(dB) | Detector<br>(PK/Ave./QP) |
|--------------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.154000           | 48.9                             | 20.0                         | 65.8            | 16.9           | QP                       |
| 0.154000           | 37.2                             | 20.0                         | 55.8            | 18.6           | Ave.                     |
| 0.201500           | 41.8                             | 20.0                         | 63.6            | 21.8           | QP                       |
| 0.201500           | 36.0                             | 20.0                         | 53.5            | 17.5           | Ave.                     |
| 0.209500           | 45.5                             | 20.0                         | 63.3            | 17.8           | QP                       |
| 0.209500           | 35.8                             | 20.0                         | 53.3            | 17.5           | Ave.                     |
| 0.364450           | 43.3                             | 19.9                         | 58.7            | 15.4           | QP                       |
| 0.364450           | 36.8                             | 19.9                         | 48.7            | 11.9           | Ave.                     |
| 0.959630           | 34.4                             | 20.0                         | 56.0            | 21.6           | QP                       |
| 0.959630           | 24.0                             | 20.0                         | 46.0            | 22.0           | Ave.                     |
| 2.831730           | 36.3                             | 20.0                         | 56.1            | 19.8           | QP                       |
| 2.831730           | 20.3                             | 20.0                         | 46.0            | 25.7           | Ave.                     |

FCC Part 15.247 Page 14 of 59

# AC 120V/60 Hz, Neutral:

#### EMI Auto Test N

Report No.: RSZ160530001-00B

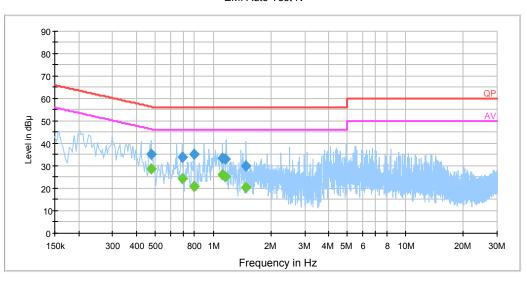

| Frequency<br>(MHz) | Corrected<br>Amplitude<br>(dBµV) | Correction<br>Factor<br>(dB) | Limit<br>(dBµV) | Margin<br>(dB) | Detector<br>(PK/Ave./QP) |
|--------------------|----------------------------------|------------------------------|-----------------|----------------|--------------------------|
| 0.474830           | 35.2                             | 19.9                         | 56.4            | 21.2           | QP                       |
| 0.474830           | 28.7                             | 19.9                         | 46.4            | 17.7           | Ave.                     |
| 0.691650           | 34.0                             | 19.9                         | 56.0            | 22.0           | QP                       |
| 0.691650           | 24.2                             | 19.9                         | 46.0            | 21.8           | Ave.                     |
| 0.798030           | 35.3                             | 19.9                         | 56.0            | 20.7           | QP                       |
| 0.798030           | 20.9                             | 19.9                         | 46.0            | 25.1           | Ave.                     |
| 1.113170           | 33.3                             | 20.0                         | 56.0            | 22.7           | QP                       |
| 1.113170           | 26.1                             | 20.0                         | 46.0            | 19.9           | Ave.                     |
| 1.160390           | 32.9                             | 20.0                         | 56.0            | 23.1           | QP                       |
| 1.160390           | 25.1                             | 20.0                         | 46.0            | 20.9           | Ave.                     |
| 1.483710           | 29.9                             | 20.0                         | 56.1            | 26.2           | QP                       |
| 1.483710           | 20.5                             | 20.0                         | 46.0            | 25.5           | Ave.                     |

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 15 of 59

# FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

#### **Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

#### **Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RSZ160530001-00B

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report.

#### **EUT Setup**

#### **Below 1 GHz:**

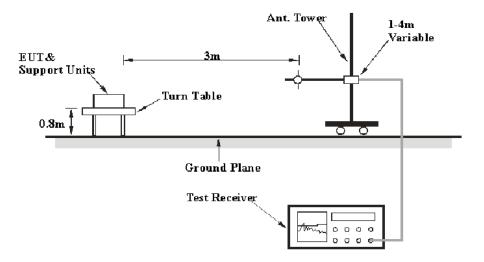

FCC Part 15.247 Page 16 of 59

#### **Above 1GHz:**



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

# **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | PK       |
|                   | 1 MHz   | 10 Hz     | /       | Ave.     |

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

FCC Part 15.247 Page 17 of 59

# **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RSZ160530001-00B

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

### **Test Equipment List and Details**

| Manufacturer                  | Description        | Model                     | Serial<br>Number       | Calibration<br>Date | Calibration<br>Due Date |
|-------------------------------|--------------------|---------------------------|------------------------|---------------------|-------------------------|
| HP                            | Amplifier          | HP8447E                   | 1937A01046             | 2016-05-06          | 2017-05-06              |
| Rohde & Schwarz               | EMI Test Receiver  | ESCI                      | 101120                 | 2015-12-15          | 2016-12-14              |
| Sunol Sciences                | Bi-log Antenna     | JB1                       | A040904-2              | 2014-12-07          | 2017-12-06              |
| Mini                          | Amplifier          | ZVA-183-S+                | 5969001149             | 2016-04-23          | 2017-04-23              |
| A.H. System                   | Horn Antenna       | SAS-200/571               | 135                    | 2015-08-18          | 2018-08-17              |
| Rohde & Schwarz               | Signal Analyzer    | FSIQ26                    | 8386001028             | 2015-12-11          | 2016-12-11              |
| the electro-<br>Mechanics Co. | Horn Antenna       | 3116                      | 9510-2270              | 2013-10-14          | 2016-10-13              |
| TDK                           | Chamber            | Chamber A                 | 2#                     | 2013-10-15          | 2016-10-15              |
| TDK                           | Chamber            | Chamber B                 | 1#                     | 2015-07-23          | 2016-07-22              |
| DUCOMMUN                      | Pre-amplifier      | ALN-<br>22093530-01       | 991373-01              | 2015-08-03          | 2016-08-03              |
| R&S                           | Auto test Software | EMC32                     | V9.10                  | NCR                 | NCR                     |
| Ducommun technologies         | RF Cable           | UFA210A-1-<br>4724-30050U | MFR64369<br>223410-001 | 2015-06-15          | 2016-06-15              |
| Ducommun technologies         | RF Cable           | 104PEA                    | 218124002              | 2015-06-15          | 2016-06-15              |
| Ducommun technologies         | RF Cable           | RG-214                    | 1                      | 2015-06-15          | 2016-06-15              |
| Ducommun technologies         | RF Cable           | RG-214                    | 2                      | 2015-06-15          | 2016-06-15              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 18 of 59

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247</u>.

### 0.33 dB at 2483.53 MHz in the Horizontal polarization for High Channel

Report No.: RSZ160530001-00B

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than +  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |
|--------------------|-----------|
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-06-03.

EUT operation mode: Transmitting & Charging

**30 MHz -25 GHz:** (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case as below)

| Frequency | Re             | eceiver                  | Turntable | Rx Antenna Corrected |                |             | 15.247                | C Part<br>/205/209 |                |
|-----------|----------------|--------------------------|-----------|----------------------|----------------|-------------|-----------------------|--------------------|----------------|
| (MHz)     | Reading (dBµV) | Detector<br>(PK/QP/Ave.) |           | Height (m)           | Polar<br>(H/V) | Factor (dB) | Amplitude<br>(dBµV/m) | Limit<br>(dBµV/m)  | Margin<br>(dB) |
|           |                |                          | Low Ch    | annel (2             | 2402 M         | Hz)         |                       |                    |                |
| 399.94    | 40.24          | QP                       | 351       | 1.5                  | Н              | -4.40       | 35.84                 | 46                 | 10.16          |
| 2402.00   | 102.41         | PK                       | 344       | 2.3                  | Н              | -6.46       | 95.95                 | /                  | /              |
| 2402.00   | 91.99          | Ave.                     | 344       | 2.3                  | Н              | -6.46       | 85.53                 | /                  | /              |
| 2402.00   | 102.21         | PK                       | 158       | 1.7                  | V              | -6.46       | 95.75                 | /                  | /              |
| 2402.00   | 92.74          | Ave.                     | 158       | 1.7                  | V              | -6.46       | 86.28                 | /                  | /              |
| 2388.47   | 56.34          | PK                       | 51        | 2.1                  | Н              | -6.46       | 49.88                 | 74                 | 24.12          |
| 2388.47   | 42.56          | Ave.                     | 51        | 2.1                  | Н              | -6.46       | 36.10                 | 54                 | 17.90          |
| 2388.95   | 57.33          | PK                       | 231       | 2.1                  | Н              | -6.46       | 50.87                 | 74                 | 23.13          |
| 2388.95   | 43.91          | Ave.                     | 231       | 2.1                  | Н              | -6.46       | 37.45                 | 54                 | 16.55          |
| 2483.51   | 42.82          | PK                       | 267       | 1.3                  | Н              | -4.74       | 38.08                 | 74                 | 35.92          |
| 2483.51   | 28.34          | Ave.                     | 267       | 1.3                  | Н              | -4.74       | 23.60                 | 54                 | 30.40          |
| 4804.00   | 40.59          | PK                       | 61        | 1.3                  | V              | 3.79        | 44.38                 | 74                 | 29.62          |
| 4804.00   | 26.66          | Ave.                     | 61        | 1.3                  | V              | 3.79        | 30.45                 | 54                 | 23.55          |

FCC Part 15.247 Page 19 of 59

| Frequency | Re                        | eceiver                  | Turntable | Rx An      | itenna         |             | Corrected             | 15.247 | C Part<br>/205/209 |
|-----------|---------------------------|--------------------------|-----------|------------|----------------|-------------|-----------------------|--------|--------------------|
| (MHz)     | Reading (dBµV)            | Detector<br>(PK/QP/Ave.) | Degree    | Height (m) | Polar<br>(H/V) | Factor (dB) | Amplitude<br>(dBµV/m) |        | Margin (dB)        |
|           | Middle Channel (2441 MHz) |                          |           |            |                |             |                       |        |                    |
| 399.94    | 41.93                     | QP                       | 103       | 2.0        | Н              | -4.40       | 37.53                 | 46     | 8.47               |
| 2441.00   | 101.91                    | PK                       | 239       | 1.2        | Н              | -6.46       | 95.45                 | /      | /                  |
| 2441.00   | 92.32                     | Ave.                     | 239       | 1.2        | Н              | -6.46       | 85.86                 | /      | /                  |
| 2441.00   | 101.61                    | PK                       | 157       | 1.0        | V              | -6.46       | 95.15                 | /      | /                  |
| 2441.00   | 92.12                     | Ave.                     | 157       | 1.0        | V              | -6.46       | 85.66                 | /      | /                  |
| 2385.75   | 44.95                     | PK                       | 32        | 2.5        | Н              | -6.46       | 38.49                 | 74     | 35.51              |
| 2385.75   | 28.27                     | Ave.                     | 32        | 2.5        | Н              | -6.46       | 21.81                 | 54     | 32.19              |
| 2484.67   | 46.76                     | PK                       | 239       | 1.1        | Н              | -4.74       | 42.02                 | 74     | 31.98              |
| 2484.67   | 28.54                     | Ave.                     | 239       | 1.1        | Н              | -4.74       | 23.80                 | 54     | 30.20              |
| 2488.29   | 46.35                     | PK                       | 19        | 2.0        | Н              | -4.74       | 41.61                 | 74     | 32.39              |
| 2488.29   | 28.33                     | Ave.                     | 19        | 2.0        | Н              | -4.74       | 23.59                 | 54     | 30.41              |
| 4882.00   | 41.37                     | PK                       | 225       | 1.8        | V              | 3.56        | 44.93                 | 74     | 29.07              |
| 4882.00   | 27.26                     | Ave.                     | 225       | 1.8        | V              | 3.56        | 30.82                 | 54     | 23.18              |
|           | •                         |                          | High Cl   | annel (2   | 2480 M         | Hz)         |                       |        |                    |
| 399.94    | 41.49                     | QP                       | 151       | 1.4        | Н              | -4.40       | 37.09                 | 46     | 8.91               |
| 2480.00   | 101.02                    | PK                       | 253       | 2.2        | Н              | -4.74       | 96.28                 | /      | /                  |
| 2480.00   | 91.19                     | Ave.                     | 253       | 2.2        | Н              | -4.74       | 86.45                 | /      | /                  |
| 2480.00   | 104.82                    | PK                       | 118       | 2.5        | V              | -4.74       | 100.08                | /      | /                  |
| 2480.00   | 95.13                     | Ave.                     | 118       | 2.5        | V              | -4.74       | 90.39                 | /      | /                  |
| 2368.43   | 42.49                     | PK                       | 105       | 1.8        | Н              | -6.46       | 36.03                 | 74     | 37.97              |
| 2368.43   | 28.28                     | Ave.                     | 105       | 1.8        | Н              | -6.46       | 21.82                 | 54     | 32.18              |
| 2483.53   | 78.41                     | PK                       | 154       | 1.7        | Н              | -4.74       | 73.67                 | 74     | 0.33               |
| 2483.53   | 50.51                     | Ave.                     | 154       | 1.7        | Н              | -4.74       | 45.77                 | 54     | 8.23               |
| 2483.86   | 77.19                     | PK                       | 205       | 1.9        | Н              | -4.74       | 72.45                 | 74     | 1.55               |
| 2483.86   | 49.81                     | Ave.                     | 205       | 1.9        | Н              | -4.74       | 45.07                 | 54     | 8.93               |
| 4960.00   | 41.38                     | PK                       | 179       | 1.1        | V              | 3.19        | 44.57                 | 74     | 29.43              |
| 4960.00   | 27.51                     | Ave.                     | 179       | 1.1        | V              | 3.19        | 30.70                 | 54     | 23.30              |

Report No.: RSZ160530001-00B

#### Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading Margin = Limit - Corrected. Amplitude

FCC Part 15.247 Page 20 of 59

# FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

#### **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ160530001-00B

#### **Test Procedure**

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

#### **Test Equipment List and Details**

| Manufacturer          | Description     | Model  | Serial<br>Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz       | Signal Analyzer | FSIQ26 | 8386001028       | 2015-12-11          | 2016-12-11              |
| Ducommun technologies | RF Cable        | RG-214 | 3                | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator  | 5321   | AU0709           | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |  |  |
|--------------------|-----------|--|--|
| Relative Humidity: | 56 %      |  |  |
| ATM Pressure:      | 101.0 kPa |  |  |

The testing was performed by Sonia Zhou on 2016-06-01.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 21 of 59


| Mode           | Channel  | Frequency<br>(MHz) | Channel<br>Separation<br>(MHz) | ≥Limit<br>(MHz) | Result |
|----------------|----------|--------------------|--------------------------------|-----------------|--------|
|                | Low      | 2402               | 1.002                          | 0.61            | Pass   |
|                | Adjacent | 2403               | 1.002                          | 0.01            | rass   |
| BDR            | Middle   | 2441               | 1.002                          | 0.61            | Pass   |
| (GFSK)         | Adjacent | 2442               | 1.002                          | 0.61            | Pass   |
|                | High     | 2480               | 0.000                          | 0.61            | D      |
|                | Adjacent | 2479               | 0.998                          | 0.61            | Pass   |
|                | Low      | 2402               | 0.000                          | 0.04            | D      |
|                | Adjacent | 2403               | 0.998                          | 0.84            | Pass   |
| EDR            | Middle   | 2441               | 1.004                          | 0.84            | Pass   |
| (π/4-DQPSK)    | Adjacent | 2442               | 1.004                          |                 | газз   |
|                | High     | 2480               | 1.004                          | 0.04            | Pass   |
|                | Adjacent | 2479               | 1.004                          | 0.84            |        |
|                | Low      | 2402               | 1.004                          | 0.82            | D      |
|                | Adjacent | 2403               | 1.004                          | 0.82            | Pass   |
| EDR<br>(8DPSK) | Middle   | 2441               | 0.000                          | 0.82            | Pass   |
|                | Adjacent | 2442               | 0.998                          | 0.82            | rass   |
|                | High     | 2480               | 1.004                          | 0.00            | D      |
|                | Adjacent | 2479               | 1.004                          | 0.82            | Pass   |

Note: Limit = 20 dB bandwidth \*2/3

FCC Part 15.247 Page 22 of 59

### BDR (GFSK): Low Channel

Report No.: RSZ160530001-00B

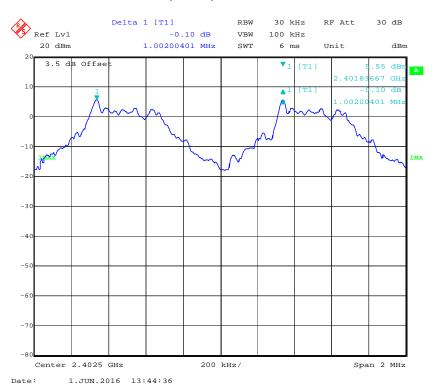


### BDR (GFSK): Middle Channel




FCC Part 15.247 Page 23 of 59

### **BDR (GFSK): High Channel**

Report No.: RSZ160530001-00B

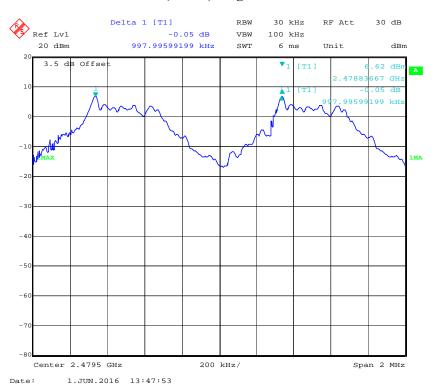


### EDR ( $\pi/4$ -DQPSK): Low Channel

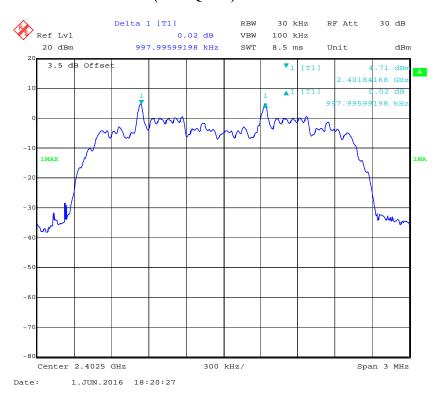


FCC Part 15.247 Page 24 of 59

### EDR (π/4-DQPSK): Middle Channel

Report No.: RSZ160530001-00B

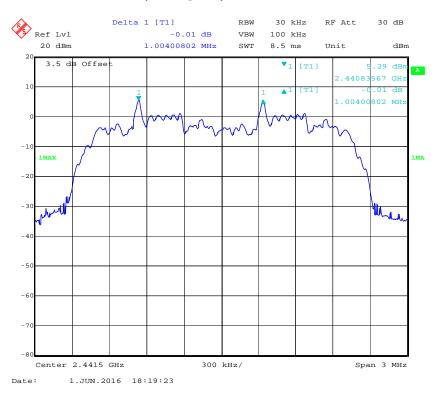

### EDR ( $\pi/4$ -DQPSK): High Channel

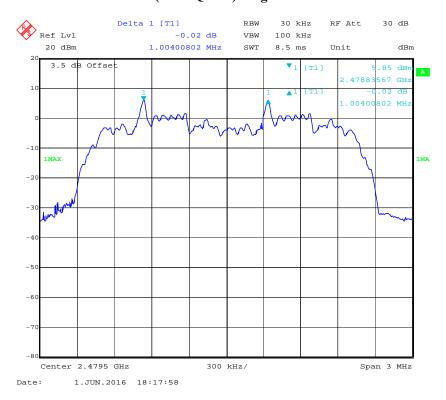


FCC Part 15.247 Page 25 of 59

# EDR (8DPSK): Low Channel

Report No.: RSZ160530001-00B




# EDR (8DPSK): Middle Channel

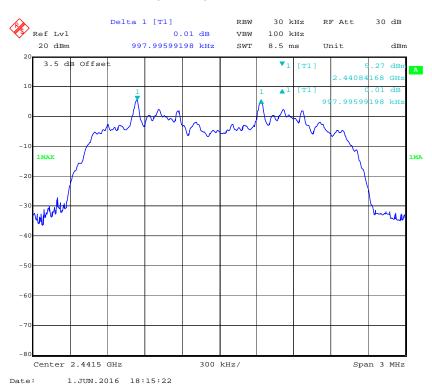

FCC Part 15.247 Page 26 of 59

# EDR (8DPSK): High Channel

Report No.: RSZ160530001-00B

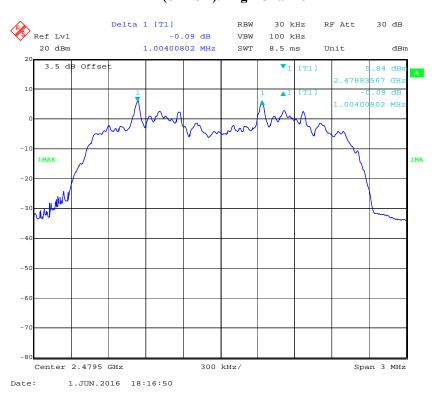

FCC Part 15.247 Page 27 of 59

# FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

#### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ160530001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

#### **Test Equipment List and Details**

| Manufacturer          | Description     | Model  | Serial<br>Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz       | Signal Analyzer | FSIQ26 | 8386001028       | 2015-12-11          | 2016-12-11              |
| Ducommun technologies | RF Cable        | RG-214 | 3                | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator  | 5321   | AU0709           | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |
|--------------------|-----------|
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-06-01.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 28 of 59

| Mode               | Channel | Frequency<br>(MHz) | 20 dB Emission<br>Bandwidth<br>(MHz) |
|--------------------|---------|--------------------|--------------------------------------|
|                    | Low     | 2402               | 0.91                                 |
| BDR<br>(GFSK)      | Middle  | 2441               | 0.91                                 |
| (01312)            | High    | 2480               | 0.91                                 |
|                    | Low     | 2402               | 1.26                                 |
| EDR<br>(π/4-DQPSK) | Middle  | 2441               | 1.26                                 |
| ( 1 = (2 % 2 5)    | High    | 2480               | 1.26                                 |
|                    | Low     | 2402               | 1.23                                 |
| EDR<br>(8DPSK)     | Middle  | 2441               | 1.23                                 |
| (obi sik)          | High    | 2480               | 1.23                                 |


# BDR (GFSK): Low Channel

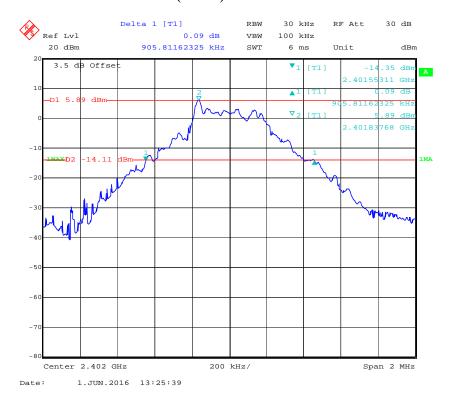


FCC Part 15.247 Page 29 of 59

# BDR (GFSK): Middle Channel

Report No.: RSZ160530001-00B

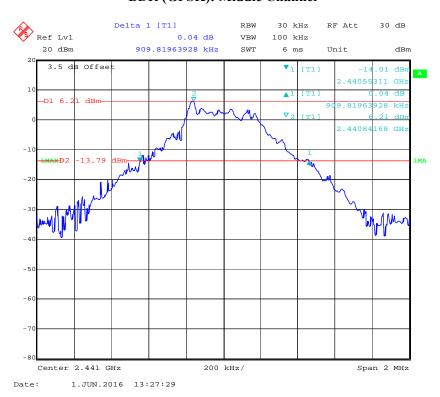

# BDR (GFSK): High Channel

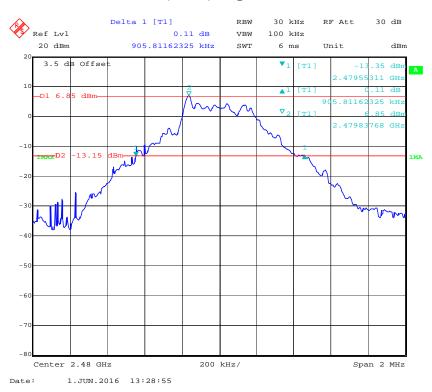


FCC Part 15.247 Page 30 of 59

### EDR ( $\pi/4$ -DQPSK): Low Channel

Report No.: RSZ160530001-00B



### EDR ( $\pi/4$ -DQPSK): Middle Channel

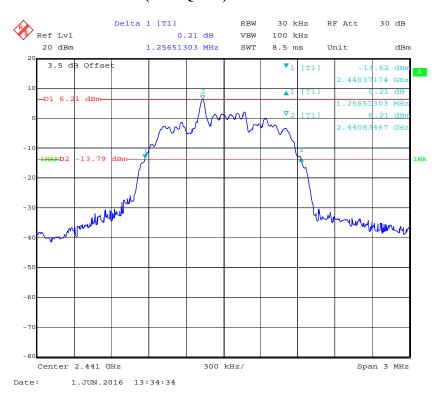

FCC Part 15.247 Page 31 of 59

### EDR (π/4-DQPSK): High Channel

Report No.: RSZ160530001-00B




# EDR (8DPSK): Low Channel




FCC Part 15.247 Page 32 of 59

# EDR (8DPSK): Middle Channel

Report No.: RSZ160530001-00B

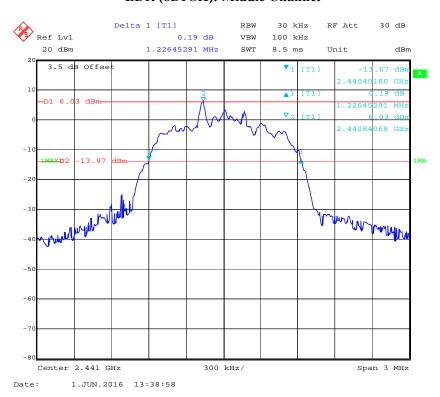

# EDR (8DPSK): High Channel

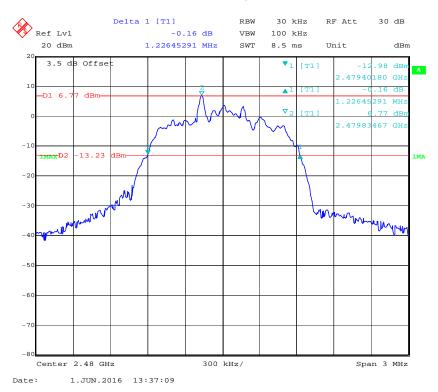

FCC Part 15.247 Page 33 of 59

# FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

#### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ160530001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

#### **Test Equipment List and Details**

| Manufacturer          | Description     | Model  | Serial<br>Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz       | Signal Analyzer | FSIQ26 | 8386001028       | 2015-12-11          | 2016-12-11              |
| Ducommun technologies | RF Cable        | RG-214 | 3                | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator  | 5321   | AU0709           | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |  |
|--------------------|-----------|--|
| Relative Humidity: | 56 %      |  |
| ATM Pressure:      | 101.0 kPa |  |

The testing was performed by Sonia Zhou on 2016-06-01.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 34 of 59

| Mode               | Frequency Range<br>(MHz) | Number of Hopping<br>Channel<br>(CH) | Limit<br>(CH) |
|--------------------|--------------------------|--------------------------------------|---------------|
| BDR<br>(GFSK)      | 2400-2483.5              | 79                                   | 75            |
| EDR<br>(π/4-DQPSK) | 2400-2483.5              | 79                                   | 75            |
| EDR<br>(8DPSK)     | 2400-2483.5              | 79                                   | 75            |


### BDR (GFSK): Number of Hopping Channels

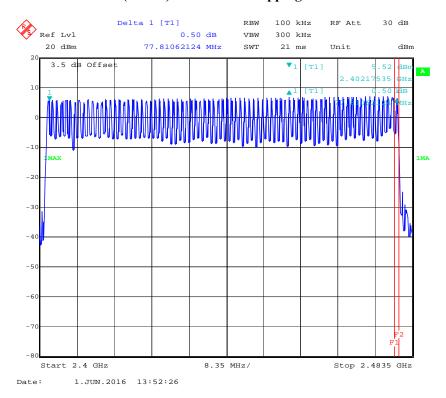


FCC Part 15.247 Page 35 of 59

#### Report No.: RSZ160530001-00B

#### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

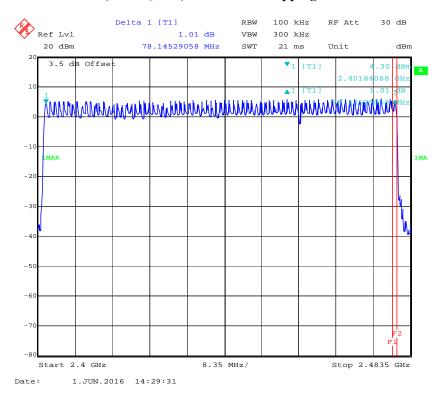

# **EDR (8DPSK): Number of Hopping Channels**

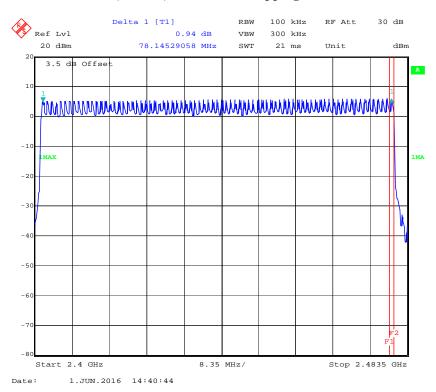

FCC Part 15.247 Page 36 of 59

# FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

#### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ160530001-00B

#### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

#### **Test Equipment List and Details**

| Manufacturer          | Description     | Model  | Serial<br>Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------|--------|------------------|---------------------|-------------------------|
| Rohde & Schwarz       | Signal Analyzer | FSIQ26 | 8386001028       | 2015-12-11          | 2016-12-11              |
| Ducommun technologies | RF Cable        | RG-214 | 3                | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator  | 5321   | AU0709           | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |  |
|--------------------|-----------|--|
| Relative Humidity: | 56 %      |  |
| ATM Pressure:      | 101.0 kPa |  |

The testing was performed by Sonia Zhou on 2016-06-01.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


FCC Part 15.247 Page 37 of 59

| Mode                   |          | Channel  | Pulse Width (ms)   | Dwell Time<br>(S) | Limit (S)   | Result |  |
|------------------------|----------|--|--------------------|-------------------|-------------|--------|--|
|                        |          | Low  | 0.469              | 0.150             | 0.4         | Pass   |  |
|                        | DII 1    | Middle   | 0.469              | 0.150             | 0.4         | Pass   |  |
|                        | DH 1     | High   | 0.469              | 0.150             | 0.4         | Pass   |  |
|                        | <b>-</b> | Note:  | DH1:Dwell time = P | ulse time*(1600/  | 2/79)*31.6S | •      |  |
|                        |          | Low  | 1.729              | 0.277             | 0.4         | Pass   |  |
| BDR                    | DII 2    | Middle   | 1.729              | 0.277             | 0.4         | Pass   |  |
| (GFSK)                 | DH 3     | High   | 1.729              | 0.277             | 0.4         | Pass   |  |
|                        | -        | Note:  | DH3:Dwell time = P | Pulse time*(1600/ | 4/79)*31.6S |        |  |
|                        |          | Low  | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        | DIL 5    | Middle   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        | DH 5     | High   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        | <br>     | Note:  | DH5:Dwell time = P | ulse time*(1600/  | 6/79)*31.6S |        |  |
|                        |          | Low  | 0.467              | 0.149             | 0.4         | Pass   |  |
|                        | 2DII 1   | Middle   | 0.467              | 0.149             | 0.4         | Pass   |  |
|                        | 2DH 1    | High   | 0.467              | 0.149             | 0.4         | Pass   |  |
|                        | =        | Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                    |                   |             |        |  |
|                        | 20044.0  | Low  | 1.729              | 0.277             | 0.4         | Pass   |  |
| EDR                    |          | Middle   | 1.729              | 0.277             | 0.4         | Pass   |  |
| $(\pi/4\text{-DQPSK})$ | 2DH 3    | High   | 1.729              | 0.277             | 0.4         | Pass   |  |
|                        |          | Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                    |                   |             |        |  |
|                        | 2011.5   | Low  | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        |          | Middle   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        | 2DH 5    | High   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        | <br>     | Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S  |                    |                   |             |        |  |
|                        |          | Low  | 0.467              | 0.149             | 0.4         | Pass   |  |
|                        | 3DH 1    | Middle   | 0.467              | 0.149             | 0.4         | Pass   |  |
| EDR<br>(8DPSK)         |          | High   | 0.467              | 0.149             | 0.4         | Pass   |  |
|                        |          | Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                    |                   |             |        |  |
|                        | 3DH 3    | Low  | 1.723              | 0.276             | 0.4         | Pass   |  |
|                        |          | Middle   | 1.723              | 0.276             | 0.4         | Pass   |  |
|                        | 3DH 3    | High   | 1.723              | 0.276             | 0.4         | Pass   |  |
|                        |          | Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                    |                   |             |        |  |
|                        | 3DH 5    | Low  | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        |          | Middle   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        |          | High   | 3.016              | 0.322             | 0.4         | Pass   |  |
|                        |          | Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                    |                   |             |        |  |


FCC Part 15.247 Page 38 of 59

## BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RSZ160530001-00B

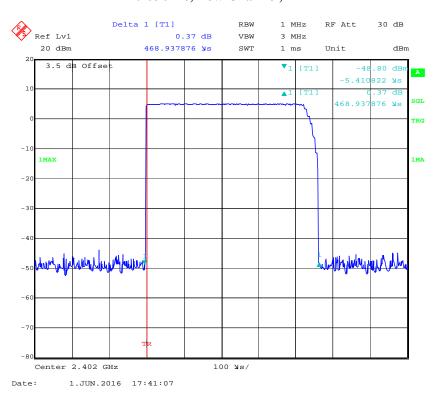


## Pulse time, Middle Channel, DH1

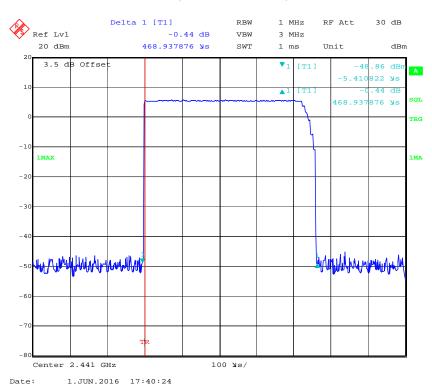


FCC Part 15.247 Page 39 of 59

#### Pulse time, High Channel, DH1

Report No.: RSZ160530001-00B

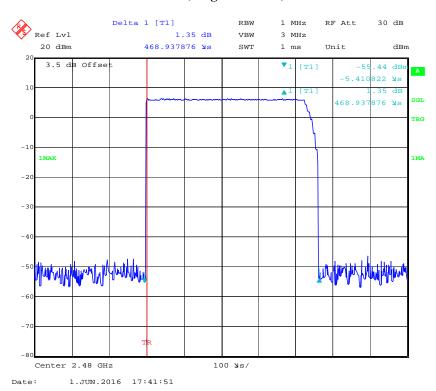


## Pulse time, Low Channel, DH3

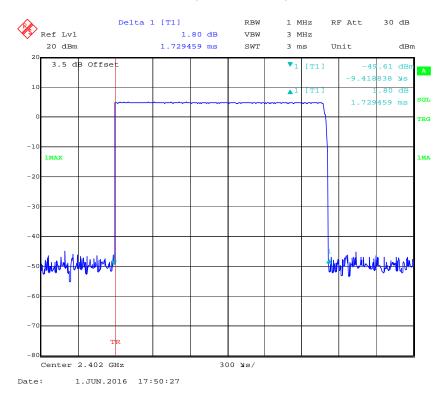


FCC Part 15.247 Page 40 of 59

## Pulse time, Middle Channel, DH3

Report No.: RSZ160530001-00B

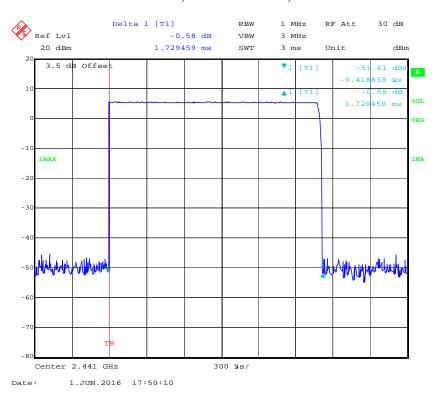


## Pulse time, High Channel, DH3

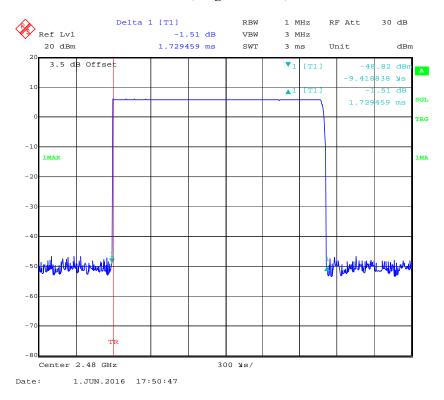


FCC Part 15.247 Page 41 of 59

#### Pulse time, Low Channel, DH5

Report No.: RSZ160530001-00B

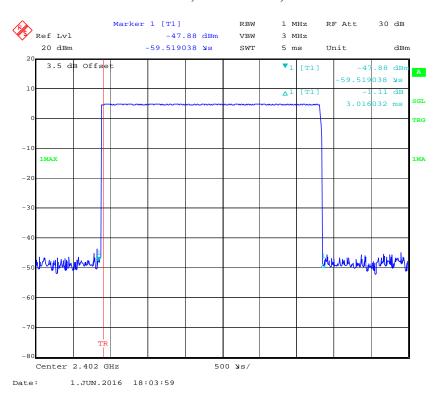


## Pulse time, Middle Channel, DH5

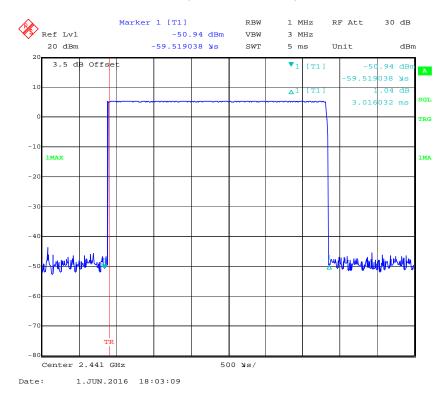


FCC Part 15.247 Page 42 of 59

## Pulse time, High Channel, DH5

Report No.: RSZ160530001-00B

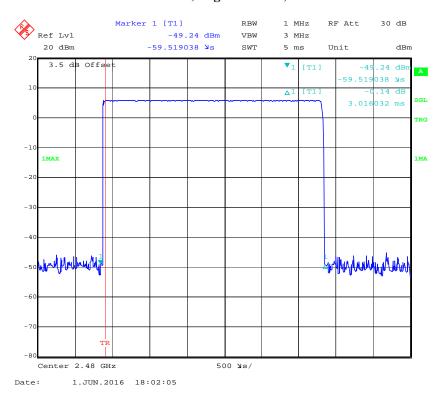


# EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

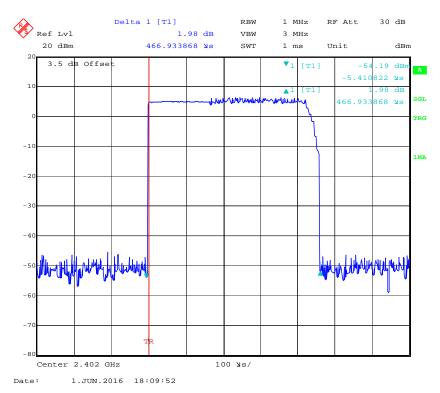


FCC Part 15.247 Page 43 of 59

#### Pulse time, Middle Channel, 2DH1

Report No.: RSZ160530001-00B

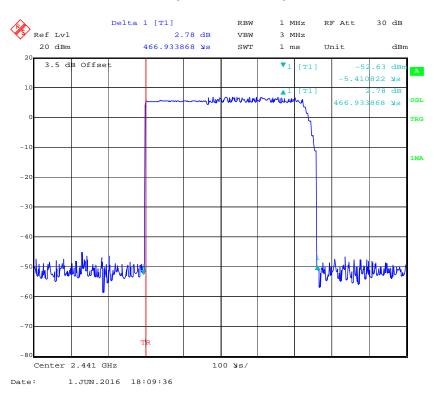


## Pulse time, High Channel, 2DH1

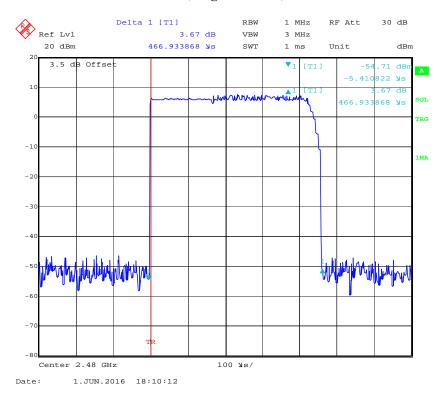


FCC Part 15.247 Page 44 of 59

#### Pulse time, Low Channel, 2DH3

Report No.: RSZ160530001-00B

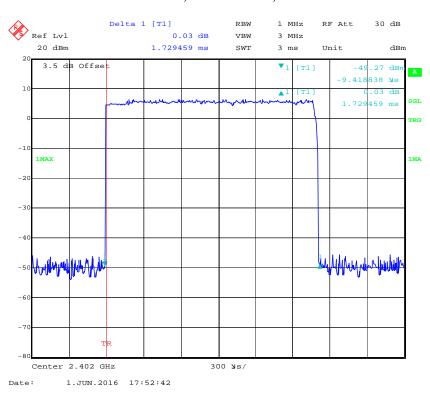


## Pulse time, Middle Channel, 2DH3

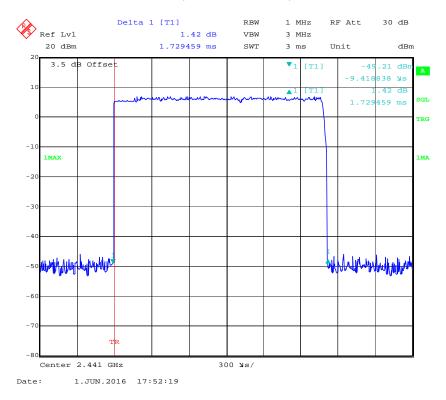


FCC Part 15.247 Page 45 of 59

# Pulse time, High Channel, 2DH3

Report No.: RSZ160530001-00B

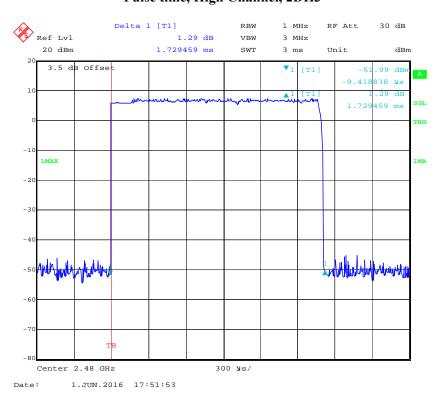


## Pulse time, Low Channel, 2DH5

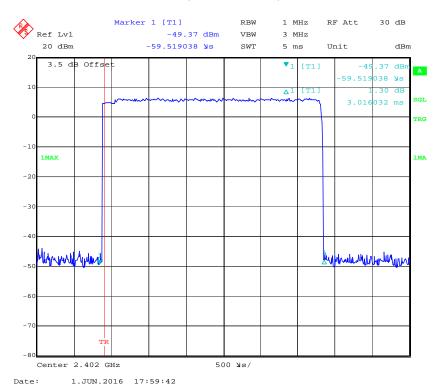


FCC Part 15.247 Page 46 of 59

## Pulse time, Middle Channel, 2DH5

Report No.: RSZ160530001-00B

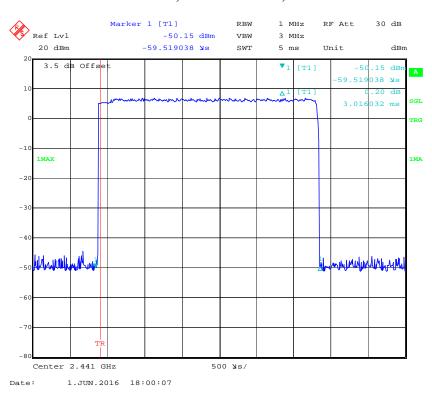


## Pulse time, High Channel, 2DH5

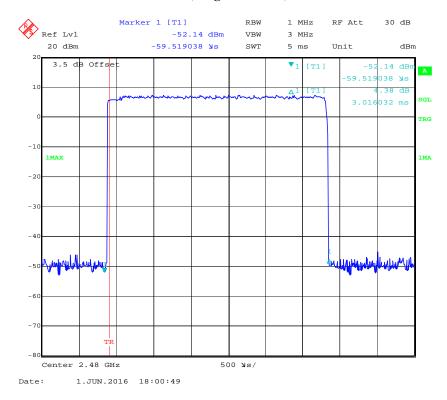


FCC Part 15.247 Page 47 of 59

# EDR (8DPSK): Pulse time, Low Channel, 3DH1

Report No.: RSZ160530001-00B

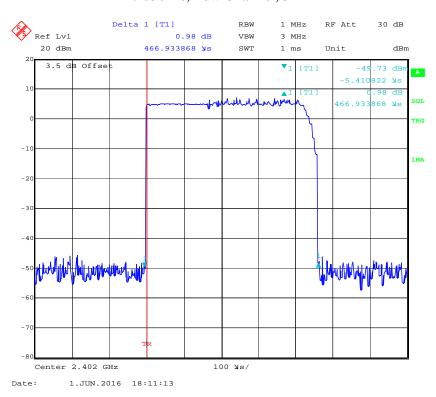


## Pulse time, Middle Channel, 3DH1

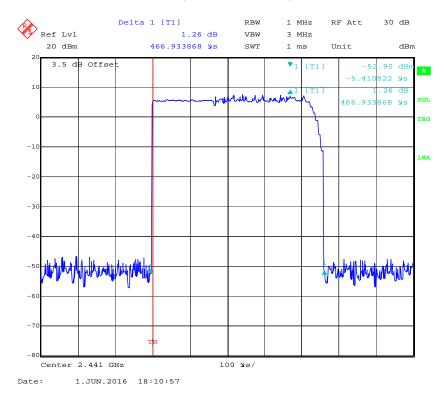


FCC Part 15.247 Page 48 of 59

# Pulse time, High Channel, 3DH1

Report No.: RSZ160530001-00B

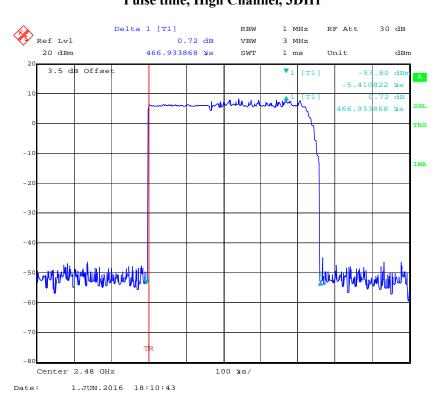


## Pulse time, Low Channel, 3DH3

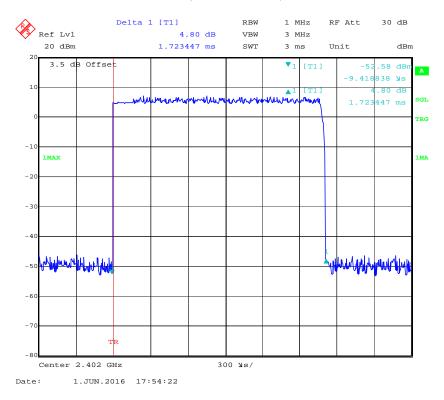


FCC Part 15.247 Page 49 of 59

# Pulse time, Middle Channel, 3DH3

Report No.: RSZ160530001-00B

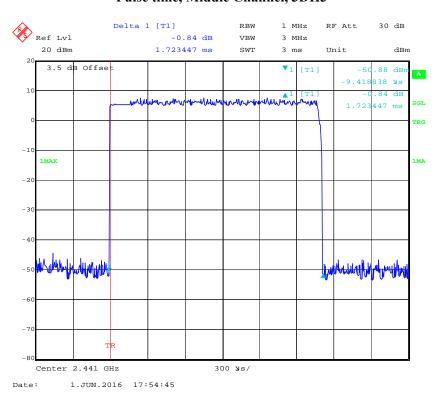


## Pulse time, High Channel, 3DH3

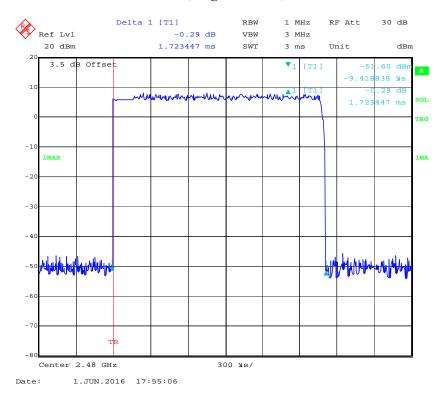


FCC Part 15.247 Page 50 of 59

#### Pulse time, Low Channel, 3DH5

Report No.: RSZ160530001-00B

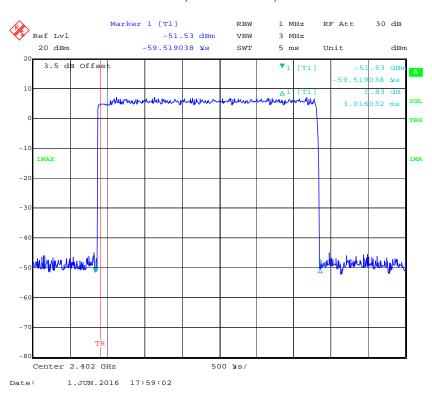


## Pulse time, Middle Channel, 3DH5

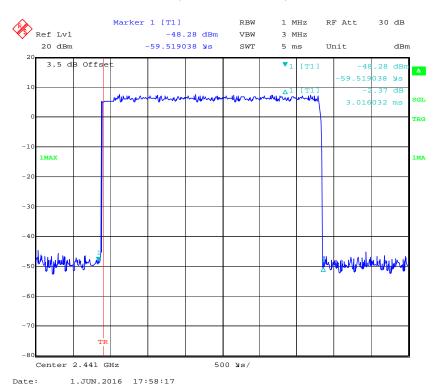

FCC Part 15.247 Page 51 of 59

# Pulse time, High Channel, 3DH5

Report No.: RSZ160530001-00B

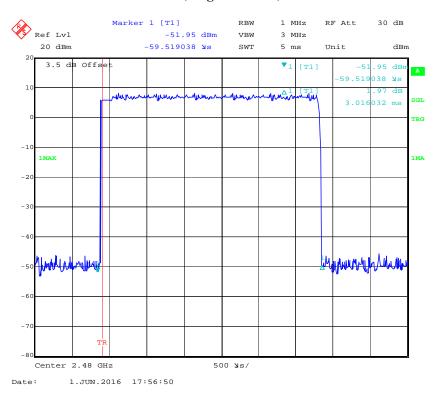

FCC Part 15.247 Page 52 of 59

# FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

#### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ160530001-00B

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

#### **Test Equipment List and Details**

| Manufacturer          | Description    | Model  | Serial Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|----------------|--------|---------------|---------------------|-------------------------|
| HP                    | Power Meter    | N1912A | MY5000448     | 2015-12-18          | 2016-12-17              |
| НР                    | Power Sensor   | N1921A | MY54210016    | 2015-12-18          | 2016-12-17              |
| Ducommun technologies | RF Cable       | RG-214 | 3             | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator | 5321   | AU0709        | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

| Temperature:       | 25 ℃      |
|--------------------|-----------|
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Sonia Zhou on 2016-06-01.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

FCC Part 15.247 Page 53 of 59

| Mode               | Channel | Frequency | Peak Out | Limit |      |
|--------------------|---------|-----------|----------|-------|------|
| Wiode              |         | (MHz)     | (dBm)    | (mW)  | (mW) |
|                    | Low     | 2402      | 5.95     | 3.94  | 1000 |
| BDR<br>(GFSK)      | Middle  | 2441      | 6.42     | 4.36  | 1000 |
| (312)              | High    | 2480      | 7.03     | 5.05  | 1000 |
| EDR<br>(π/4-DQPSK) | Low     | 2402      | 7.71     | 5.90  | 1000 |
|                    | Middle  | 2441      | 8.31     | 6.78  | 1000 |
|                    | High    | 2480      | 8.91     | 7.78  | 1000 |
|                    | Low     | 2402      | 8.10     | 6.46  | 1000 |
| EDR<br>(8DPSK)     | Middle  | 2441      | 8.67     | 7.36  | 1000 |
|                    | High    | 2480      | 9.26     | 8.43  | 1000 |

FCC Part 15.247 Page 54 of 59

# FCC §15.247(d) - BAND EDGES TESTING

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ160530001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Equipment List and Details**

| Manufacturer          | Description     | Model  | Serial Number | Calibration<br>Date | Calibration<br>Due Date |
|-----------------------|-----------------|--------|---------------|---------------------|-------------------------|
| Rohde & Schwarz       | Signal Analyzer | FSIQ26 | 8386001028    | 2015-12-11          | 2016-12-11              |
| Ducommun technologies | RF Cable        | RG-214 | 3             | 2015-06-15          | 2016-06-15              |
| WEINSCHEL             | 3dB Attenuator  | 5321   | AU0709        | 2015-06-18          | 2016-06-18              |

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 55 of 59

# **Test Data**

## **Environmental Conditions**

| Temperature:       | 25 ℃      |
|--------------------|-----------|
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

Report No.: RSZ160530001-00B

The testing was performed by Sonia Zhou on 2016-06-01.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


FCC Part 15.247 Page 56 of 59

#### BDR (GFSK): Left Band Edge

Report No.: RSZ160530001-00B

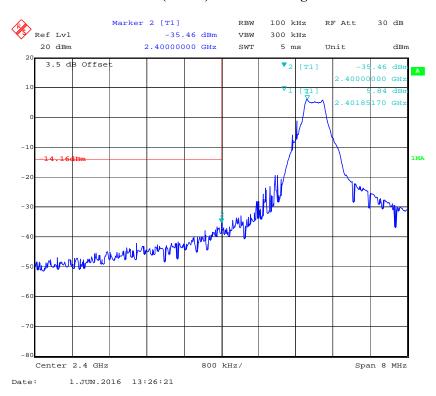


#### BDR (GFSK): Right Band Edge

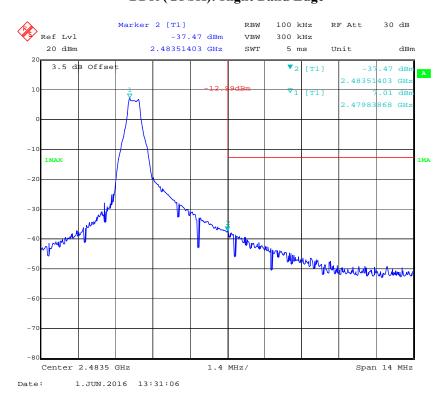


FCC Part 15.247 Page 57 of 59

## EDR ( $\pi/4$ -DQPSK): Left Band Edge

Report No.: RSZ160530001-00B

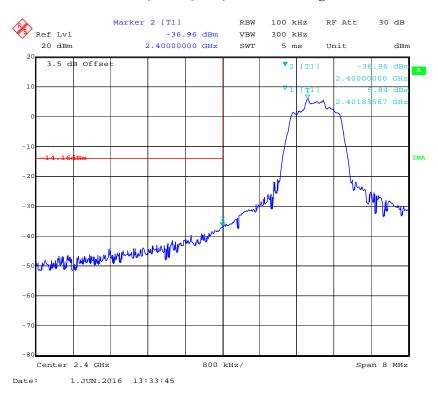


## EDR (π/4-DQPSK): Right Band Edge

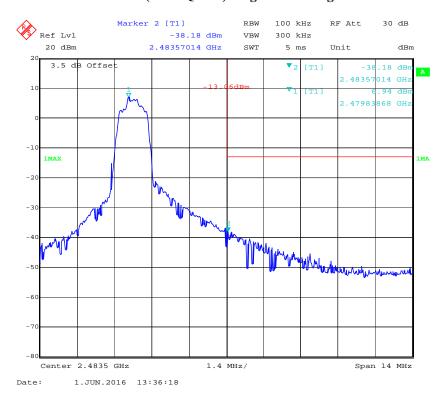


FCC Part 15.247 Page 58 of 59

## EDR (8DPSK): Left Band Edge

Report No.: RSZ160530001-00B

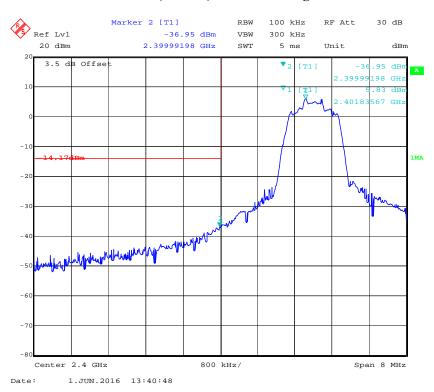

#### BDR (8DPSK): Right Band Edge

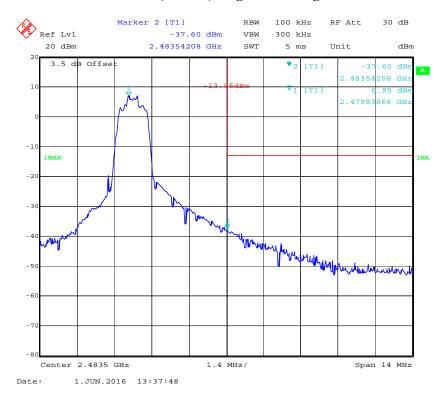

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 59 of 59