



FCC Test Report (BLE)

FCC ID : 2ADRK-S3

Applicant : Xiamen Maxa Engineering Co., Ltd
RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China

Sample Description

Product Name : Bluetooth Headset

Model No. : S3

Trademark : N/A

Receipt Date : 2014-12-01

Test Date : 2014-12-01 to 2014-12-08

Issue Date : 2014-12-09

Test Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer : Jason Deng

Approved & Authorized : Frank Zhang

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

CONTENTS.....	2
1. GENERAL INFORMATION.....	4
1.1. Client Information.....	4
1.2. General Description of EUT (Equipment Under Test).....	4
1.3. Block Diagram Showing The Configuration of System Tested.....	5
1.4. Description of Support Units.....	5
1.5. External I/O Cable.....	5
1.6. Description of Test Mode.....	6
1.7. Test Instruments List.....	6
1.8. Laboratory Location.....	7
2. TEST SUMMARY.....	8
3. ANTENNA REQUIREMENT.....	9
3.1. Standard Requirement.....	9
3.2. Antenna Connected Construction.....	9
4. CONDUCTED EMISSION TEST.....	10
4.1. Test Standard and Limit.....	10
4.2. Test Setup.....	10
4.3. Test Procedure.....	10
4.4. Test Data.....	11
5. CONDUCTED PEAK OUTPUT POWER TEST.....	14
5.1. Test Standard and Limit.....	14
5.2. Test Setup.....	14
5.3. Test Procedure.....	14
5.4. Test Data.....	14
6. OCCUPY BANDWIDTH TEST.....	17
6.1. Test Standard and Limit.....	17
6.2. Test Setup.....	17
6.3. Test Procedure.....	17
6.4. Test Data.....	17
7. POWER SPECTRAL DENSITY TEST.....	20
7.1. Test Standard and Limit.....	20
7.2. Test Setup.....	20
7.3. Test Procedure.....	20
7.4. Test Data.....	20
8. BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD).....	23
8.1. Test Standard and Limit.....	23
8.2. Test Setup.....	23



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 3 of 33

8.3. Test Procedure.....	23
8.4. Test Data.....	23
9. BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD).....	25
9.1. Test Standard and Limit.....	25
9.2. Test Setup.....	25
9.3. Test Procedure.....	25
9.4. Test Data.....	26
10. SPURIOUS EMISSION.....	27
10.1. Test Standard and Limit.....	27
10.2. Test Setup.....	27
10.3. Test Procedure.....	27
10.4. Test Data.....	28



1. General Information

1.1. Client Information

Applicant	:	Xiamen Maxa Engineering Co., Ltd
Address	:	RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China
Manufacturer	:	Xiamen Maxa Engineering Co., Ltd
Address	:	RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China

1.2. General Description of EUT (Equipment Under Test)

Product Name	:	Bluetooth Headset	
Models No.	:	S3	
Trademark	:	N/A	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
		Transfer Rate:	1 Mbits/s
		Number of Channel:	40 Channels
		Modulation Type:	GFSK
		Modulation Technology:	FHSS
		Antenna Type:	Integral PCB Antenna
		Antenna Gain:	1.9 dBi
Power Supply	:	3.7V (Internal rechargeable battery) or DC 5V by external power	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472




ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 5 of 33

08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		
Remark: Channel 0, 20 & 39 selected for GFSK.					

1.3. Block Diagram Showing The Configuration of System Tested

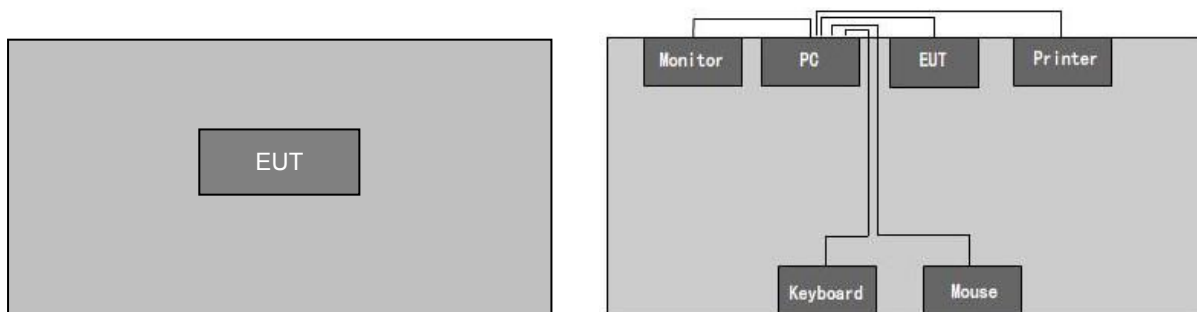

1.4. Description of Support Units

Name	Model	Serial Number	Manufacturer
Printer	HP1020	CNCJ410726	HP
LCD Monitor	G205HV	10306738385	ACER
PC	ASPIREM1830	PTSF90C00305005CAC3000	ACER
Keyboard	SK-9625	KBUSB1580500037E0100	ACER
Mouse	MS.11200.014	M-UAY-ACR2	ACER
Adapter	TRAVEL	N/A	N/A

1.5. External I/O Cable

Cable Description	Length(m)	From/ Port	To
Shielding Detachable USB Cable	1.5	Host PC	Mouse
Shielding Detachable K/B Cable	1.5	Host PC	Keyboard
Shielding Detachable serial Cable	1.5	Host PC	Printer
Shielding Detachable VGA Cable	1.5	Host PC	LCD Monitor
Unshielding Detachable USB&AV Cable	0.5	EUT	Host PC



1.6. Description of Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Test Mode	Description
Charging & BT mode	Keep the EUT in Charging & BT mode
Transmitting mode	Keep the EUT in Transmitting mode

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

1.7. Test Instruments List

Item	Test Equipment	Manufacturer	Model No.	Cal. Date	Cal. Due date
1	Bilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	Mar. 28, 2014	Mar. 27, 2015
2	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	Mar. 28, 2014	Mar. 27, 2015
3	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
4	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
5	Coaxial cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
6	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
7	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
8	Amplifier (10kHz-1.3GHz)	HP	8447D	Mar. 28, 2014	Mar. 27, 2015
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	Mar. 28, 2014	Mar. 27, 2015
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	Mar. 28, 2014	Mar. 27, 2015
11	Horn Antenna	ETS-LINDGREN	3160	Mar. 28, 2014	Mar. 27, 2015
12	Positioning Controller	UC	UC3000	N/A	N/A
13	Spectrum analyzer 9kHz-30GHz	Rohde & Schwarz	FSP	Mar. 28, 2014	Mar. 27, 2015



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 7 of 33

14	EMI Test Receiver	Rohde & Schwarz	ESPI	Mar. 28, 2014	Mar. 27, 2015
15	Loop antenna	Laplace instrument	RF300	Mar. 28, 2014	Mar. 27, 2015
16	Universal radio communication tester	Rhode & Schwarz	CMU200	Mar. 28, 2014	Mar. 27, 2015
17	Signal Analyzer	Rohde & Schwarz	FSIQ3	Mar. 28, 2014	Mar. 27, 2015
18	EMI Test Receiver	Rohde & Schwarz ESCI	ESCI	Mar. 28, 2014	Mar. 27, 2015
19	LISN	CHASE	MN2050D	Mar. 28, 2014	Mar. 27, 2015

1.8. Laboratory Location

Shenzhen TOBY technology Co.,Ltd

Address: 1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, 518057, China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

Tel:0086-755-26509301 Fax: 0086-755-26509195



2. Test Summary

Standard Section	Test Item	Judgment
15.203/15.247(c)	Antenna Requirement	PASSED
15.207	Conducted Emission	PASSED
15.247(b)(3)	Conducted Peak Output Power	PASSED
15.247(a)(2)	6dB Occupied Bandwidth	PASSED
15.247(e)	Power Spectral Density	PASSED
15.205/15.209	Spurious Emission	PASSED
15.247(d)	Band Edge	PASSED
Remark: "N/A" is an abbreviation for Not Applicable.		



3. Antenna Requirement

3.1. Standard Requirement

3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2. Antenna Connected Construction

The Bluetooth antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 1.9dBi. It complies with the standard requirement.

4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1 Test Standard

FCC Part15 Section 15.207


4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequencies.

4.2. Test Setup

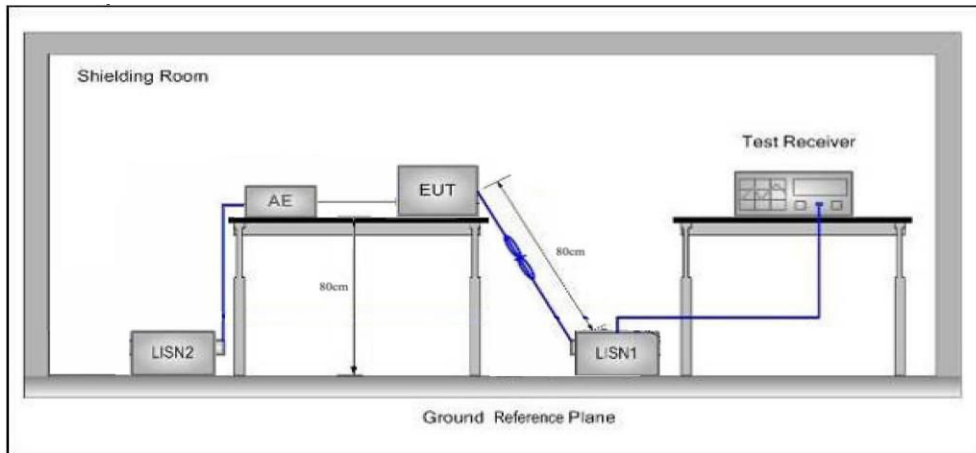

4.3. Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \Omega / 50 \mu\text{H} + 5 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

The Test Receiver setup: RBW=9kHz, VBW=30kHz, Sweep time= auto


4.4. Test Data

Please to see the following pages



Conducted Emission Test Data

EUT: Bluetooth Headset M/N: S3
Operating Condition: Charging & BT mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC120V/60Hz
Polarization: Line
Note: Tem:25°C Hum:50%

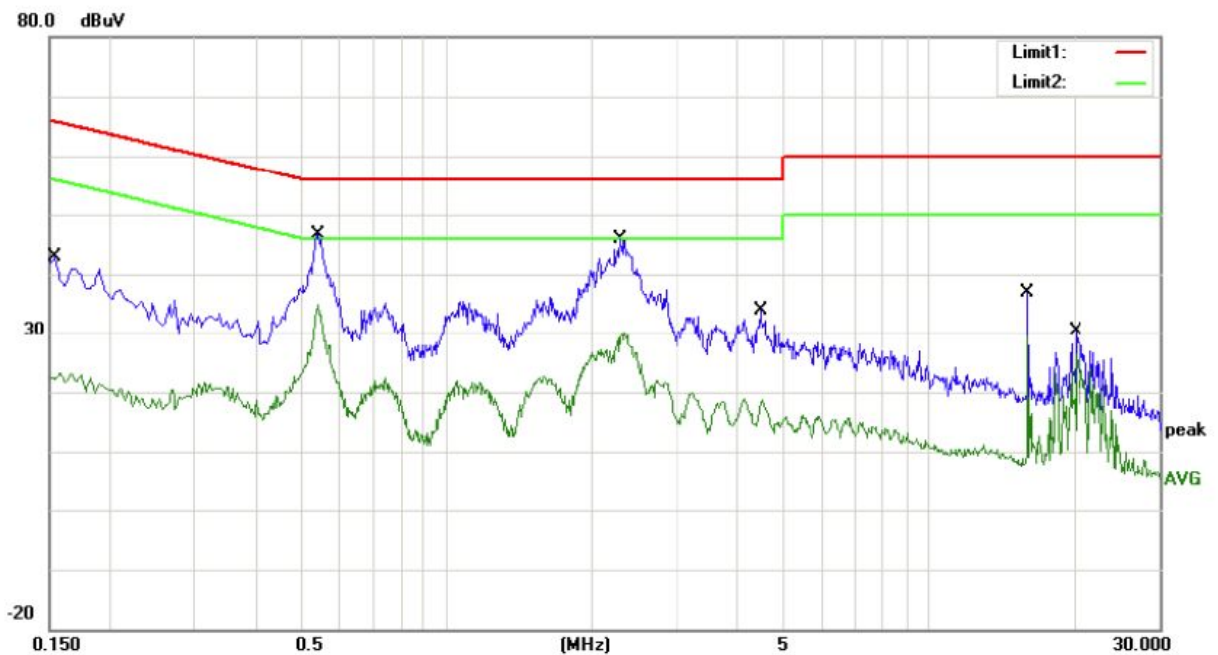


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	42.87	0.00	42.87	65.78	-22.91	QP	
2		0.1540	23.08	0.00	23.08	55.78	-32.70	AVG	
3	*	0.5420	46.66	0.00	46.66	56.00	-9.34	QP	
4		0.5420	34.76	0.00	34.76	46.00	-11.24	AVG	
5		2.2860	45.80	0.00	45.80	56.00	-10.20	QP	
6		2.2860	30.02	0.00	30.02	46.00	-15.98	AVG	
7		4.4580	33.76	0.00	33.76	56.00	-22.24	QP	
8		4.4580	18.80	0.00	18.80	46.00	-27.20	AVG	
9		16.0020	36.90	0.00	36.90	60.00	-23.10	QP	
10		16.0020	29.25	0.00	29.25	50.00	-20.75	AVG	
11		20.2620	30.45	0.00	30.45	60.00	-29.55	QP	
12		20.2620	26.40	0.00	26.40	50.00	-23.60	AVG	



Conducted Emission Test Data

EUT: Bluetooth Headset M/N: S3
Operating Condition: Charging & BT mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Neutral
Note Tem:25°C Hum:50%

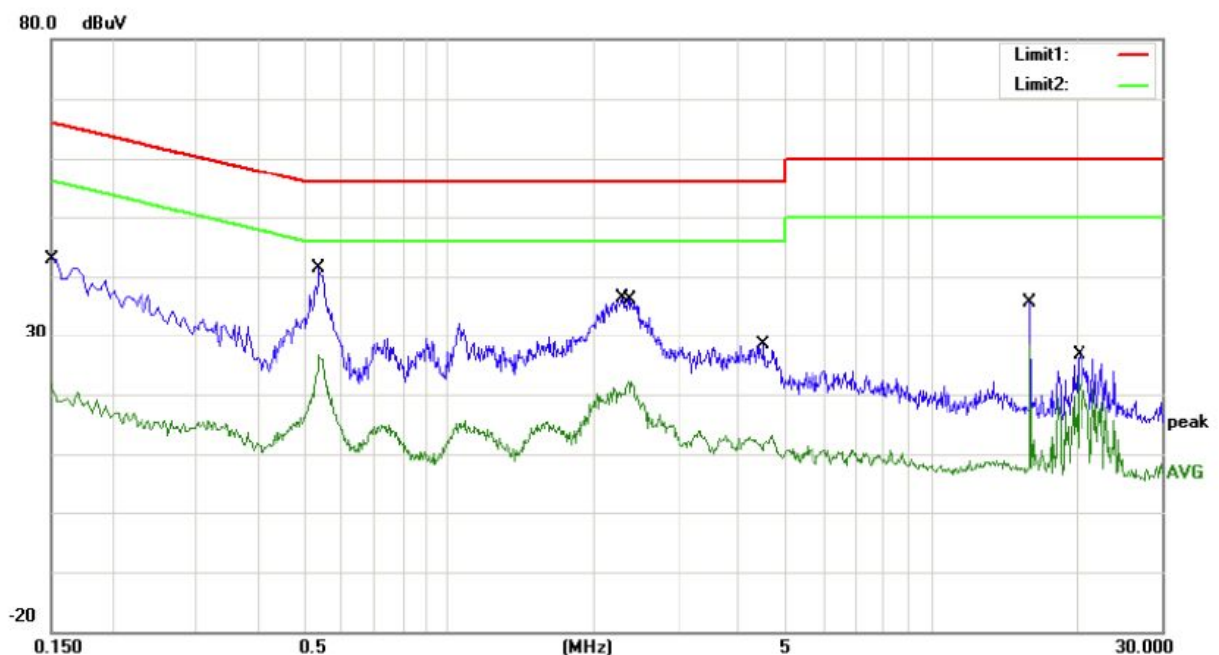

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	42.86	0.00	42.86	66.00	-23.14	QP	
2		0.1500	21.79	0.00	21.79	56.00	-34.21	AVG	
3	*	0.5380	41.43	0.00	41.43	56.00	-14.57	QP	
4		0.5380	26.62	0.00	26.62	46.00	-19.38	AVG	
5		2.2860	36.29	0.00	36.29	56.00	-19.71	QP	
6		2.3860	22.09	0.00	22.09	46.00	-23.91	AVG	
7		4.4940	28.40	0.00	28.40	56.00	-27.60	QP	
8		4.4940	13.13	0.00	13.13	46.00	-32.87	AVG	
9		16.0020	35.75	0.00	35.75	60.00	-24.25	QP	
10		16.0020	28.41	0.00	28.41	50.00	-21.59	AVG	
11		20.3220	26.66	0.00	26.66	60.00	-33.34	QP	
12		20.3220	22.94	0.00	22.94	50.00	-27.06	AVG	



5. Conducted Peak Output Power Test

5.1. Test Standard and Limit


5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3); KDB558074

5.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Peak Output Power	30dBm	2400~2483.5

5.2. Test Setup



5.3. Test Procedure

Refer to KDB558074 v03r01 (DTS Measure Guidance) Section 9.1.

5.4. Test Data


Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (dBm)	Judgment
CH 00	2402	5.203	30	PASSED
CH 20	2442	5.764	30	PASSED
CH 39	2480	5.584	30	PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 15 of 33

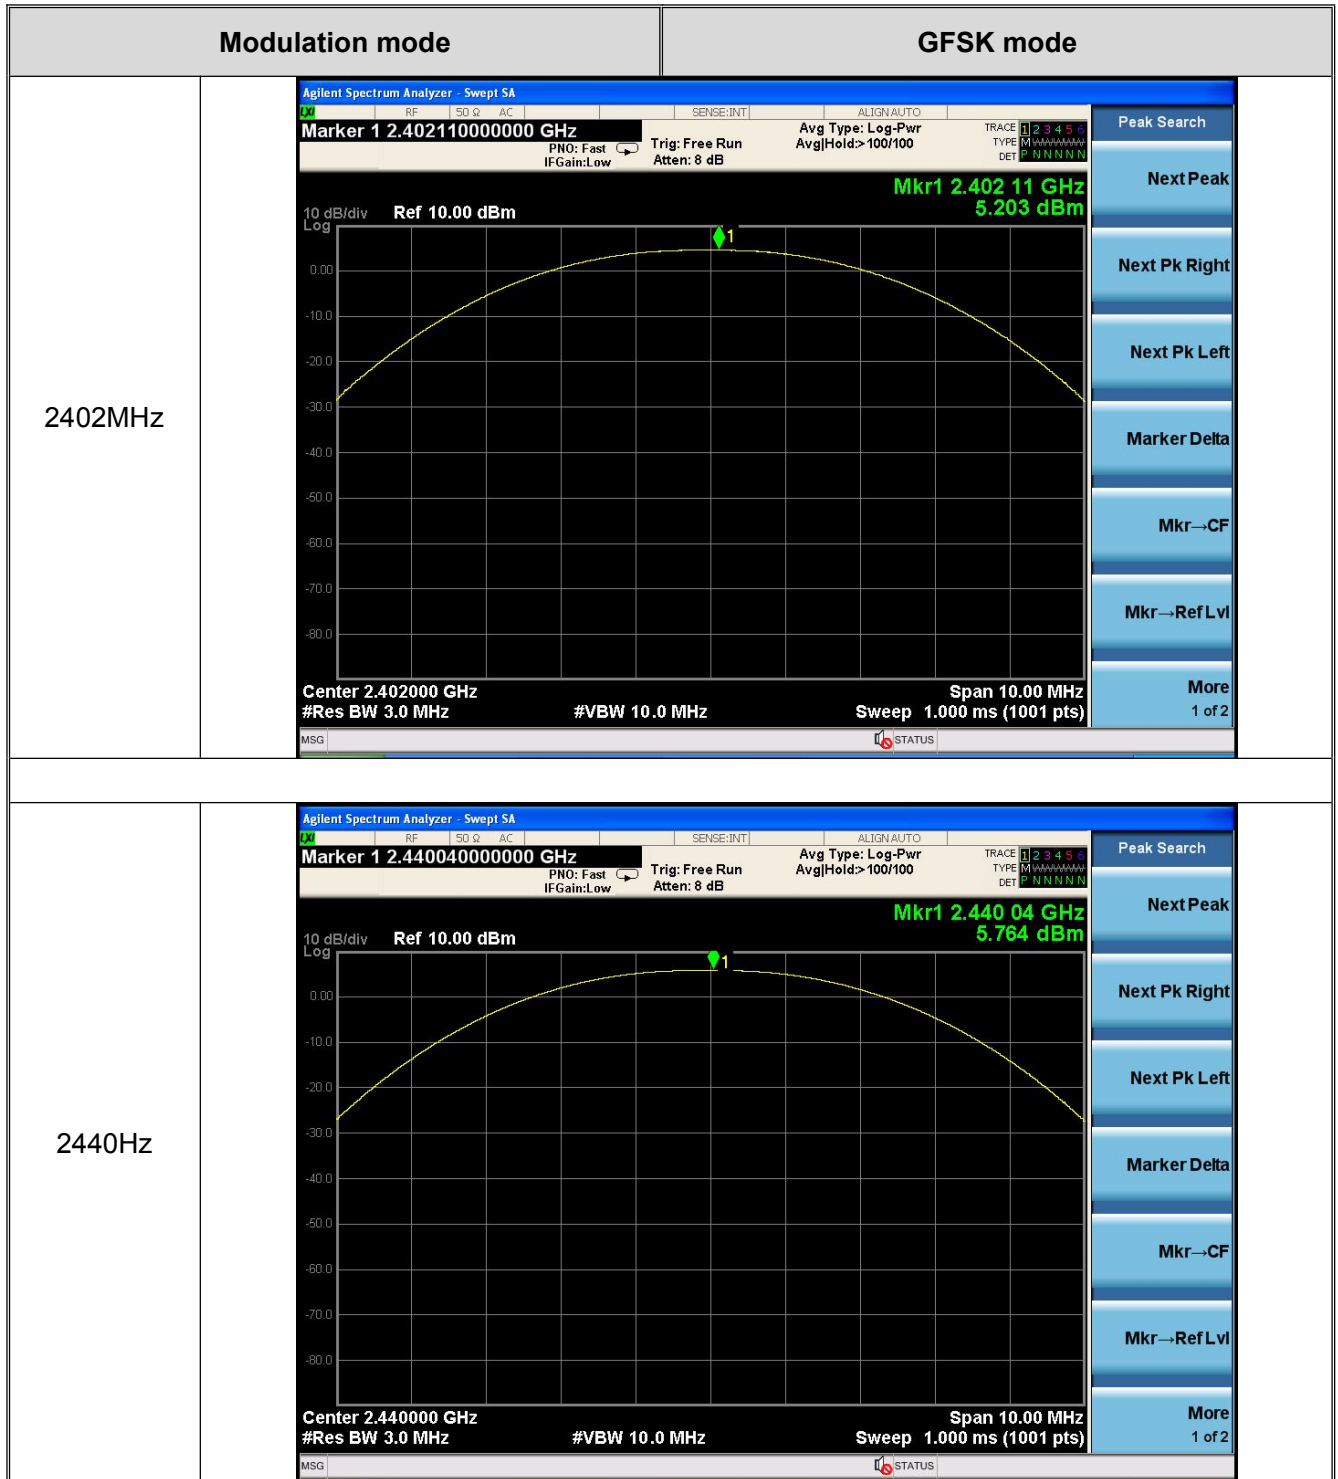




ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 16 of 33

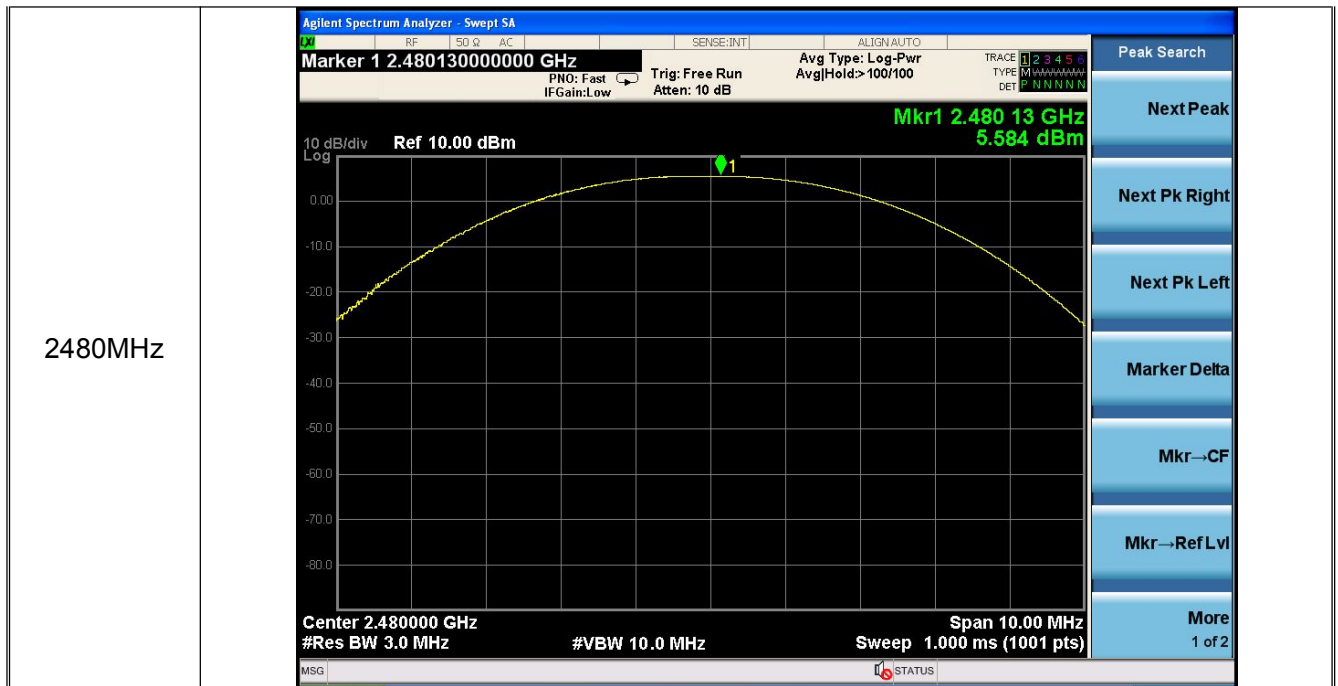



6. Occupy Bandwidth Test

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(2); KDB558074

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	>500kHz	2400~2483.5

6.2. Test Setup



6.3. Test Procedure

Refer to KDB558074 v03r01 (DTS Measure Guidance) Section 8.0

6.4. Test Data

Channel Number	Channel Frequency	6dB Bandwidth (kHz)	Limit(kHz)	Judgment
CH 00	2402(MHz)	746.57	>500	PASSED
CH 20	2442(MHz)	748.46	>500	PASSED
CH 39	2480(MHz)	736.32	>500	PASSED
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 18 of 33


6dB EBW Modulation mode		GFSK mode	
2402MHz			Meas Setup
			Avg Number 10 On Off
2402MHz			Avg Mode Exp Repeat
			Max Hold On Off
2402MHz			Occ BW % Pwr 99.00 %
			OBW Span 3.00000000 MHz
2402MHz			x dB -6.00 dB
			Optimize Ref Level
2442MHz			Freq/Channel
			Center Freq 2.44000000 GHz
2442MHz			Start Freq 2.43850000 GHz
			Stop Freq 2.44150000 GHz
2442MHz			CF Step 300.000000 kHz Auto Man
			Freq Offset 0.00000000 Hz
2442MHz			Signal Track On Off
			Scale Type Log Lin



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 19 of 33

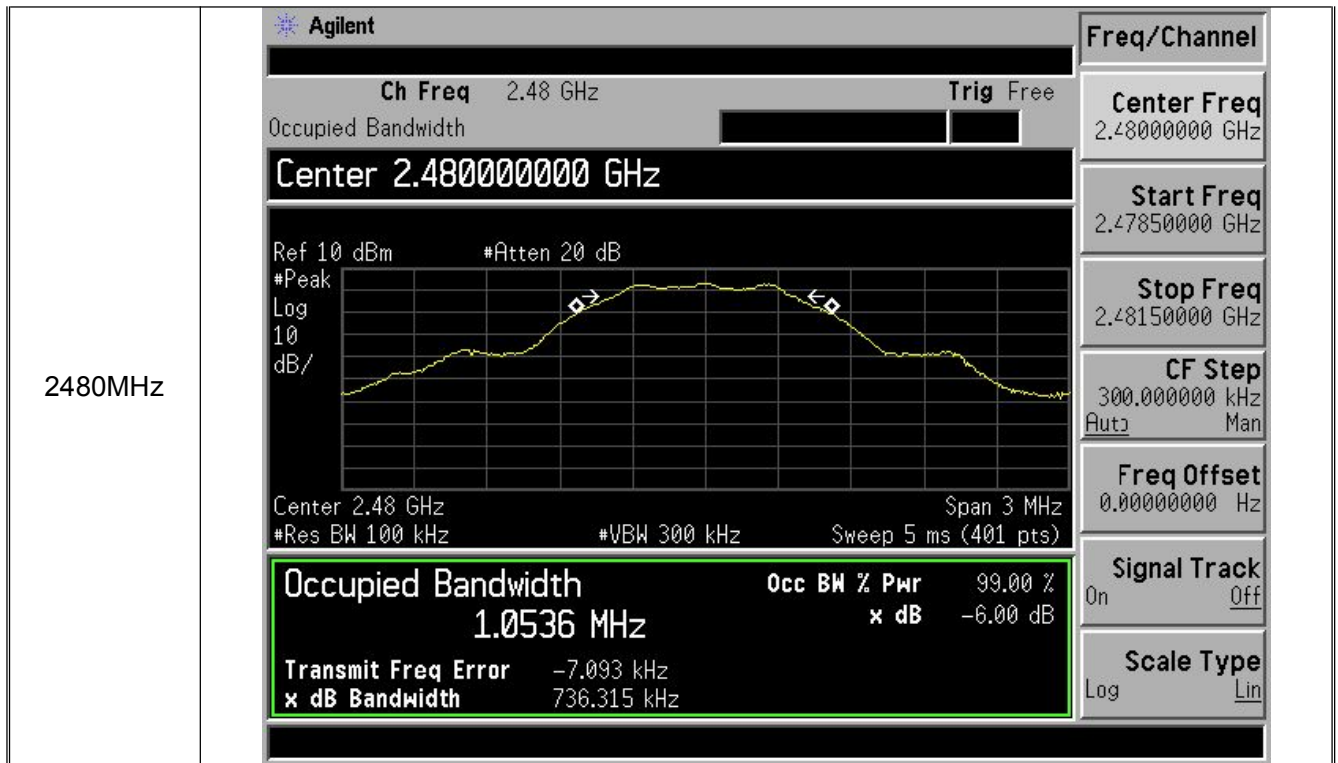



7. Power Spectral Density Test

7.1. Test Standard and Limit


7.1.1 Test Standard

FCC Part15 C Section 15.247 (e); KDB558074

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density Test	8dBm

7.2. Test Setup



7.3. Test Procedure

Refer to KDB558074 v03r01 (DTS Measure Guidance) Section 10.0

7.4. Test Data


Channel Number	Channel Frequency	Power Spectral Density (dBm)	Limit (dBm)	Judgment
CH 00	2402(MHz)	-11.97	8.0	PASSED
CH 20	2442(MHz)	-11.26	8.0	PASSED
CH 39	2480(MHz)	-11.30	8.0	PASSED
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 21 of 33

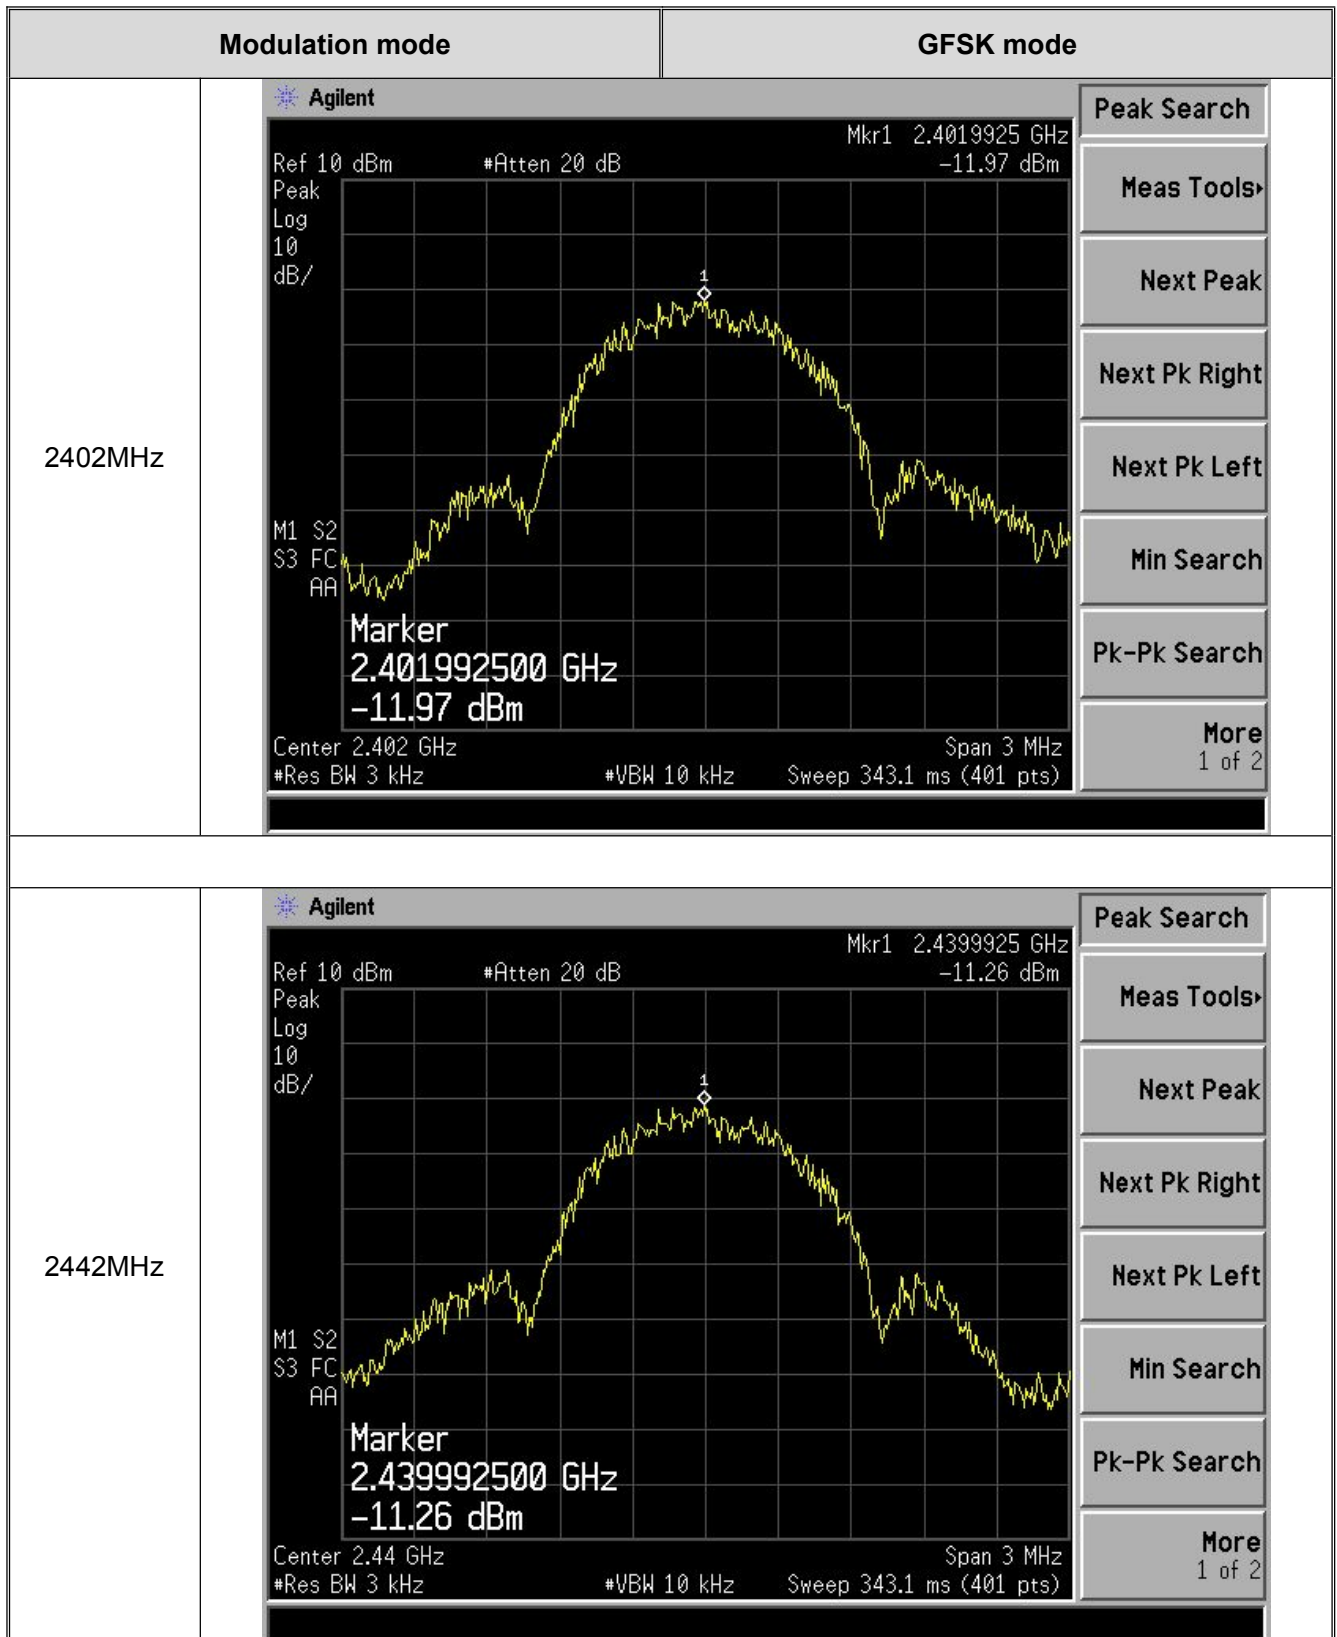




ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 22 of 33

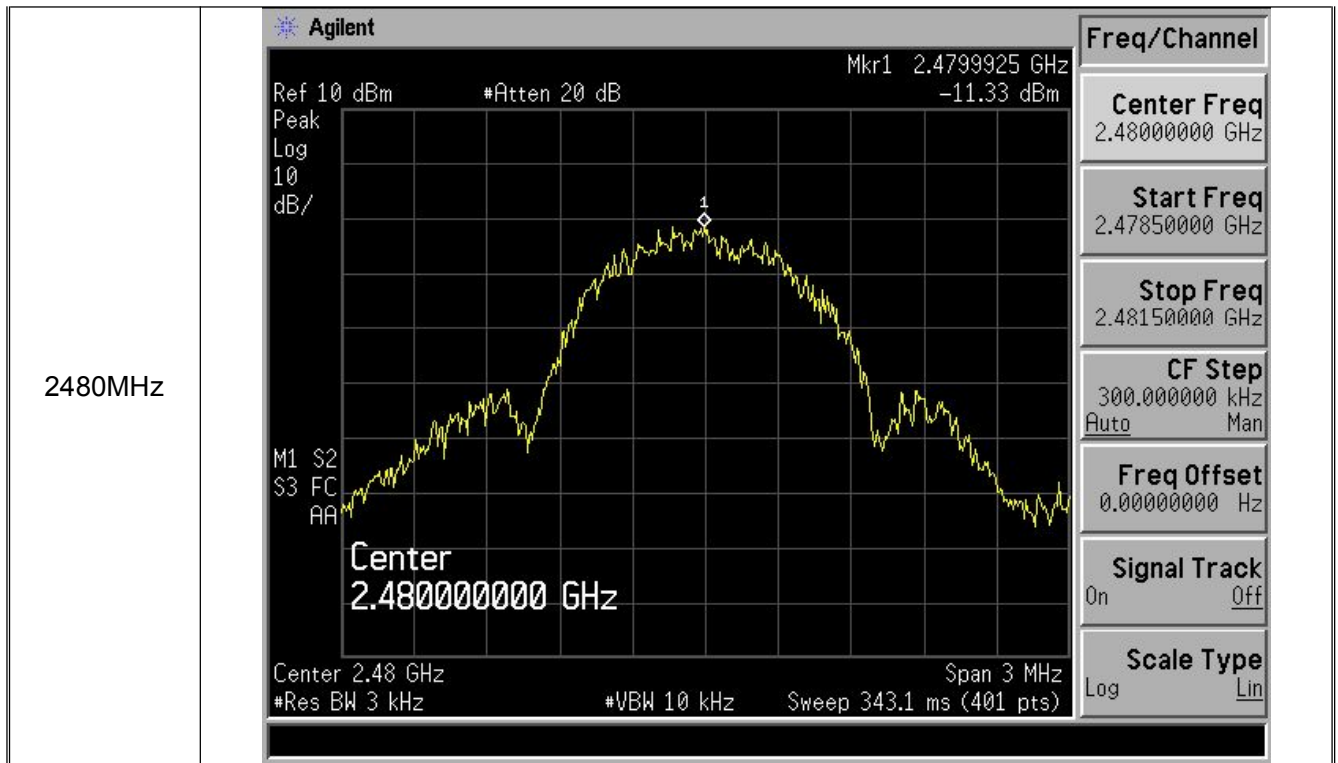



8. Band Edge Requirement (Conducted Emission Method)

8.1. Test Standard and Limit


8.1.1 Test Standard

FCC Part15 C Section 15.247 (d); KDB558074

8.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

8.2. Test Setup



8.3. Test Procedure

Refer to KDB558074 v03r01 (DTS Measure Guidance) Section 12.0

8.4. Test Data

Test plot as follows



Modulation mode	GFSK
Lowest	Highest

9. Band Edge Requirement (Radiated Emission Method)

9.1. Test Standard and Limit

9.1.1 Test Standard


FCC Part15 C Section 15.209 and 15.205

9.1.2 Test Limit

Radiated Emission Test Limit

Frequency	Limit (dB μ V/m @3m)	Remark
Above 1GHz	54.00	Average value
	74.00	Peak value

9.2. Test Setup

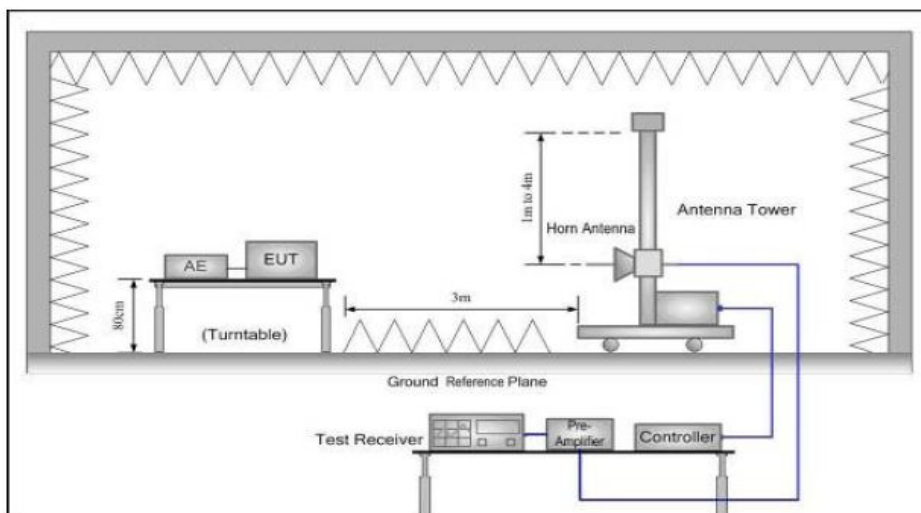

9.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Peak Value: RBW=1MHz, VBW=3MHz; Average value: RBW=1MHz, VBW=10Hz



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 26 of 33

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

9.4. Test Data

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	24.65	27.58	5.67	0.00	57.90	74.00	-16.10	H	PEAK
2400.00	26.30	27.58	5.67	0.00	59.55	74.00	-14.45	V	PEAK
2400.00	14.24	27.58	5.67	0.00	47.49	54.00	-6.51	H	AVG.
2400.00	15.27	27.58	5.67	0.00	48.52	54.00	-5.48	V	AVG.
Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	27.32	27.52	5.70	0.00	60.54	74.00	-13.46	H	PEAK
2483.50	26.45	27.52	5.70	0.00	59.67	74.00	-14.33	V	PEAK
2483.50	19.18	27.52	5.70	0.00	52.40	54.00	-1.60	H	AVG.
2483.50	18.46	27.52	5.70	0.00	51.68	54.00	-2.32	V	AVG.

Remark:

- Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.



10. Spurious Emission

10.1. Test Standard and Limit

10.1.1 Test Standard

FCC Part15 C Section 15.209 and 15.205


10.1.2 Test Limit

Frequency (MHz)	Limit (dB μ V/m)	
	At 3m Distance	
30MHz~88MHz	40	Quasi-peak
88MHz~216MHz	43.5	Quasi-peak
216MHz~960MHz	46	Quasi-peak
960MHz~1000MHz	54	Quasi-peak
Above 1000MHz	54	Average
	74	Peak


Remark: 1. The lower limit shall apply at the transition frequency.

10.2. Test Setup

Below 1GHz

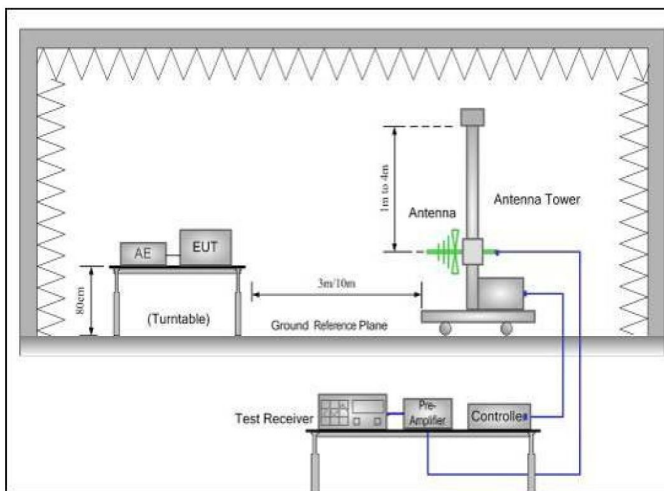

Above 1GHz

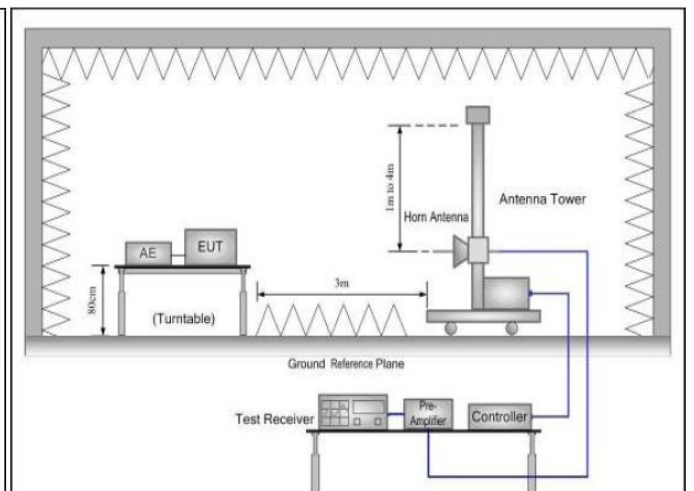

10.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set



to make the measurement.

- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Peak value: RBW=1MHz, VBW=3MHz;

Average value: RBW=1MHz, VBW=10Hz;

QP Value: RBW=120kHz, VBW=300kHz

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

10.4. Test Data


Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
2. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.



Radiated Emission Test Data (Below 1GHz)

EUT: Bluetooth Headset M/N: S3
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Jason
Test Specification: AC120V/60Hz
Polarization: Horizontal
Note Tem:23°C Hum:50%

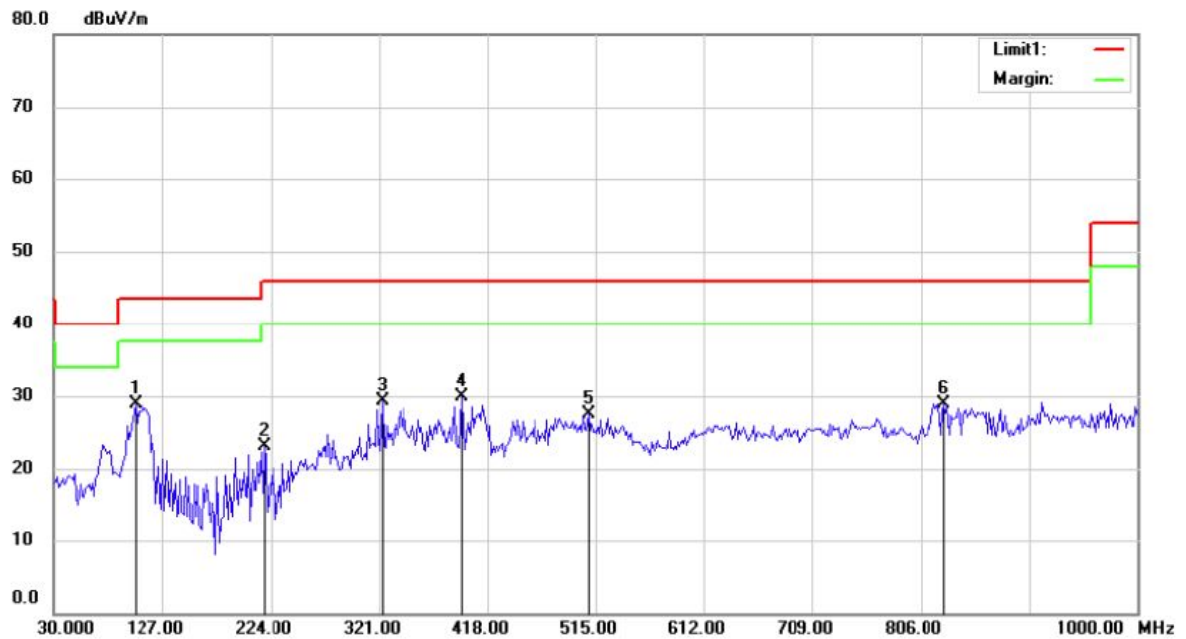

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	103.0608	16.00	12.87	28.87	43.50	-14.63	QP		
2		218.0930	12.17	10.90	23.07	46.00	-22.93	QP		
3		323.7980	14.80	14.60	29.40	46.00	-16.60	QP		
4		395.3042	11.34	18.52	29.86	46.00	-16.14	QP		
5		508.7820	6.48	20.99	27.47	46.00	-18.53	QP		
6		827.4520	4.11	24.76	28.87	46.00	-17.13	QP		



Radiated Emission Test Data (Below 1GHz)

EUT: Bluetooth Headset M/N: S3
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Jason
Test Specification: AC120V/60Hz
Polarization: Vertical
Note Tem:23°C Hum:50%



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	82.8525	20.40	8.04	28.44	40.00	-11.56	QP		Comment
2		110.8332	15.71	12.53	28.24	43.50	-15.26	QP		
3		131.0415	15.60	9.72	25.32	43.50	-18.18	QP		
4		508.7820	11.12	20.99	32.11	46.00	-13.89	QP		
5		625.3685	5.54	22.48	28.02	46.00	-17.98	QP		
6		748.1730	3.11	24.08	27.19	46.00	-18.81	QP		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 31 of 33

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	58.31	31.53	8.90	40.24	58.72	74.00	-15.28	V	PEAK
7206.00	50.52	36.47	10.59	41.24	56.53	74.00	-17.47	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	58.55	31.53	8.90	40.24	58.96	74.00	-15.04	H	PEAK
7206.00	51.42	36.47	10.59	41.24	57.43	74.00	-16.57	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	47.12	31.53	8.90	40.24	47.53	54.00	-6.47	V	AVG.
7206.00	39.64	36.47	10.59	41.24	45.65	54.00	-8.35	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	46.82	31.53	8.90	40.24	47.23	54.00	-6.77	H	AVG.
7206.00	39.67	36.47	10.59	41.24	45.68	54.00	-8.32	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 32 of 33

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Middle				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4884.00	55.23	31.58	8.98	40.15	55.64	74.00	-18.36	V	PEAK
7326.00	51.25	36.47	10.69	41.15	57.26	74.00	-16.74	V	PEAK
9768.00	*					74.00		V	PEAK
12210.00	*					74.00		V	PEAK
14652.00	*					74.00		V	PEAK
17094.00	*					74.00		V	PEAK
4884.00	57.37	31.58	8.98	40.15	57.78	74.00	-16.22	H	PEAK
7326.00	52.12	36.47	10.69	41.15	58.13	74.00	-15.87	H	PEAK
9768.00	*					74.00		H	PEAK
12210.00	*					74.00		H	PEAK
14652.00	*					74.00		H	PEAK
17094.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4884.00	44.28	31.58	8.98	40.15	44.69	54.00	-9.31	V	AVG.
7326.00	41.62	36.47	10.69	41.15	47.63	54.00	-6.37	V	AVG.
9768.00	*					54.00		V	AVG.
12210.00	*					54.00		V	AVG.
14652.00	*					54.00		V	AVG.
17094.00	*					54.00		V	AVG.
4884.00	45.47	31.58	8.98	40.15	45.88	54.00	-8.12	H	AVG.
7326.00	41.56	36.47	10.69	41.15	47.57	54.00	-6.43	H	AVG.
9768.00	*					54.00		H	AVG.
12210.00	*					54.00		H	AVG.
14652.00	*					54.00		H	AVG.
17094.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA141203002F

Page: 33 of 33

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	57.36	31.69	9.08	40.03	57.77	74.00	-16.23	V	PEAK
7440.00	49.71	36.60	10.80	41.05	55.72	74.00	-18.28	V	PEAK
9920.00	*					74.00		V	PEAK
12400.00	*					74.00		V	PEAK
14880.00	*					74.00		V	PEAK
17360.00	*					74.00		V	PEAK
4960.00	57.12	31.69	9.08	40.03	57.53	74.00	-16.47	H	PEAK
7440.00	48.47	36.60	10.80	41.05	54.48	74.00	-19.52	H	PEAK
9920.00						74.00		H	PEAK
12400.00	*					74.00		H	PEAK
14880.00	*					74.00		H	PEAK
17360.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	47.15	31.69	9.08	40.03	47.56	54.00	-6.44	V	AVG.
7440.00	39.33	36.60	10.80	41.05	45.34	54.00	-8.66	V	AVG.
9920.00	*					54.00		V	AVG.
12400.00	*					54.00		V	AVG.
14880.00	*					54.00		V	AVG.
17360.00	*					54.00		V	AVG.
4960.00	48.19	31.69	9.08	40.03	48.60	54.00	-5.40	H	AVG.
7440.00	38.37	36.60	10.80	41.05	44.38	54.00	-9.62	H	AVG.
9920.00	*					54.00		H	AVG.
12400.00	*					54.00		H	AVG.
14880.00	*					54.00		H	AVG.
17360.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.