

# FCC RADIO TEST REPORT

## FCC ID: 2ADSCPA-09

**Product :** TV box

**Trade Name :**



**Model Name :** PA-09

**Serial Model:** PA-01, PA-03, PA-07, PA-09 A,  
PA-09 MX, H1, M8, MXQ, CS918, 4K

### Prepared for

DongGuan Lionpower Electronic Co., Ltd.

No.2, Hongsheng Park, East 3rd Street, Shatou, Chang'an Town, Dongguan,  
Guangdong, China

### Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming  
Community, Dongcheng District, Dongguan, Guangdong, China

## TEST RESULT CERTIFICATION

**Applicant's name** ..... DongGuan Lionpower Electronic Co., Ltd.  
**Address** ..... No.2, Hongsheng Park, East 3rd Street, Shatou, Chang'an Town,  
Dongguan, Guangdong, China

**Manufacture's Name**... DongGuan Lionpower Electronic Co., Ltd.  
**Address** ..... No.2, Hongsheng Park, East 3rd Street, Shatou, Chang'an  
Town, Dongguan, Guangdong, China

### Product description

**Product name** ..... TV box

**Model and/or type**  
**reference** ..... PA-09

**Serial Model** ..... PA-01, PA-03, PA-07, PA-09 A, PA-09 MX, H1, M8, MXQ, CS918, 4K

The appearance and size are different, the color of the appearance is same. The location and content of the silk-screen are different.

**Standards** ..... FCC Part15.247

**Test procedure** ..... ANSI C63.4-2003

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


**Date of Test** .....

**Date (s) of performance of tests** ..... Dec, 11. 2014 ~ Dec, 16. 2014

**Date of Issue** ..... Dec, 16. 2014

**Test Result** ..... **Pass**

Testing Engineer :



Assistant

Technical Manager :



Supervisor

Authorized  
Signatory :



Jacky Ou /  
Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS

## TABLE OF CONTENTS

<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	5
3.2 DETAILS OF E.U.T. ....	5
3.3 CHANNEL LIST.....	5
3.4 DESCRIPTION OF SUPPORT UNITS .....	5
3.5 TEST MODE.....	6
3.6 TEST FACILITY.....	7
<b>4 EQUIPMENT USED DURING TEST.....</b>	<b>8</b>
4.1 EQUIPMENTS LIST .....	8
4.2 MEASUREMENT UNCERTAINTY .....	8
4.3 TEST EQUIPMENT CALIBRATION.....	8
<b>5 CONDUCTED EMISSION.....</b>	<b>9</b>
5.1 E.U.T. OPERATION .....	9
5.2 EUT SETUP.....	9
5.3 MEASUREMENT DESCRIPTION.....	9
5.4 CONDUCTED EMISSION TEST RESULT .....	10
<b>6 SPURIOUS RADIATED EMISSIONS .....</b>	<b>11</b>
6.1 EUT OPERATION : .....	11
6.2 TEST SETUP.....	12
6.3 SPECTRUM ANALYZER SETUP.....	13
6.4 TEST PROCEDURE .....	14
6.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
6.6 SUMMARY OF TEST RESULTS.....	15
<b>7 BAND EDGE MEASUREMENT .....</b>	<b>24</b>
7.1 TEST PROCEDURE .....	24
7.2 TEST RESULT:.....	25
<b>8 6 DB BANDWIDTH MEASUREMENT.....</b>	<b>28</b>
8.1 TEST PROCEDURE: .....	28
8.2 TEST RESULT:.....	28
<b>9 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>34</b>
9.1 TEST PROCEDURE: .....	34
9.2 BLOCK DIAGRAM OF TEST SETUP.....	34
9.3 KEEP THE EUT IN TRANSMITTING AT LOWEST, MEDIUM AND HIGHEST CHANNEL INDIVIDUALLY. RECORD THE MAX TEST RESULT:.....	35
<b>10 POWER SPECTRAL DENSITY .....</b>	<b>36</b>
10.1 TEST PROCEDURE: .....	36
10.2 TEST RESULT:.....	36
<b>11 ANTENNA REQUIREMENT.....</b>	<b>42</b>

### 3 General Information

#### 3.1 General Description of E.U.T.

**Product Name** : TV box

**Model No.** : PA-09

**Brand Name**



**Model Description** : Serial Production

**Operation Frequency** : 2412MHz ~ 2462MHz

**Type of Modulation** : IEEE 802.11b (CCK/QPSK/BPSK, 11Mbps max.)  
IEEE 802.11g (BPSK/QPSK/16QAM/64QAM, 54Mbps max.)  
IEEE 802.11n (BPSK/QPSK/16QAM/64QAM, HT20: 72Mbps max.)

**Oscillator** : 40MHz for RF module

**Antenna Gain** : 2dBi

#### 3.2 Details of E.U.T.

**Technical Data** : (1)DC 5V, 2000mA by adapter  
(2)AC 100-240V, 0.3A

#### 3.3 Channel List

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

#### 3.4 Description of Support Units

No.	Equipment	Manufacturer	Model No.	Serial No.
1.	Mouse	LENOVO	Z7541	845689
2.	Monitor	LG	C1490	357894

### 3.5 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Table 2 Tests Carried Out Under FCC part 15.207 &amp; FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication

### **3.6 Test Facility**

The test facility has a test site registered with the following organizations:

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 4 Equipment Used during Test

### 4.1 Equipments List

Mains Terminal Disturbance Voltage (Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Cal. Interval
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.17,2015	1 Y
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.17,2015	1 Y
3.	Cable	LARGE	RF300	-	Sep.17,2015	1 Y
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.17,2015	1 Y
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.17,2015	1 Y
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	1 Y
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.17,2015	1 Y
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	1 Y
6	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.06,2015	1 Y
7	Coaxial Cable (above 1GHz)	Top	25MHz-18GHz	EW02014-7	Apr.19,2015	1 Y
8	Horn Antenna	EM	EM-AH-10180	2011071402	Apr.19,2015	1 Y
9	Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	1 Y
10	Power meter	Anritsu	ML2487A	6K00002472	Apr.19,2015	1 Y
11	Power sensor	Anritsu	MI2491A	0033005	Apr.19,2015	1 Y
12	Spectrum analyzer	R&S	FSU	1166.1660.26	Apr.19,2015	1 Y
13	RF Cable	Micable	C10-01-01-1	100309	Apr.19,2015	1 Y

### 4.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Temperature	$\pm 1$ °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 4.74$ dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	3.64dB (150kHz~30MHz)

### 4.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.



## 5 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 5.1 E.U.T. Operation

#### Operating Environment:

Temperature: 25.1 °C

Humidity: 52% RH


Atmospheric Pressure: 1013 mbar

#### EUT Operation:

The test was performed in communication mode, the test data were shown in the report.

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

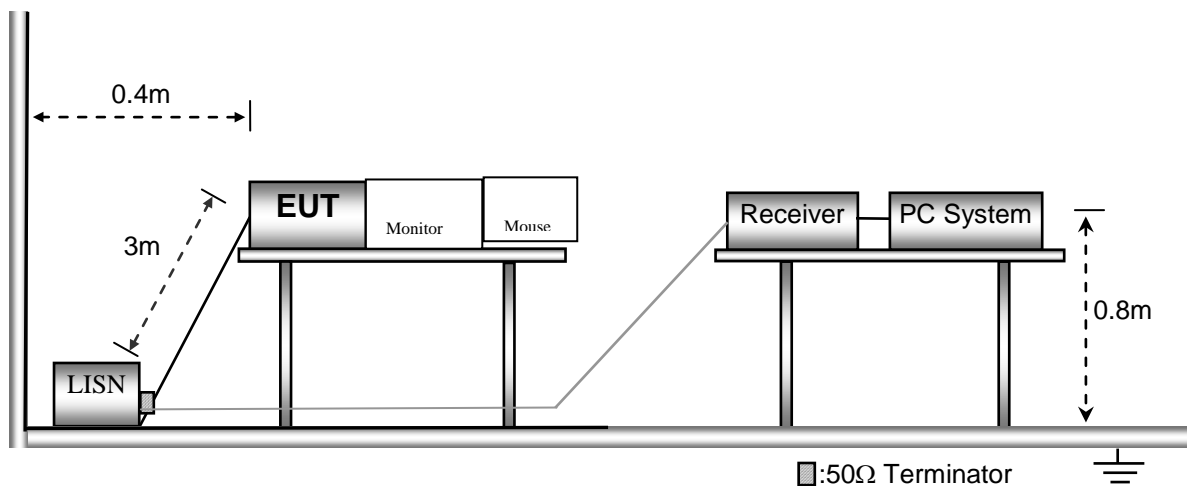


### 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 5.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

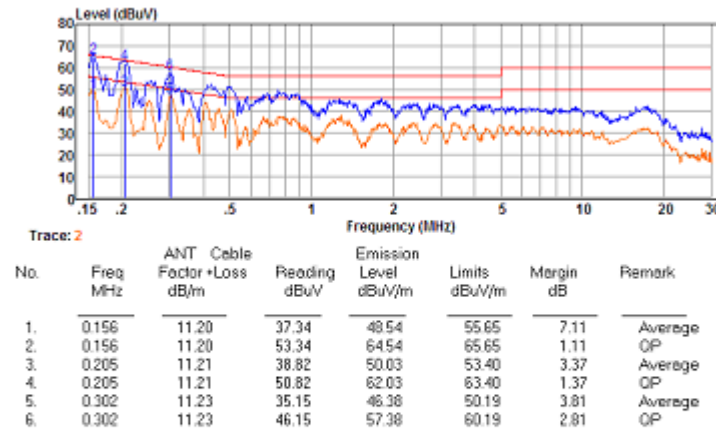

Note: 1. The emission levels that are 20dB below the official limit are not reported.  
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

Neutral line:

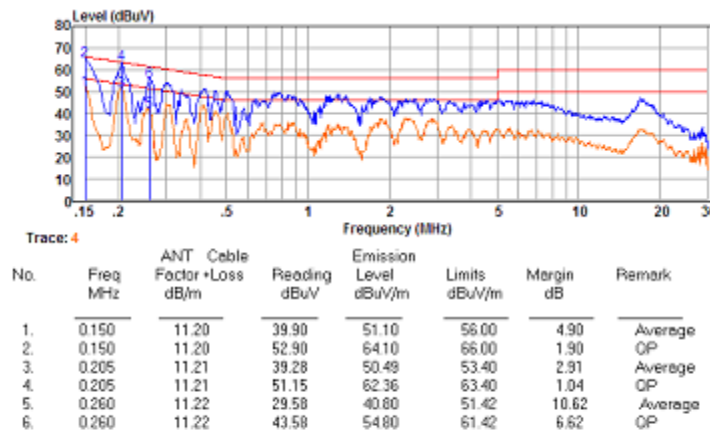

Note: 1. The emission levels that are 20dB below the official limit are not reported.  
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

## 6 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: ANSI C63.4:2003  
 KDB 558074 D01 DTS Meas Guidance v03r02.  
 Test Result: PASS  
 Measurement Distance: 3m  
 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation :

Operating Environment:  
 Temperature: 25.2°C  
 Humidity: 52% RH  
 Atmospheric Pressure: 1010 mbar


#### Operation Mode:

The EUT was tested in transmitting mode, and the data were shown as follow.


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

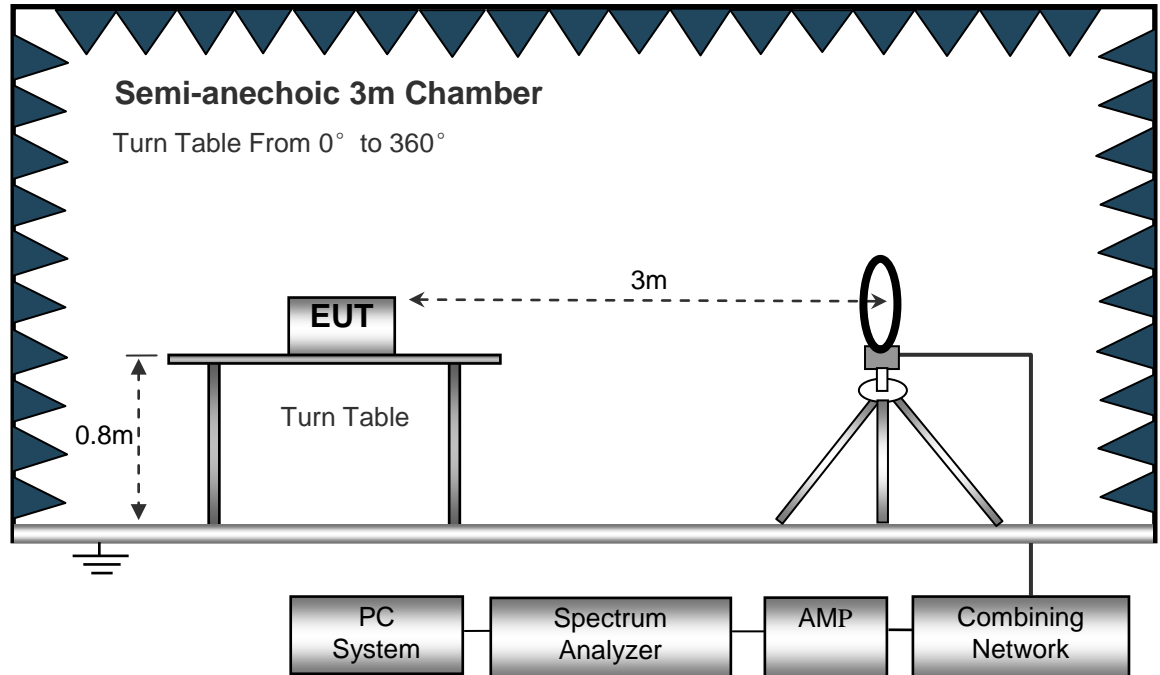

The test setup for emission measurement from 30 MHz to 1 GHz.

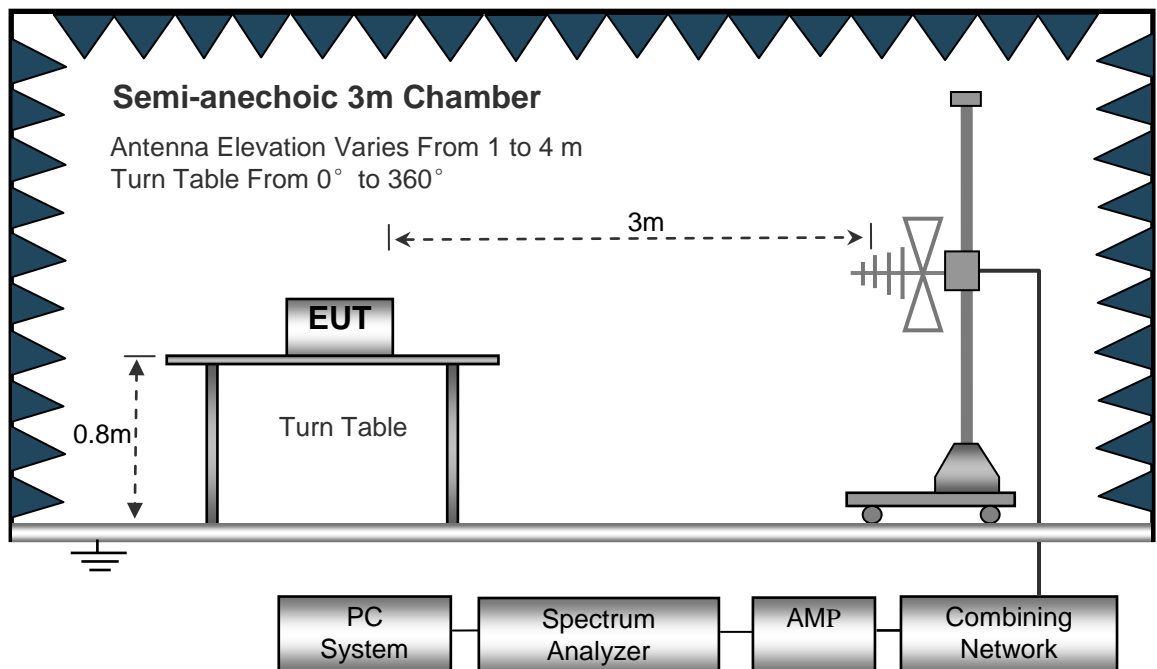

The test setup for emission measurement above 1 GHz.

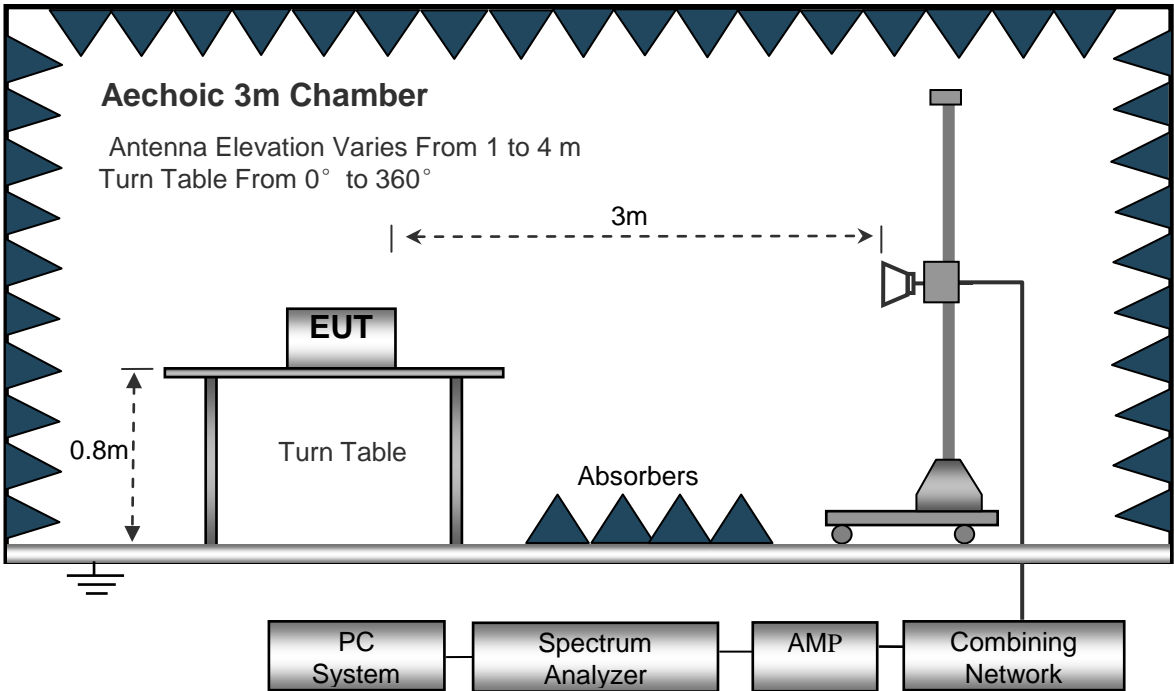

6.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9kHz to 25000MHz.

Below 30MHz

Sweep Speed ..... Auto  
IF Bandwidth..... 10kHz  
Video Bandwidth..... 10kHz  
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth..... 100kHz  
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth..... 1MHz  
Video Bandwidth..... 3MHz  
Detector ..... Ave.  
Resolution Bandwidth..... 1MHz  
Video Bandwidth..... 10Hz

## 6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement

## 6.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 6.6 Summary of Test Results

### Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
240.02	19.02	PK	333	1.6	H	17.01	36.03	40.00	-3.97
240.03	18.75	PK	153	1.7	V	17.01	35.76	40.00	-4.24
4824.00	54.02	PK	8	1.7	V	-1.06	52.96	74.00	-21.04
4824.00	43.06	Ave	8	1.7	V	-1.06	42.00	54.00	-12.00
7236.00	42.06	PK	336	1.7	H	1.33	43.39	74.00	-30.61
7236.00	39.58	Ave	336	1.7	H	1.33	40.91	54.00	-13.09
2340.38	45.02	PK	243	1.1	V	-13.19	31.83	74.00	-42.17
2340.38	34.26	Ave	243	1.1	V	-13.19	21.07	54.00	-32.93
2373.80	42.54	PK	64	1.3	H	-13.14	29.40	74.00	-44.60
2373.80	31.26	Ave	64	1.3	H	-13.14	18.12	54.00	-35.88
2497.40	38.59	PK	13	1.2	V	-13.08	25.51	74.00	-48.49
2497.40	29.26	Ave	13	1.2	V	-13.08	16.18	54.00	-37.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
240.02	19.52	PK	103	1.1	H	17.01	36.53	40.00	-3.47
240.02	19.03	PK	62	1.9	V	17.01	36.04	40.00	-3.96
4874.00	55.02	PK	251	1.4	V	-0.62	54.40	74.00	-19.60
4874.00	44.02	Ave	251	1.4	V	-0.62	43.40	54.00	-10.60
7311.00	40.26	PK	93	1.8	H	2.21	42.47	74.00	-31.53
7311.00	38.26	Ave	93	1.8	H	2.21	40.47	54.00	-13.53
2348.92	44.15	PK	50	1.5	V	-13.19	30.96	74.00	-43.04
2348.92	35.26	Ave	50	1.5	V	-13.19	22.07	54.00	-31.93
2380.49	40.26	PK	67	1.8	H	-13.14	27.12	74.00	-46.88
2380.49	30.65	Ave	67	1.8	H	-13.14	17.51	54.00	-36.49
2490.03	39.02	PK	204	1.1	V	-13.08	25.94	74.00	-48.06
2490.03	30.26	Ave	204	1.1	V	-13.08	17.18	54.00	-36.82



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
240.01	18.98	PK	219	1.5	H	17.01	35.99	40.00	-4.01
240.21	19.24	PK	306	1.8	V	17.01	36.25	40.00	-3.75
4924.00	56.27	PK	296	1.6	V	-0.24	56.03	74.00	-17.97
4924.00	45.69	Ave	296	1.6	V	-0.24	45.45	54.00	-8.55
7386.00	41.85	PK	82	1.2	H	2.84	44.69	74.00	-29.31
7386.00	39.65	Ave	82	1.2	H	2.84	42.49	54.00	-11.51
2310.70	43.85	PK	284	1.5	V	-13.19	30.66	74.00	-43.34
2310.70	33.54	Ave	284	1.5	V	-13.19	20.35	54.00	-33.65
2357.94	41.29	PK	308	1.3	H	-13.14	28.15	74.00	-45.85
2357.94	31.56	Ave	308	1.3	H	-13.14	18.42	54.00	-35.58
2494.86	38.47	PK	282	1.4	V	-13.08	25.39	74.00	-48.61
2494.86	29.85	Ave	282	1.4	V	-13.08	16.77	54.00	-37.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
240	19.75	PK	301	1.3	H	17.01	36.76	40.00	-3.24
240	18.96	PK	336	1.6	V	17.01	35.97	40.00	-4.03
4824.00	53.96	PK	258	1.3	V	-1.06	52.90	74.00	-21.10
4824.00	43.26	Ave	258	1.3	V	-1.06	42.20	54.00	-11.80
7236.00	42.65	PK	211	1.1	H	1.33	43.98	74.00	-30.02
7236.00	33.68	Ave	211	1.1	H	1.33	35.01	54.00	-18.99
2335.01	42.69	PK	114	1.7	V	-13.19	29.50	74.00	-44.50
2335.01	33.26	Ave	114	1.7	V	-13.19	20.07	54.00	-33.93
2353.43	39.58	PK	252	1.2	H	-13.14	26.44	74.00	-47.56
2353.43	29.87	Ave	252	1.2	H	-13.14	16.73	54.00	-37.27
2498.30	37.15	PK	273	1.0	V	-13.08	24.07	74.00	-49.93
2498.30	27.69	Ave	273	1.0	V	-13.08	14.61	54.00	-39.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
240	18.87	PK	14	1.6	H	17.01	35.88	40.00	-4.12
240	19.26	PK	257	1.8	V	17.01	36.27	40.00	-3.73
4874.00	56.68	PK	121	1.5	V	-0.62	56.06	74.00	-17.94
4874.00	45.78	Ave	121	1.5	V	-0.62	45.16	54.00	-8.84
7311.00	42.36	PK	328	1.1	H	2.21	44.57	74.00	-29.43
7311.00	35.26	Ave	328	1.1	H	2.21	37.47	54.00	-16.53
2331.22	43.26	PK	342	1.2	V	-13.19	30.07	74.00	-43.93
2331.22	33.69	Ave	342	1.2	V	-13.19	20.50	54.00	-33.50
2362.90	41.68	PK	308	1.5	H	-13.14	28.54	74.00	-45.46
2362.90	31.25	Ave	308	1.5	H	-13.14	18.11	54.00	-35.89
2489.05	38.47	PK	349	1.1	V	-13.08	25.39	74.00	-48.61
2489.05	28.59	Ave	349	1.1	V	-13.08	15.51	54.00	-38.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
240.03	19.45	PK	158	1.5	H	17.01	36.46	40.00	-3.54
240.03	19.23	PK	14	1.1	V	17.01	36.24	40.00	-3.76
4924.00	56.58	PK	321	1.0	V	-0.24	56.34	74.00	-17.66
4924.00	45.85	Ave	321	1.0	V	-0.24	45.61	54.00	-8.39
7386.00	45.26	PK	20	1.9	H	2.84	48.10	74.00	-25.90
7386.00	37.59	Ave	20	1.9	H	2.84	40.43	54.00	-13.57
2319.03	43.25	PK	111	1.5	V	-13.19	30.06	74.00	-43.94
2319.03	34.14	Ave	111	1.5	V	-13.19	20.95	54.00	-33.05
2352.56	41.26	PK	306	1.9	H	-13.14	28.12	74.00	-45.88
2352.56	31.26	Ave	306	1.9	H	-13.14	18.12	54.00	-35.88
2487.20	38.26	PK	318	1.1	V	-13.08	25.18	74.00	-48.82
2487.20	28.26	Ave	318	1.1	V	-13.08	15.18	54.00	-38.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
240.02	19.45	PK	221	1.3	H	17.01	36.46	40.00	-3.54
240.02	18.75	PK	147	1.4	V	17.01	35.76	40.00	-4.24
4824.00	56.25	PK	357	1.2	V	-1.06	55.19	74.00	-18.81
4824.00	45.58	Ave	357	1.2	V	-1.06	44.52	54.00	-9.48
7236.00	41.58	PK	149	1.4	H	1.33	42.91	74.00	-31.09
7236.00	36.25	Ave	149	1.4	H	1.33	37.58	54.00	-16.42
2340.83	43.24	PK	287	1.7	V	-13.19	30.05	74.00	-43.95
2340.83	33.65	Ave	287	1.7	V	-13.19	20.46	54.00	-33.54
2389.89	41.26	PK	92	1.0	H	-13.14	28.12	74.00	-45.88
2389.89	31.25	Ave	92	1.0	H	-13.14	18.11	54.00	-35.89
2490.26	38.35	PK	27	1.5	V	-13.08	25.27	74.00	-48.73
2490.26	28.59	Ave	27	1.5	V	-13.08	15.51	54.00	-38.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
240.00	18.86	PK	331	1.6	H	17.01	35.87	40.00	-4.13
240.00	18.41	PK	257	1.3	V	17.01	35.42	40.00	-4.58
4874.00	56.25	PK	191	1.5	V	-0.62	55.63	74.00	-18.37
4874.00	45.26	Ave	191	1.5	V	-0.62	44.64	54.00	-9.36
7311.00	41.26	PK	44	1.6	H	2.21	43.47	74.00	-30.53
7311.00	34.25	Ave	44	1.6	H	2.21	36.46	54.00	-17.54
2317.19	43.25	PK	341	1.6	V	-13.19	30.06	74.00	-43.94
2317.19	33.58	Ave	341	1.6	V	-13.19	20.39	54.00	-33.61
2352.34	41.26	PK	107	1.0	H	-13.14	28.12	74.00	-45.88
2352.34	31.28	Ave	107	1.0	H	-13.14	18.14	54.00	-35.86
2489.51	38.59	PK	87	1.5	V	-13.08	25.51	74.00	-48.49
2489.51	28.59	Ave	87	1.5	V	-13.08	15.51	54.00	-38.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
240.00	19.15	PK	181	1.5	H	17.01	36.16	40.00	-3.84
240.00	18.59	PK	253	1.3	V	17.01	35.60	40.00	-4.40
4924.00	54.85	PK	323	1.0	V	-0.24	54.61	74.00	-19.39
4924.00	43.98	Ave	323	1.0	V	-0.24	43.74	54.00	-10.26
7386.00	42.26	PK	193	1.0	H	2.84	45.10	74.00	-28.90
7386.00	39.68	Ave	193	1.0	H	2.84	42.52	54.00	-11.48
2312.85	41.26	PK	19	1.7	V	-13.19	28.07	74.00	-45.93
2312.85	32.26	Ave	19	1.7	V	-13.19	19.07	54.00	-34.93
2355.97	41.25	PK	335	1.2	H	-13.14	28.11	74.00	-45.89
2355.97	31.02	Ave	335	1.2	H	-13.14	17.88	54.00	-36.12
2489.28	38.58	PK	204	1.9	V	-13.08	25.50	74.00	-48.50
2489.28	29.02	Ave	204	1.9	V	-13.08	15.94	54.00	-38.06

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## **7 Band Edge Measurement**

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB558074 D01
Test Mode:	Transmitting



### **7.1 Test Procedure**



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.





7.2 Test Result:

Test result plots shown as follows:

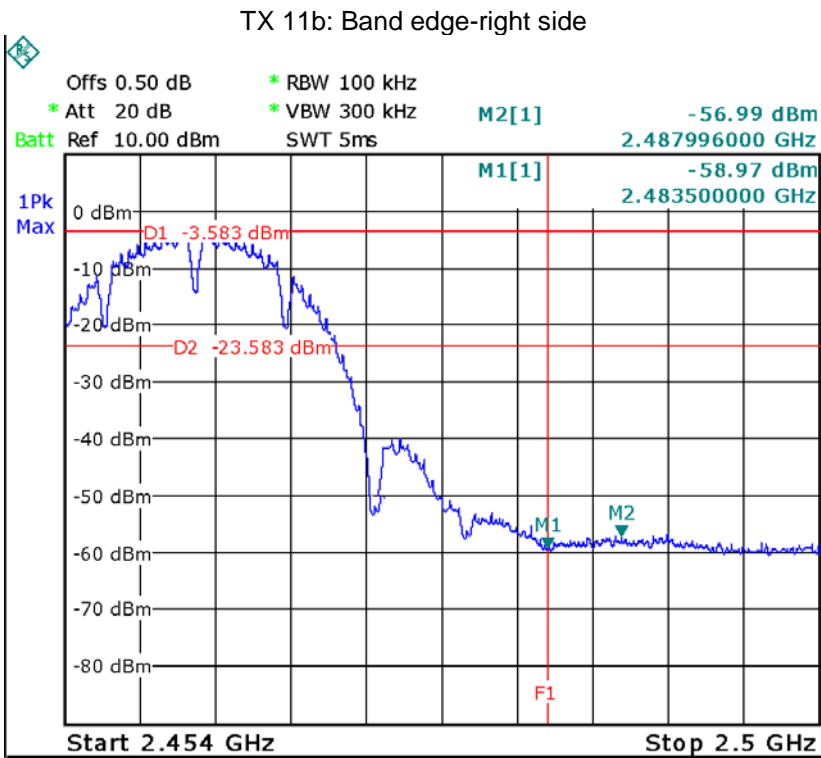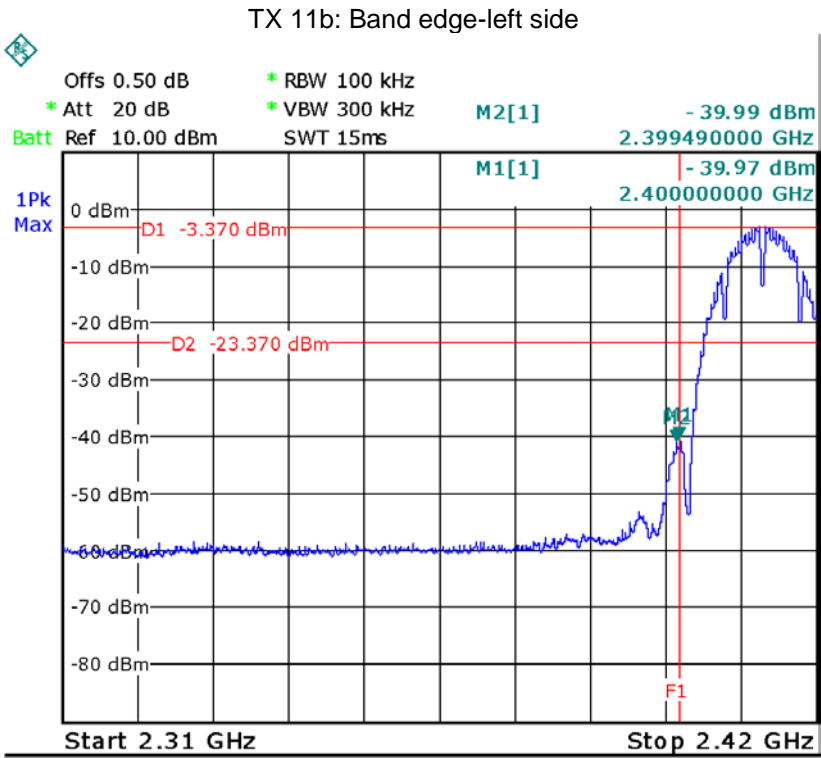

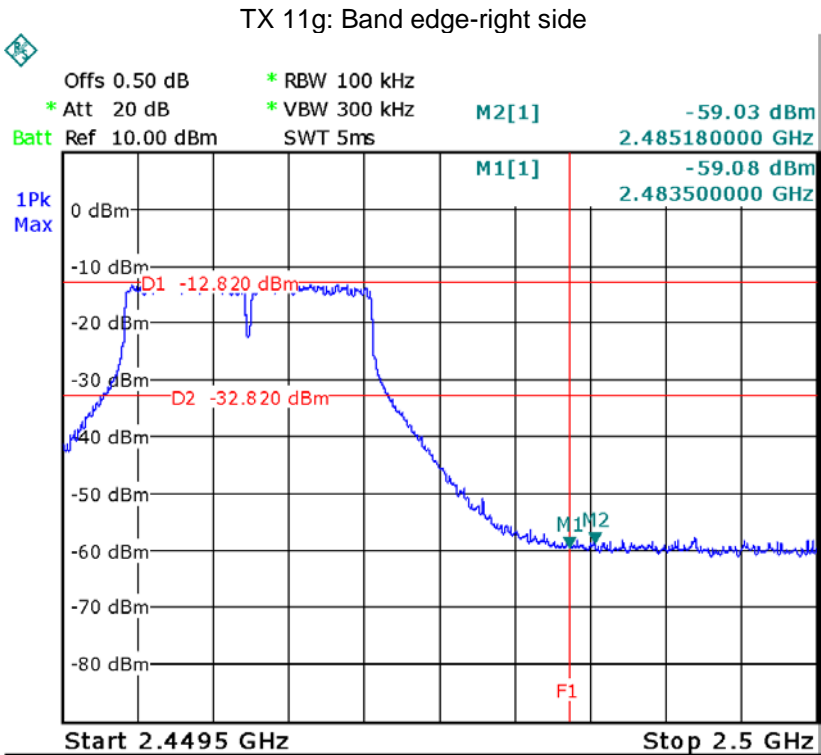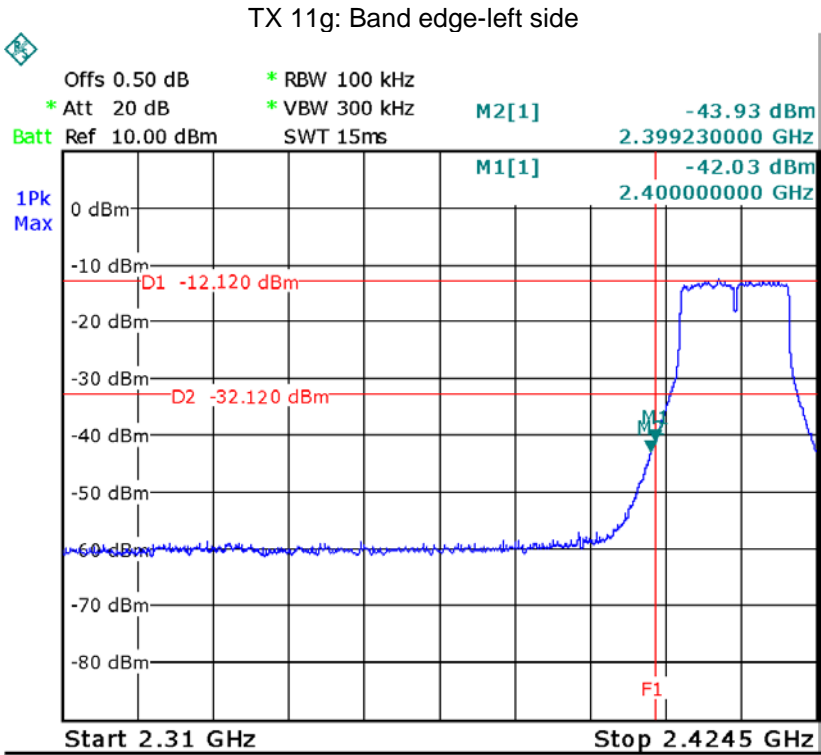

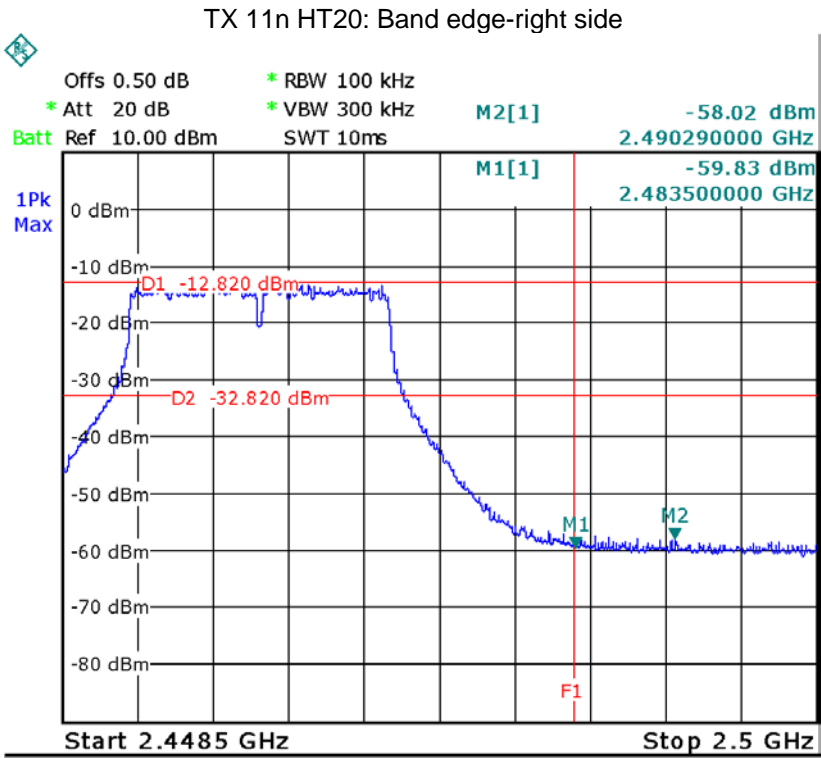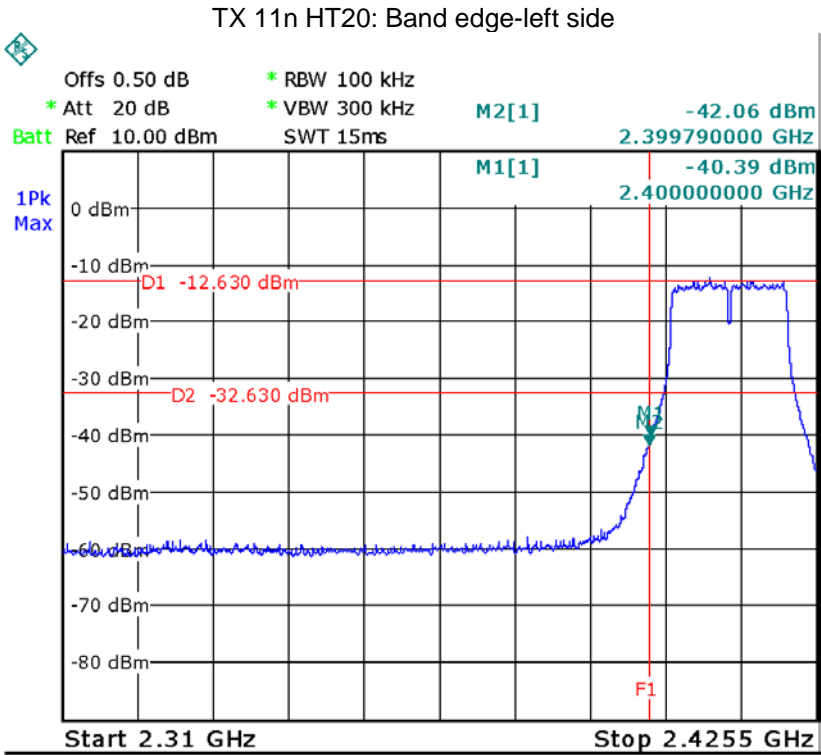

## 8 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01

### 8.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 8.2 Test Result:


Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	10.03	10.03	10.03
TX 11g	16.37	16.37	16.37
TX 11n HT20	17.71	17.71	17.71



Test result plot as follows:



Mode: TX 11b channel 1

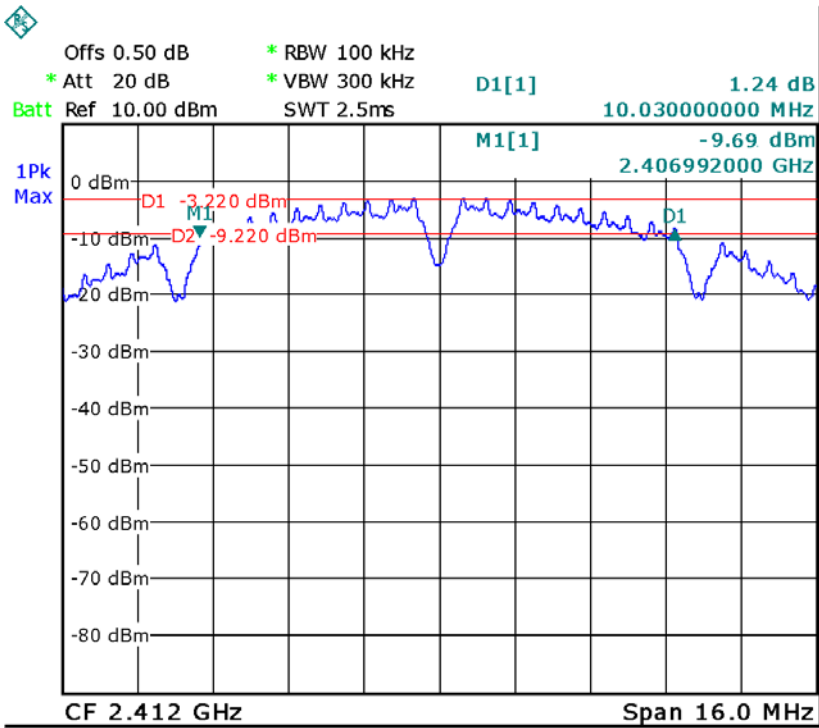


Mode: TX 11b channel 6

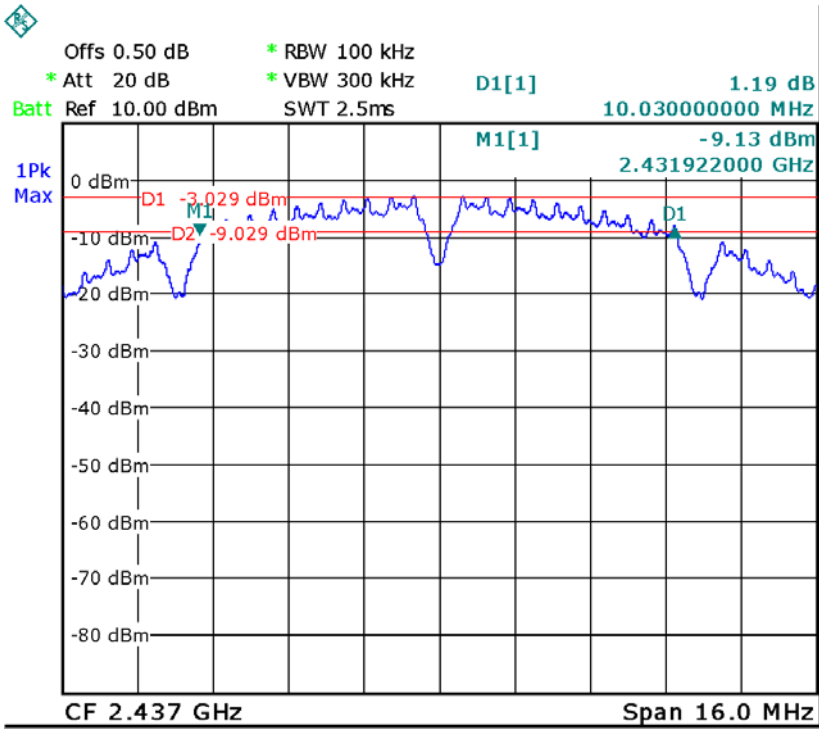

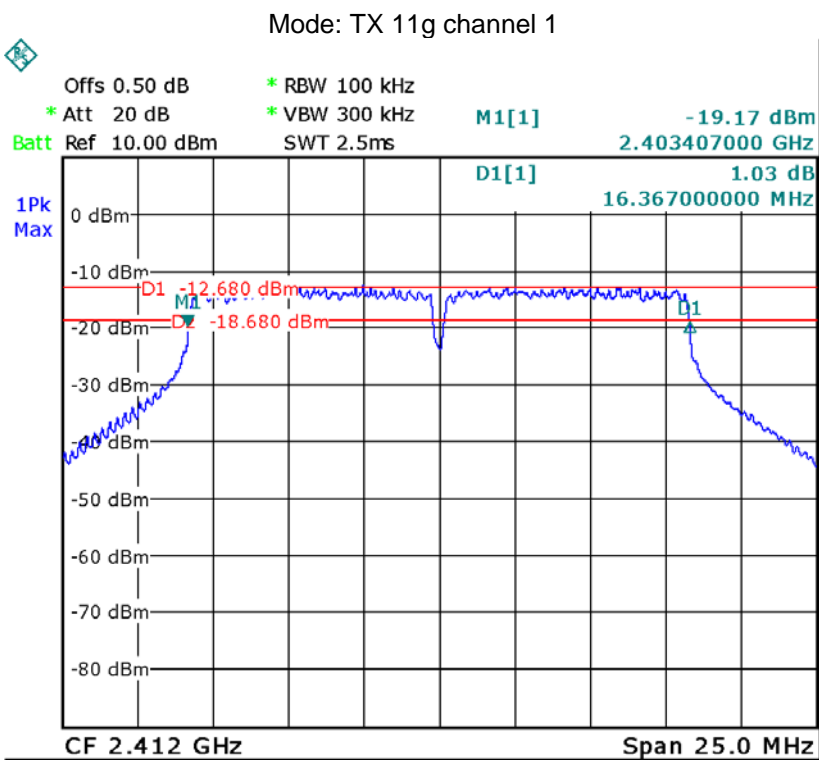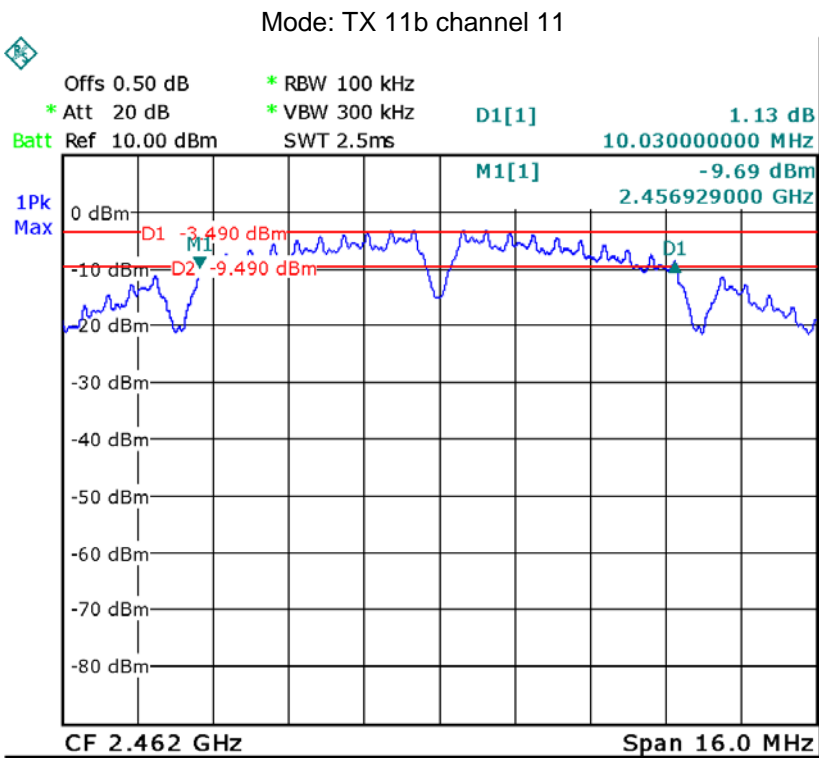


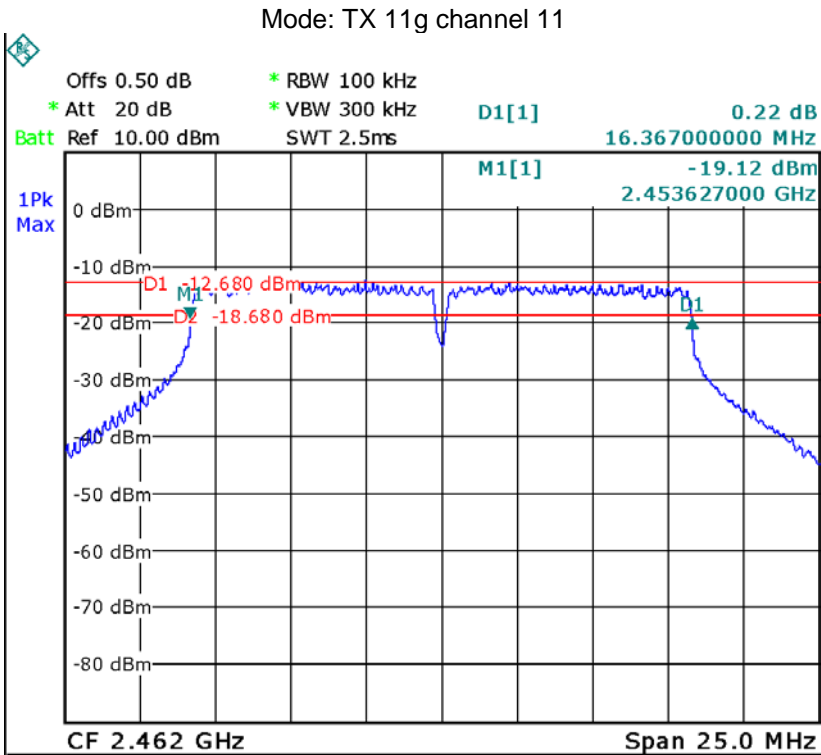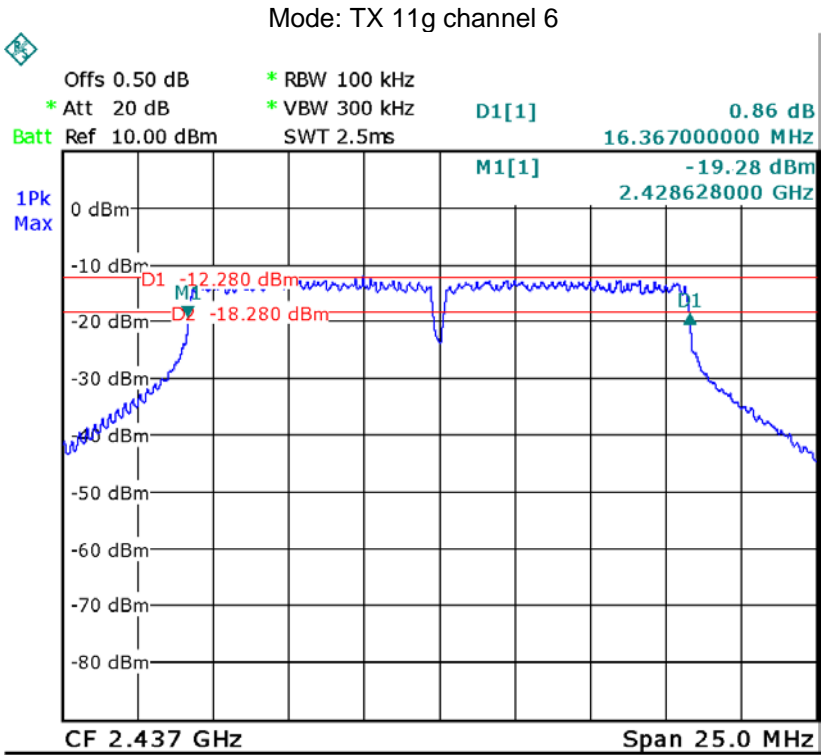

Mode: TX 11n HT20 channel 1

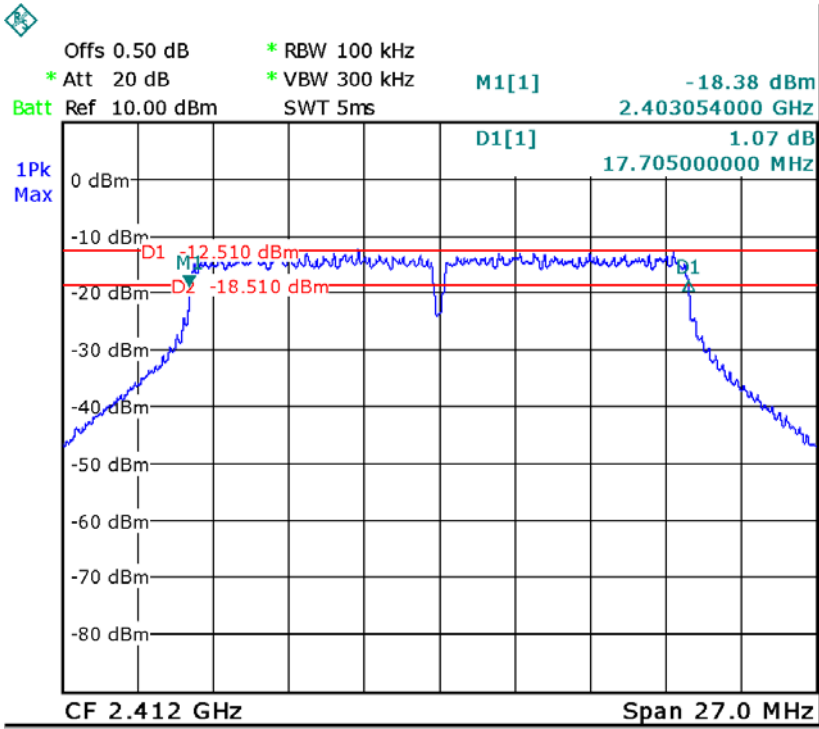


Mode: TX 11n HT20 channel 6

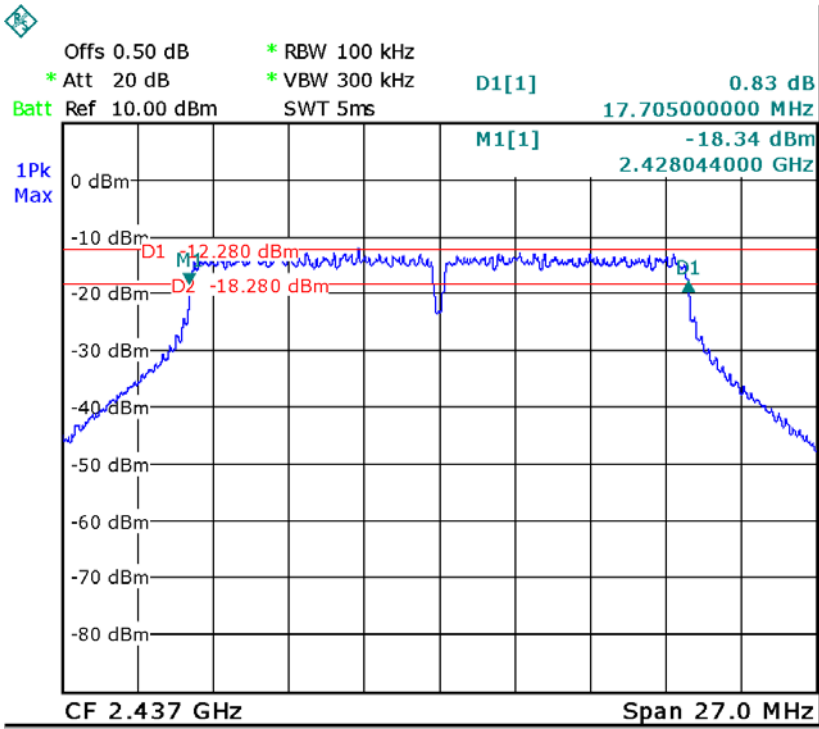



Mode: TX 11n HT20 channel 11

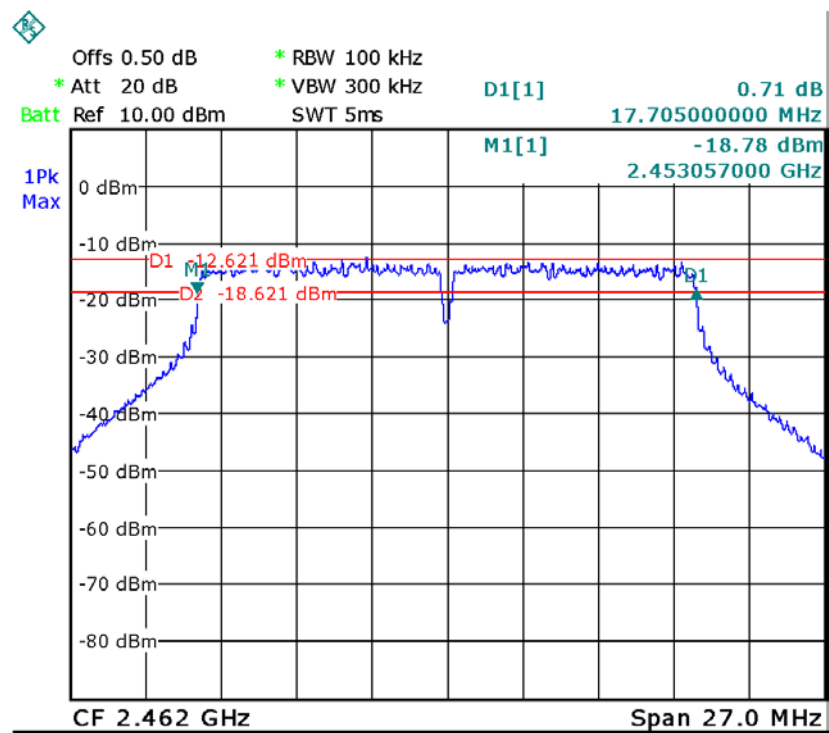

## 9 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01

### 9.1 Test Procedure:

KDB558074 D01

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

#### Maximum peak conducted output power

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

##### RBW $\geq$ DTS bandwidth


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth
- b) Set VBW  $\geq 3 \times$  RBW
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 9.2 Block diagram of test setup

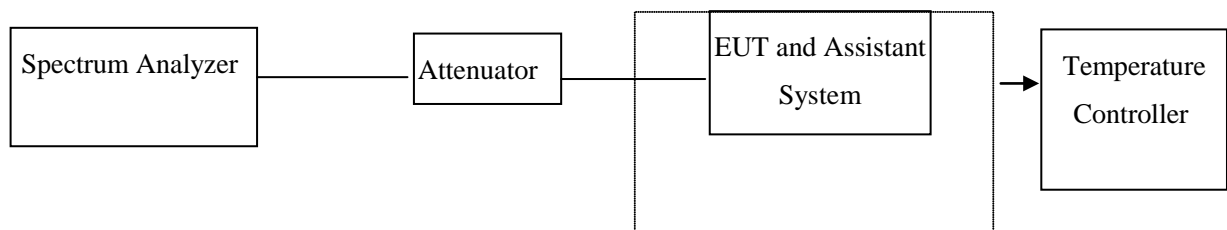

**9.3 Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max Test Result:**

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.52	9.32	9.45
Limit: 1W/30dBm		
1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.58	9.29	9.21
Limit		
1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.42	9.36	9.57
Limit		
1W/30dBm		

## 10 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01

### 10.1 Test Procedure:

KDB558074 D01

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



### 10.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-24.05	-23.62	-23.61
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-27.17	-27.36	-27.61
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-27.09	-26.71	-27.04
8dBm per 3kHz		

Test result plot as follows:

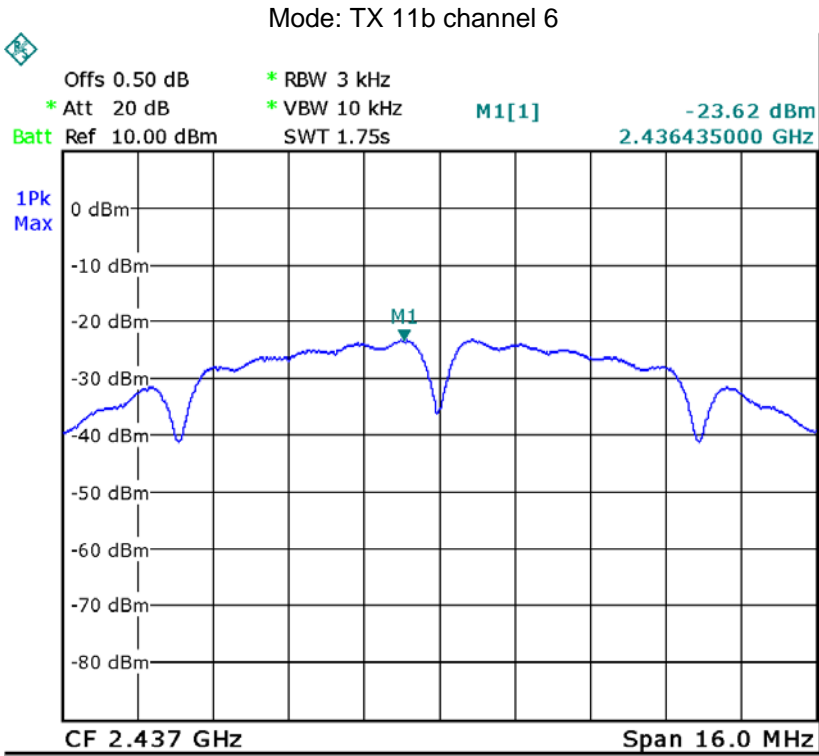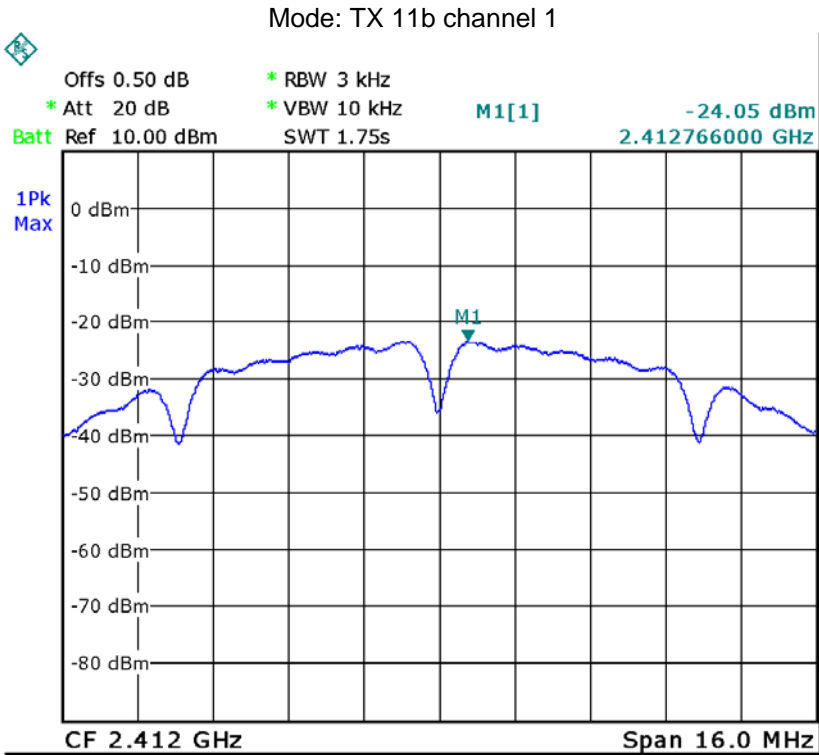


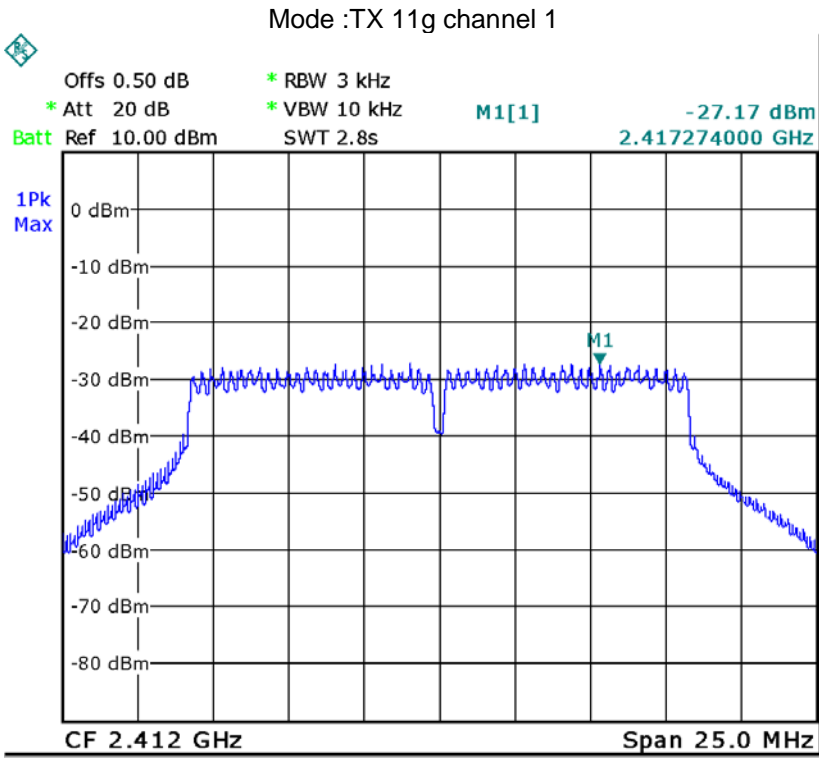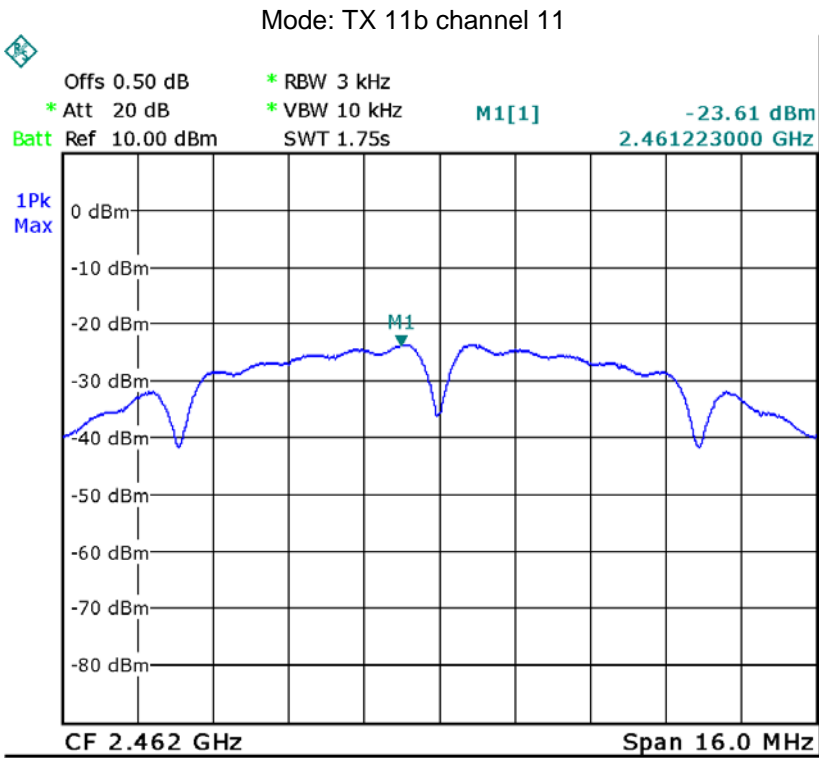

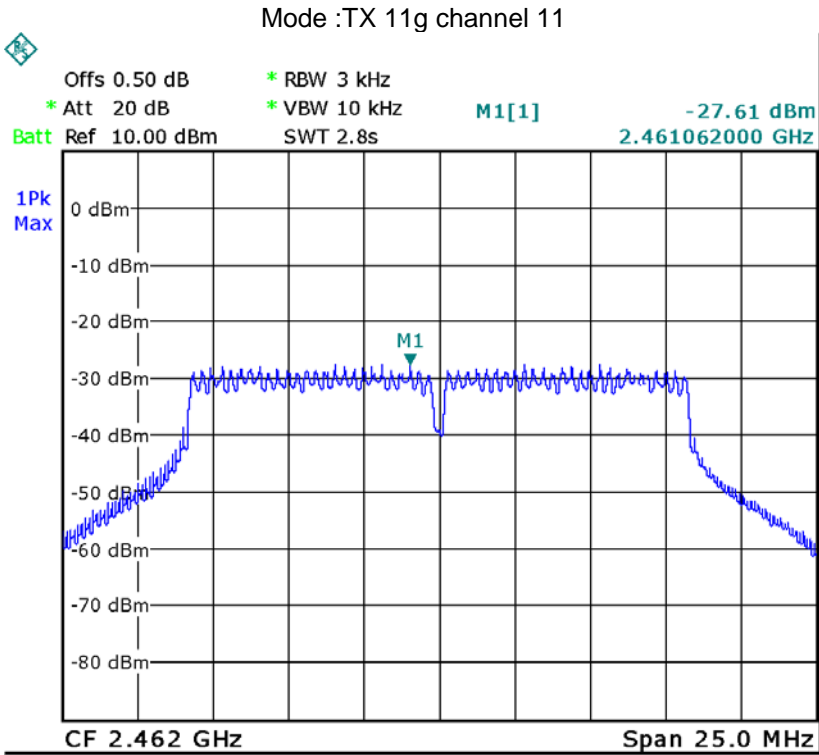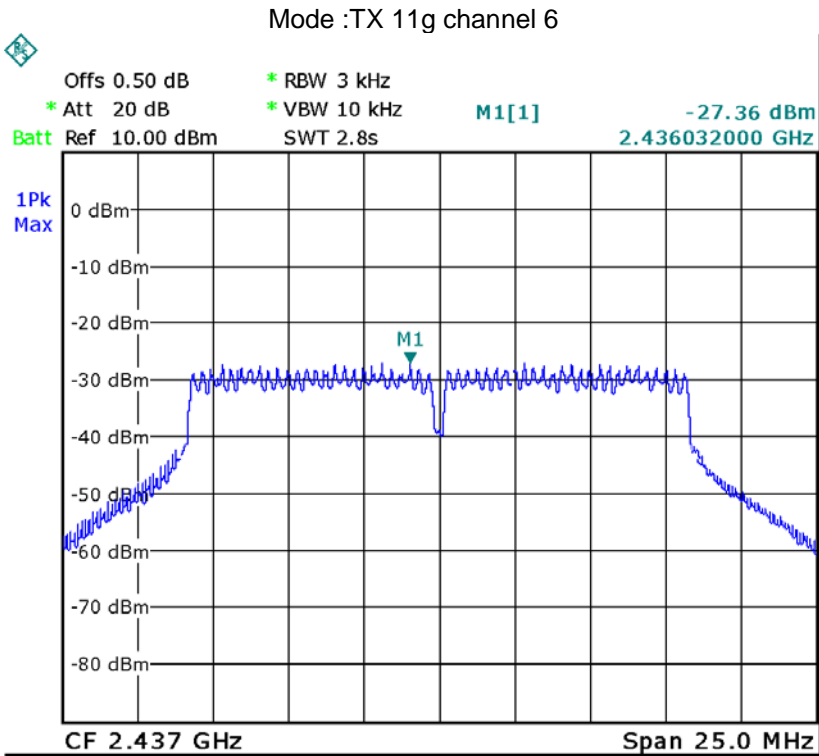

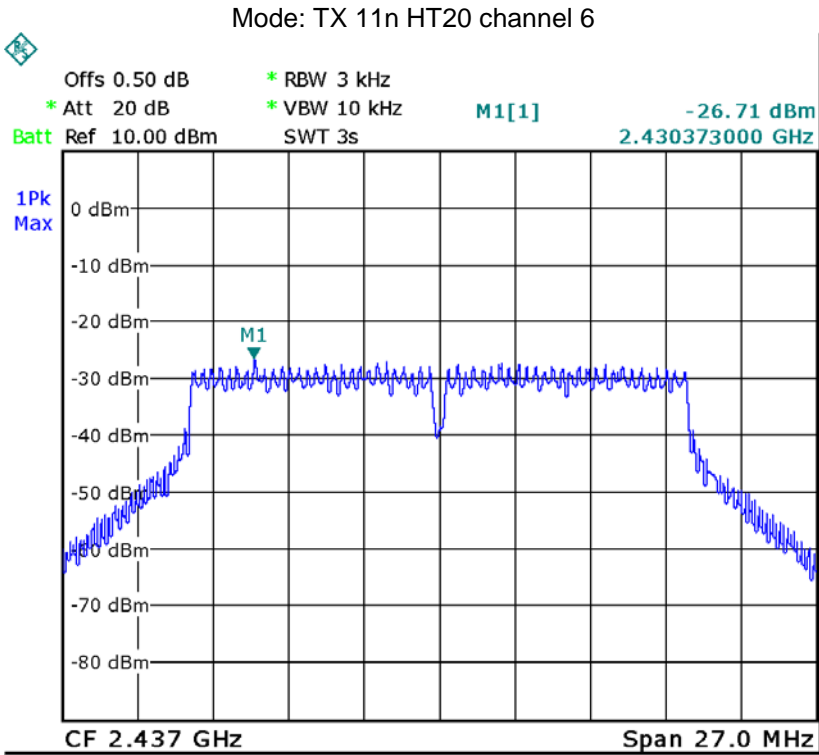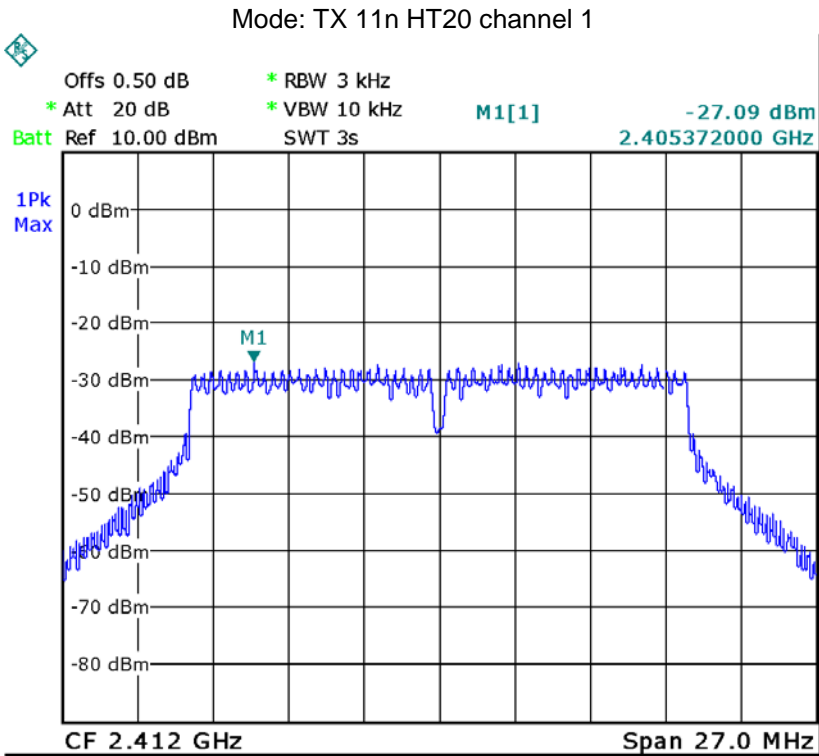



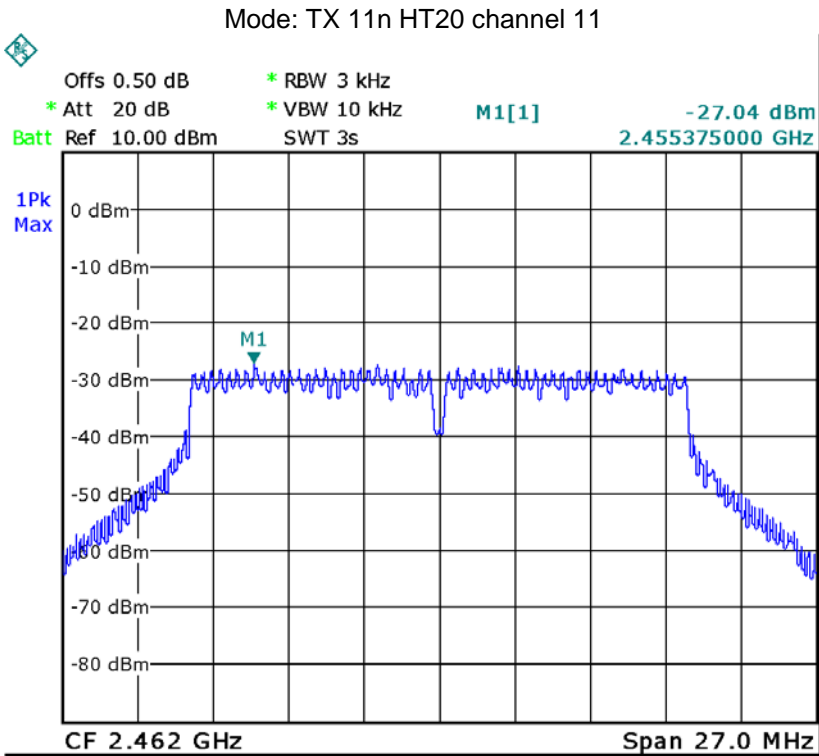

## **11 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

===== End of Test Report =====