

# **FCC Test Report**

Report No.: AGC10423170802FE06

FCC ID : 2ADSH-UMV3BTZB

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION** : Universal Module V3

BRAND NAME : Danalock

MODEL NAME : UMV3-BTZB

**CLIENT** : Poly-Control ApS

**DATE OF ISSUE** : Jan. 19, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Page 2 of 30

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	TC MANAGEMENT	Jan. 19, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	The state of the s
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RELATED SUBMITTAL(S) / GRANT (S)	
2.4. TEST METHODOLOGY	6
2.5. SPECIAL ACCESSORIES	6
2.6. EQUIPMENT MODIFICATIONS	
3. MEASUREMENT UNCERTAINTY	7
	The transfer of the transfer o
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	The following of the state of t
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. RADIATED EMISSION	11
7.1. MEASUREMENT PROCEDURE	11
7.2. TEST SETUP	
7.3. LIMITS AND MEASUREMENT RESULT	
7.4. TEST RESULT	
8. BAND EDGE EMISSION	19
8.1. MEASUREMENT PROCEDURE	The state of the s
8.2. TEST SET-UP	
8.3. TEST RESULT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	24
ADDENDIV D. DUOTOOD ADUO OF FUT	findament - C findament

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 4 of 30

## 1. VERIFICATION OF CONFORMITY

Applicant	Poly-Control ApS
Address	Gammel Stillingvej 427C, DK-8462 Harlev J, Denmark
Manufacturer	Xiamen CMM CO., LTD.
Address	No.136 Xin Guang Road, Haicang District   Xiamen city, Fujian Province, P.R. China
Product Designation	Universal Module V3
Brand Name	Danalock
Test Model	UMV3-BTZB
Date of test	Jan. 16, 2018 to Jan. 19, 2018
Deviation	None ® ###################################
Condition of Test Sample	Normal
Test Result	Pass Office of the Control of the Co
Report Template	AGCRT-US-BGN/RF
42 Allo 20 TO	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Tested by	Nw 21	mg 60 =
	Max Zhang(Zhang Yi)	Jan. 19, 2018
Reviewed by	Borex	ie i
	Bart Xie(Xie Xiaobin)	Jan. 19, 2018

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 30

## 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Universal Module V3". It is designed by way of utilizing the OQPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2402-2480MHz
Modulation	GFSK(BLE)
Number of channels	40
Hardware Version	101-026_D1
Software Version	0.6.0
Antenna Designation	Fixed Antenna (Met 15.203 Antenna requirement)
Antenna Gain	3.1dBi
Power Supply	DC 12V

Note: The BLE module and ZigBee model can not transmit simultaneously.

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
The Marcon Strategy and	© Mestation of 1	2402 MHZ
States tulin of Global Co.	2	2404 MHZ
The state of the s	3	2406 MHZ
70	Harris Harris Comme	637 65
The Country Company	The country of the co	
Riestulor of C Affect Miles		1
GO NO		A Barrier O M. Fred Connection
2400~2483.5MHZ	环境神经 一年形	of Frederick -C
2400~2403.3WII IZ	© ## Attended.	-C
of Company Co.	1.0	111
		The state of the s
	· Rame · K Paraller · ®	
The townships of the state of t	John Com. 8 # John Jil Globs	
® ## Allerdon Cook	38	2476 MHZ
	39	2478 MHZ
lin:	40	2480 MHZ

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 6 of 30

## 2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ADSH-UMV3BTZB** filing to comply with the FCC PART 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 7 of 30

#### 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.gott.com.



Page 8 of 30

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Low channel TX(with active ZigBee)	1.GO
<sup>2</sup> 2 <sub>8</sub>	Middle channel TX(with active ZigBee)	THE THE
3	High channel TX(with active ZigBee)	© A Jon of Clobal Co.

#### Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 9 of 30

## 5. SYSTEM TEST CONFIGURATION

## 5.1. CONFIGURATION OF EUT SYSTEM

Configure:

EUT
-----

#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1 🔞	Universal Module V3	UMV3-BTZB	2ADSH-UMV3BTZB	EUT

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT Compliant	
§15.209	Radiated Emission		
§15.247	Band Edges	Compliant	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 10 of 30

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd				
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012				
NVLAP LAB CODE	600153-0				
Designation Number	CN5028				
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0				

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Active loop antenna (9K-30MHz)	A.H.	SAS-562B	N/A	Mar.01, 2016	Feb.28, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Report No.: AGC10423170802FE06 Page 11 of 30

#### 7. RADIATED EMISSION

#### 7.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.




## 7.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

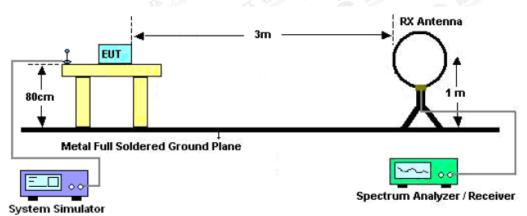

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

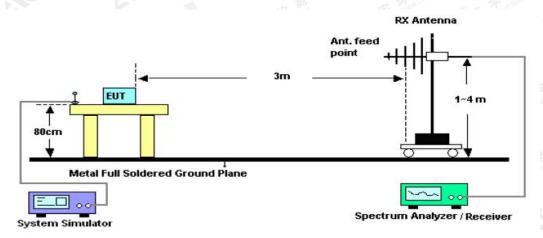

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

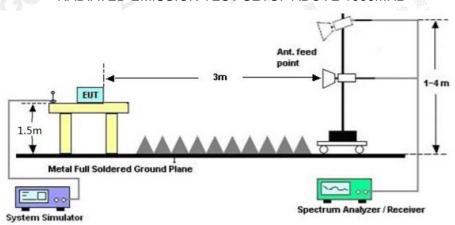

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 13 of 30

#### 7.3. LIMITS AND MEASUREMENT RESULT

FCC part 15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	The state of the s		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

#### 7.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**


No emission found between lowest internal used/generated frequencies to 30MHz.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



## **RADIATED EMISSION BELOW 1GHZ**

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

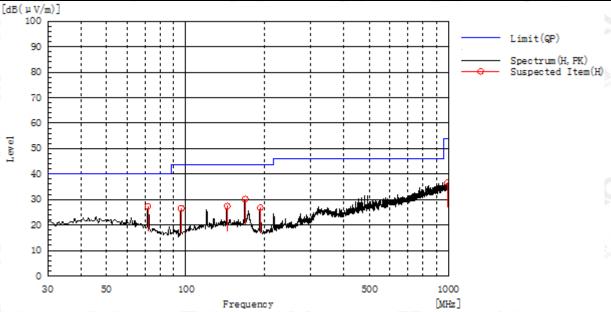


	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
ucs m	71.710	of Global H ®	13.3	14.0	27.3	40.0	12.7	Pass	150.0	288.1
	95.960	Н	13.8	12.8	26.6	43.5	16.9	Pass	200.0	287.8
	143.975	Н	10.8	16.6	27.4	43.5	16.1	Pass	100.0	93.1
~	168.225	® ## John of Clothad Col	14.1	16.1	30.2	43.5	13.3	Pass	100.0	93.1
on of	191.990	Н	13.1	13.7	26.8	43.5	16.7	Pass	150.0	215.9
	993.210	Н	5.7	31.0	36.7	54.0	17.3	Pass	150.0	288.1

RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cent.com.



EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

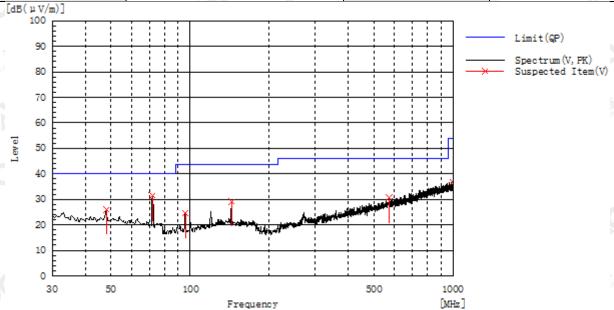

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
47.945	V	8.9	17.2	26.1	40.0	13.9	Pass	150.0	72.5
71.710	V	17.4	14.0	31.4	40.0	8.6	Pass	150.0	72.5
95.960	V ®	11.8	12.8	24.6	43.5	18.9	Pass	100.0	91.5
143.975	v	12.6	16.6	29.2	43.5	14.3	Pass	200.0	217.3
999.515	V	5.7	31.1	36.8	54.0	17.2	Pass	150.0	107.5
573.200	© Water of Global Car	6.3	24.4	30.7	46.0	15.3	Pass	150.0	72.5

## **RESULT: PASS**

#### Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The Mode 1 is the worst case and recorded in the report.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 16 of 30

## **RADIATED EMISSION ABOVE 1GHZ**

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4802	42.42	7.12	49.54	74	24.46	Peak
4802	36.03	7.12	43.15	54	10.85	Average
7206	34.93	9.84	44.77	74	29.23	Peak
7206	29.84	9.84	39.68	54	14.32	Average

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4802	42.00	7.12	49.12	74	24.88	Peak
4802	35.73	7.12	42.85	54	11.15	Average
7206	34.81	9.84	44.65	74	29.35	Peak
7206	29.70	9.84	39.54	54	14.46	Average

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.cett.com.



Report No.: AGC10423170802FE06 Page 17 of 30

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

1000	76.52	250	(311)	2,402		
Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4880	42.36	7.18	49.54	74	24.46	Peak
4880	35.94	7.18	43.12	54	10.88	Average
7320	35.26	9.86	45.12	74	28.88	Peak
7320	30.42	9.86	40.28	54	13.72	Average

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4880	41.93	7.18	49.11	74	24.89	Peak
4880	35.67	7.18	42.85	54	11.15	Average
7320	35.51	9.86	45.37	74	28.63	Peak
7320	30.55	9.86	40.41	54	13.59	Average

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document to confirmed at attp://www.agc.gett.com.



Report No.: AGC10423170802FE06 Page 18 of 30

and the same of th	
JMV3-BTZB	- F
5.4%	(8) Attestation of C

EUT Temperature	UNIVERSAL MODULE V3 25°C	Model Name  Relative Humidity	UMV3-BTZB 55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4960	42.5	7.24	49.74	74	24.26	Peak
4960	36.28	7.24	43.52	54	10.48	Average
7440	38.46	9.92	48.38	74	25.62	Peak
7440	32.05	9.92	41.97	54	12.03	Average

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Reading Level	Factor	Emission Level	Limit	Margin	Value type
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	value type
4960	42.04	7.24	49.28	74	24.72	Peak
4960	35.88	7.24	43.12	54	10.88	Average
7440	38.57	9.92	48.49	74	25.51	Peak
7440	32.16	9.92	42.08	54	11.92	Average

## **RESULT: PASS**

#### Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Marin= Limit-Emission level.

The "Factor" value can be calculated automatically by software of measurement system

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.



Page 19 of 30

## 8. BAND EDGE EMISSION

#### **8.1. MEASUREMENT PROCEDURE**

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting


#### 8.2. TEST SET-UP

same as 11.2

#### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V/m) to represent the Field Strength. So A=F.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.







#### 8.3. TEST RESULT

EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

#### PK

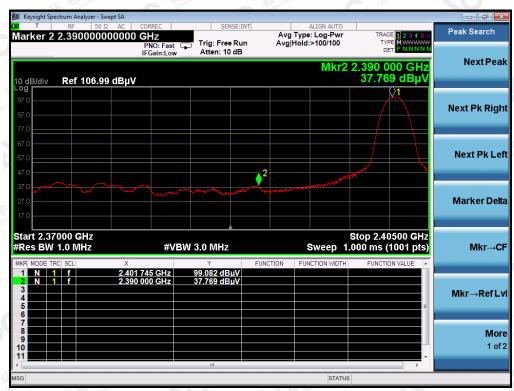

The results shown the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a the confirmed at a the confirmed at a the confirmed at the






EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

#### PK




The results shown the streport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc cent.com.






EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

#### PK

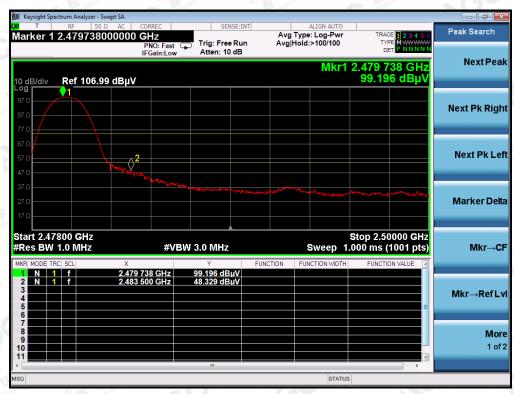

The results shown the streport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc cent.com.





EUT	UNIVERSAL MODULE V3	Model Name	UMV3-BTZB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

#### PΚ




Note: The level of peak emission is less than the average limit, so the level of average emission need not to be tested.

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ

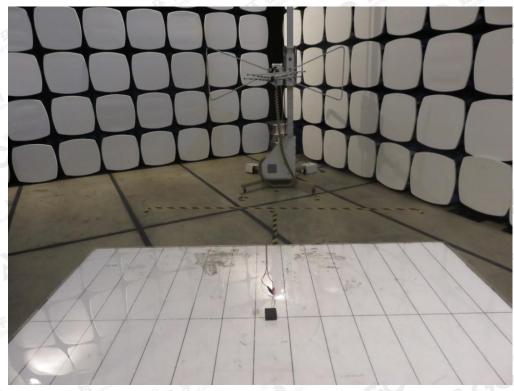

RADIATED EMISSION TEST SETUP ABOVE 1GHZ

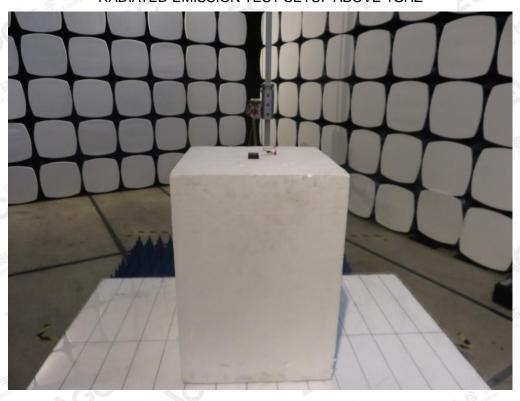

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (C), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gert.com. AGC ?

Attestation of Global Compliance


E-mail: agc@agc-cert.com Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

**6** 400 089 2118




## APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

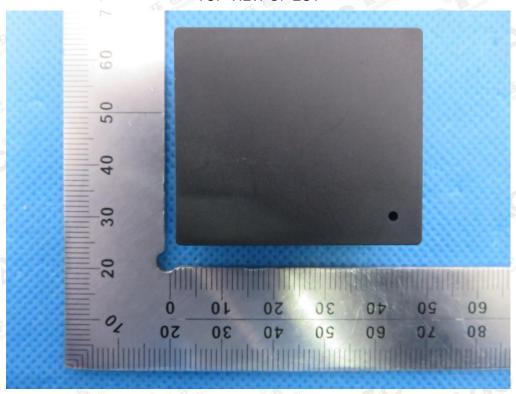

**BOTTOM VIEW OF EUT** 

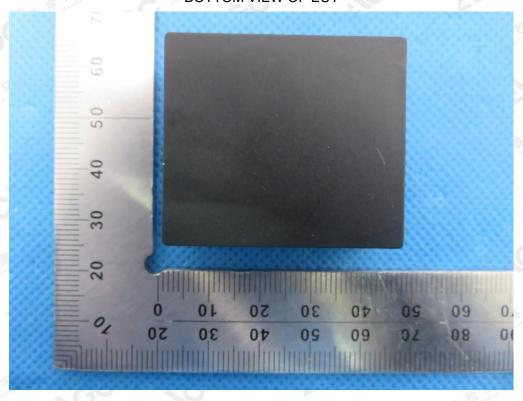


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.


Attestation of Global Compliance



#### FRONT VIEW OF EUT

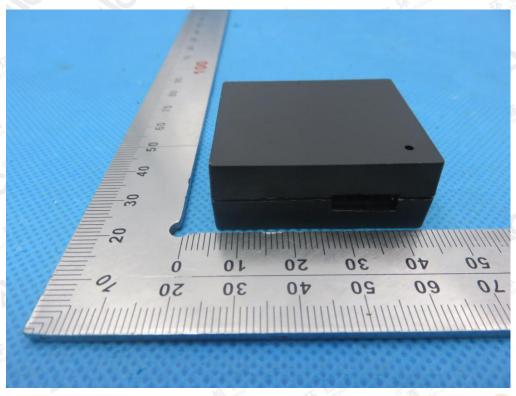

**BACK VIEW OF EUT** 

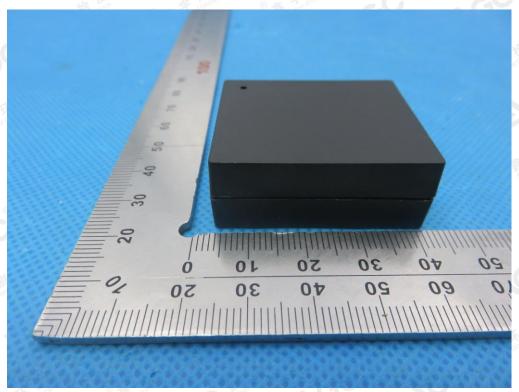


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission.


Attestation of Global Compliance



## LEFT VIEW OF EUT

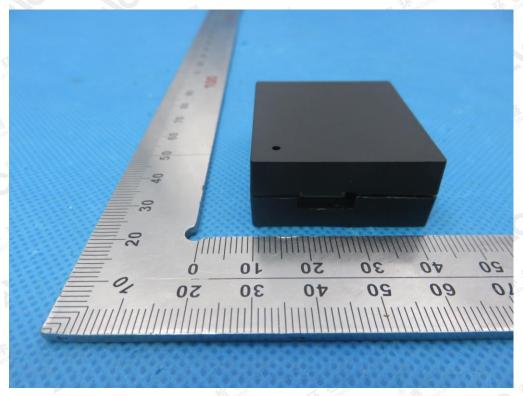

**RIGHT VIEW OF EUT** 

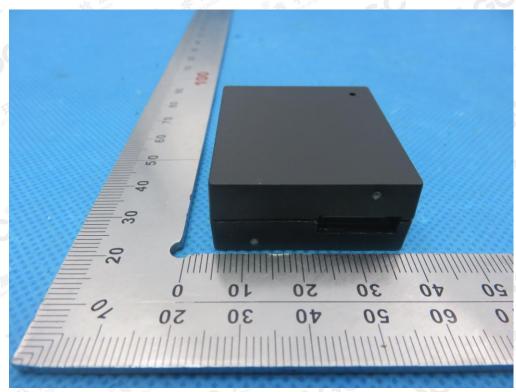


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a strong way.


Attestation of Global Compliance



## **OPEN VIEW OF EUT**

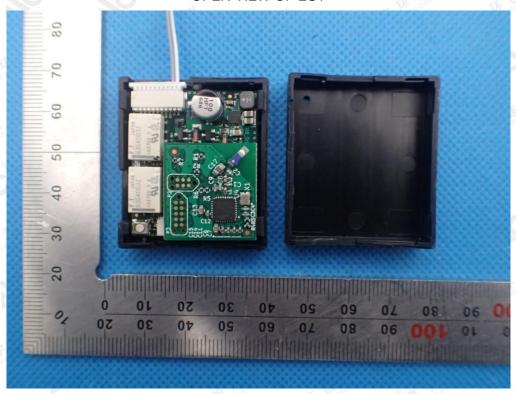

#### **INTERNAL VIEW OF EUT-1**

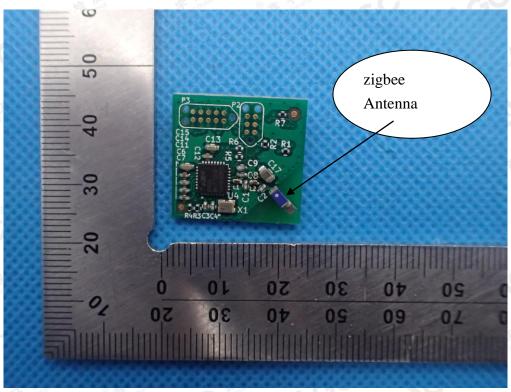


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


Attestation of Global Compliance



## **INTERNAL VIEW OF EUT-2**

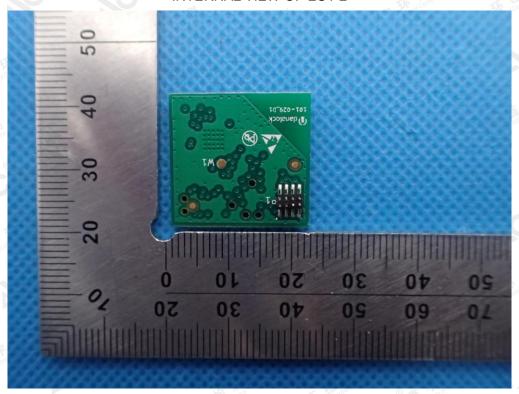


**INTERNAL VIEW OF EUT-3** 

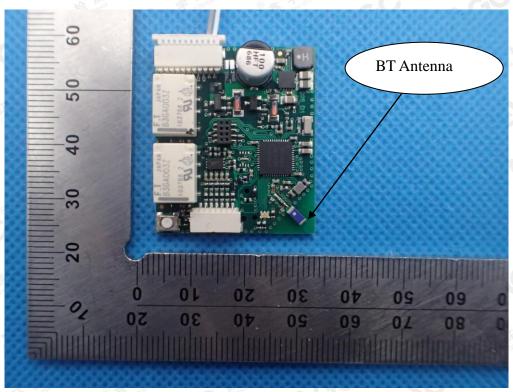

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.



## **INTERNAL VIEW OF EUT-4**

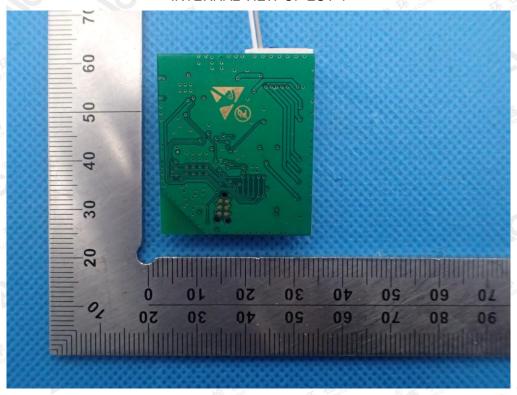

----END OF REPORT----

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.gent.com.

Attestation of Global Compliance