
Appendix A for SHEM180600506402


1.6dB Bandwidth

Test Mode	Test	EBW	[MHz]	Limit	Verdict
rest Mode		Ant1	Ant2	LITTIIL	Verdict
11B	2412	10.07	10.08	0.5	PASS
11B	2437	10.07	10.07	0.5	PASS
11B	2462	10.08	10.08	0.5	PASS
11G	2412	16.58	16.59	0.5	PASS
11G	2437	16.59	16.59	0.5	PASS
11G	2462	16.58	16.59	0.5	PASS
11N20SISO	2412	17.78	17.80	0.5	PASS
11N20SISO	2437	17.76	17.80	0.5	PASS
11N20SISO	2462	17.78	17.81	0.5	PASS
11N40SISO	2422	36.46	36.47	0.5	PASS
11N40SISO	2437	36.49	36.48	0.5	PASS
11N40SISO	2452	36.47	36.49	0.5	PASS






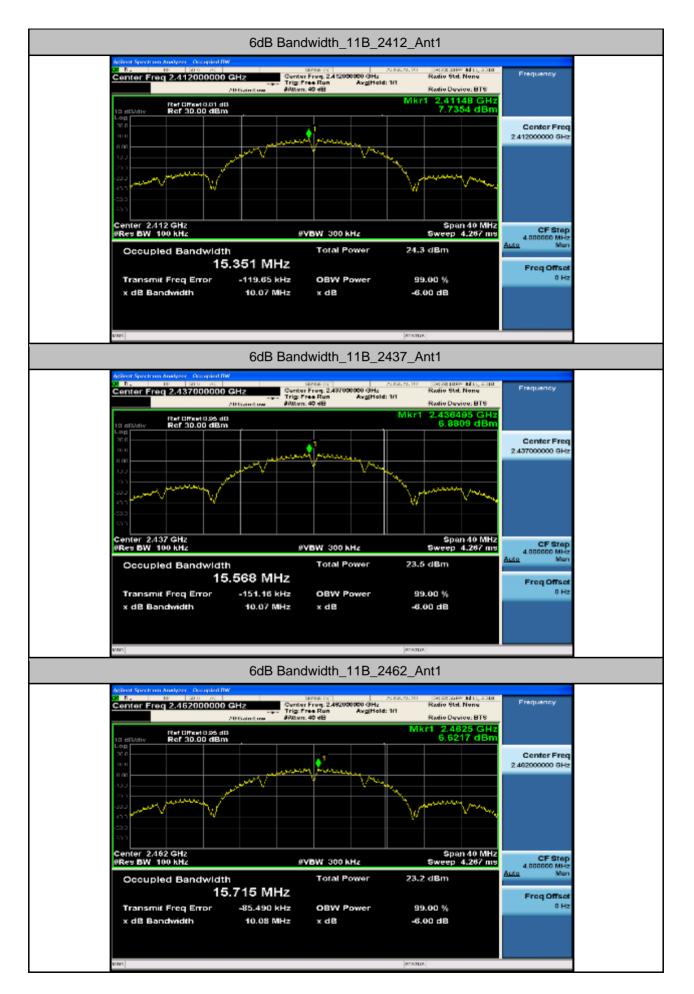


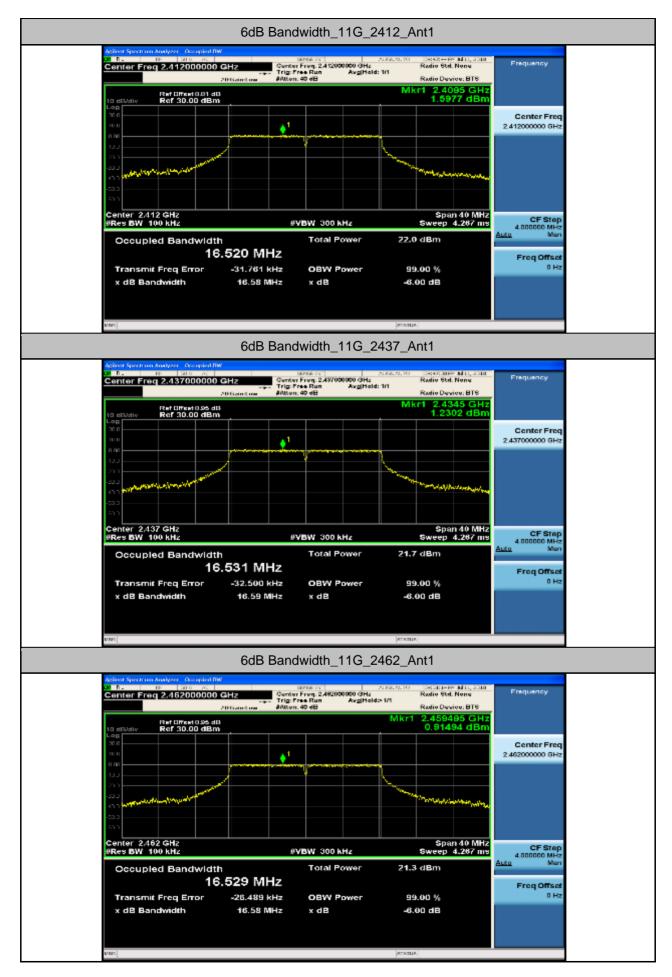




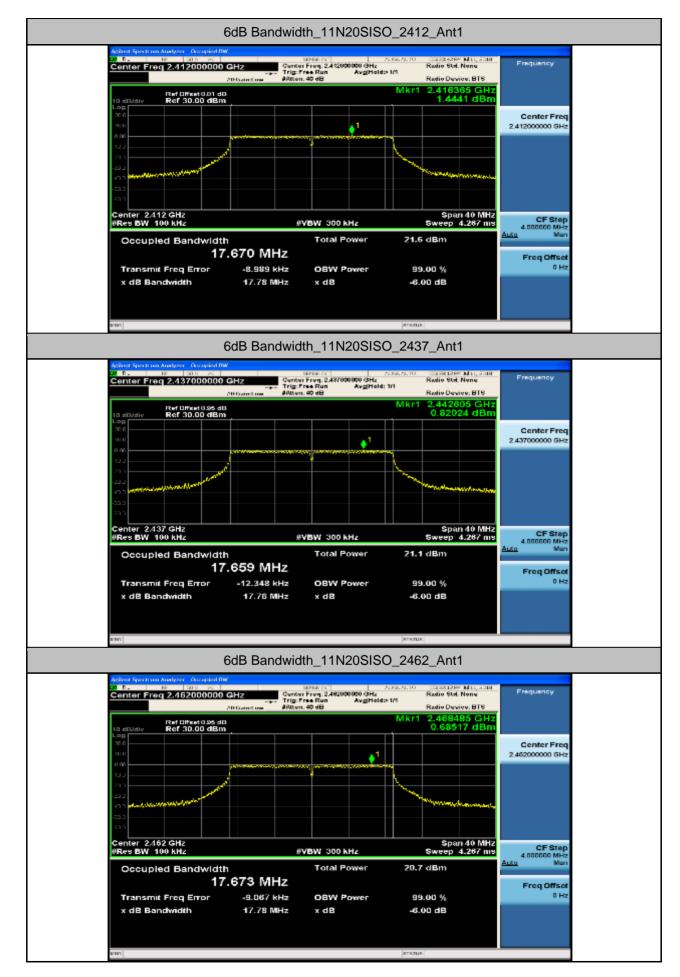




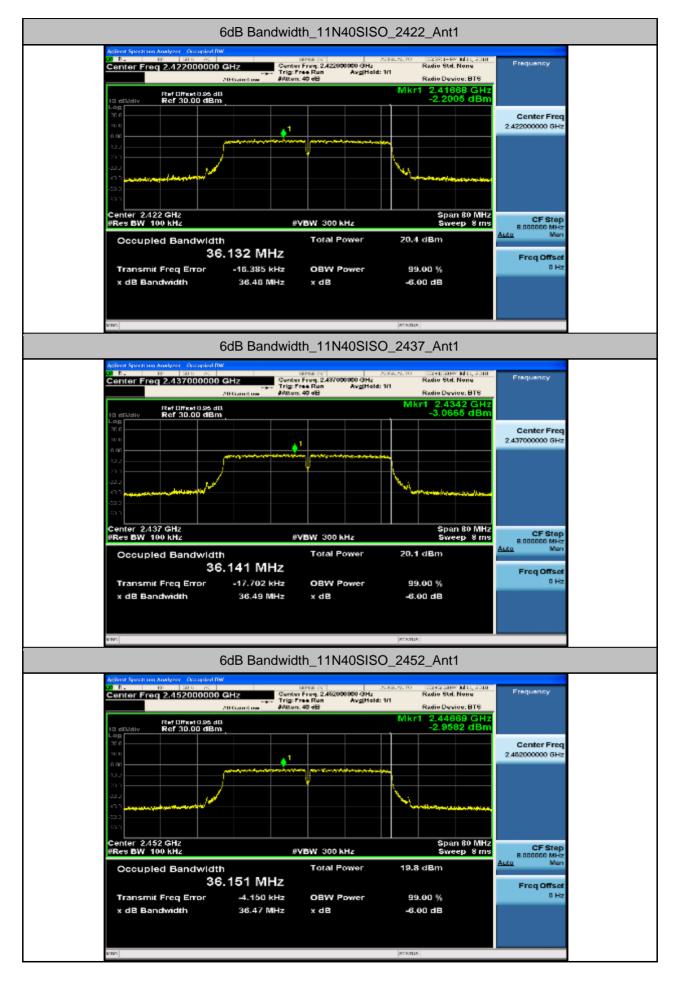




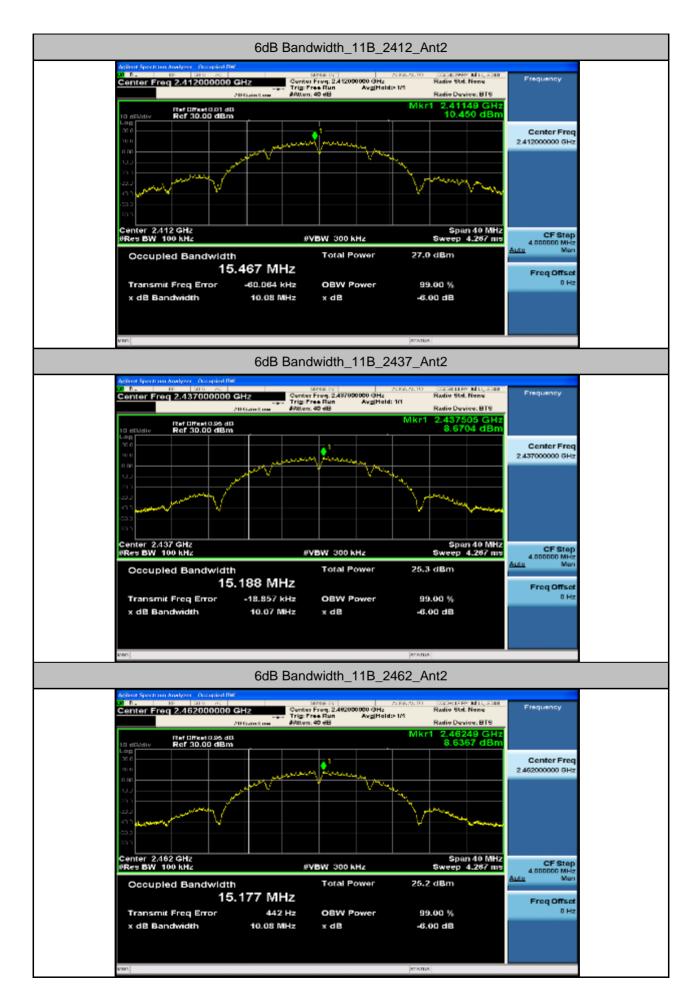




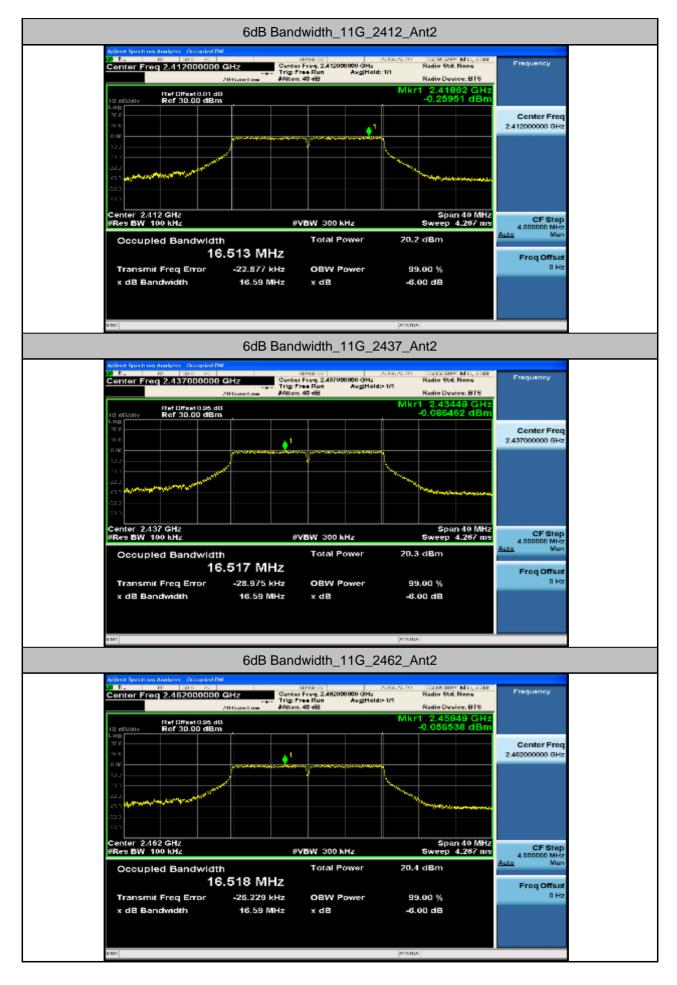



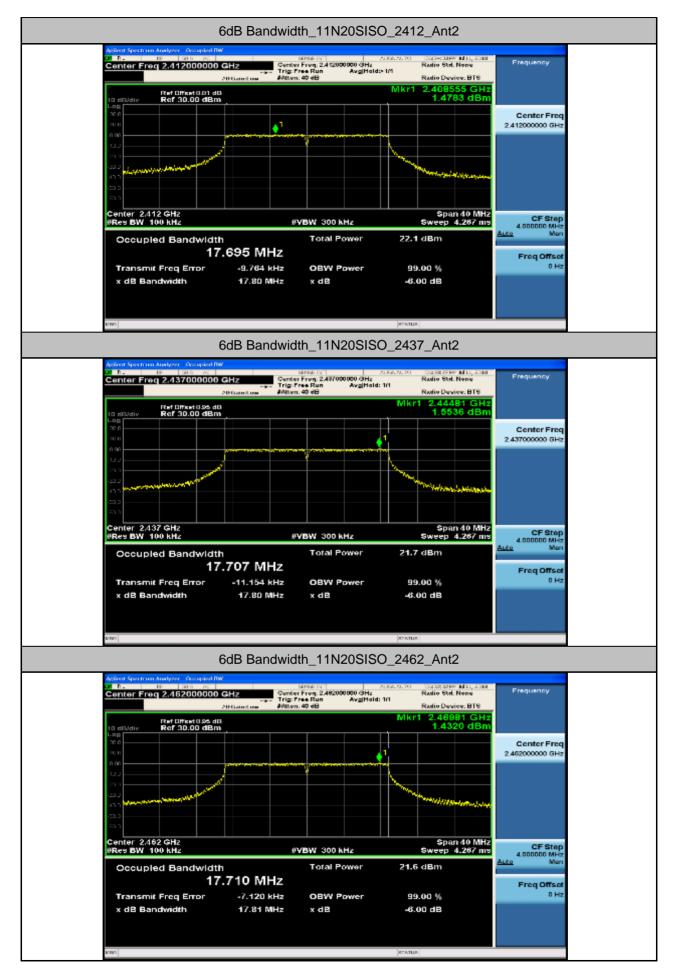



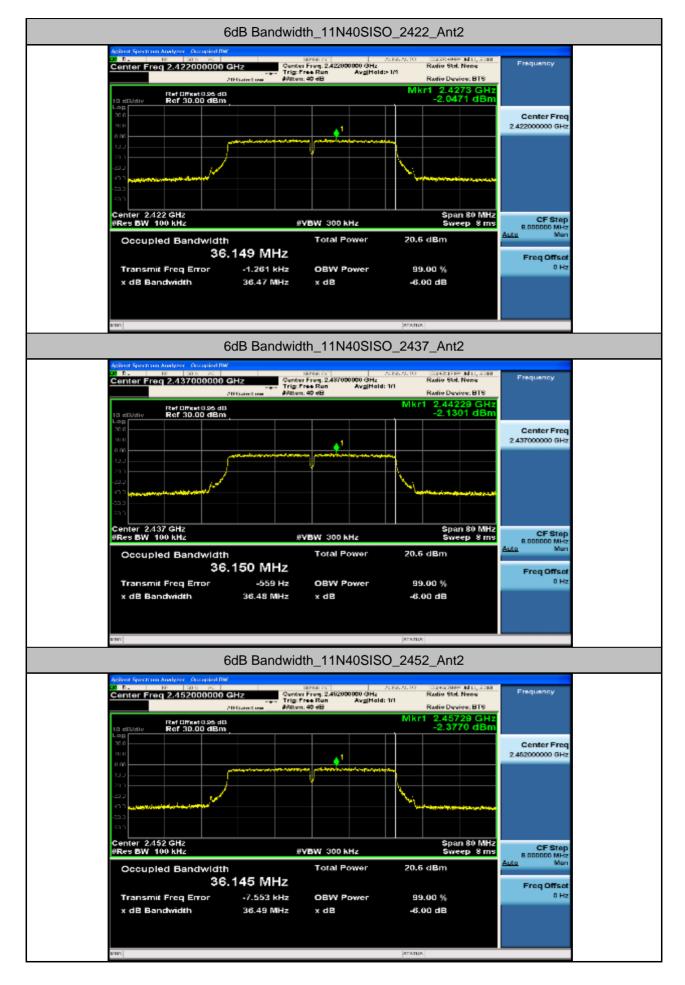




2.Maximum conducted (average) output power


Test Mode	Test Channel	Level [dBm]			Power [dBm]		Limit	Verdict
		Ant1	Ant2	Ant1	Ant2	MIMO	[dBm]	7010101
11B	2412	17.11	18.43	17.11	18.43	N/A	30	PASS
11B	2437	16.47	18.48	16.47	18.48	N/A	30	PASS
11B	2462	16.44	18.48	16.44	18.48	N/A	30	PASS
11G	2412	16.1	14.24	16.10	14.24	N/A	30	PASS
11G	2437	15.67	14.38	15.67	14.38	N/A	30	PASS
11G	2462	15.29	14.42	15.29	14.42	N/A	30	PASS
11N20SISO	2412	15.1	15.36	15.10	15.36	18.24	30	PASS
11N20SISO	2437	14.64	15.26	14.64	15.26	17.97	30	PASS
11N20SISO	2462	14.24	15.18	14.24	15.18	17.75	30	PASS
11N40SISO	2422	13.9	14.42	13.90	14.42	17.18	30	PASS
11N40SISO	2437	13.72	14.36	13.72	14.36	17.06	30	PASS
11N40SISO	2452	13.36	14.33	13.36	14.33	16.88	30	PASS

Remark: For device which direction antenna gain greater than 6dBi transmit under MIMO mode conducted output power should be 27.50dBm




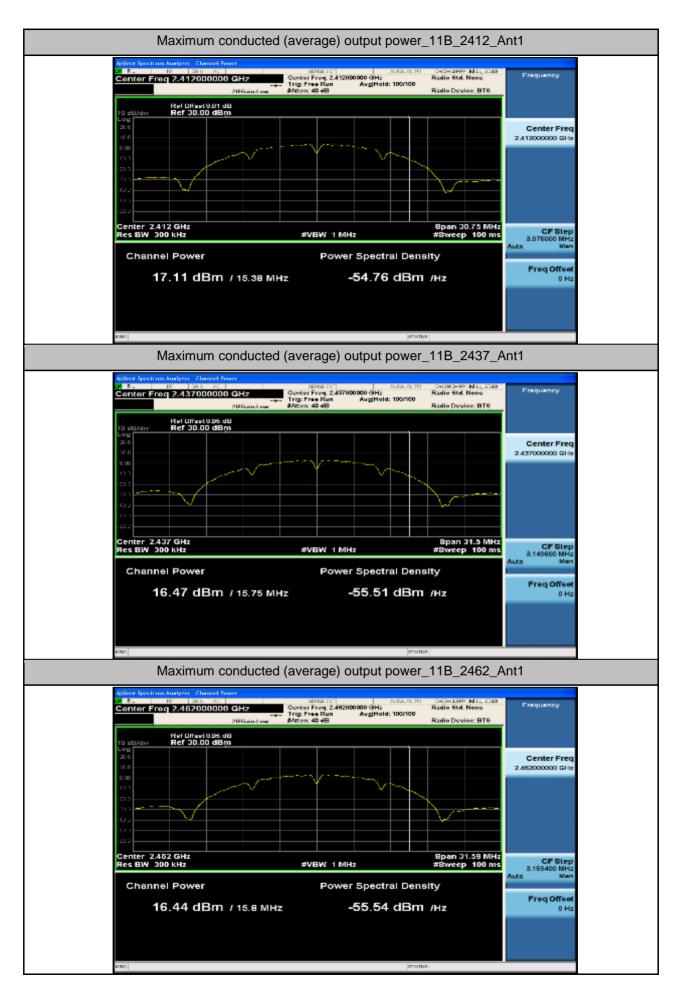




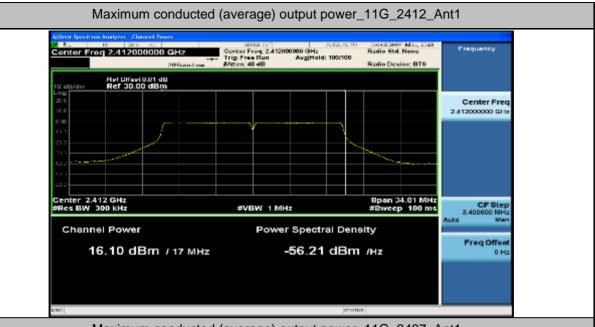

Maximum conducted (average) output power_11G_2437_Ant1

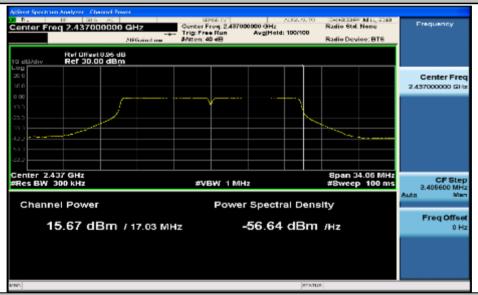


Maximum conducted (average) output power_11G_2462_Ant1

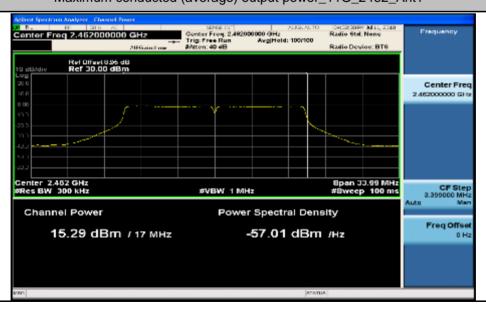







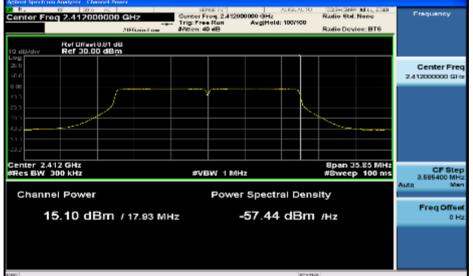


Maximum conducted (average) output power_11N20SISO_2437_Ant1

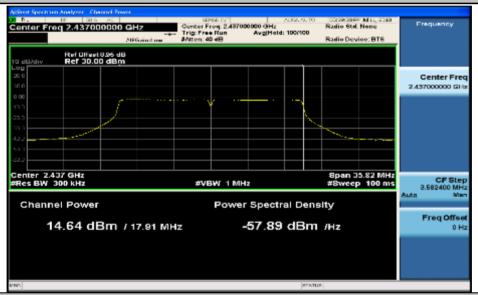


Maximum conducted (average) output power_11N20SISO_2462_Ant1

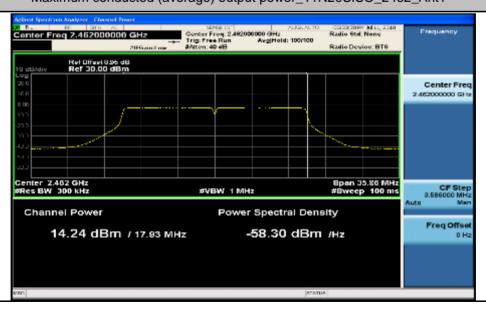






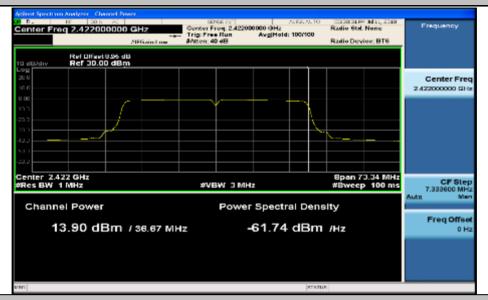


Maximum conducted (average) output power_11N40SISO_2437_Ant1




Maximum conducted (average) output power_11N40SISO_2452_Ant1

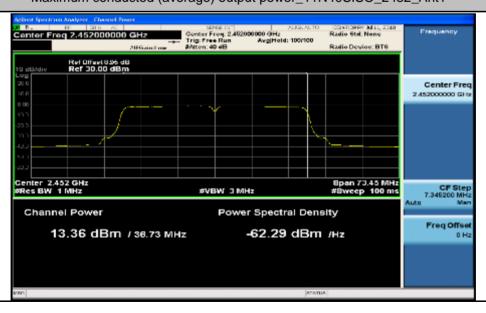




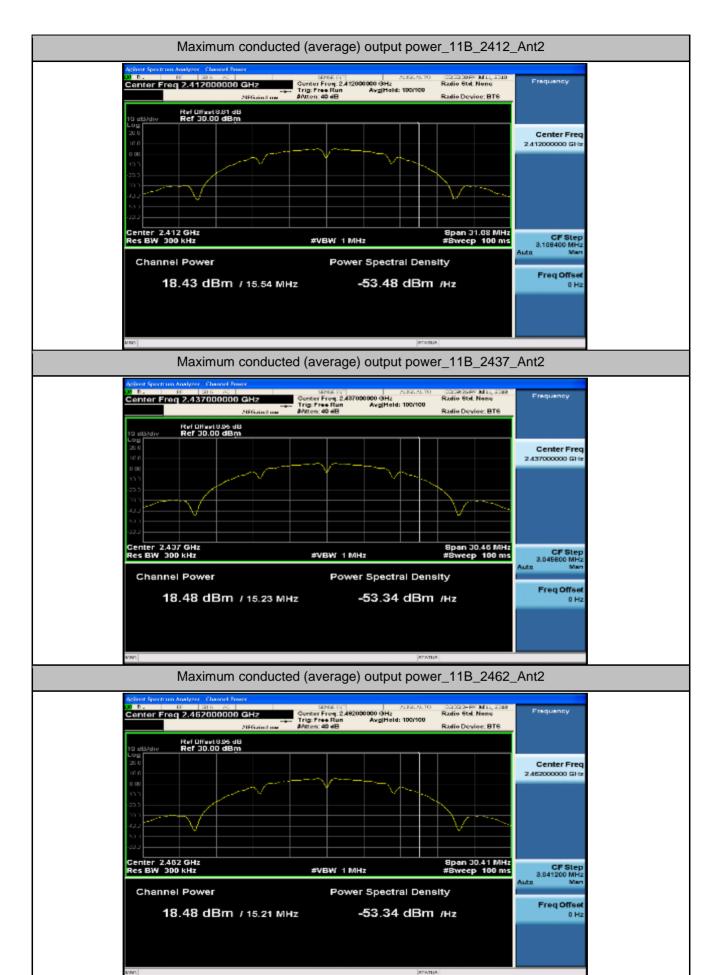



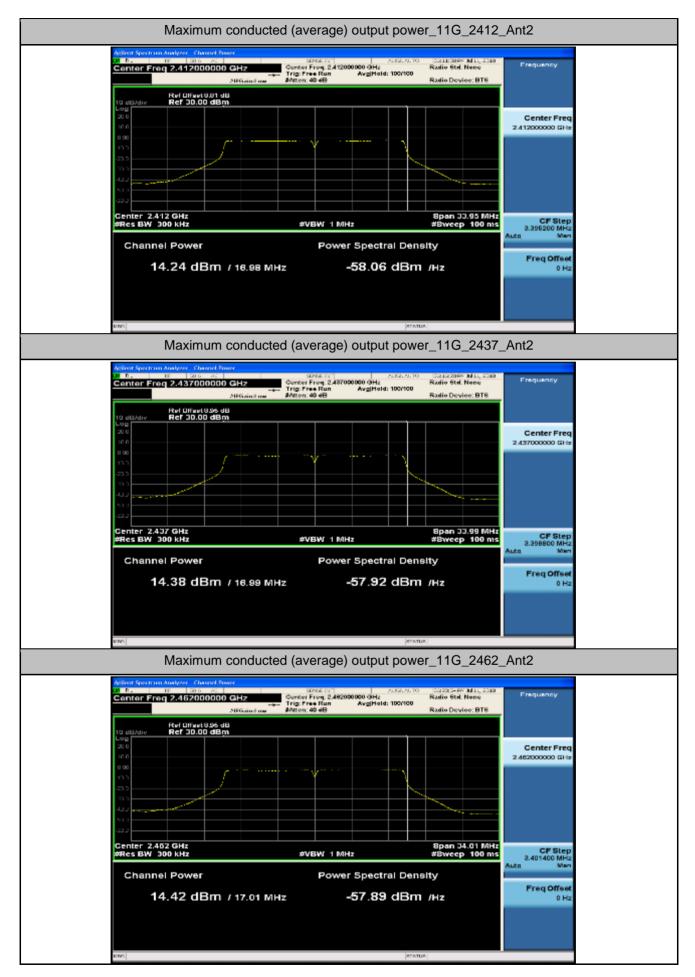



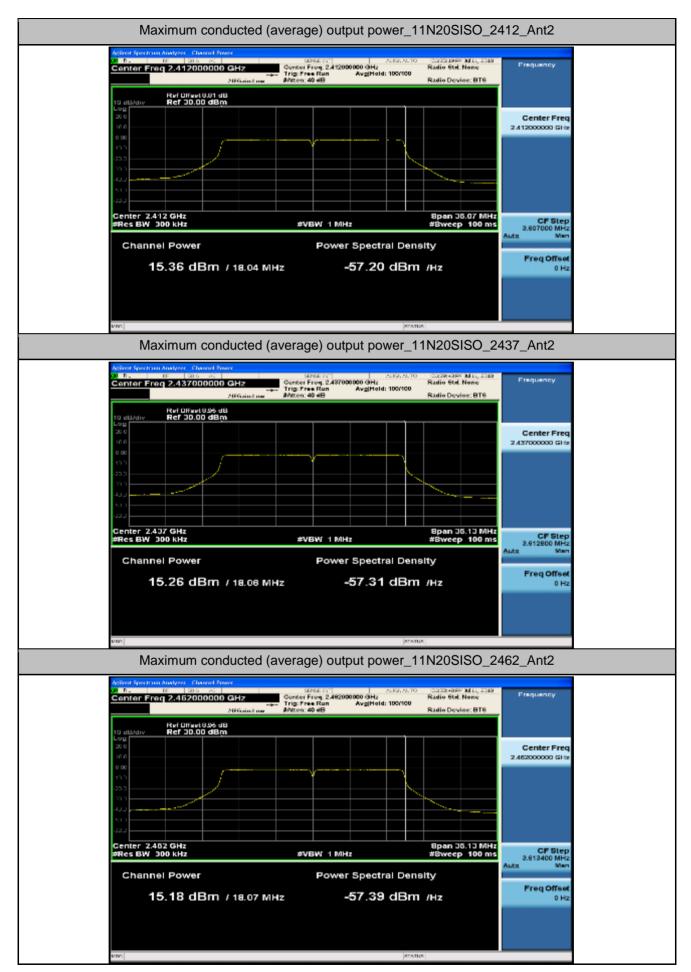





3.Maximum(average) power spectral density

Test Test	Test	Level [dBm/3kH:		10log(1/x) Factor[dB]		PSD[dBm/3kHz]			Lina iti dDira /OLJ Inl	\/a ==li at
Mode	Mode Channel	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	MIMO	Limit[dBm/3kHz]	verdict
11B	2412	-15.98	-14.43	0.00	0.00	-15.98	-14.43	N/A	8.00	PASS
11B	2437	-16.42	-14.33	0.00	0.00	-16.42	-14.33	N/A	8.00	PASS
11B	2462	-13.01	-14.33	0.00	0.00	-13.01	-14.33	N/A	8.00	PASS
11G	2412	-18.54	-20.43	0.00	0.00	-18.54	-20.43	N/A	8.00	PASS
11G	2437	-18.87	-20.28	0.00	0.00	-18.87	-20.28	N/A	8.00	PASS
11G	2462	-19.42	-20.20	0.00	0.00	-19.42	-20.20	N/A	8.00	PASS
11N20SISO	2412	-19.83	-19.62	0.00	0.00	-19.83	-19.62	-16.71	8.00	PASS
11N20SISO	2437	-20.31	-19.54	0.00	0.00	-20.31	-19.54	-16.90	8.00	PASS
11N20SISO	2462	-20.65	-19.58	0.00	0.00	-20.65	-19.58	-17.07	8.00	PASS
11N40SISO	2422	-23.78	-23.67	0.00	0.00	-23.78	-23.67	-20.71	8.00	PASS
11N40SISO	2437	-24.34	-23.71	0.00	0.00	-24.34	-23.71	-21.00	8.00	PASS
11N40SISO	2452	-24.70	-23.85	0.00	0.00	-24.70	-23.85	-21.24	8.00	PASS


Remark: For this device which direction antenna gain greater than 6dBi transmit under MIMO mode power spectrum density should be 5.50dBm











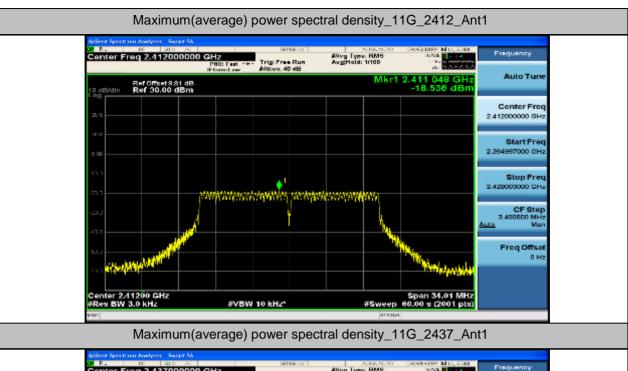

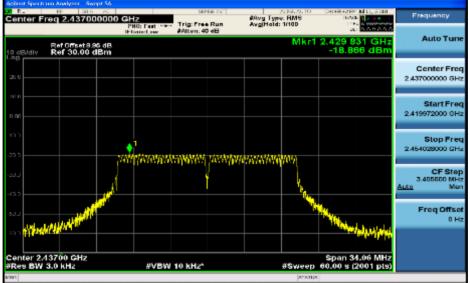



Maximum(average) power spectral density_11G_2462_Ant1

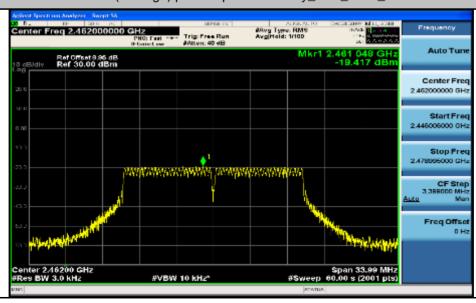









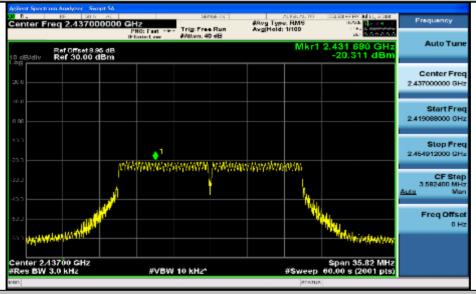


Maximum(average) power spectral density_11N20SISO_2462_Ant1

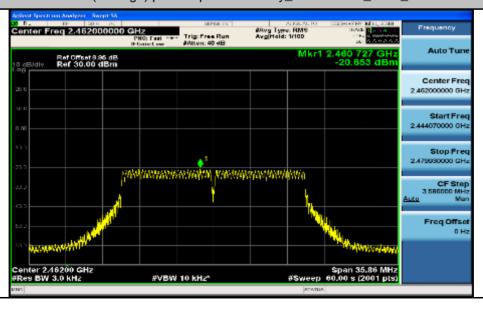



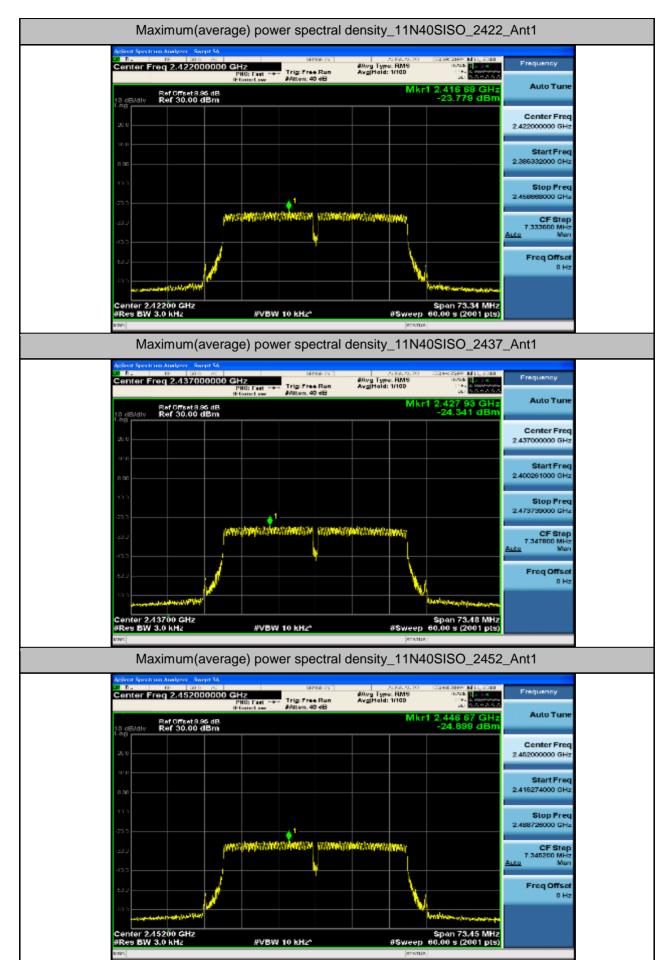








Maximum(average) power spectral density_11B_2437_Ant2




Maximum(average) power spectral density_11B_2462_Ant2









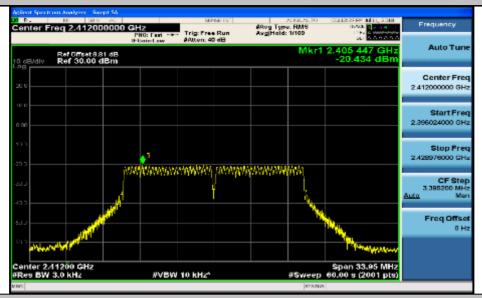


Maximum(average) power spectral density_11G_2437_Ant2

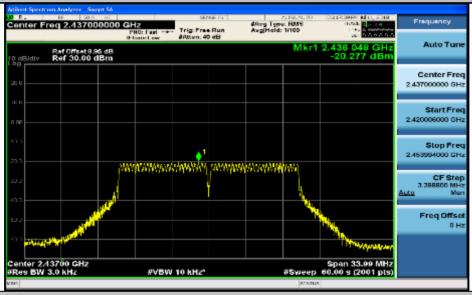


Maximum(average) power spectral density_11G_2462_Ant2

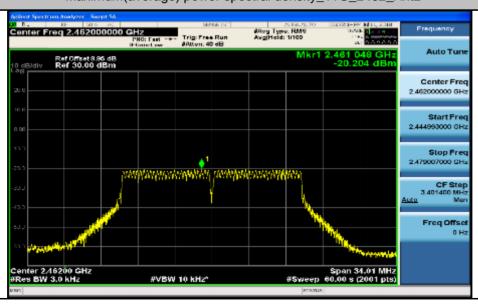







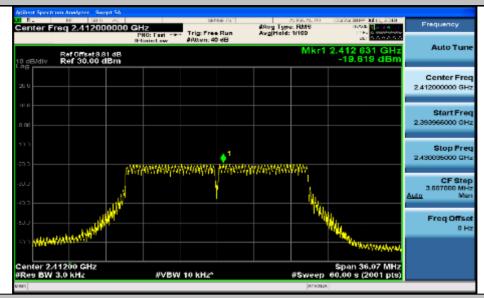


Maximum(average) power spectral density_11N20SISO_2437_Ant2

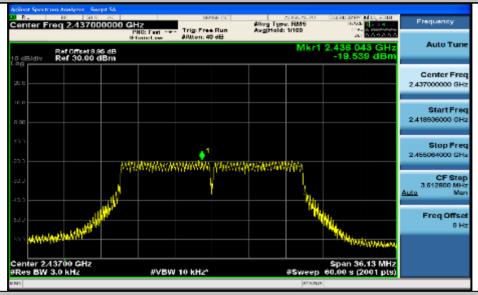


Maximum(average) power spectral density_11N20SISO_2462_Ant2

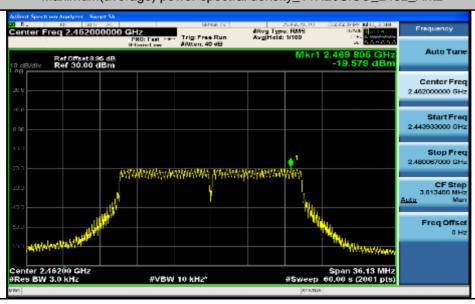






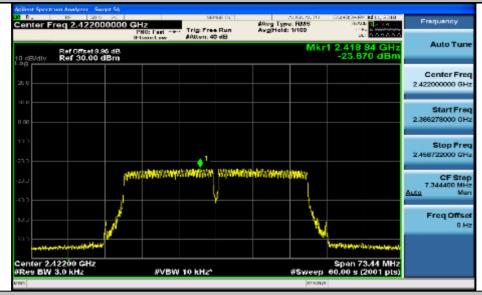

Maximum(average) power spectral density_11N40SISO_2437_Ant2



Maximum(average) power spectral density_11N40SISO_2452_Ant2

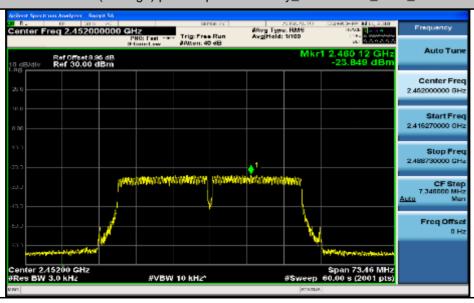



4Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Po	wer[dBm]	Max. Spuri [dB	Limit [dBm]		Verdict	
		Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Voluiot
11B	2412	7.29	8.57	-23.43	-25.86	-22.71	-21.43	PASS
11B	2462	10.01	8.72	-45.89	-50.06	-19.99	-21.28	PASS
11G	2412	1.58	-0.19	-28.90	-31.01	-28.42	-30.19	PASS
11G	2462	0.95	-0.11	-42.04	-44.39	-29.05	-30.11	PASS
11N20SISO	2412	1.12	0.93	-30.71	-29.16	-28.88	-29.07	PASS
11N20SISO	2462	0.67	0.96	-43.29	-40.44	-29.33	-29.04	PASS
11N40SISO	2422	-2.63	-2.42	-33.50	-33.92	-32.63	-32.42	PASS
11N40SISO	2452	-3.27	-2.32	-43.66	-42.53	-33.27	-32.32	PASS







