

# TEST REPORT

## Part 15 Subpart C 15.247

**Equipment under test** THINKWARE DASH CAM

**Model name** U1000

**FCC ID** 2ADTG-U1000

**Applicant** THINKWARE CORPORATION

**Manufacturer** THINKWARE CORPORATION

**Date of test(s)** 2019.06.14 ~ 2019.06.24

**Date of issue** 2019.06.25

**Issued to**

**THINKWARE CORPORATION**

A, 9FL, Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu,  
Seongnam-si, Gyeonggi-do, South Korea

Tel: +82-10-2320-7248



**Issued by**

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Won-Jun Sim Test engineer	Hyeon-Su, Jang Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page ( 2 ) of (48)

---

**Revision history**

Revision	Date of issue	Test report No.	Description
-	2019.06.25	KES-RF-19T0083	Initial

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## TABLE OF CONTENTS

1.	General information.....	4
1.1.	EUT description.....	4
1.2.	Test configuration.....	4
1.3.	Device modifications.....	5
1.4.	Accessory information .....	5
1.5.	Measurement results explanation example.....	5
1.6.	Measurement Uncertainty .....	5
1.7.	Frequency/channel operations.....	5
1.8.	Worst case data rate .....	5
2.	Summary of tests .....	6
3.	Test results .....	7
3.1.	Output power.....	7
3.2.	Radiated restricted band and emissions.....	9
Appendix A.	Measurement equipment .....	47
Appendix B.	Test setup photos .....	48



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page ( 4 ) of (48)

### 1. General information

Applicant: THINKWARE CORPORATION  
Applicant address: A, 9FL, Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do, South Korea  
Test site: KES Co., Ltd.  
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
FCC rule part(s): 15.247  
FCC ID: 2ADTG-U1000  
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

#### 1.1. EUT description

Equipment under test THINKWARE DASH CAM  
Frequency range 2 412 MHz ~ 2 462 MHz (11b/g/n\_HT20)  
UNII-1 5 180 MHz ~ 5 240 MHz (11a/n\_HT20, 11ac\_VHT20)  
5 190 MHz ~ 5 230 MHz (11n\_HT40, 11ac\_VHT40)  
Model: U1000  
Modulation technique DSSS, OFDM  
Number of channels 2 412 MHz ~ 2 462 MHz (11b/g/n\_HT20) : 11ch  
5 180 MHz ~ 5 240 MHz (11a/n\_HT20, 11ac\_VHT20) : 4ch  
5 190 MHz ~ 5 230 MHz (11a/n\_HT40, 11ac\_VHT40) : 2ch  
Antenna specification Antenna type(2.4GHz WIFI) : Chip antenna, Peak gain : 0.80 dBi  
Antenna type(BT, 5GHz WIFI) : Chip antenna, Peak gain : 1.95 dBi  
Power source DC 12 & 24 V  
H/W version V4.0  
S/W version V1.00.00

#### 1.2. Test configuration

The **THINKWARE CORPORATION // U1000 // FCC ID: 2ADTG-U1000** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247  
KDB 558074 D01 v05 r02  
ANSI C63.10-2013

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 1.3. Device modifications

N/A

### 1.4. Accessory information

N/A

### 1.5. Measurement results explanation example

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.82 + 10 = 10.82 \text{ (dB)}\end{aligned}$$

### 1.6. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.62 dB
Uncertainty for Radiation emission test (include Fundamental emission)	9kHz - 30MHz	4.54 dB
	30MHz - 1GHz	4.36 dB
	Above 1GHz	5.00 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

### 1.7. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
01	2412	802.11b/g/n_HT20
.	.	.
06	2437	802.11b/g/n_HT20
.	.	.
11	2462	802.11b/g/n_HT20

### 1.8. Worst case data rate

- Radiated emission was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- Worst-case data rates were:  
802.11b: **11 Mbps**  
802.11g: **54 Mbps**  
802.11n\_HT20: **MCS7**



## 2. Summary of tests

Section in FCC Part 15	Parameter	Test results
15.247(a)(2)	6 dB bandwidth	N/A <sup>1)</sup>
15.247(b)(3)	Output power	Pass
15.247(e)	Power spectral density	N/A <sup>1)</sup>
15.205 15.209	Radiated restricted band and emission	Pass
15.247(d)	Conducted spurious emission and band edge	N/A <sup>1)</sup>
15.207(a)	AC conducted emissions	N/A <sup>1)</sup>

**Note :**

- 1) Please Refer to the approved Module Report (Report No.: NTC1712035FV00) for these parameters.


### 3. Test results

#### 3.1. Output power

##### Test procedure

ANSI C63.10-2013 - Section 11.9.1.3 and 11.9.2.3.2

##### Test setup



##### ANSI C63.10-2013 - Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

##### ANSI C63.10-2013 - Section 11.9.2.3.2

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

##### Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page ( 8 ) of (48)

**Test results****12V**

Measured output power (dBm)						
Mode	2412 MHz		2437 MHz		2462 MHz	
	Peak	Average	Peak	Average	Peak	Average
11b	16.86	14.19	20.46	17.66	21.80	18.88
11g	16.74	14.09	20.54	17.76	21.39	18.62
11n_HT 20	16.24	13.25	19.87	17.17	20.81	17.92

**24V**

Measured output power (dBm)						
Mode	2412 MHz		2437 MHz		2462 MHz	
	Peak	Average	Peak	Average	Peak	Average
11b	16.92	14.31	20.44	17.62	21.68	19.05
11g	16.78	13.91	20.43	18.00	21.26	18.77
11n_HT 20	16.33	13.70	19.86	16.97	20.93	18.01


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




### 3.2. Radiated restricted band and emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

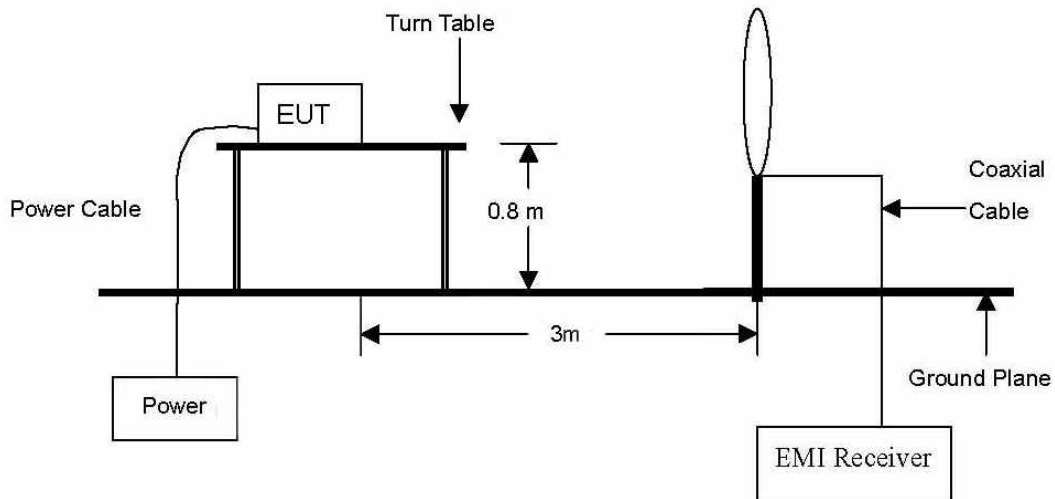

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

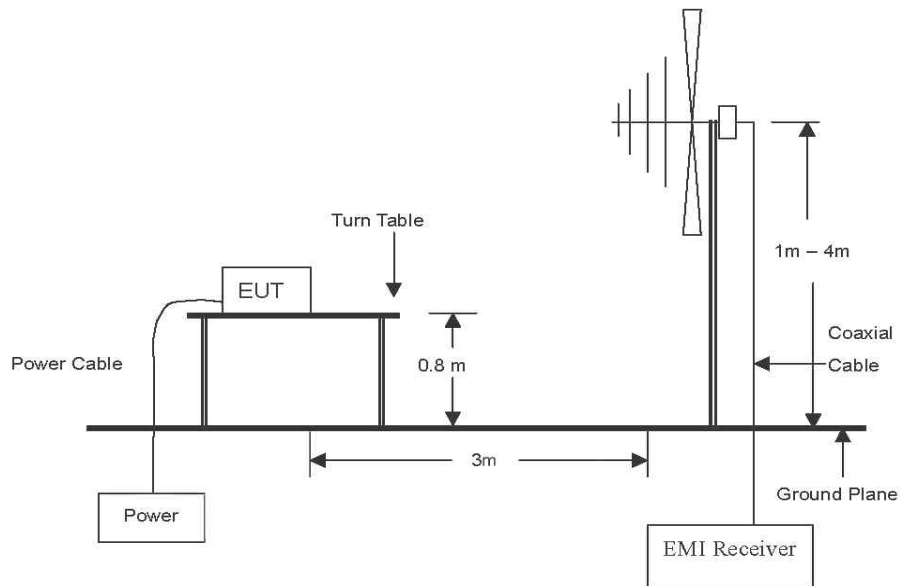

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

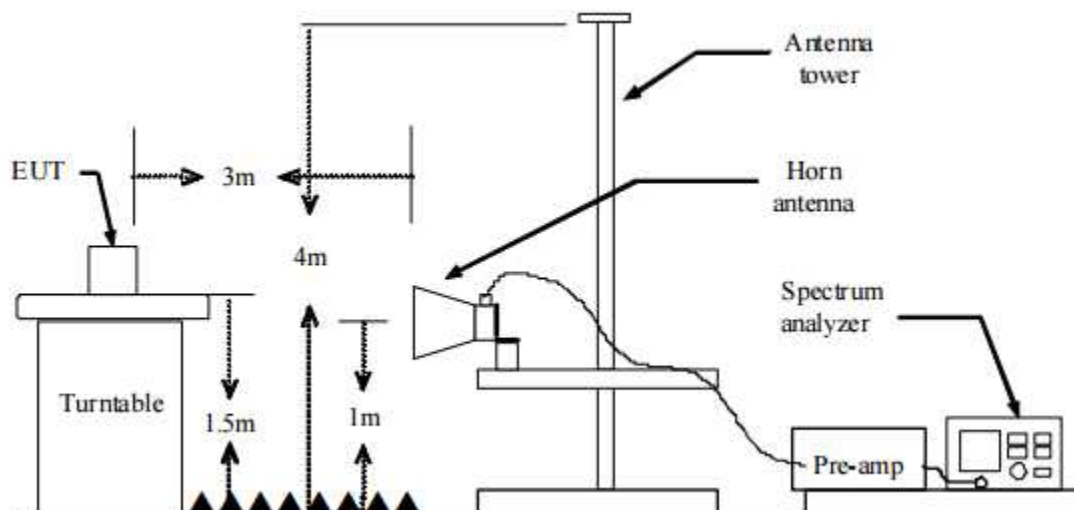

### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna ,and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. it was determined that **Horizontal** was worst-case polarizations
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for  $f < 1$  GHz:

- ① Span = wide enough to fully capture the emission being measured
- ② RBW = 100 kHz
- ③ VBW  $\geq$  RBW
- ④ Detector = quasi peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold

6. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq$  3 MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for  $f \geq 1$  GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times$  RBW
- ④ Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m/D_s)$   
 Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
2. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
6. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

## Duty cycle


Regarding to KDB 558074 D01\_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

Test mode	T <sub>on</sub> time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
802.11b	1.202 9	1.311 6	0.917 1	91.71	0.38
802.11g	0.247 8	0.355 1	0.697 8	69.78	1.56
802.11n(HT20)	0.229 0	0.334 8	0.684 0	68.40	1.65

Duty cycle (Linear) = T<sub>on</sub> time/Period


DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

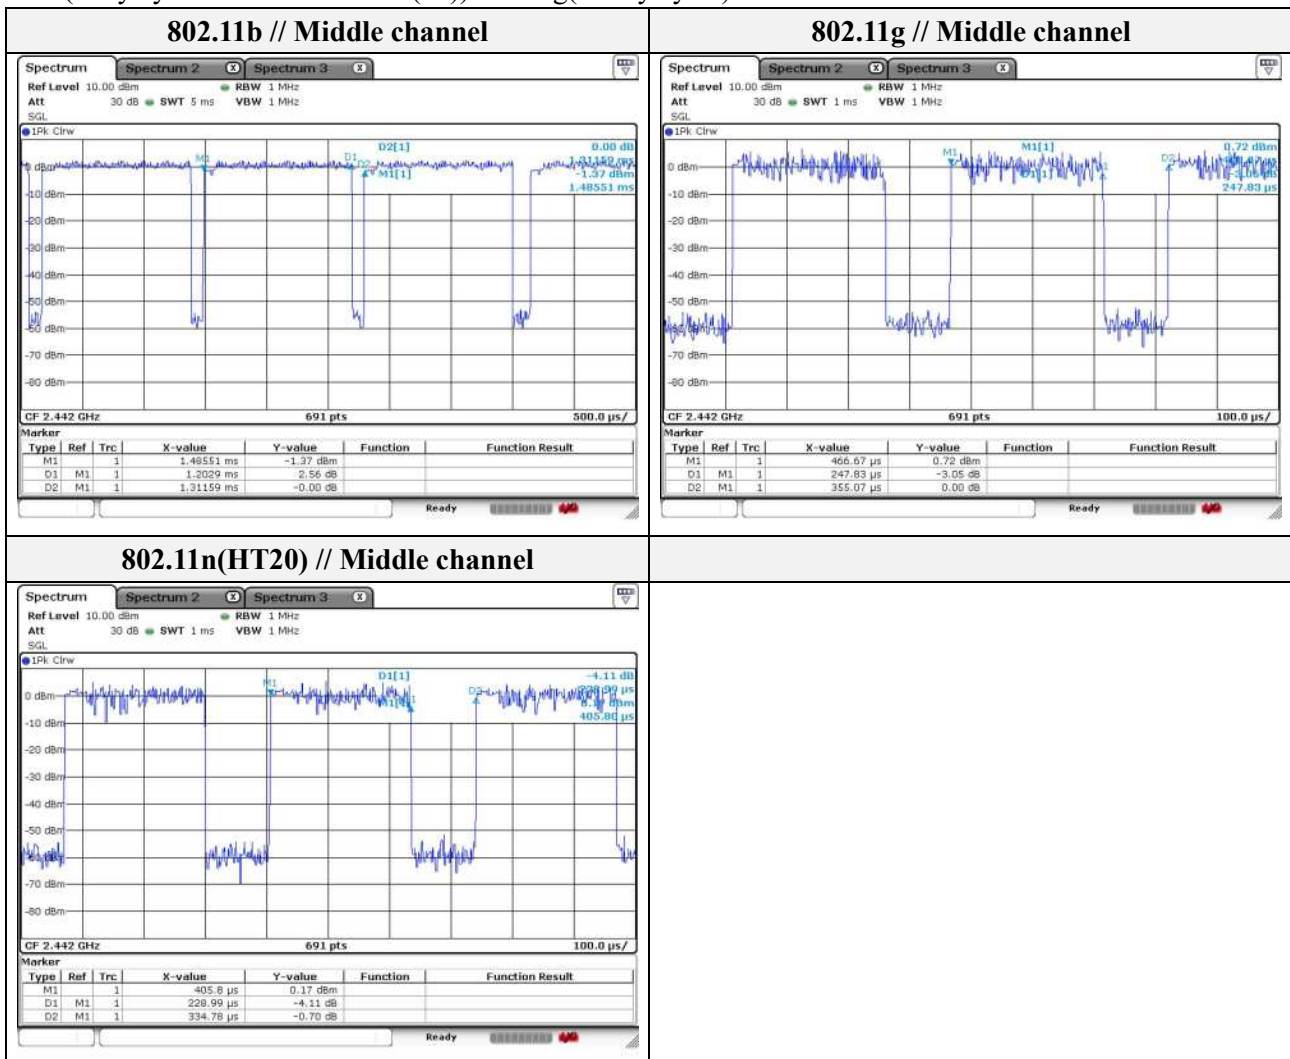

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### Test results (Below 30 MHz)

Mode: 802.11g  
 Distance of measurement: 3 meter  
 Channel: 01 (Worst case)

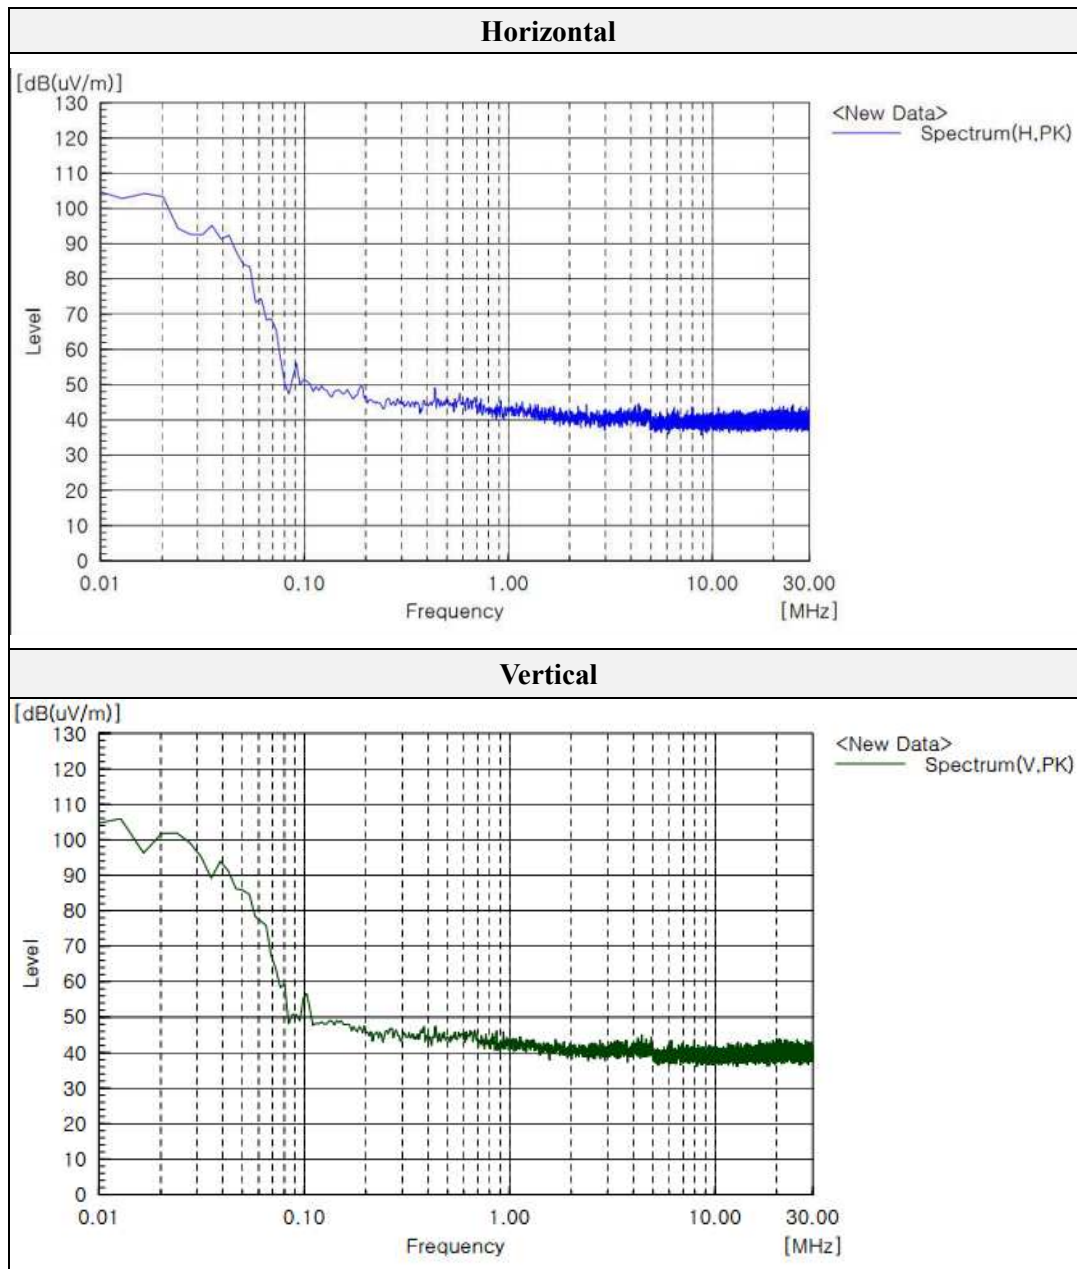

No spurious emission were detected below 30 MHz






### Test results (Below 1 000 MHz)

Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 01 (Worst case)

#### Horizontal // Vertical

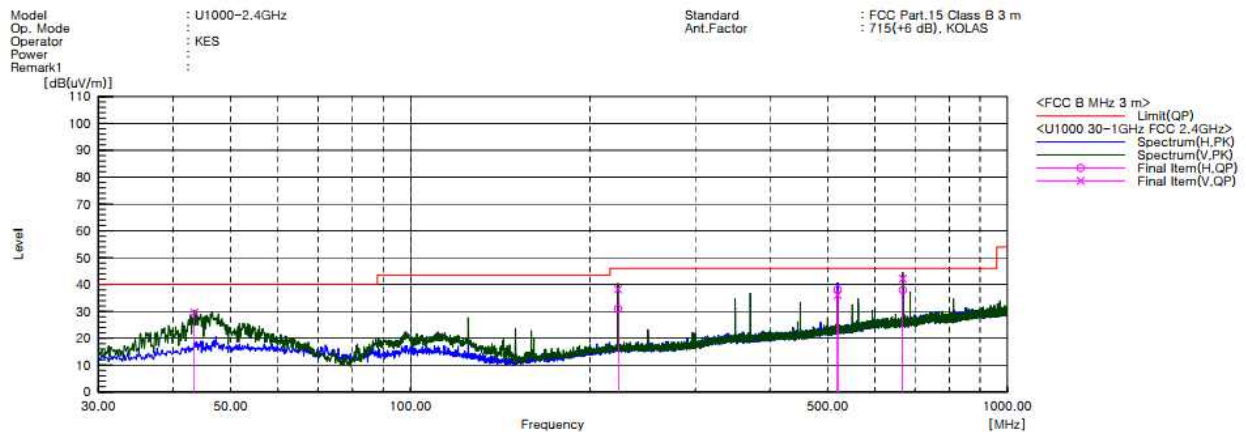

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	43.459	V	52.2	-22.6	29.6	40.0	10.4	145.0	237.0	
2	222.788	V	59.8	-21.6	38.2	46.0	7.8	241.0	142.0	
3	222.788	H	52.6	-21.6	31.0	46.0	15.0	398.0	187.0	
4	519.729	V	50.0	-13.9	36.1	46.0	9.9	104.0	261.0	
5	519.729	H	52.1	-13.9	38.2	46.0	7.8	344.0	274.0	
6	668.260	V	53.1	-10.9	42.2	46.0	3.8	202.0	185.0	
7	668.260	H	48.8	-10.9	37.9	46.0	8.1	375.0	235.0	



**Test results (Above 1 000 MHz)**

**12 V**

Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 01


**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 000.10	50.83	Peak	H	24.08	-31.81	-	39.00	74.00	35.00
1 000.10	39.55	Average	H	24.08	-31.81	0.38	26.72	54.00	27.28
6 855.40	43.56	Peak	H	36.51	-20.91	-	59.69	74.00	14.31
6 855.40	32.16	Average	H	36.51	-20.91	0.38	47.62	54.00	6.38

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 310.00	56.37	Peak	H	28.54	-30.39	-	54.52	74.00	19.48
2 310.00	46.32	Average	H	28.54	-30.39	0.38	44.85	54.00	9.15
2 374.24	58.36	Peak	H	28.80	-29.78	-	57.38	74.00	16.62
2 374.24	46.44	Average	H	28.80	-29.78	0.38	45.84	54.00	8.16
2 390.00	57.48	Peak	H	28.86	-29.63	-	56.71	74.00	17.29
2 390.00	47.12	Average	H	28.86	-29.63	0.38	46.73	54.00	7.27



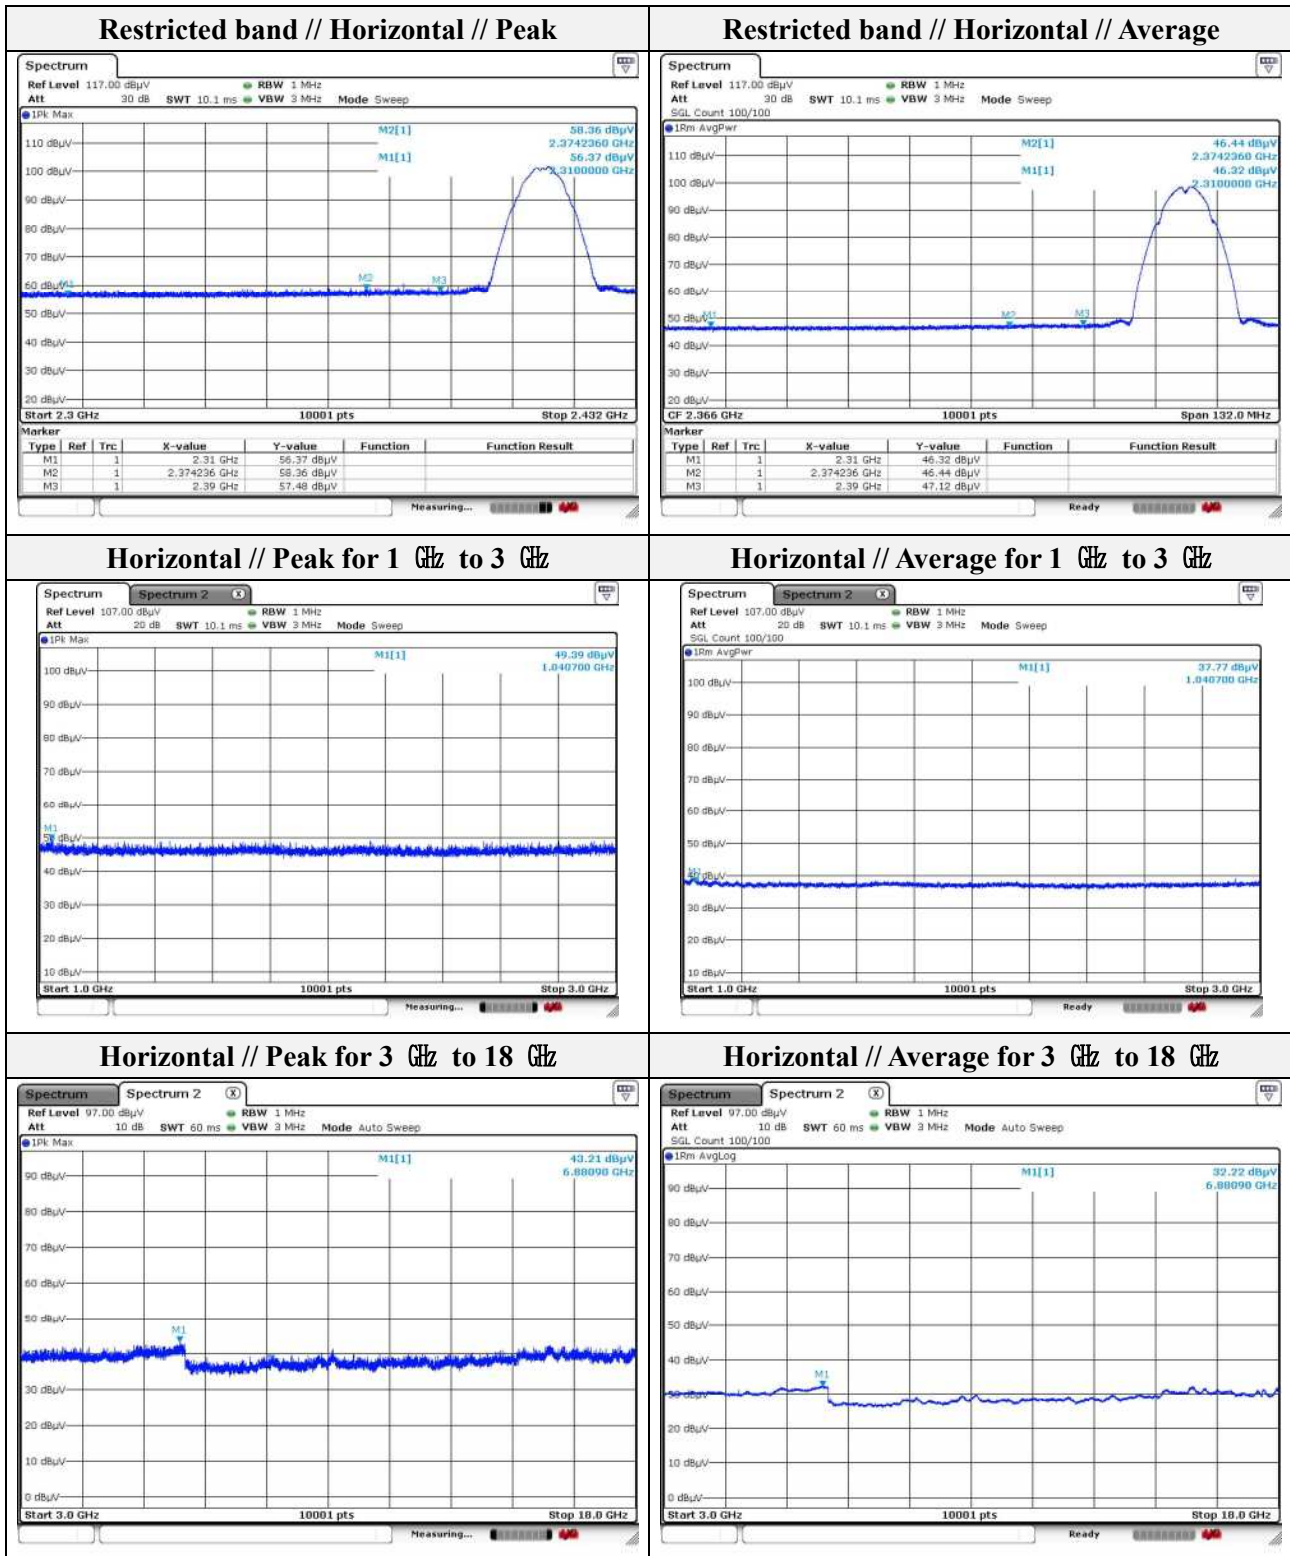




Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 06

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 915.91	50.83	Peak	H	29.50	-27.57	-	52.76	74.00	21.24
2 915.91	39.55	Average	H	29.50	-27.57	0.38	41.86	54.00	12.14
6 645.40	43.31	Peak	H	36.30	-21.55	-	58.06	74.00	15.94
6 645.40	31.59	Average	H	36.30	-21.55	0.38	46.72	54.00	7.28

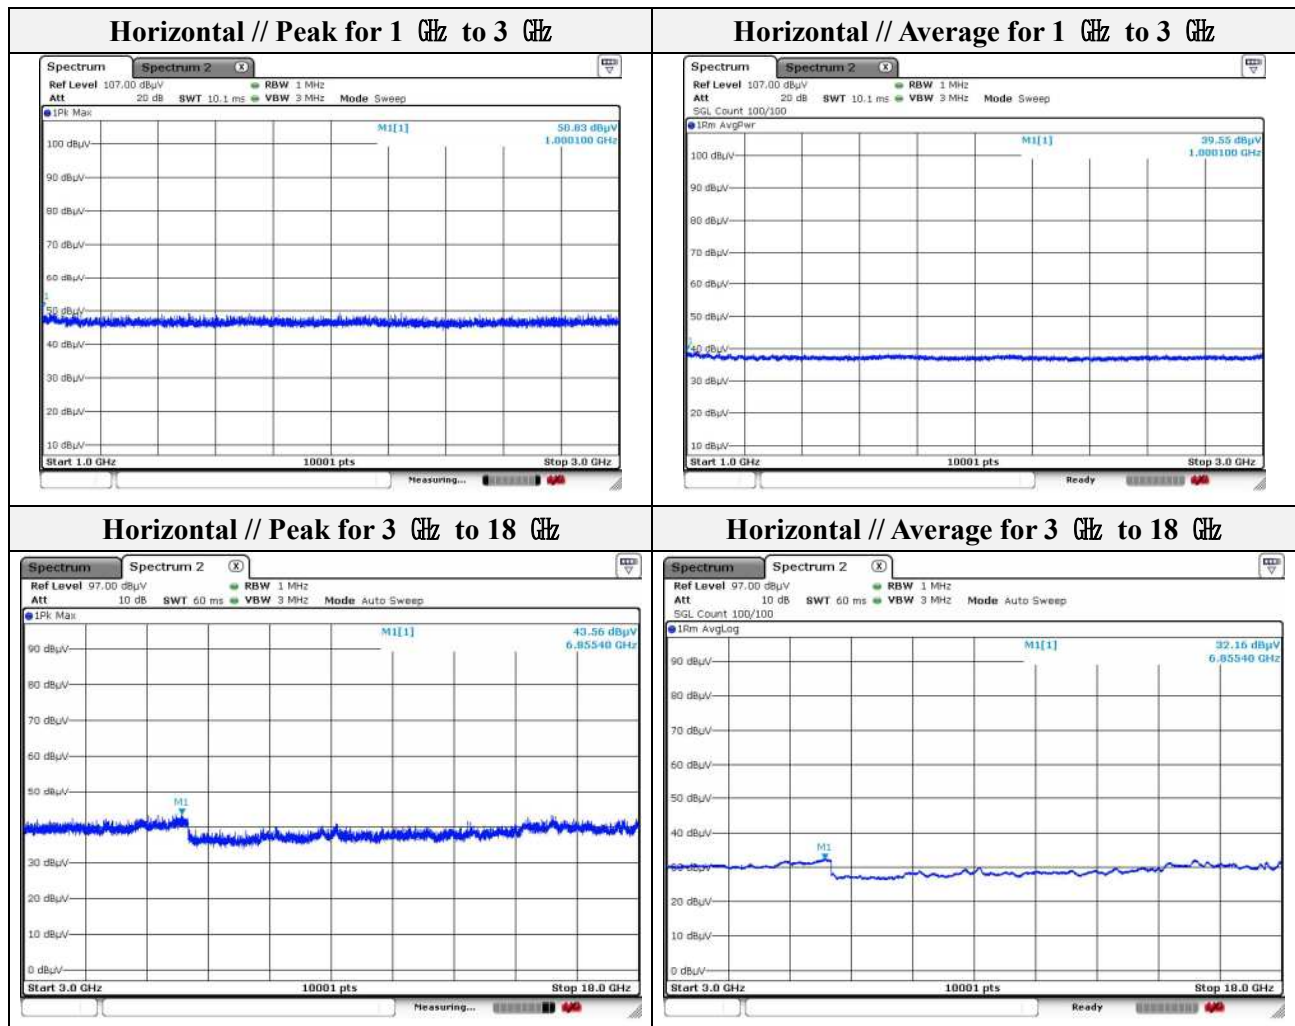

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (19 ) of (48)

Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 11

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 361.86	49.50	Peak	H	29.30	-28.72	-	58.26	74.00	15.74
1 361.86	36.92	Average	H	29.30	-28.72	0.38	47.76	54.00	6.24
6 940.90	43.18	Peak	H	29.31	-28.70	-	59.45	74.00	14.55
6 940.90	32.10	Average	H	29.31	-28.70	0.38	48.20	54.00	5.80


**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.50	57.68	Peak	H	29.30	-28.72	-	58.26	74.00	15.74
2 483.50	46.80	Average	H	29.30	-28.72	0.38	47.76	54.00	6.24
2 485.83	58.84	Peak	H	29.31	-28.70	-	59.45	74.00	14.55
2 485.83	47.21	Average	H	29.31	-28.70	0.38	48.20	54.00	5.80
2 500.00	56.96	Peak	H	29.40	-28.56	-	57.80	74.00	16.20
2 500.00	46.43	Average	H	29.40	-28.56	0.38	47.65	54.00	6.35


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




### Restricted band // Horizontal // Peak

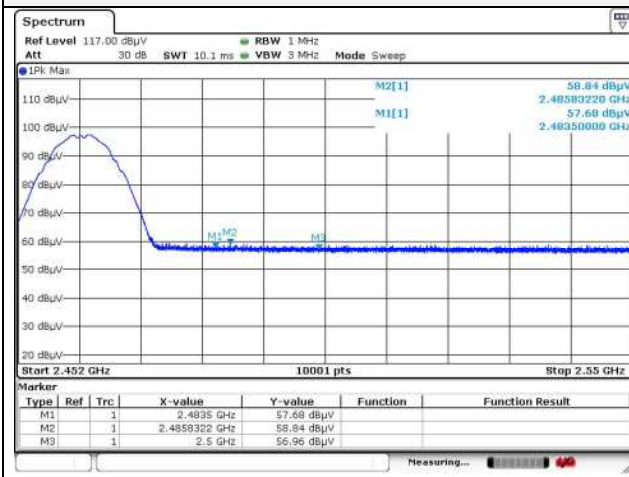


### Restricted band // Horizontal // Average

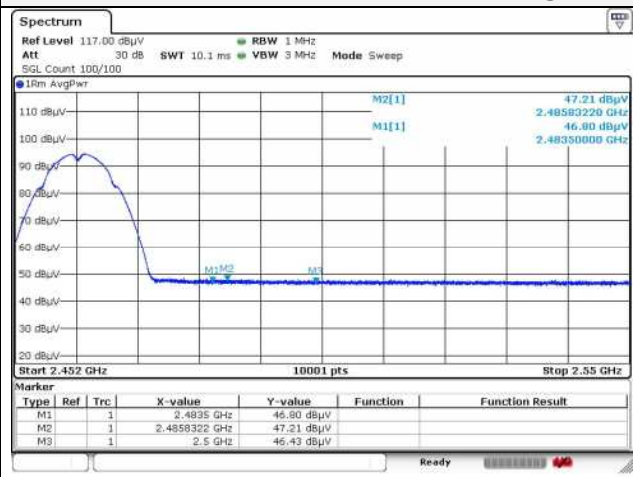


### Horizontal // Peak for 1 GHz to 3 GHz

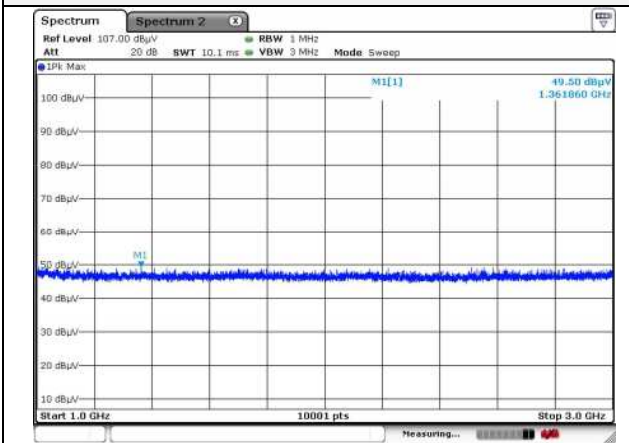


### Horizontal // Average for 1 GHz to 3 GHz

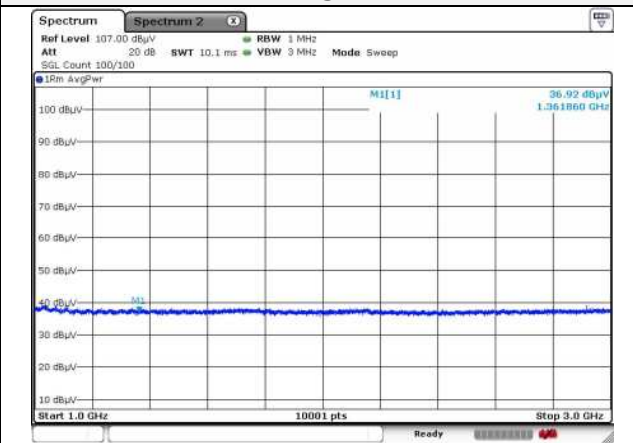

### Horizontal // Peak for 3 GHz to 18 GHz

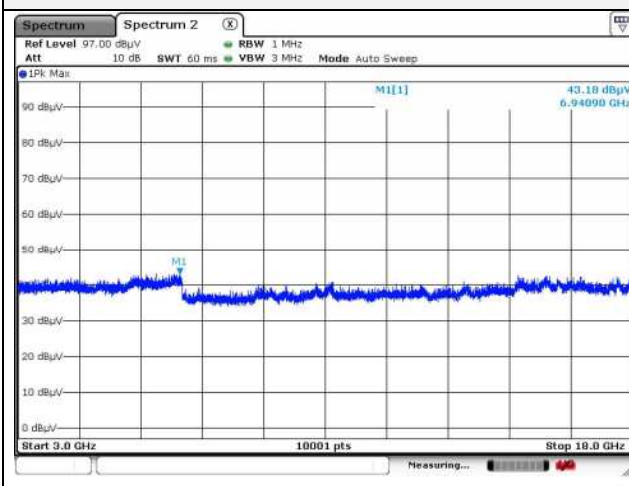

### Horizontal // Average for 3 GHz to 18 GHz

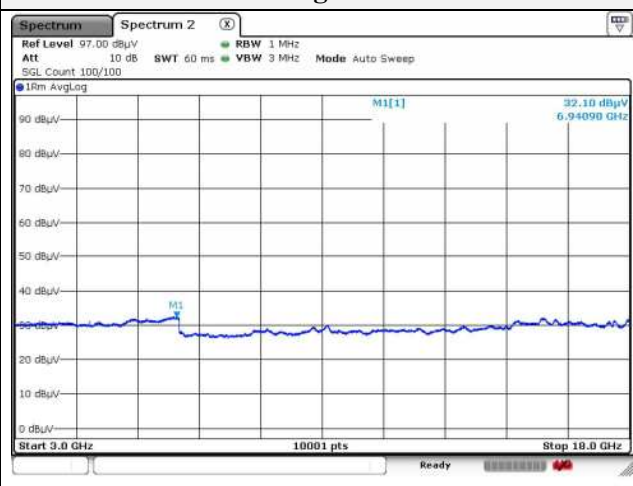

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (21 ) of (48)

Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 01


**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 040.90	50.10	Peak	H	23.90	-32.03	-	41.97	74.00	32.03
1 040.90	38.09	Average	H	23.90	-32.03	1.56	31.52	54.00	22.48
5 928.50	43.54	Peak	H	34.76	-24.37	-	53.93	74.00	20.07
5 928.50	31.57	Average	H	34.76	-24.37	1.56	43.52	54.00	10.48

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 310.00	55.47	Peak	H	28.54	-30.39	-	53.62	74.00	20.38
2 310.00	16.02	Average	H	28.54	-30.39	1.56	15.73	54.00	38.27
2 385.47	59.31	Peak	H	28.84	-29.67	-	58.48	74.00	15.52
2 385.47	46.32	Average	H	28.84	-29.67	1.56	47.05	54.00	6.95
2 390.00	57.03	Peak	H	28.86	-29.63	-	56.26	74.00	17.74
2 390.00	47.17	Average	H	28.86	-29.63	1.56	47.96	54.00	6.04

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

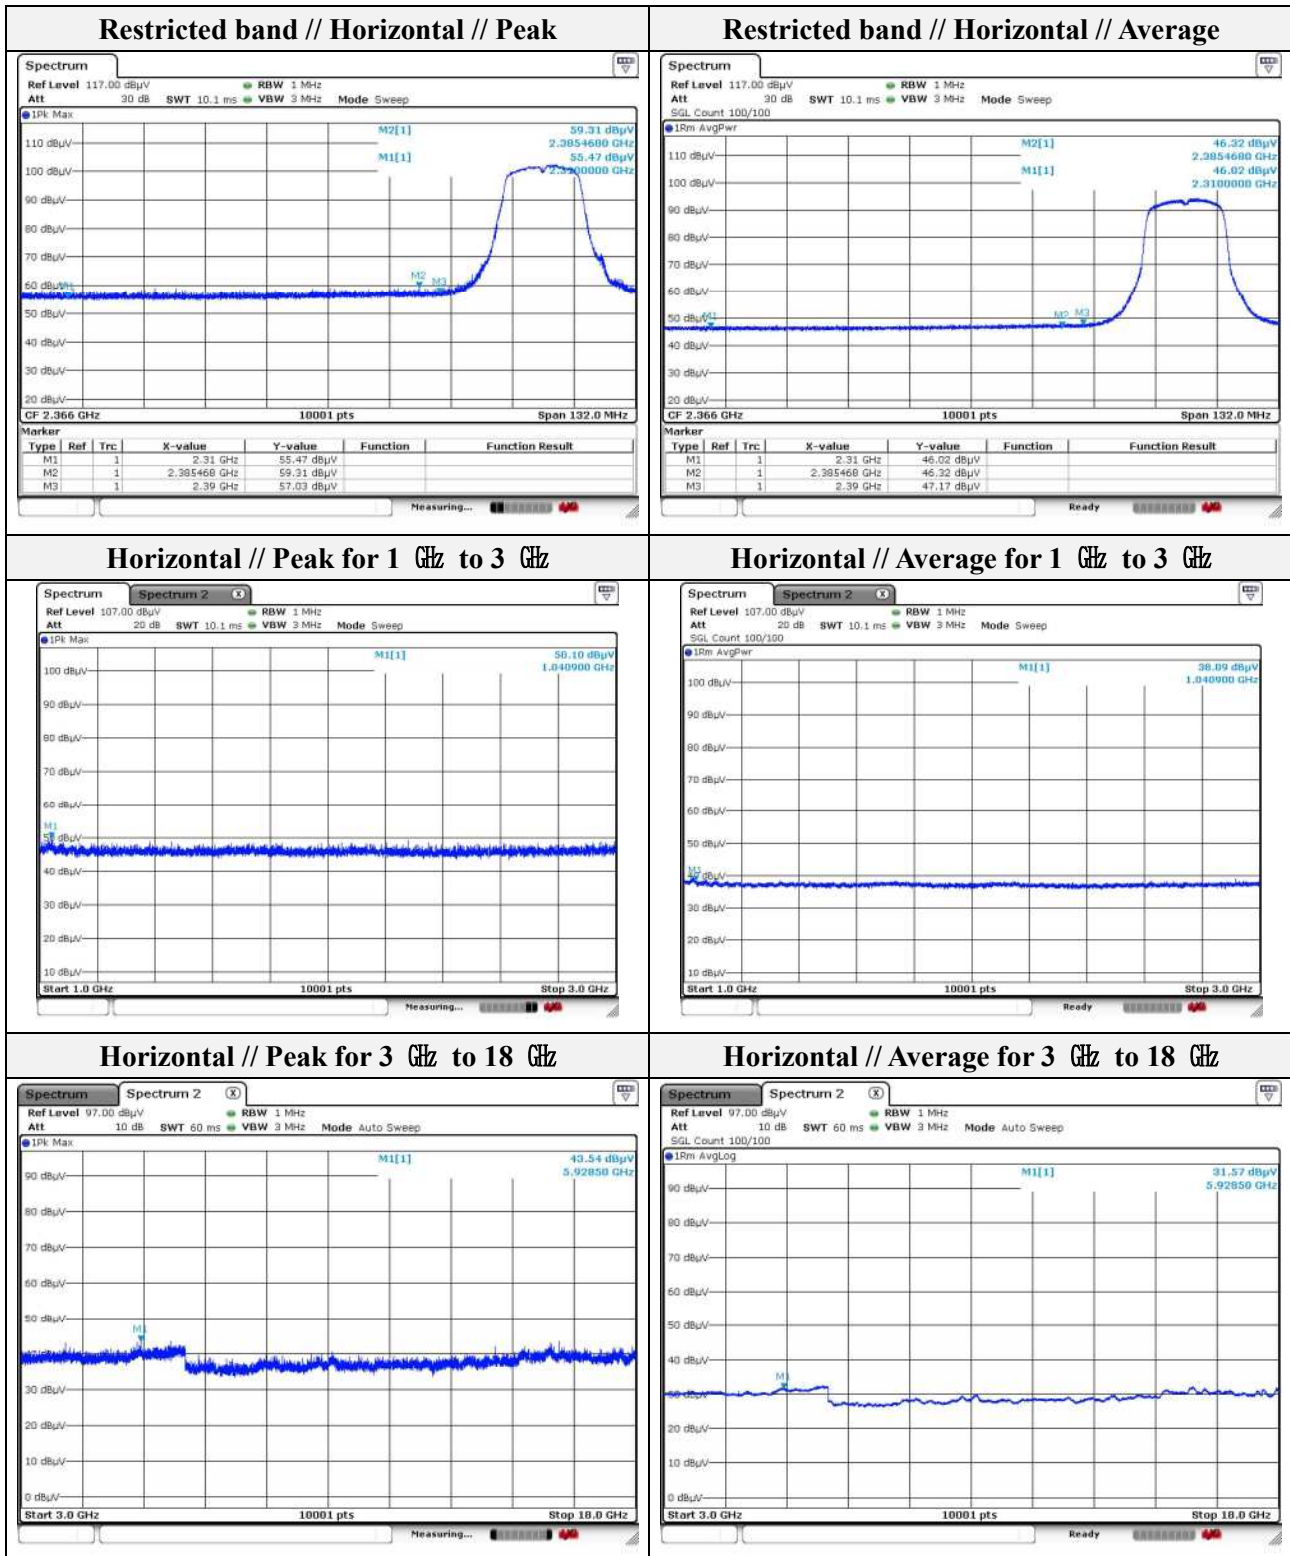

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr






Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 06


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.30	49.89	Peak	H	23.90	-32.20	-	41.59	74.00	32.41
1 000.30	38.15	Average	H	23.90	-32.20	1.56	31.41	54.00	22.59
6 870.40	43.35	Peak	H	36.42	-21.04	-	58.73	74.00	15.27
6 870.40	32.38	Average	H	36.42	-21.04	1.56	49.32	54.00	4.68


Horizontal // Peak for 1 GHz to 3 GHz

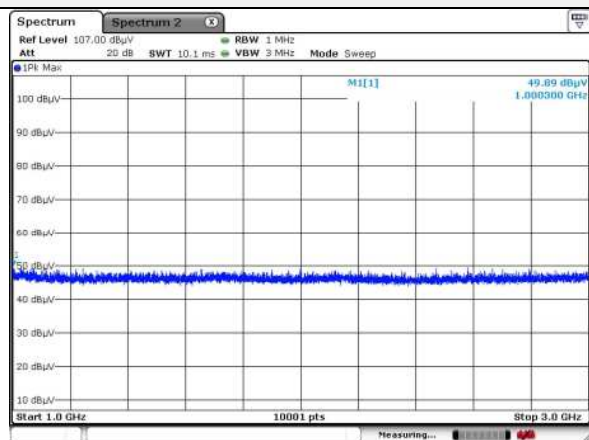


Horizontal // Average for 1 GHz to 3 GHz

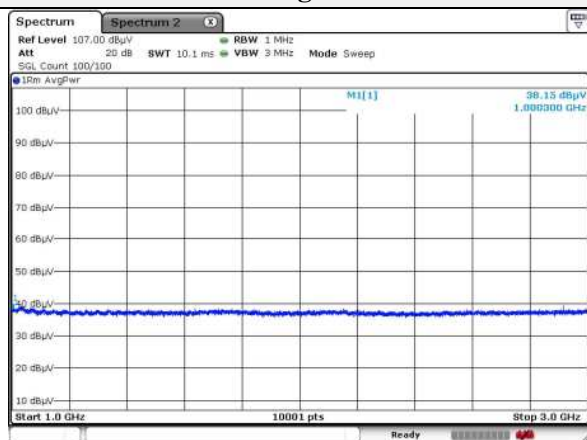

Horizontal // Peak for 3 GHz to 18 GHz

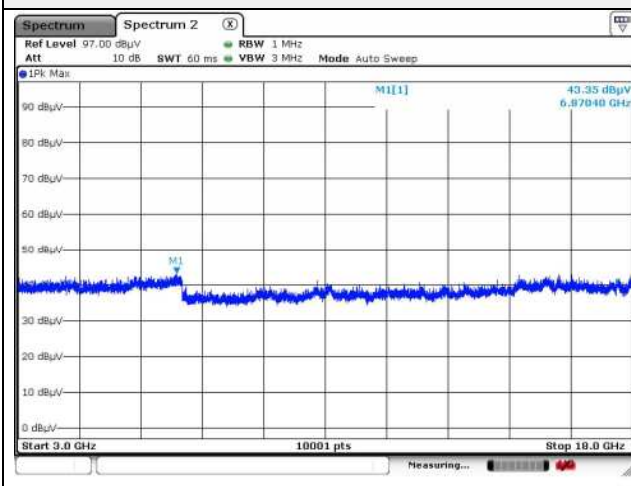

Horizontal // Average for 3 GHz to 18 GHz

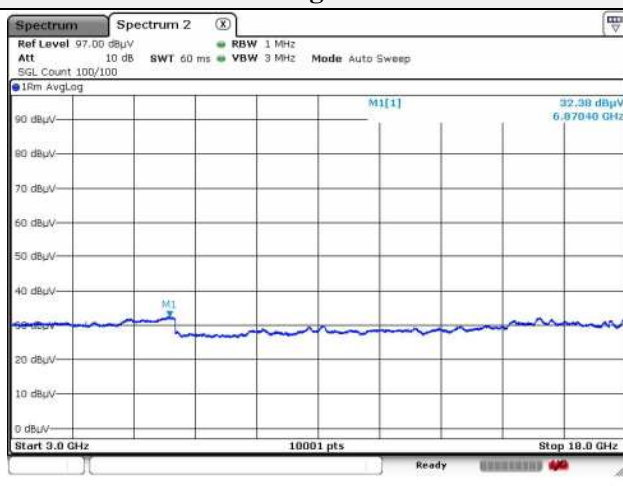

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (24 ) of (48)

Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 11

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 119.99	49.36	Peak	H	28.20	-32.21	-	45.35	74.00	28.65
2 119.99	37.43	Average	H	28.20	-32.21	1.56	34.98	54.00	19.02
6 888.40	42.93	Peak	H	36.53	-21.01	-	58.45	74.00	15.55
6 888.40	32.19	Average	H	36.53	-21.01	1.56	49.27	54.00	4.73

**- Band edge**


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.50	58.31	Peak	H	29.30	-28.72	-	58.89	74.00	15.11
2 483.50	46.94	Average	H	29.30	-28.72	1.56	49.08	54.00	4.92
2 484.07	58.31	Peak	H	29.30	-28.72	-	58.89	74.00	15.11
2 484.07	47.42	Average	H	29.30	-28.72	1.56	49.56	54.00	4.44
2 500.00	55.91	Peak	H	29.40	-28.56	-	56.75	74.00	17.25
2 500.00	46.51	Average	H	29.40	-28.56	1.56	48.91	54.00	5.09

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr







### Restricted band // Horizontal // Peak

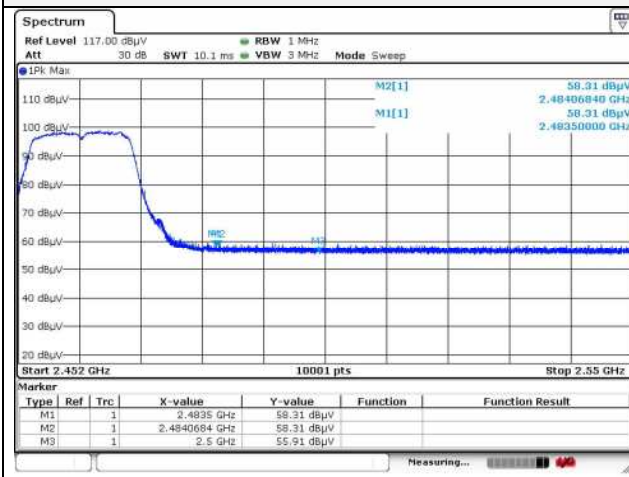


### Restricted band // Horizontal // Average

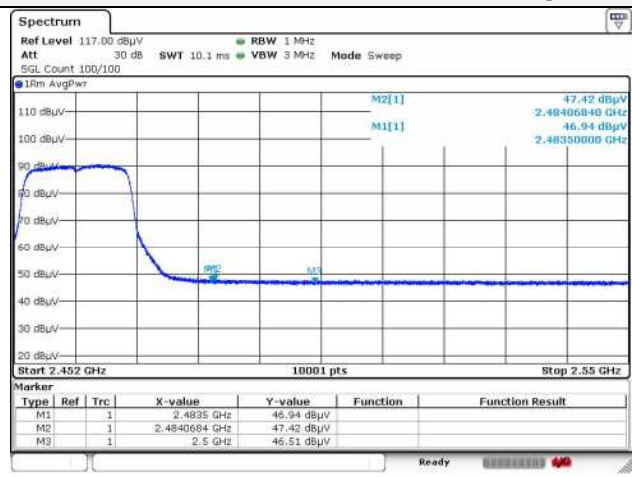


### Horizontal // Peak for 1 GHz to 3 GHz

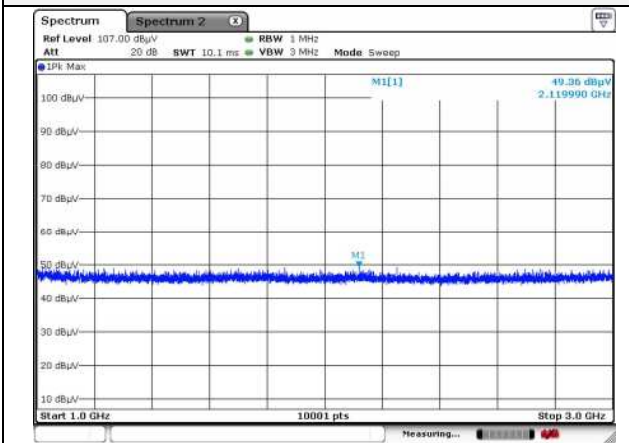


### Horizontal // Average for 1 GHz to 3 GHz

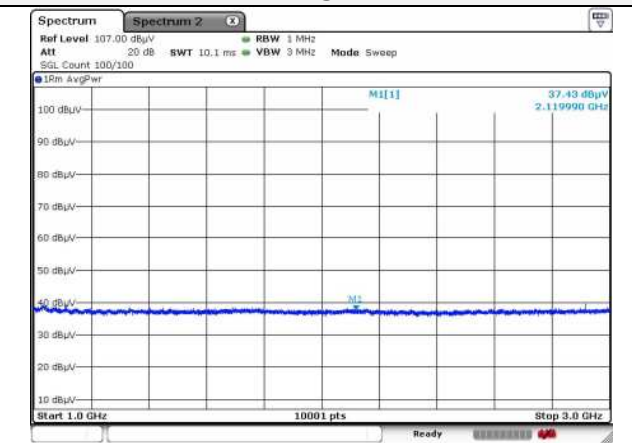

### Horizontal // Peak for 3 GHz to 18 GHz

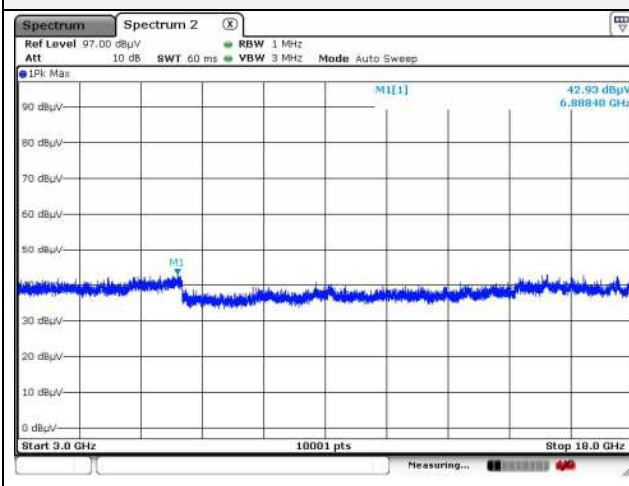

### Horizontal // Average for 3 GHz to 18 GHz

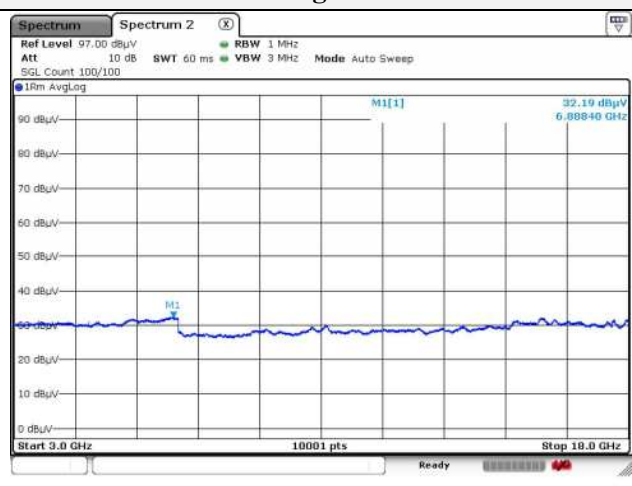




Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 01

- **Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 030.90	50.20	Peak	H	23.90	-32.07	-	42.03	74.00	31.97
1 030.90	38.88	Average	H	23.90	-32.07	1.65	32.36	54.00	21.64
6 721.90	43.46	Peak	H	36.21	-21.36	-	58.31	74.00	15.69
6 721.90	31.68	Average	H	36.21	-21.36	1.65	48.18	54.00	5.82

- **Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 310.00	56.56	Peak	H	28.54	-30.39	-	54.71	74.00	19.29
2 310.00	46.23	Average	H	28.54	-30.39	1.65	46.03	54.00	7.97
2 376.06	58.03	Peak	H	28.80	-29.76	-	57.07	74.00	16.93
2 376.06	46.47	Average	H	28.80	-29.76	1.65	47.16	54.00	6.84
2 390.00	56.74	Peak	H	28.86	-29.63	-	55.97	74.00	18.03
2 390.00	46.82	Average	H	28.86	-29.63	1.65	47.70	54.00	6.30

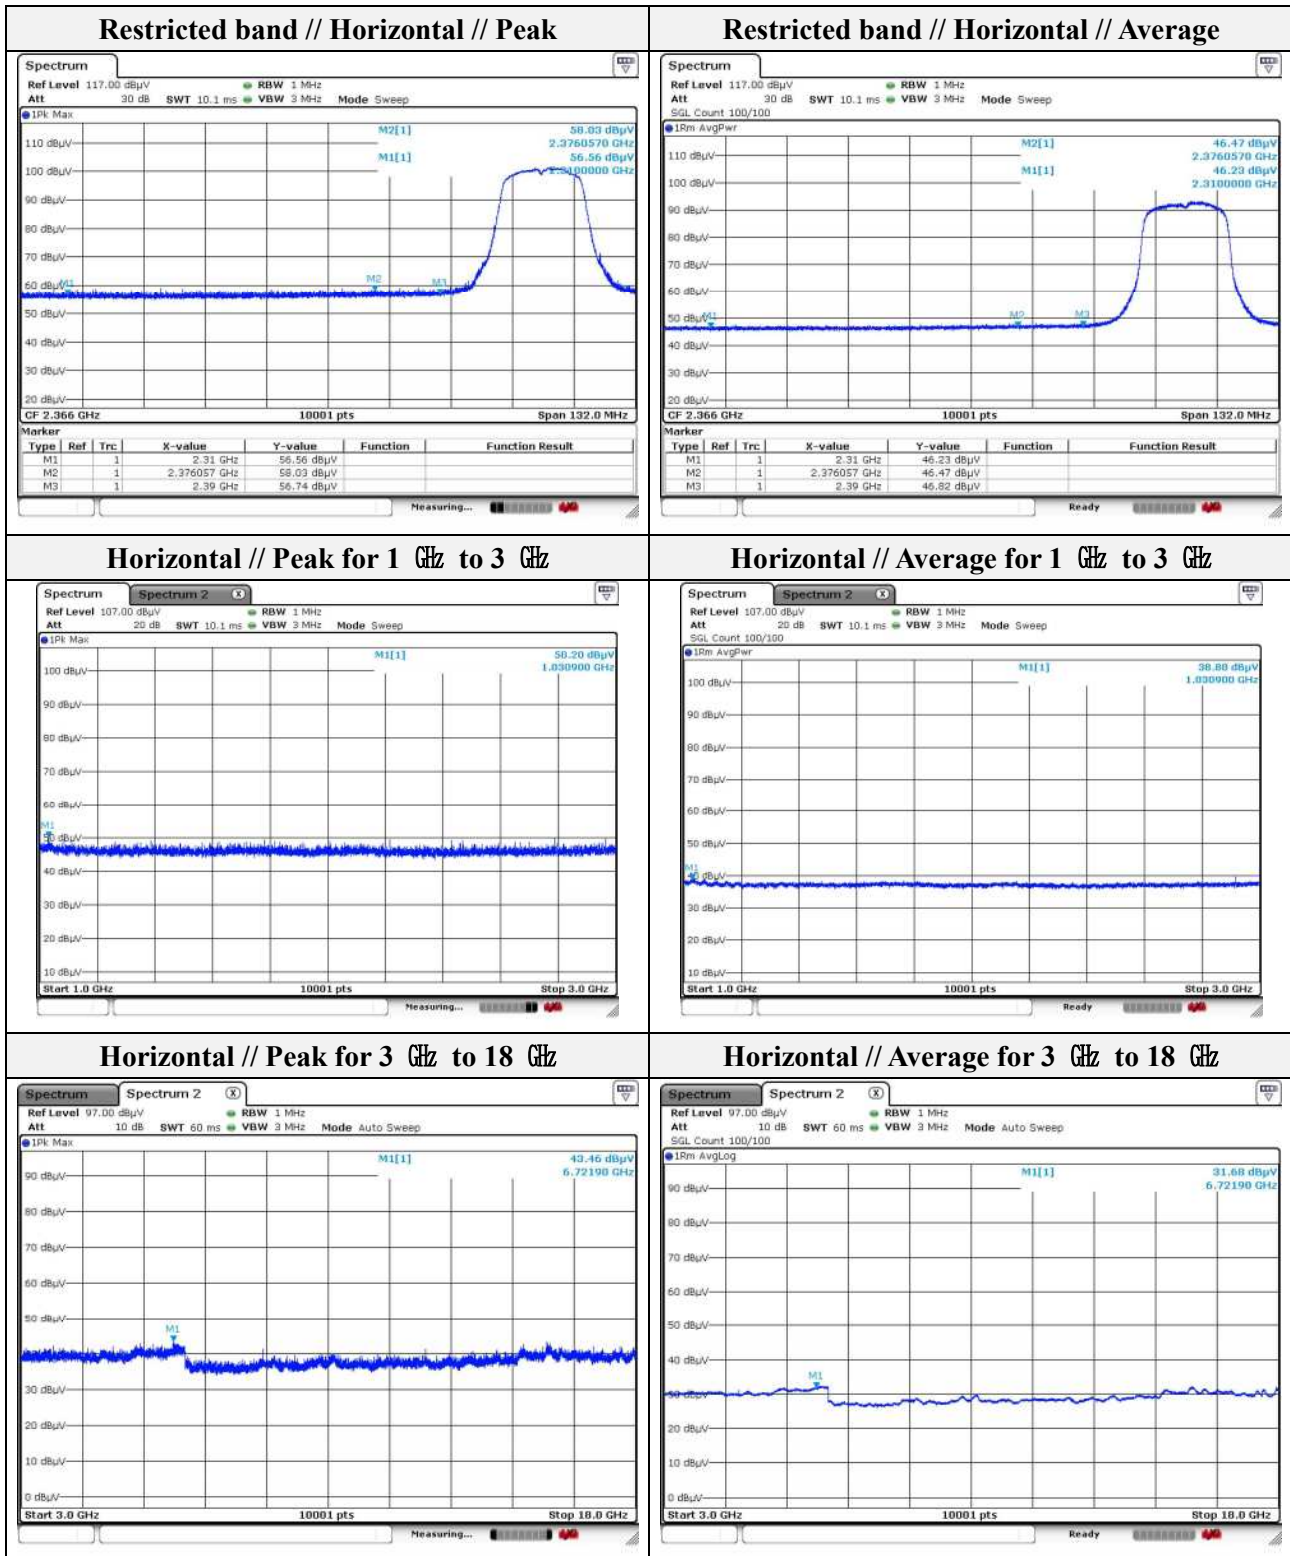




Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 06


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.10	49.32	Peak	H	23.90	-32.20	-	41.02	74.00	32.98
1 000.10	38.26	Average	H	23.90	-32.20	1.65	31.61	54.00	22.39
6 745.90	43.50	Peak	H	36.12	-21.30	-	58.32	74.00	15.68
6 745.90	31.67	Average	H	36.12	-21.30	1.65	48.14	54.00	5.86


Horizontal // Peak for 1 GHz to 3 GHz

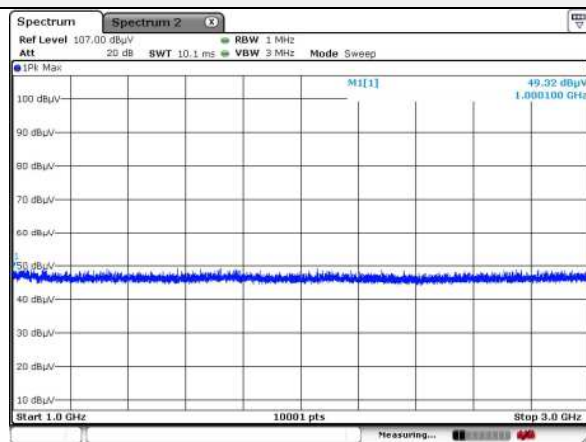


Horizontal // Average for 1 GHz to 3 GHz

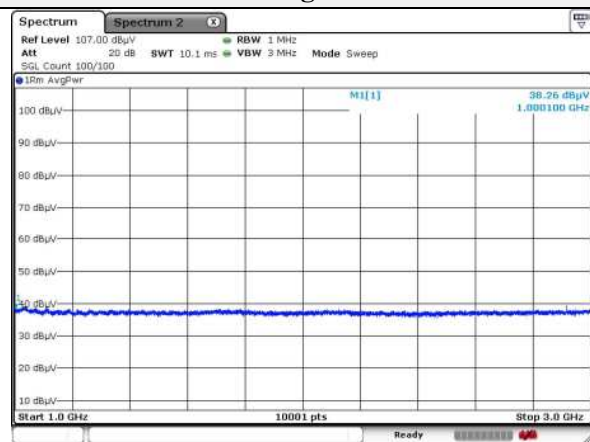

Horizontal // Peak for 3 GHz to 18 GHz

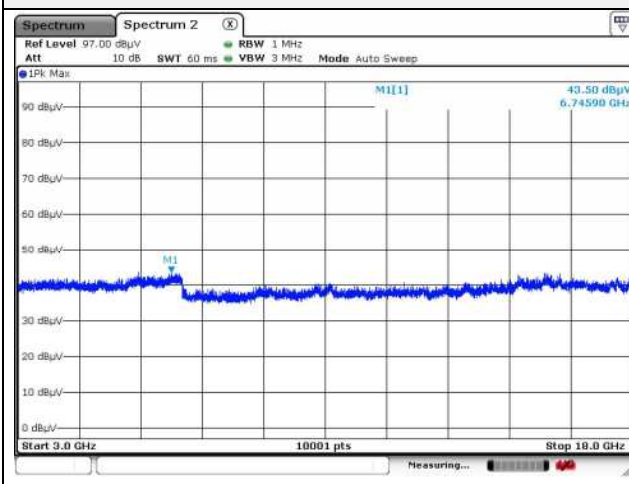

Horizontal // Average for 3 GHz to 18 GHz

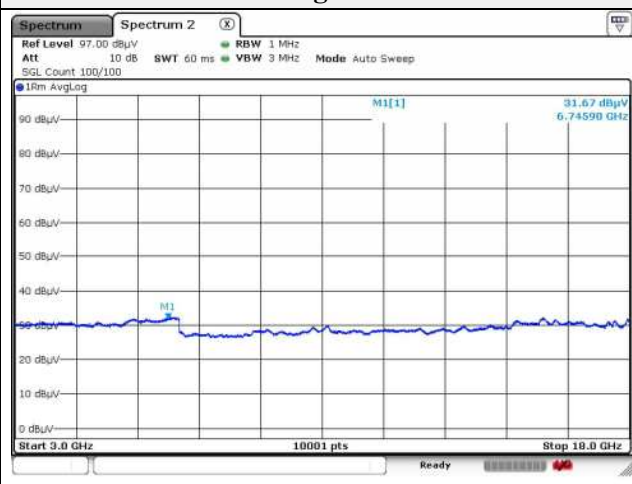



Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 11

- **Spurious**


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 916.31	50.70	Peak	H	29.50	-27.57	-	52.63	74.00	21.37
2 916.31	39.13	Average	H	29.50	-27.57	1.65	42.71	54.00	11.29
6 931.90	44.28	Peak	H	36.54	-20.94	-	59.88	74.00	14.12
6 931.90	32.38	Average	H	36.54	-20.94	1.65	49.63	54.00	4.37

- **Band edge**


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	57.24	Peak	H	29.30	-28.72	-	57.82	74.00	16.18
2 483.50	47.02	Average	H	29.30	-28.72	1.65	49.25	54.00	4.75
2 489.93	59.69	Peak	H	29.34	-28.66	-	60.37	74.00	13.63
2 489.93	46.53	Average	H	29.34	-28.66	1.65	48.86	54.00	5.14
2 500.00	57.20	Peak	H	29.40	-28.56	-	58.04	74.00	15.96
2 500.00	46.97	Average	H	29.40	-28.56	1.65	49.46	54.00	4.54




### Restricted band // Horizontal // Peak

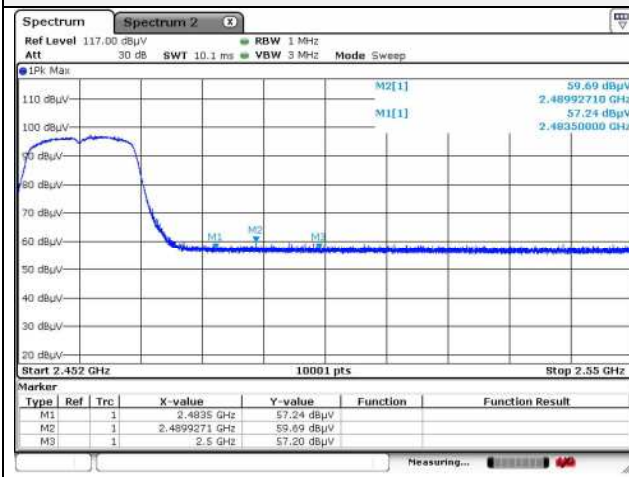


### Restricted band // Horizontal // Average

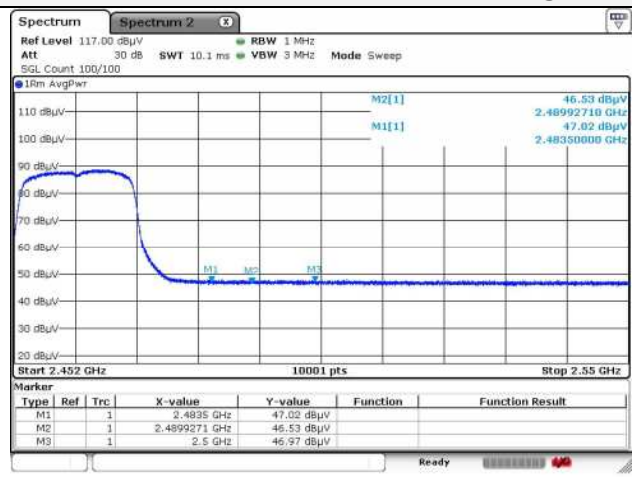


### Horizontal // Peak for 1 GHz to 3 GHz

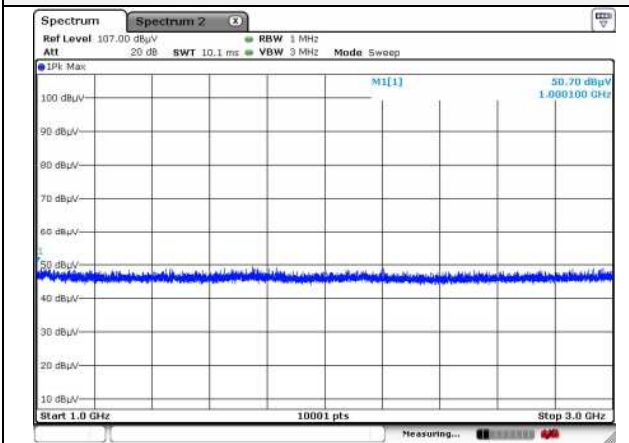


### Horizontal // Average for 1 GHz to 3 GHz

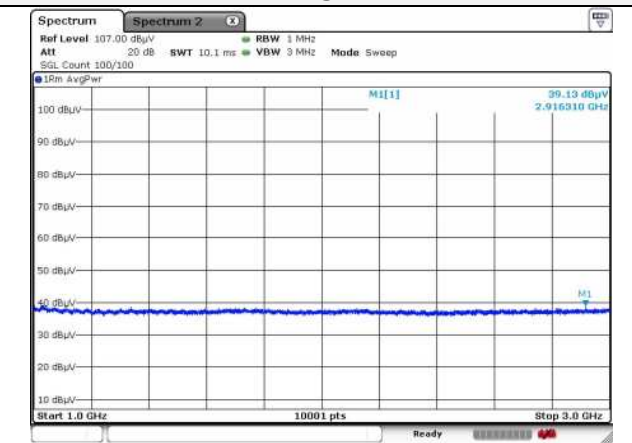

### Horizontal // Peak for 3 GHz to 18 GHz

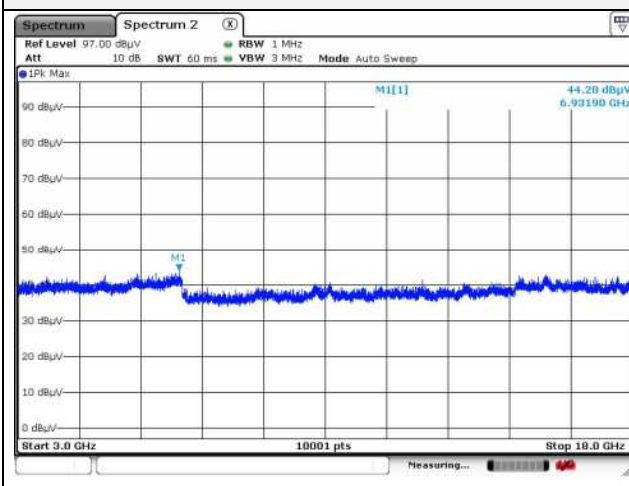

### Horizontal // Average for 3 GHz to 18 GHz

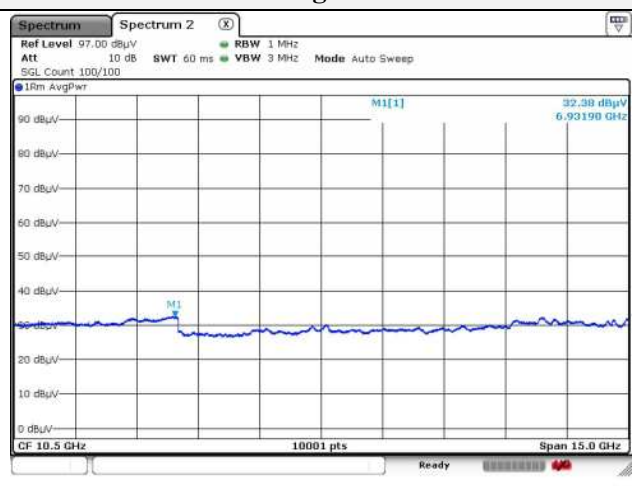





**24 V**


Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 01

**- Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.30	51.38	Peak	H	23.90	-32.20	-	43.08	74.00	30.92
1 000.30	38.46	Average	H	23.90	-32.20	0.38	30.54	54.00	23.46
6 628.90	43.02	Peak	H	36.30	-21.59	-	57.73	74.00	16.27
6 628.90	31.55	Average	H	36.30	-21.59	0.38	46.64	54.00	7.36

**- Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 310.00	56.27	Peak	H	28.54	-30.39	-	54.42	74.00	19.58
2 310.00	46.66	Average	H	28.54	-30.39	0.38	45.19	54.00	8.81
2 378.18	58.69	Peak	H	28.81	-29.74	-	57.76	74.00	16.24
2 378.18	46.60	Average	H	28.81	-29.74	0.38	46.05	54.00	7.95
2 390.00	56.20	Peak	H	28.86	-29.63	-	55.43	74.00	18.57
2 390.00	46.30	Average	H	28.86	-29.63	0.38	45.91	54.00	8.09

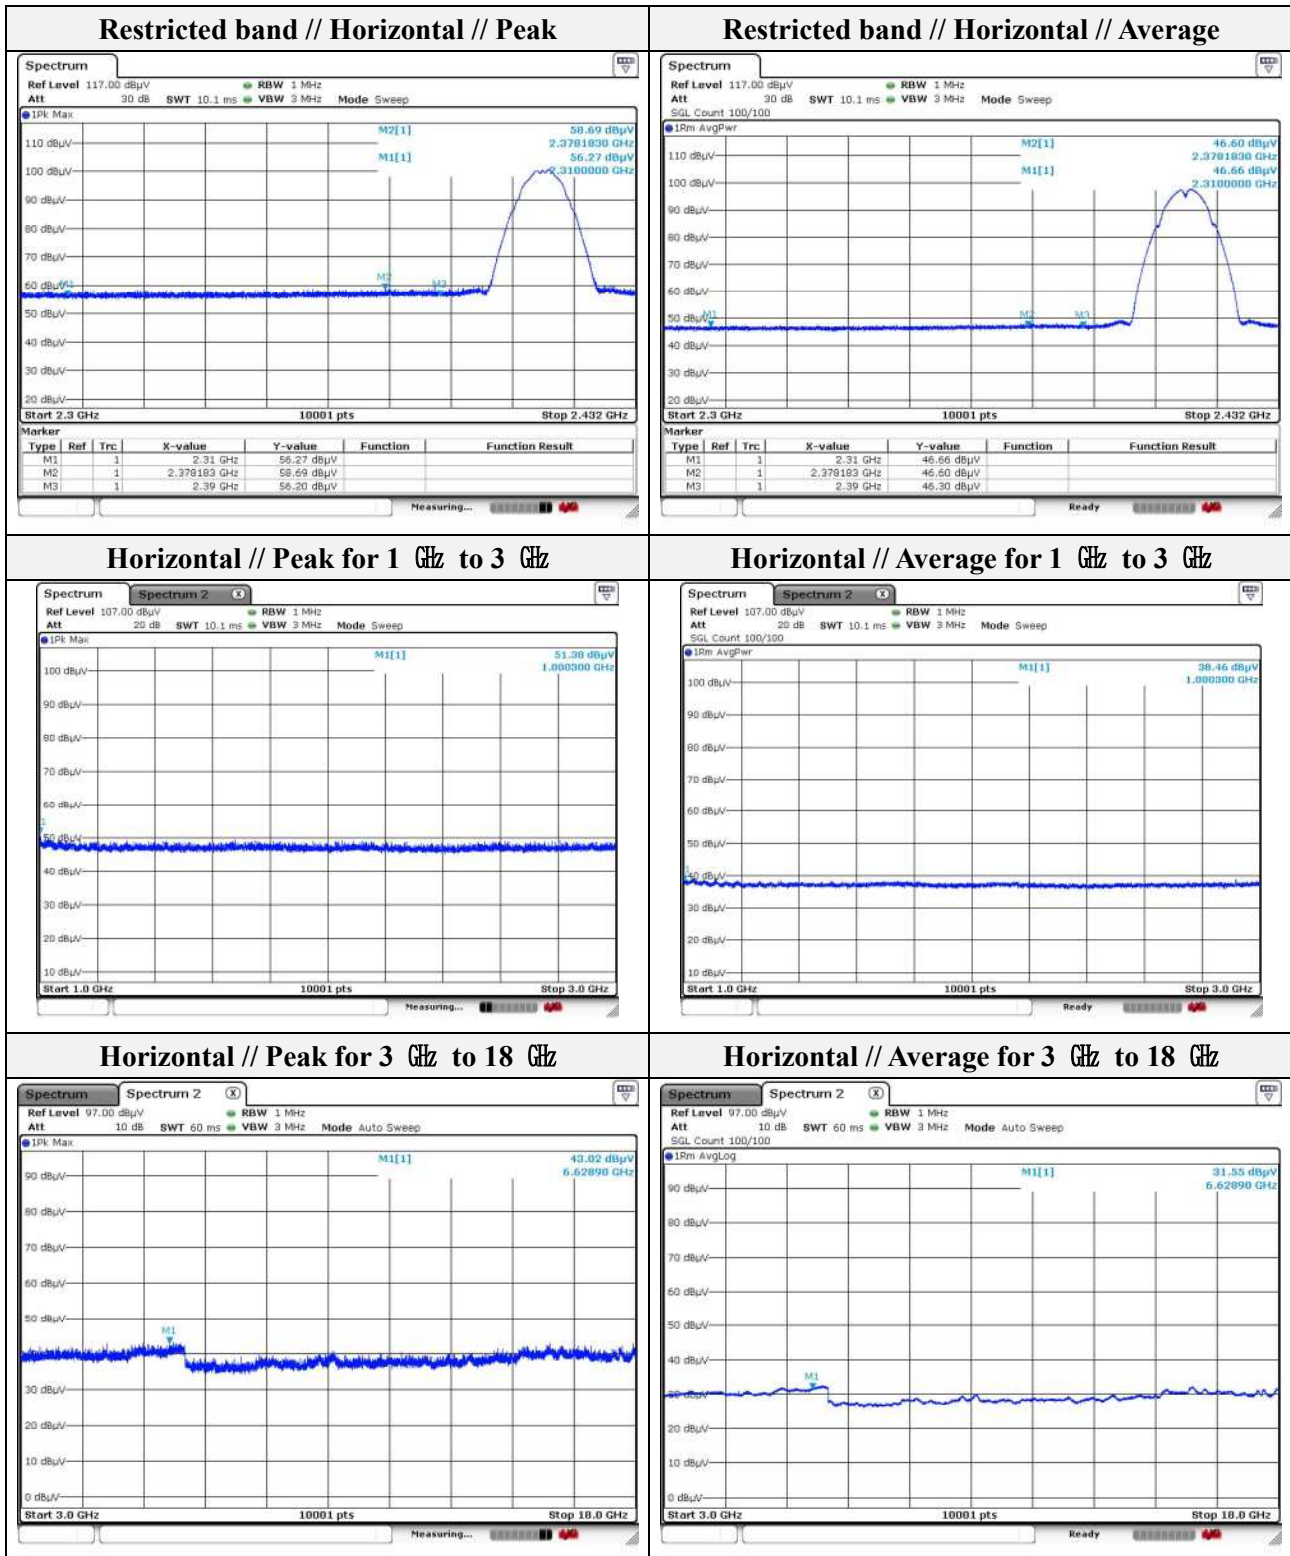






Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 06

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1000.10	49.34	Peak	H	23.90	-32.20	-	41.04	74.00	32.96
1000.10	38.21	Average	H	23.90	-32.20	0.38	30.29	54.00	23.71
6628.90	43.02	Peak	H	36.30	-21.59	-	57.73	74.00	16.27
6628.90	31.55	Average	H	36.30	-21.59	0.38	46.64	54.00	7.36

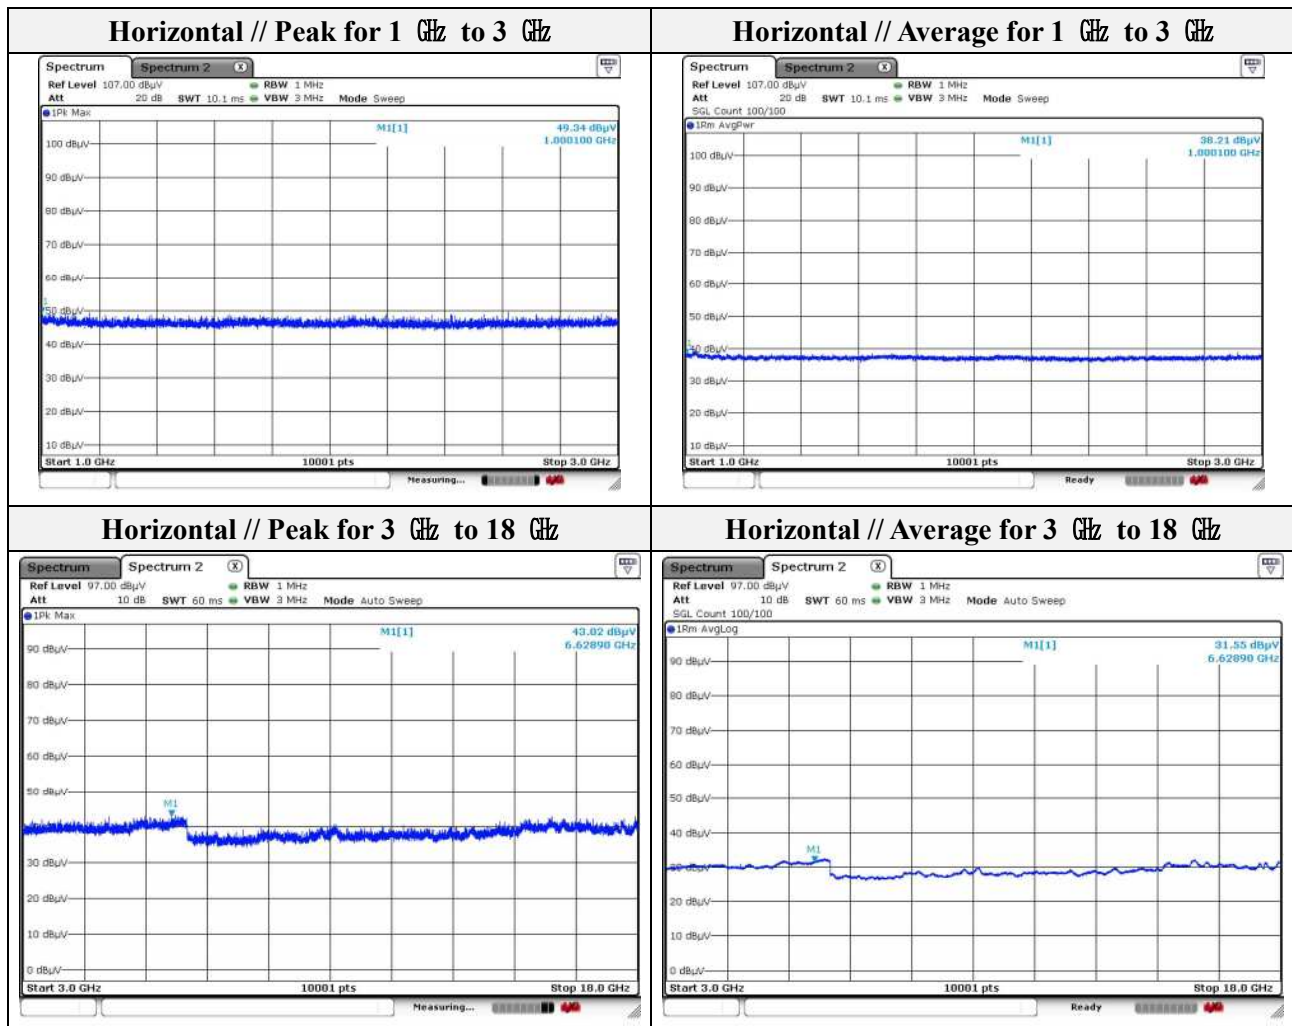

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (34 ) of (48)

Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 11

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 028.70	49.50	Peak	H	23.90	-32.08	-	41.32	74.00	32.68
1 028.70	38.77	Average	H	23.90	-32.08	0.38	30.97	54.00	23.03
6 961.90	43.23	Peak	H	36.50	-20.88	-	58.85	74.00	15.15
6 961.90	32.15	Average	H	36.50	-20.88	0.38	48.15	54.00	5.85


**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.50	56.32	Peak	H	29.30	-28.72	-	56.90	74.00	17.10
2 483.50	46.91	Average	H	29.30	-28.72	0.38	47.87	54.00	6.13
2 489.42	58.59	Peak	H	29.34	-28.66	-	59.27	74.00	14.73
2 489.42	46.62	Average	H	29.34	-28.66	0.38	47.68	54.00	6.32
2 500.00	57.24	Peak	H	29.40	-28.56	-	58.08	74.00	15.92
2 500.00	46.45	Average	H	29.40	-28.56	0.38	47.67	54.00	6.33


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




### Restricted band // Horizontal // Peak

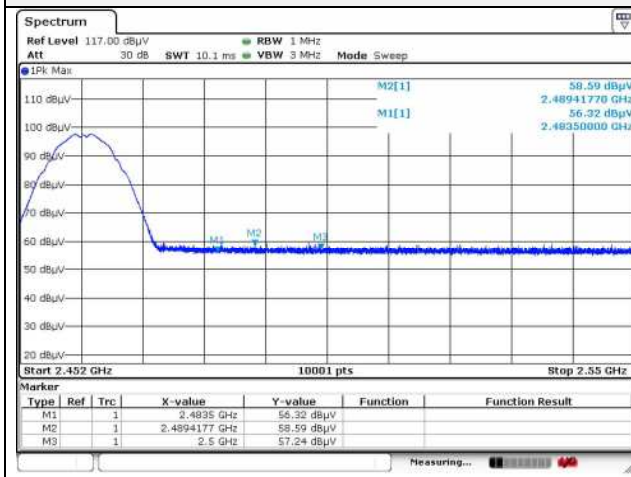


### Restricted band // Horizontal // Average

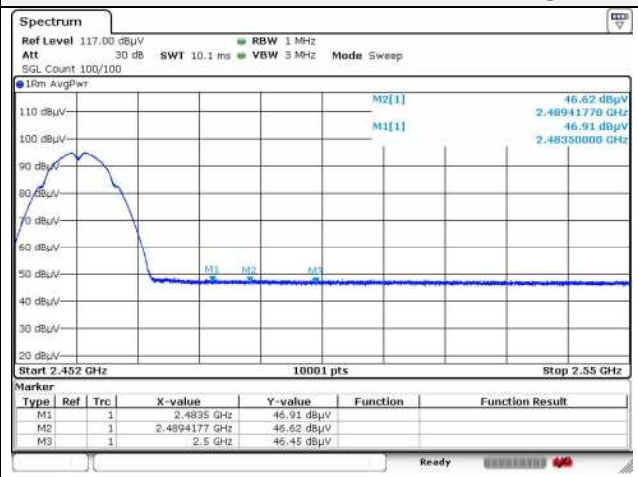


### Horizontal // Peak for 1 GHz to 3 GHz

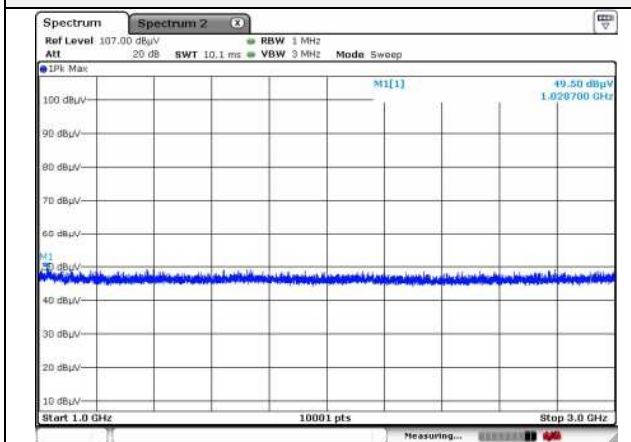


### Horizontal // Average for 1 GHz to 3 GHz

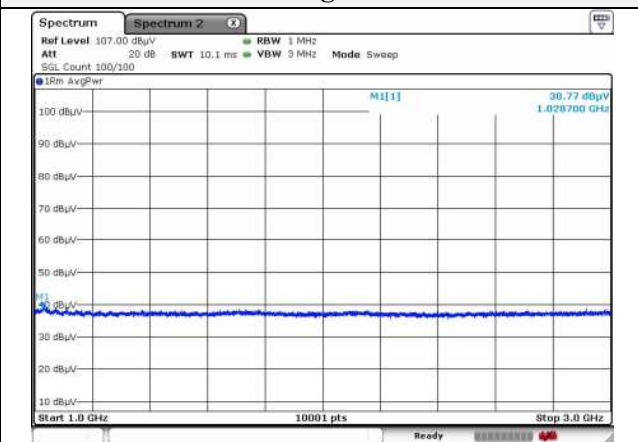

### Horizontal // Peak for 3 GHz to 18 GHz

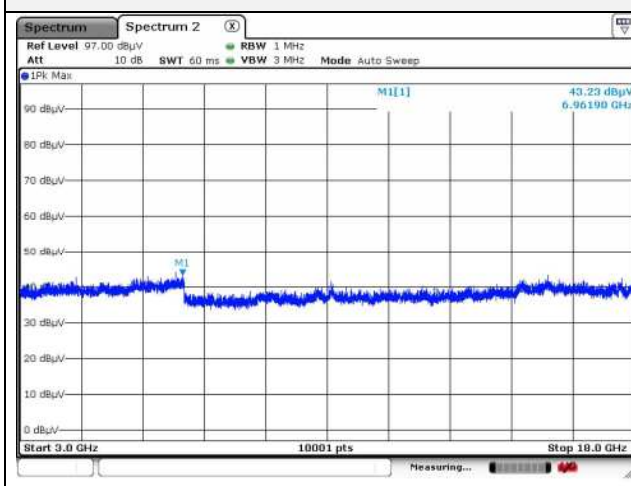

### Horizontal // Average for 3 GHz to 18 GHz

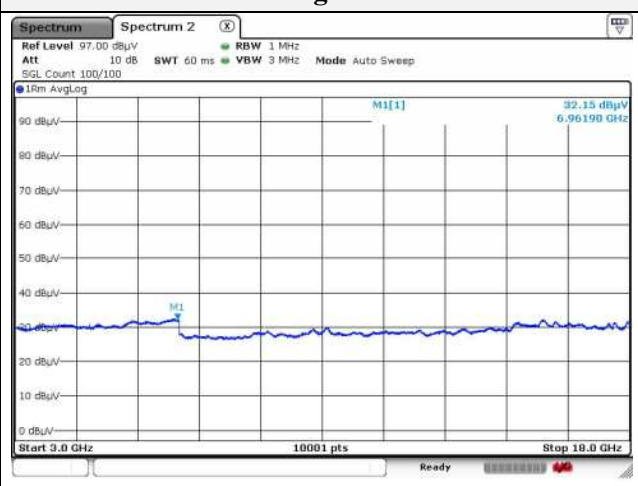

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (36 ) of (48)

Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 01


**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 000.10	50.20	Peak	H	23.90	-32.20	-	41.90	74.00	32.10
1 000.10	38.30	Average	H	23.90	-32.20	1.56	31.56	54.00	22.44
6 720.40	43.96	Peak	H	36.22	-21.37	-	58.81	74.00	15.19
6 720.40	31.84	Average	H	36.22	-21.37	1.56	48.25	54.00	5.75

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 310.00	56.47	Peak	H	28.54	-30.39	-	54.62	74.00	19.38
2 310.00	46.11	Average	H	28.54	-30.39	1.56	45.82	54.00	8.18
2 376.86	58.77	Peak	H	28.81	-29.75	-	57.83	74.00	16.17
2 376.86	46.15	Average	H	28.81	-29.75	1.56	46.77	54.00	7.23
2 390.00	57.02	Peak	H	28.86	-29.63	-	56.25	74.00	17.75
2 390.00	46.97	Average	H	28.86	-29.63	1.56	47.76	54.00	6.24

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

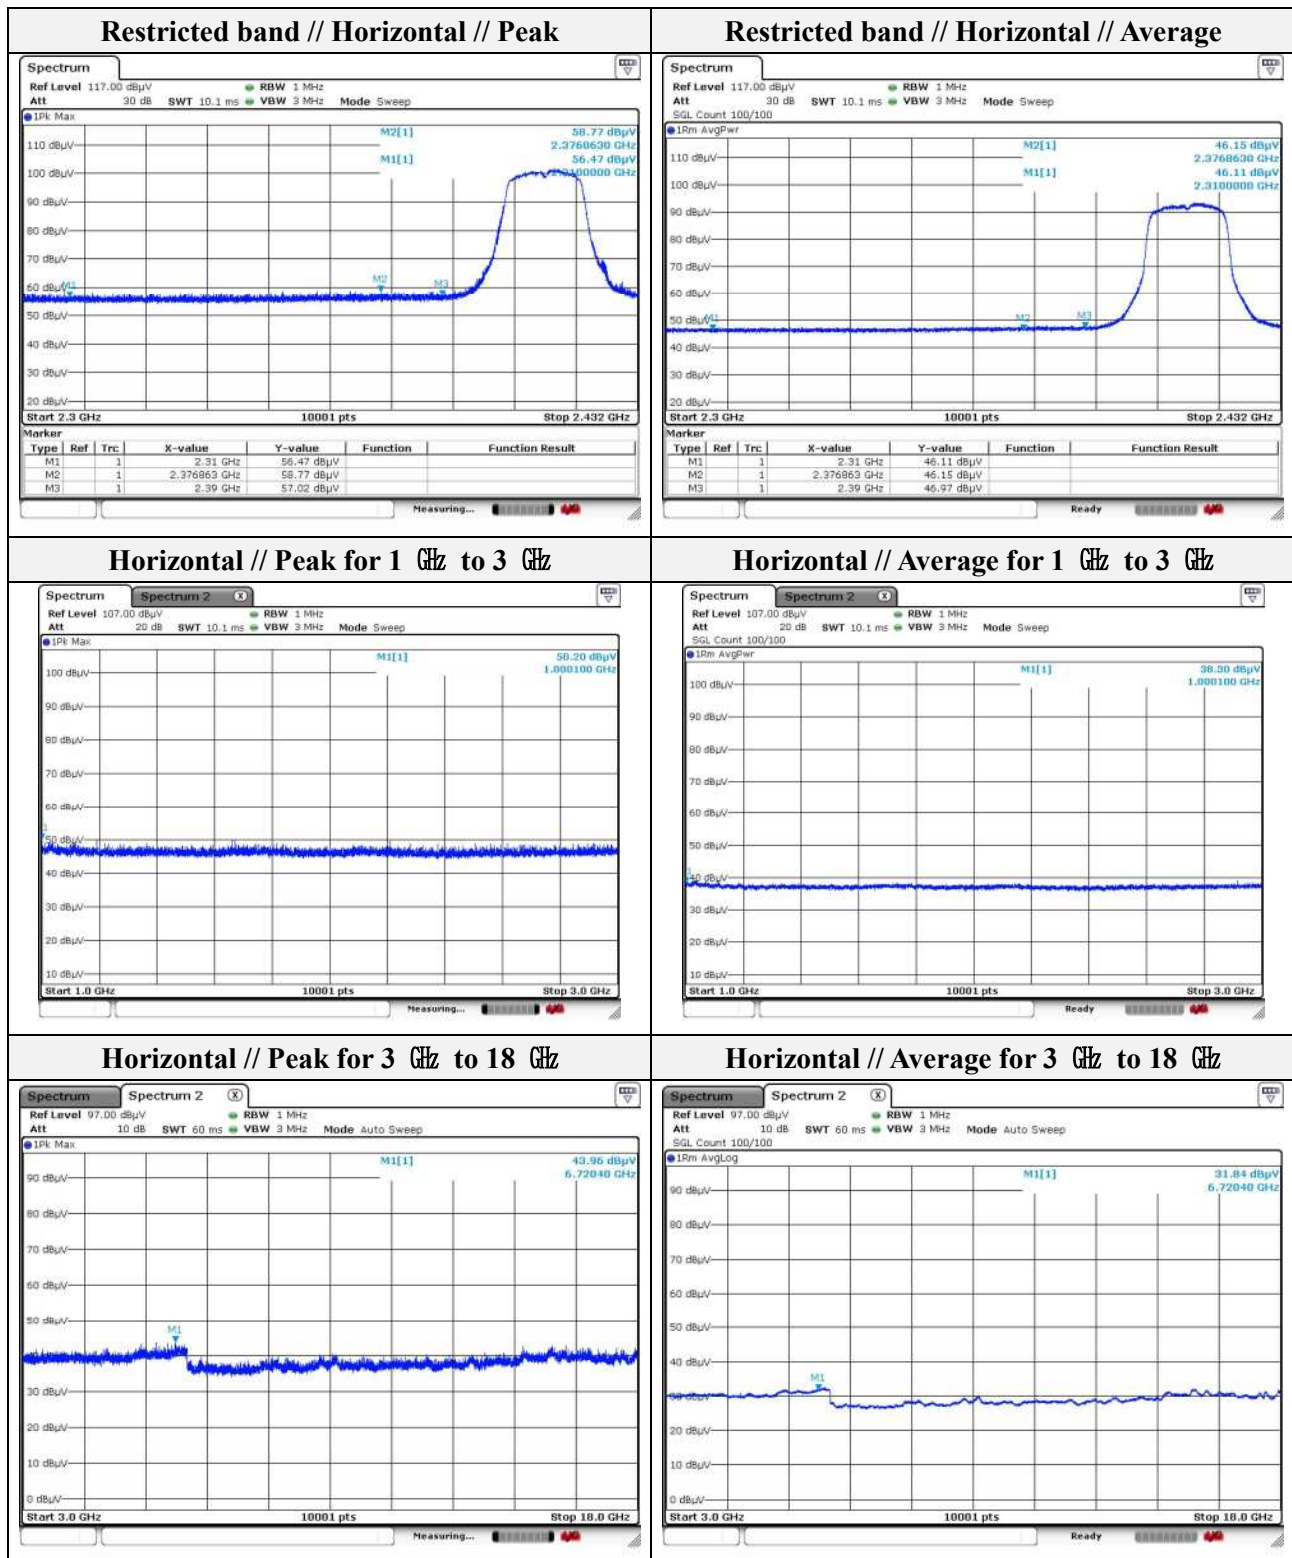




Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 06

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 775.32	49.26	Peak	H	29.35	-27.85	-	50.76	74.00	23.24
2 775.32	36.95	Average	H	29.35	-27.85	1.56	40.01	54.00	13.99
6 904.90	43.84	Peak	H	36.59	-20.98	-	59.45	74.00	14.55
6 904.90	32.08	Average	H	36.59	-20.98	1.56	49.25	54.00	4.75

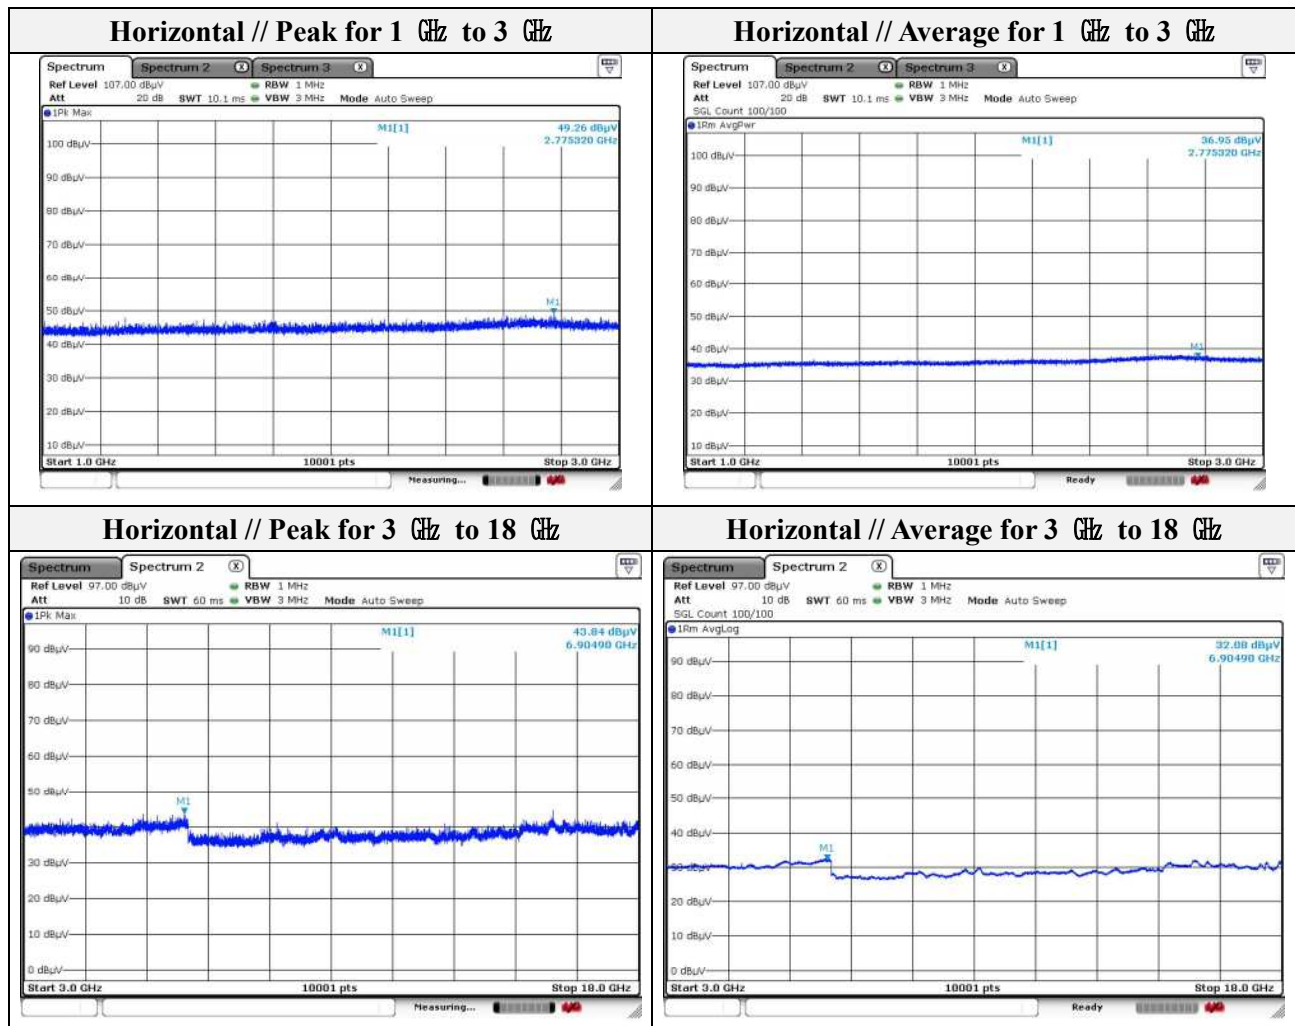

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (39 ) of (48)

Mode: 802.11g  
Distance of measurement: 3 meter  
Channel: 11

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 000.10	52.40	Peak	H	23.90	-32.20	-	44.10	74.00	29.90
1 000.10	38.01	Average	H	23.90	-32.20	1.56	31.27	54.00	22.73
6 876.40	43.06	Peak	H	36.46	-21.03	-	58.49	74.00	15.51
6 876.40	32.09	Average	H	36.46	-21.03	1.56	49.08	54.00	4.92

**- Band edge**


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.50	56.77	Peak	H	29.30	-28.72	-	57.35	74.00	16.65
2 483.50	46.98	Average	H	29.30	-28.72	1.56	49.12	54.00	4.88
2 494.50	58.53	Peak	H	29.37	-28.62	-	59.28	74.00	14.72
2 494.50	47.06	Average	H	29.37	-28.62	1.56	49.37	54.00	4.63
2 500.00	56.80	Peak	H	29.40	-28.56	-	57.64	74.00	16.36
2 500.00	46.91	Average	H	29.40	-28.56	1.56	49.31	54.00	4.69

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr







### Restricted band // Horizontal // Peak

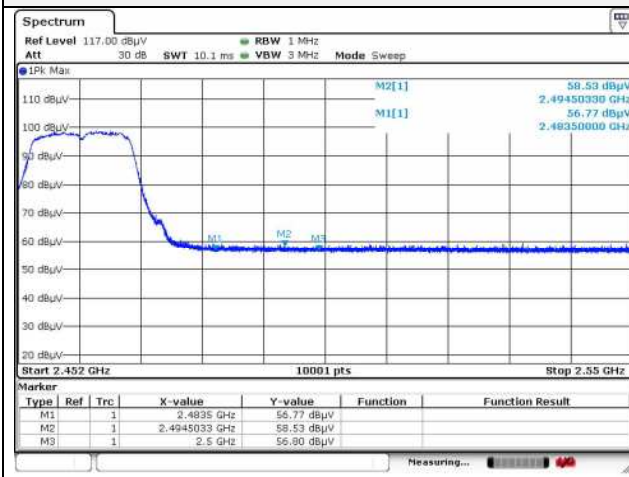


### Restricted band // Horizontal // Average

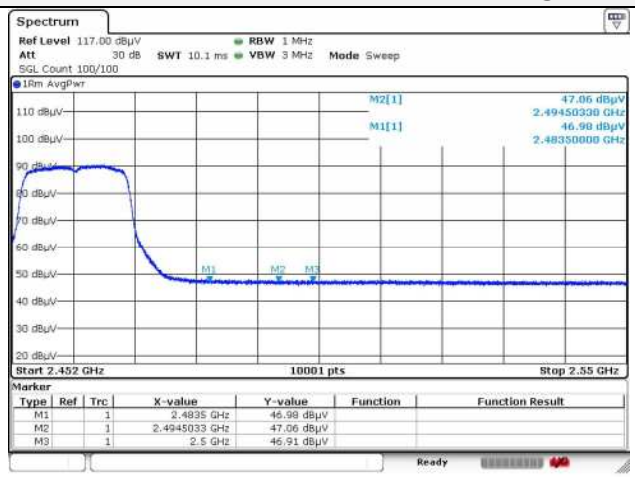


### Horizontal // Peak for 1 GHz to 3 GHz

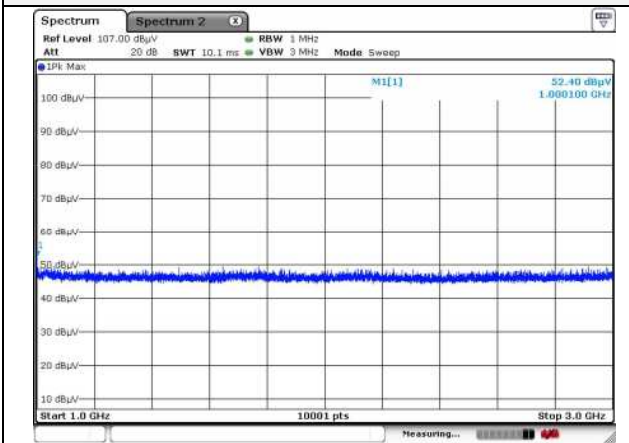


### Horizontal // Average for 1 GHz to 3 GHz

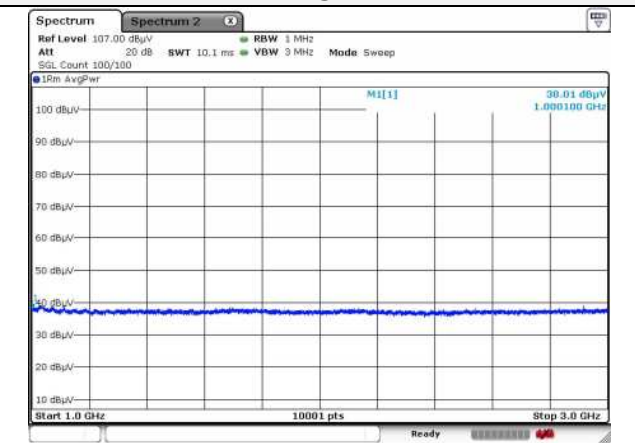

### Horizontal // Peak for 3 GHz to 18 GHz

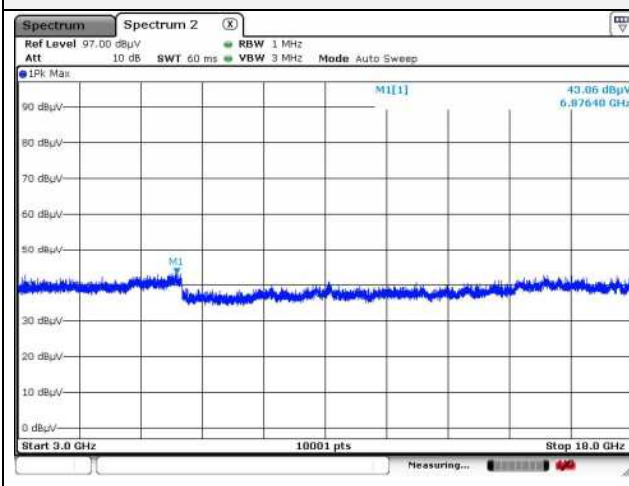

### Horizontal // Average for 3 GHz to 18 GHz

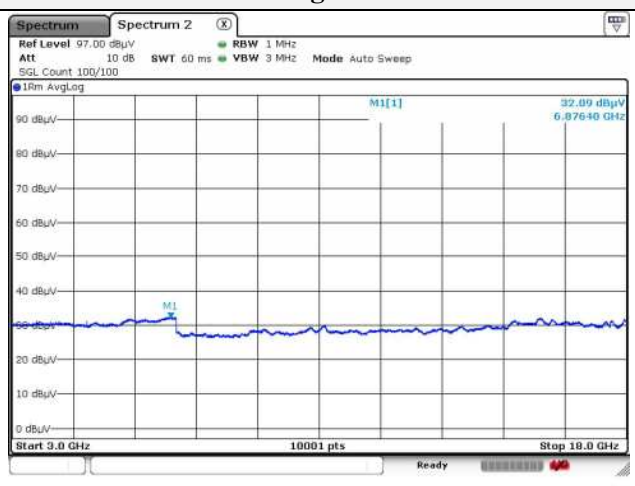






Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 01

- **Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 915.71	49.76	Peak	H	29.49	-27.57	-	51.68	74.00	22.32
2 915.71	38.16	Average	H	29.49	-27.57	1.65	41.73	54.00	12.27
6 297.40	44.17	Peak	H	35.00	-22.97	-	56.20	74.00	17.80
6 297.40	31.12	Average	H	35.00	-22.97	1.65	44.80	54.00	9.20

- **Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 310.00	54.93	Peak	H	28.54	-30.39	-	53.08	74.00	20.92
2 310.00	46.14	Average	H	28.54	-30.39	1.65	45.94	54.00	8.06
2 372.61	58.98	Peak	H	28.79	-29.79	-	57.98	74.00	16.02
2 372.61	46.52	Average	H	28.79	-29.79	1.65	47.17	54.00	6.83
2 390.00	56.68	Peak	H	28.86	-29.63	-	55.91	74.00	18.09
2 390.00	46.85	Average	H	28.86	-29.63	1.65	47.73	54.00	6.27

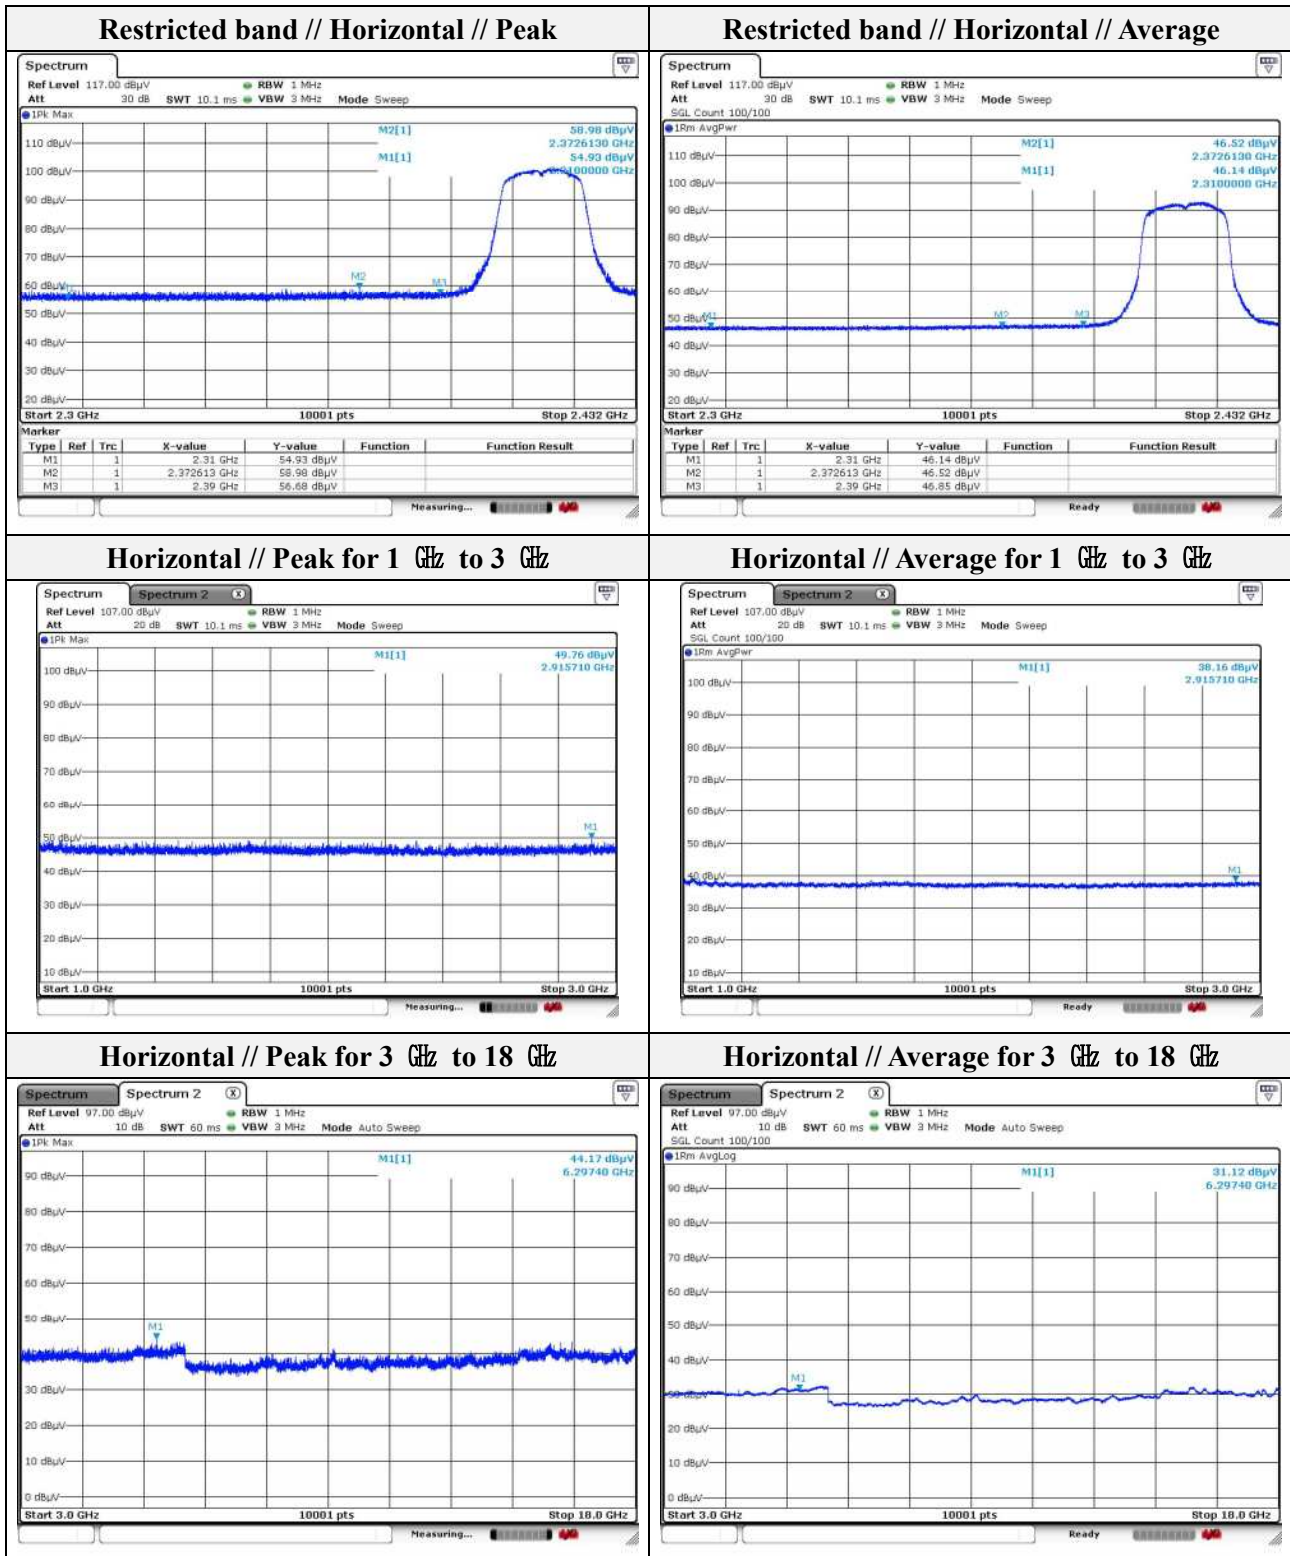




Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 06

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 077.89	49.84	Peak	H	24.01	-31.88	-	41.97	74.00	32.03
1 077.89	37.75	Average	H	24.01	-31.88	1.65	31.53	54.00	22.47
6 849.40	43.11	Peak	H	36.30	-21.08	-	58.33	74.00	15.67
6 849.40	32.48	Average	H	36.30	-21.08	1.65	49.35	54.00	4.65

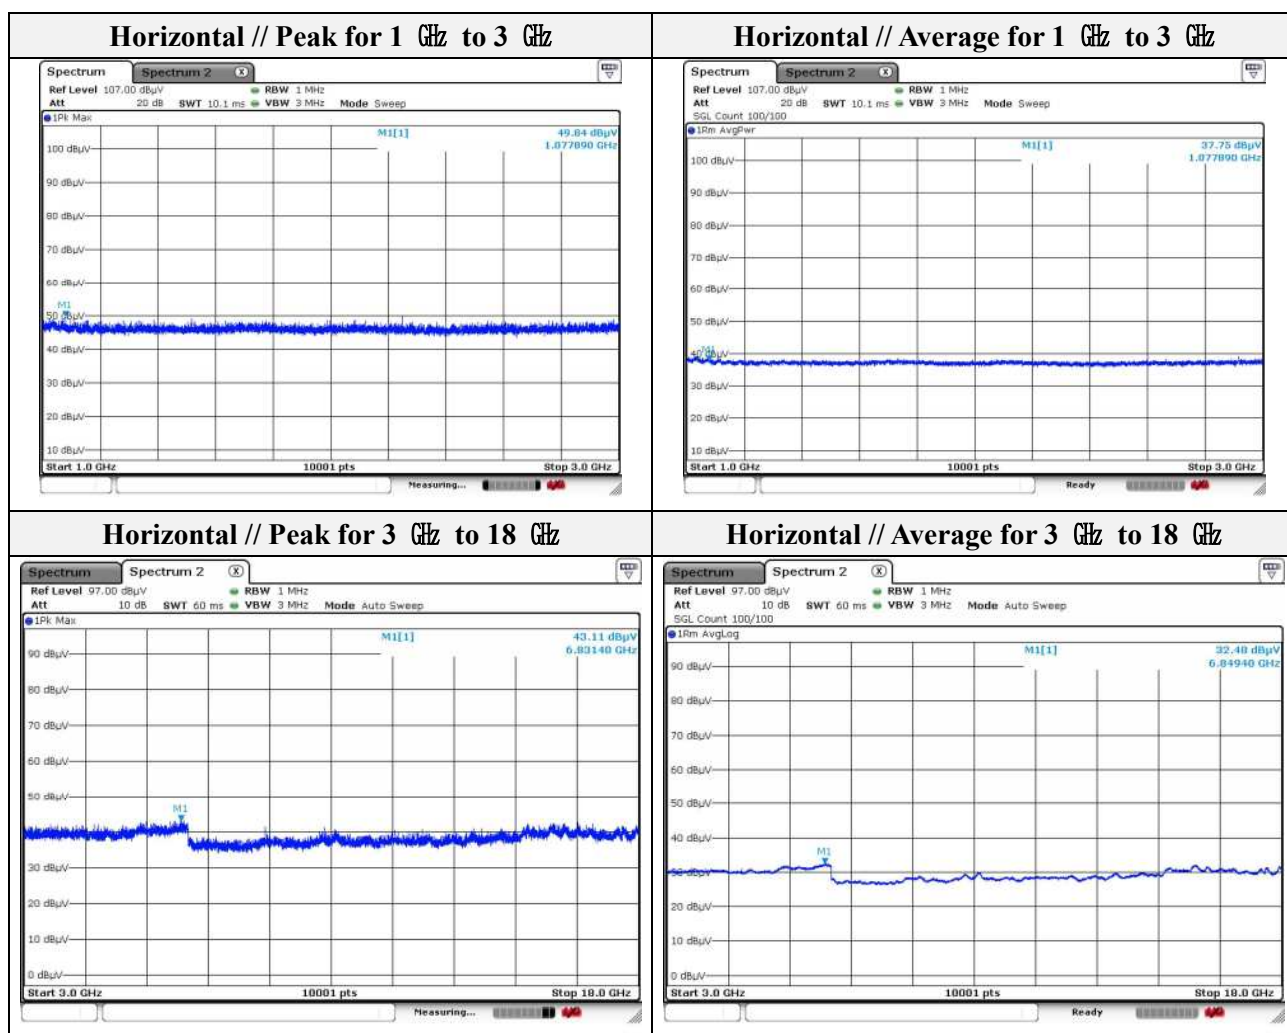

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF-19T0083

Page (44 ) of (48)

Mode: 802.11n\_HT20  
Distance of measurement: 3 meter  
Channel: 11

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1 030.30	50.02	Peak	H	23.90	-32.07	-	41.85	74.00	32.15
1 030.30	38.53	Average	H	23.90	-32.07	1.65	32.01	54.00	21.99
5 853.50	43.85	Peak	H	34.61	-24.07	-	54.39	74.00	19.61
5 853.50	31.32	Average	H	34.61	-24.07	1.65	43.51	54.00	10.49


**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	AF (dB)	AMP+CL (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.50	56.74	Peak	H	29.30	-28.72	-	57.32	74.00	16.68
2 483.50	47.01	Average	H	29.30	-28.72	1.65	49.24	54.00	4.76
2 486.79	58.75	Peak	H	29.32	-28.69	-	59.38	74.00	14.62
2 486.79	46.64	Average	H	29.32	-28.69	1.65	48.92	54.00	5.08
2 500.00	57.17	Peak	H	29.40	-28.56	-	58.01	74.00	15.99
2 500.00	47.02	Average	H	29.40	-28.56	1.65	49.51	54.00	4.49


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




### Restricted band // Horizontal // Peak

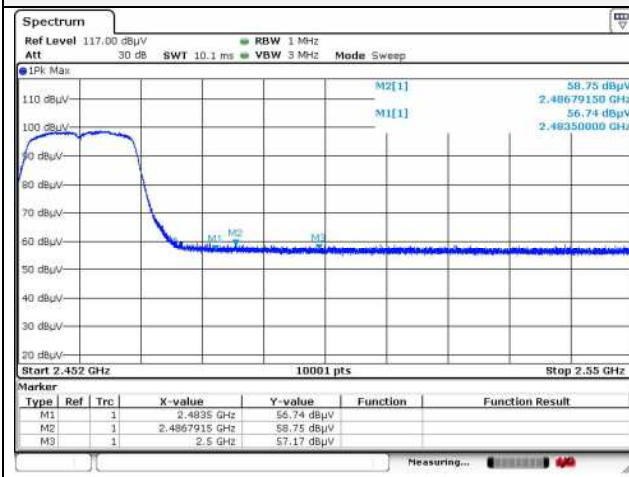


### Restricted band // Horizontal // Average

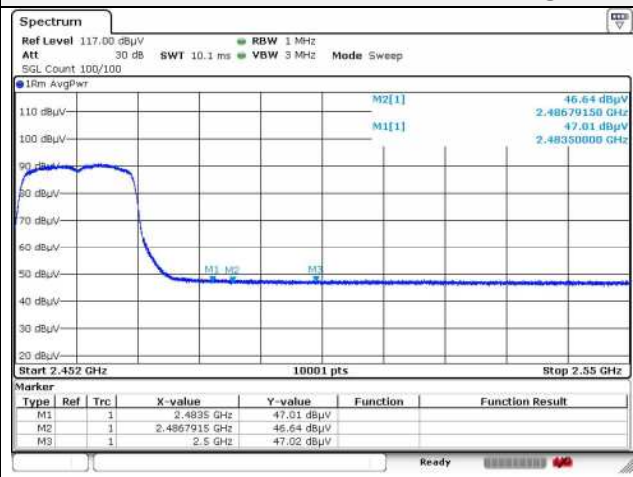


### Horizontal // Peak for 1 GHz to 3 GHz

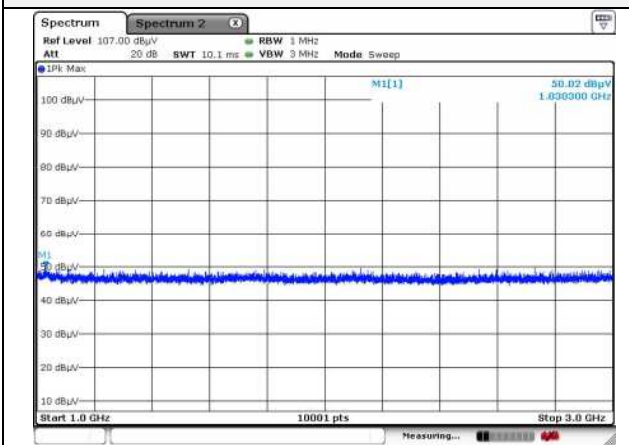


### Horizontal // Average for 1 GHz to 3 GHz

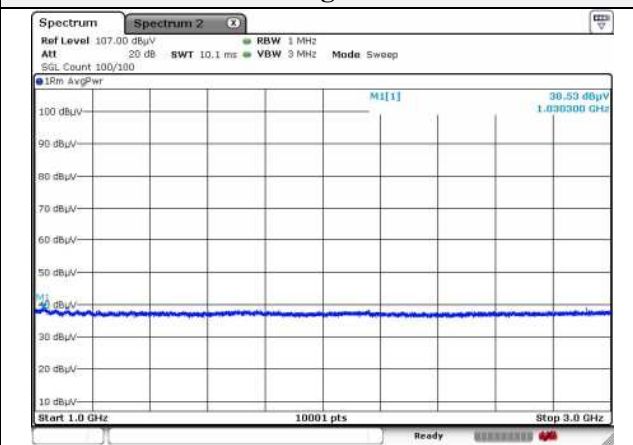

### Horizontal // Peak for 3 GHz to 18 GHz

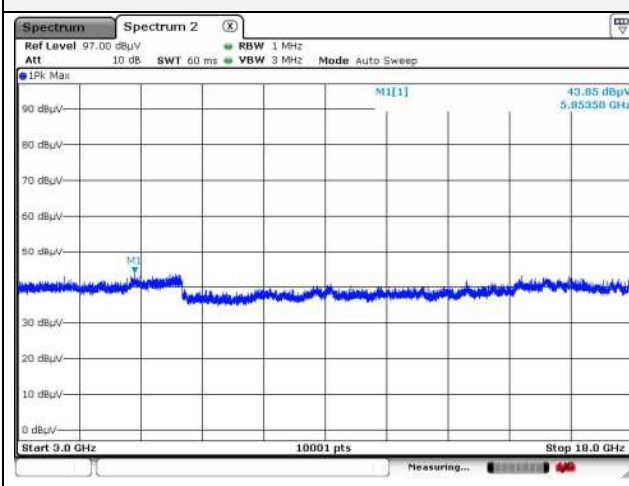


### Horizontal // Average for 3 GHz to 18 GHz

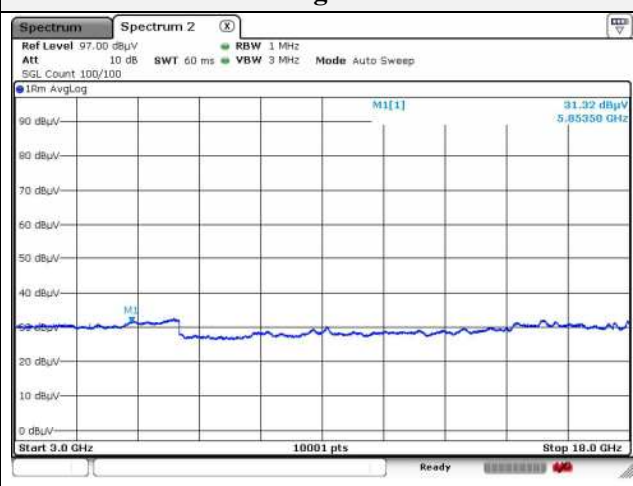



**Test results (18 GHz to 26.5 GHz) – Worst case**

Mode: 802.11b  
Distance of measurement: 3 meter  
Channel: 11 (Worst case)

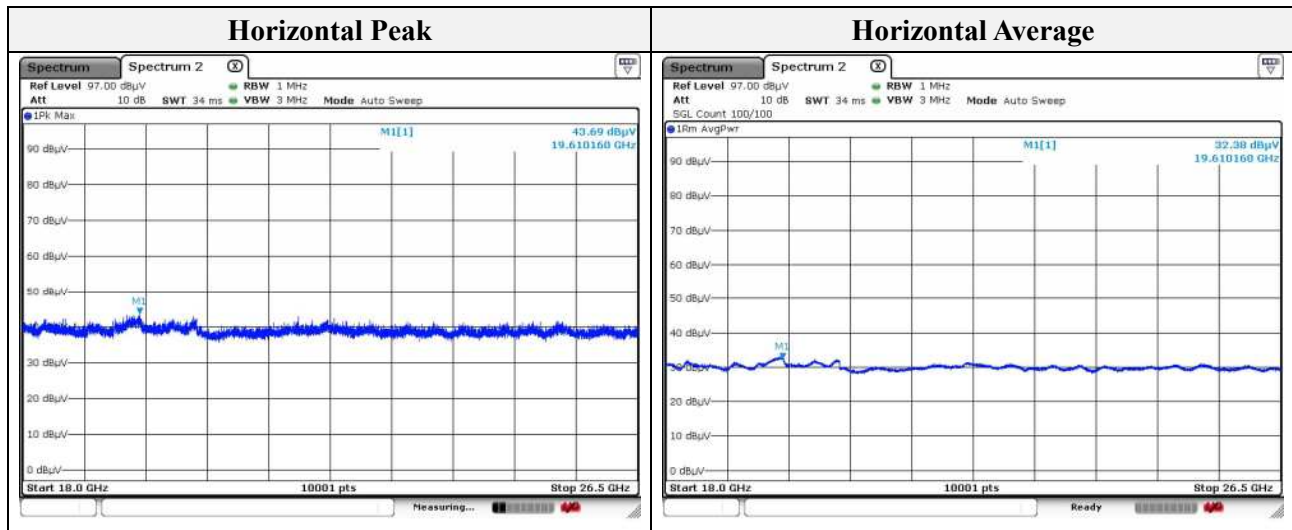

Note.  
No spurious emission were detected above 18 GHz.



## Appendix A. Measurement equipment




Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	101389	1 year	2020.01.09
Spectrum Analyzer	R&S	FSV40	101002	1 year	2019.06.29
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2020.01.15
Power Meter	Anritsu	ML2495A	1438001	1 year	2020.01.15
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2020.01.15
Attenuator	HP	8494B	2630A12857	1 year	2020.01.15
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2021.02.15
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	714	2 years	2020.11.26
Horn Antenna	A.H	SAS-571	414	2 years	2021.02.11
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	2 years	2021.02.19
High Pass Filter	Wainwright Instrument Gmbh	WHJS3000-10TT	1	1 year	2019.06.29
Band Reject Filter	MICRO-TRONICS	BRM50702	G272	1 year	2020.01.16
Low Pass Filter	Wainwright Instrument Gmbh	WLK1.0/18G-10TT	1	1 year	2019.06.29
Broadband Amplifier	Schwarzbeck	BBV9721	PS9721-003	1 year	2020.01.16
Preamplifier	AGILENT	8449B	3008A00538	1 year	2019.06.29
Amplifier	R&S	SCU 01	100603	1 year	2019.11.26
EMI Test Receiver	R&S	ESU26	100551	1 year	2020.04.09
EMI Test Receiver	R&S	ESR3	101781	1 year	2020.04.22
DC Power supply	Agilent	6632B	MY43004090	1 year	2019.06.28

## Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

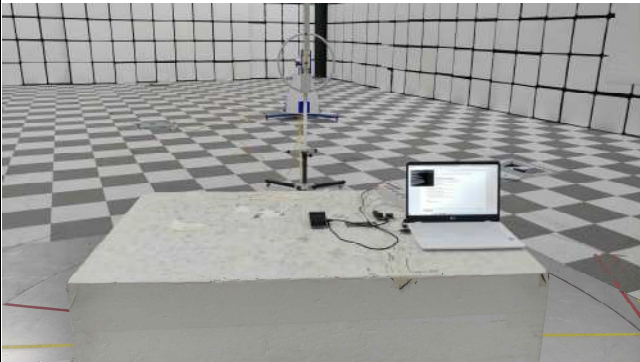

## Appendix B. Test setup photos

Radiated	
	
	Blank

The end of test report.