TEST REPORT

Reference No...... : WTS14S1220831E

FCC ID..... : 2ADTU-ZENELEMENT

Applicant.....: Acegame S.A

Address : Gorriti 4539 - C.A.B.A. - Buenos Aires - Argentina

Manufacturer.....: The same as above

..

Address.....: The same as above

Brand..... X-View

Standards : FCC PART15 SUBPART B: 2014

Date of Receipt sample : Dec. 3, 2014

Date of Test : Dec. 4, 2014 ~ Dec. 12, 2014

Date of Issue..... : Dec. 26, 2014

Test Result..... : Pass *

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,

Guangdong, China Tel:+86-755-83551033 Fax:+86-755-83552400

Page: 1 of 27

Compiled by:

Maikou.zhang / Project Engineer

Maiben zhang

Philo Zhong

Reference No.: WTS14S1220831E Page 2 of 27

1 Test Summary

Test Item	Test Requirement	Class	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass
Radiated Emission 30MHz to 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement N/A Test case does not apply to the test object

2 Contents

			Page
	COVE	R PAGE	1
1	TEST	SUMMARY	2
2	CONT	ENTS	3
3	GENE	RAL INFORMATION	4
	3.1 3.2 3.3 3.4 3.5 3.6	GENERAL DESCRIPTION OF E.U.T. DETAILS OF E.U.T. STANDARDS APPLICABLE FOR TESTING TEST FACILITY. SUBCONTRACTED. ABNORMALITIES FROM STANDARD CONDITIONS.	
4	EQUIF	MENT USED DURING TEST	6
	4.1 4.2 4.3	EQUIPMENT LIST DESCRIPTION OF SUPPORT UNITS MEASUREMENT UNCERTAINTY	7
5	EMISS	SION TEST RESULTS	8
	5.1 5.2 5.3	Power Line Conducted Emission, 150kHz to 30MHzRadiation Emission, 30MHz to 1000MHzRadiation Emission, Above 1000MHz	11
6	PHOT	OGRAPHS – TEST SETUP	17
	6.1 6.2 6.3	PHOTOGRAPH – POWER LINE CONDUCTED EMISSION TEST SETUP AT TEST SITE 2#	17
7	PHOT	OGRAPHS – CONSTRUCTIONAL DETAILS	19
	7.1 7.2	EUT – APPEARANCE VIEW	

Reference No.: WTS14S1220831E Page 4 of 27

3 General Information

3.1 General Description of E.U.T.

Product Name : Mobile Phone Model No. : zen element

Model Description : N/A

GSM Band(s) : GSM 850/900/1800/1900MHz

GPRS Class : 12(Not Support EDGE)

WCDMA Band(s) : FDD Band V

Wi-Fi Specification : 802.11b/g/n HT20/n HT40

Bluetooth Version : Bluetooth v4.0 with BLE

GPS : Support

NFC : N/A

Hardware Version : WF14001

Software Version : C101V82_jbaol_20141106

3.2 Details of E.U.T.

Operation Frequency : GSM 850: 824~849MHz

PCS 1900: 1850~1910MHz

WCDMA Band V: 824~849MHz

WiFi:

802.11b/g/n HT20: 2412-2462MHz 802.11n HT40: 2422-2452MHz

Bluetooth:

2402-2480MHz GPS: 1.57GHz

Max. RF output power : GSM 850: 33.17dBm

PCS1900: 30.39dBm

WCDMA Band V: 22.76dBm

WiFi: 9.40dBm

Bluetooth: 3.68dBm

Type of Modulation : GSM,GPRS: GMSK

WCDMA: QPSK WiFi: CCK, OFDM

Bluetooth: GFSK, Pi/4 DQPSK,8DPSK

Antenna installation : GSM/WCDMA: Wire antenna

WiFi/Bluetooth: Metal Dome

Antenna Gain : GSM 850: -0.5dBi

PCS1900: -0.5dBi

Reference No.: WTS14S1220831E Page 5 of 27

WCDMA Band V: -0.5dBi

WiFi: -0.8dBi

Bluetooth: -0.8dBi

Technical Data Battery DC 3.7V 3200mAh

DC 5.0V, 1A, charging from adapter

(Adapter Input: AC100-240V 50/60Hz, 150mA)

Adapter Manufacturer: Shenzhen JinLiYuan Communication Co.,LTD

Model No.: JLY-5010A

3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC PART 15, SUBPART B: Electronic Code of Federal Regulations- Unintentional Radiators 2014

3.4 Test Facility

The test facility has a test site registered with the following organizations:

• IC - Registration No.: 7760A-1

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, July 12, 2012.

FCC Test Site 1# Registration No.: 880581

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory 'has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

FCC Test Site 2# Registration No.: 328995

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory 'has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☐ No

If Yes, list the related test items and lab information:

Test Lab: N/A
Lab address: N/A

Reference No.: WTS14S1220831E Page 6 of 27

Test items: N/A

3.6 Abnormalities from Standard Conditions

None.

4 Equipment Used during Test

4.1 Equipment List

Condu	cted Emissions Test	Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date		
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015		
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015		
3.	Cable	Тор	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015		
Condu	cted Emissions Test	Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date		
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015		
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015		
3.	Limiter	York	MTS-IMP-136	261115-001- 0024	Sep.15,2014	Sep.14,2015		
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015		
3m Ser	3m Semi-anechoic Chamber for Radiation Emissions Test site 1#							
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date		
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015		
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015		
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015		
4	Coaxial Cable (below 1GHz)	Тор	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015		
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015		
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2014	Apr.18,2015		
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015		
8	Coaxial Cable (above 1GHz)	Тор	1GHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015		
3m Ser	mi-anechoic Chamber	for Radiation Emis	ssions Test site	2#				
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date		
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015		
2	Trilog Broadband	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015		

	Antenna						
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015	
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015	
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date	
RF Co	RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date	
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015	
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015	
	Signal Analyzer						

4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Headphone	Qisheng	S-325	N/A
Notebook	LENOVO	X201i	75Y4408
MacBook Air	APPLE	A1465	C17KTQDNF5N7

4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±3.64dB	(1)
	30MHz~1000MHz	±5.03dB	(1)
Radiation Emission	1GHz~6GHz	±5.47dB	(1)

⁽¹⁾This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Reference No.: WTS14S1220831E Page 8 of 27

5 Emission Test Results

5.1 Power Line Conducted Emission, 150kHz to 30MHz

Test Requirement: FCC PART 15, SUBPART B

Test Method: ANSI C63.4

Test Result.....: Pass

Frequency Range: 150kHz to 30MHz

Class: Class B

Limit: :

Fraguency (MUz)	Limit (dBµV)		
Frequency (MHz)	Quasi-peak	Average	
0.15 to 0.5	66 to 56*	56 to 46*	
0.5 to 5	56	46	
5 to 30	60	50	

5.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23°C

Humidity : 53.6%RH

Atmospheric Pressure.....: 101kPa

EUT Operation:

Input Voltage: (1)DC 5V by adapter input AC120V/60Hz

(2)DC 5V by PC

Operating Mode: GPS receiving mode, Charging mode, Data transmission mode


with PC.

Remark: The worse case is under the condition of AC 120V/60Hz adapter

input and the data is shown as follow.

5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the ANSI C63.4.

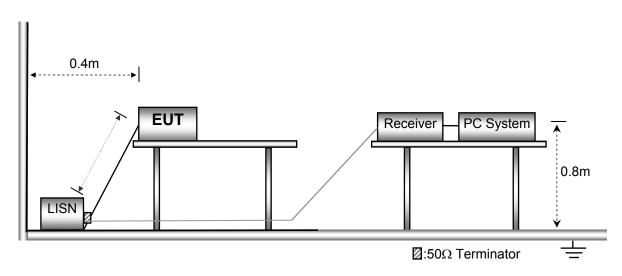


5.1.3 Measurement Data


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line. According to the data in section 5.1.4, the EUT complied with the FCC PART 15, SUBPART B standards.

5.1.4 Power Line Conducted Emission Test Data

Live Line:

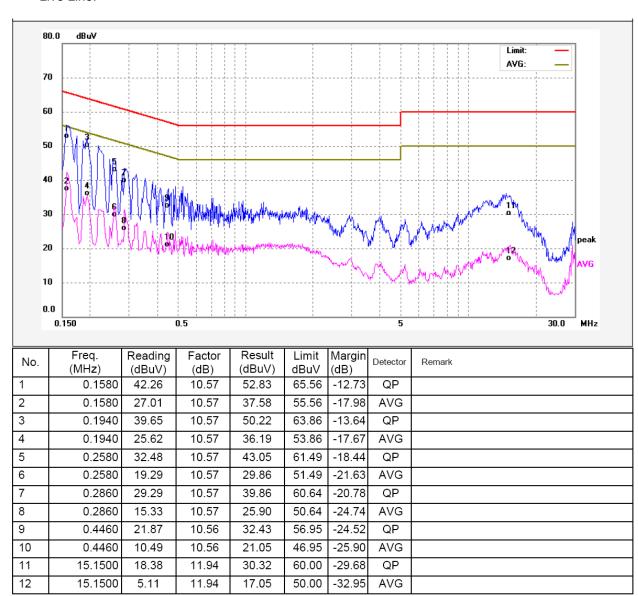

Neutral Line:

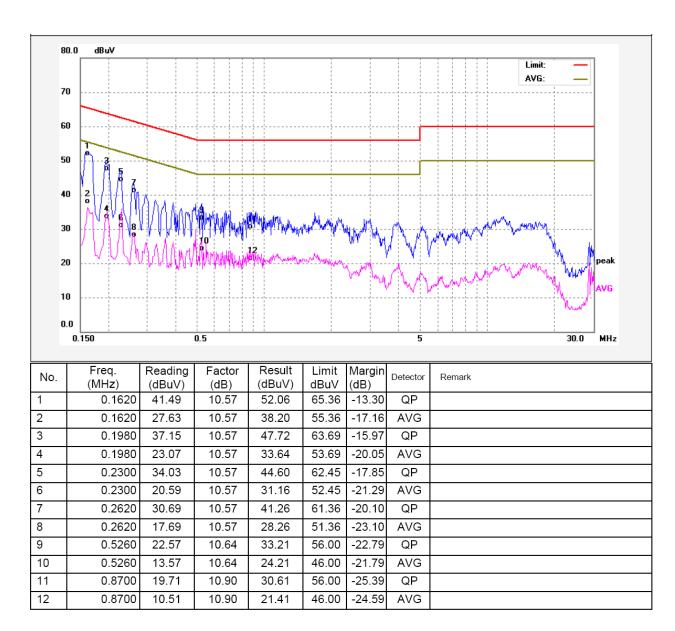

Reference No.: WTS14S1220831E Page 11 of 27

5.2 Radiation Emission, 30MHz to 1000MHz

Test Requirement : FCC PART 15, SUBPART B

Test Method: ANSI C63.4

Test Result: Pass

Frequency Range: 30MHz to 1000MHz

Class. : Class B

Limit.....: :

Fraguency (MHz)	Distance	Limit (dBµV/m
Frequency (MHz)	(Meter)	Quasi-peak
30 to 88	3	40
88 to 216	3	43.5
216 to 960	3	46
960 to 1000	3	54

5.2.1 E.U.T. Operation

Operating Environment:

 Temperature
 22.5°C

 Humidity
 52.6%RH

 Atmospheric Pressure
 101.2kPa

EUT Operation:

Input Voltage.....: (1)DC 5V by Adapter Input AC 120V/60Hz

(2)DC 5V by PC (3)DC 3.7V by Battery

Operating Mode: GPS receiving mode, Charging mode, Data transmission mode


with PC.

Remark: The worse case is under the condition of AC 120V/60Hz adapter

input and the data is shown as follow.

5.2.2 Block Diagram of Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

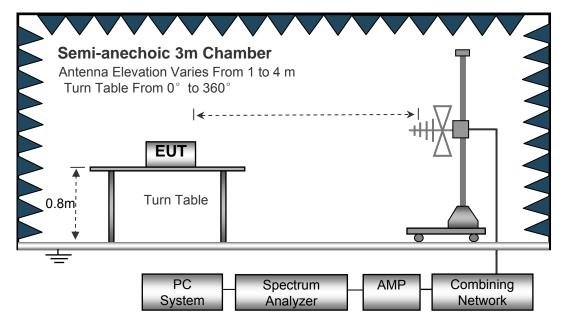

5.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Quasi-peak measurements were performed if peak emissions were within 6dB of the Quasi-peak limit line.

5.2.4 Radiated Emission Test Data, 30MHz to 1000MHz

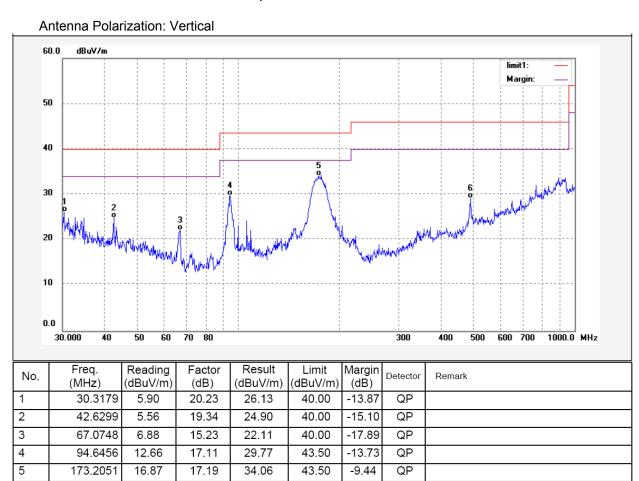

46.00

QP

-16.87

6

490.0451

3.77

25.36

29.13

Antenna Polarization: Horizontal

4

5

в

171.3890

359.7114

490.0451

19.44

3.44

1.27

14.10


22.17

26.96

33.54

25.61

28.23

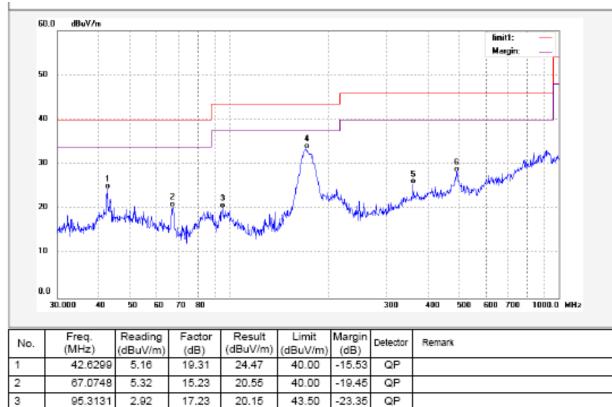

43.50

46.00

46.00

-9.96

-20.39

-17.77

QΡ

QΡ

QP

Reference No.: WTS14S1220831E Page 14 of 27

5.3 Radiation Emission, Above 1000MHz

Test Requirement: FCC PART 15, SUBPART B

Test Method: ANSI C63.4

Test Result.....: Pass

Frequency Range: 1GHz~6GHz

Class B : Class B

Limit.

Frequency Range (MHz)	Distance (Meter)	Average Limit dB(uV/m)	Peak Limit (dBuV/m)
Above 1GHz	3	54	74

5.3.1 E.U.T. Operation

Operating Environment:

Temperature : 22.4°C
Humidity : 52.3%RH
Atmospheric Pressure : 101.3kPa

EUT Operation:

Input Voltage: (1)DC 5V by Adapter Input AC 120V/60Hz

(2)DC 5V by PC (3)DC 3.7V by Battery

Operating Mode : GPS receiving mode, Charging mode, Data transmission mode


with PC.

Remark..... : The worse case is under the condition of AC 120V/60Hz adapter

input and the data is shown as follow.

5.3.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

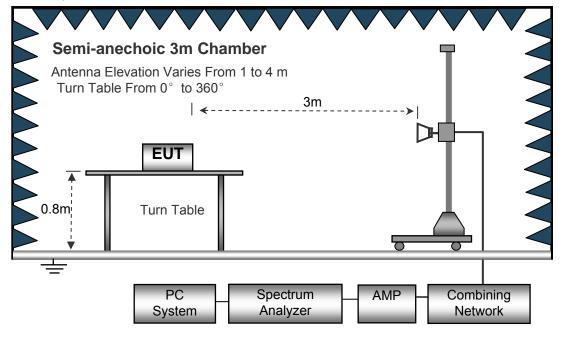


5.3.3 Measurement Data


The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Average measurements were performed if peak emissions were within 6dB of the average limit line

5.3.4 Radiated Emission Test Data, Above 1000MHz

Antenna Polarization: Vertical

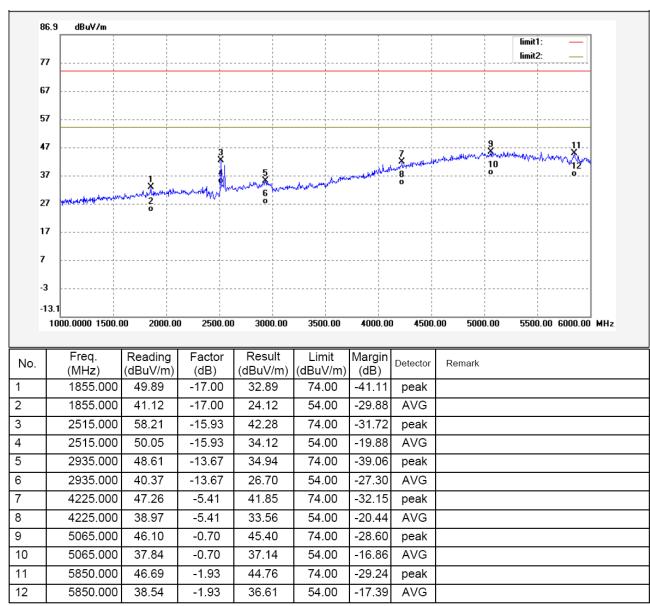

Antenna Polarization: Horizontal

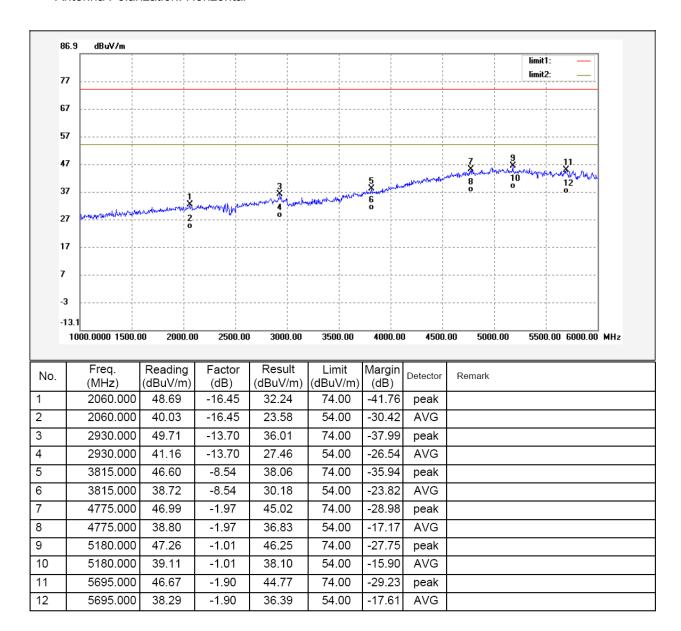


Reference No.: WTS14S1220831E Page 17 of 27

6 Photographs – Test Setup


6.1 Photograph -Power Line Conducted Emission Test Setup at Test Site 2#



6.2 Photograph – Radiated Emission Test Setup for 30~1000MHz at Test Site 2#

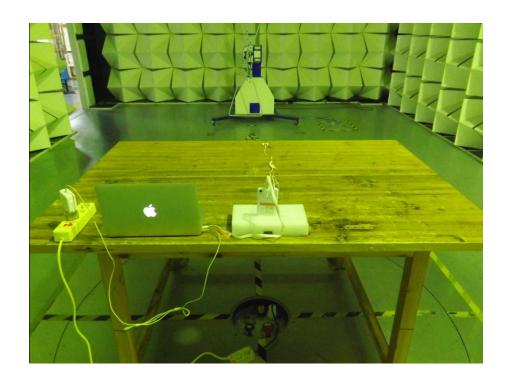

6.3 Photograph - Radiated Emission Test Setup for Above 1GHz at Test Site 1#

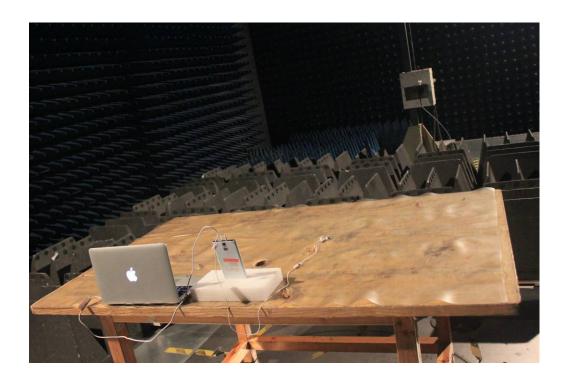

7 Photographs – Constructional Details

7.1 EUT – Appearance View





Reference No.: WTS14S1220831E Page 20 of 27





Reference No.: WTS14S1220831E Page 21 of 27





Reference No.: WTS14S1220831E Page 22 of 27







7.2 EUT – Open View








Reference No.: WTS14S1220831E Page 24 of 27

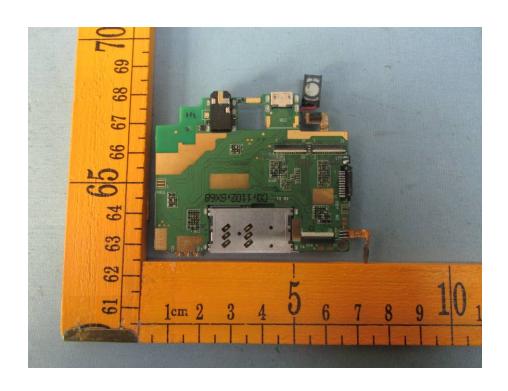


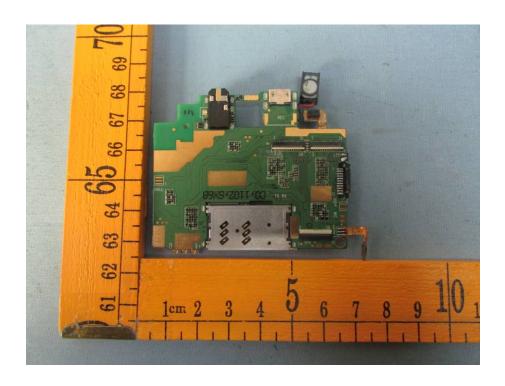

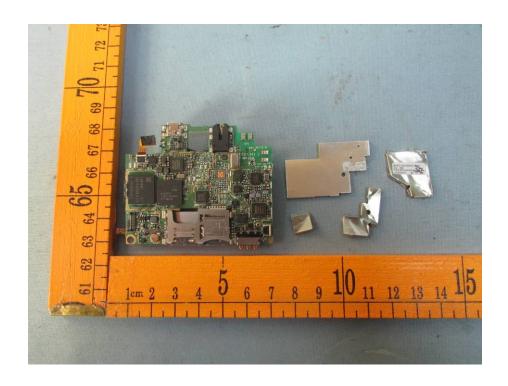


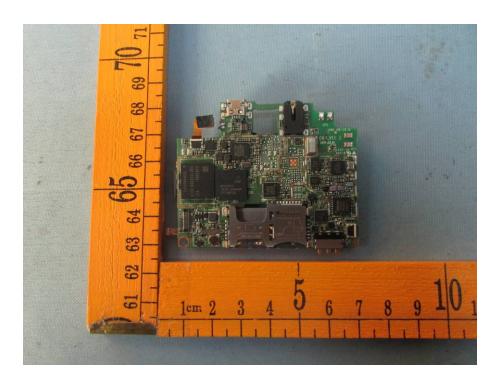

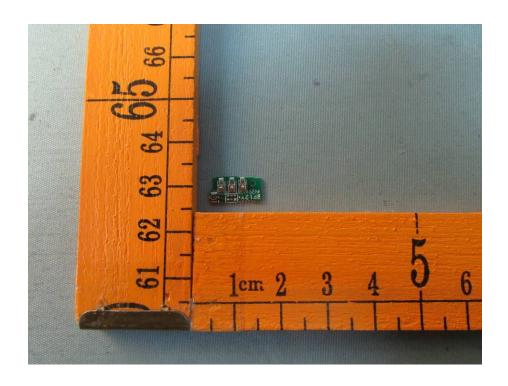

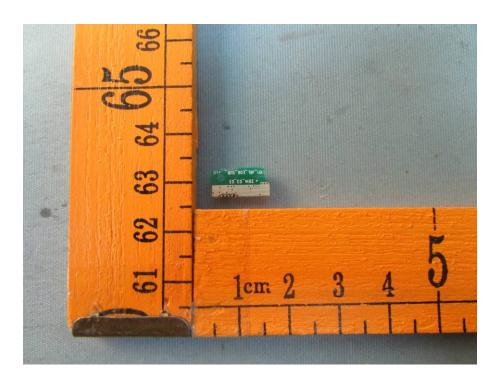



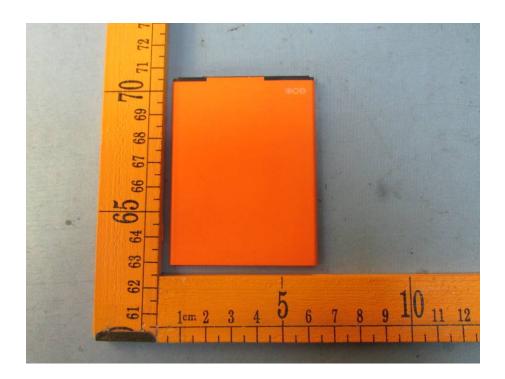

=====End of Report=====