





FCC Test Report

FCC ID : 2ADVHWF20A

Equipment **Dino-Lite CONNECT**

Brand Name : AnMo, Dino-Lite

Model Name : WF-20

Applicant : AnMo Electronics Corporation

5F-1, No.76, Sec.2, Tung-Da Road, Hsinchu 300, Taiwan

Manufacturer : AnMo Electronics Corporation

17F, No.97, Sec.4, ChongHsin Rd., Sanchong Dist., New

Taipei City 24161, Taiwan

Standard : 47 CFR FCC Part 15.247

The product was received on Jul. 18, 2018, and testing was started from Jul. 27, 2018 and completed on Jul. 31, 2018. . We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-3273456 FAX: 886-3-3270973

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Page Number

: 1 of 22

Issued Date

: Oct. 02, 2018

Report Version

: 01



FCC Test Report

Table of Contents

HIST	ORY OF THIS TEST REPORT	3
SUM	MARY OF TEST RESULT	4
1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Testing Applied Standards	6
1.3	Testing Location Information	6
1.4	Measurement Uncertainty	6
2	TEST CONFIGURATION OF EUT	7
2.1	Test Condition	7
2.2	Test Channel Mode	7
2.3	The Worst Case Measurement Configuration	8
2.4	Accessories	9
2.5	Support Equipment	9
2.6	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	DTS Bandwidth	13
3.3	Maximum Conducted Output Power	
3.4	Power Spectral Density	
3.5	Emissions in Non-restricted Frequency Bands	
3.6	Emissions in Restricted Frequency Bands	18
4	TEST EQUIPMENT AND CALIBRATION DATA	21
APPI	ENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPI	ENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPI	ENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPI	ENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPI	ENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPI	ENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPI	ENDIX G. TEST PHOTOS	
DHU.	TOGRAPHS OF FUT V01	

TEL: 886-3-3273456 FAX: 886-3-3270973

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

: 2 of 22 Page Number : Oct. 02, 2018 Issued Date

Report No.: FR860505AC

Report Version

: 01

History of this test report

01	Initial issue of report	Oct. 02, 2018

TEL: 886-3-3273456 Page Number : 3 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]: 30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]: 8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: > 30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Reviewed by: Jackson Tsai

Report Producer: Jenny Yang

TEL: 886-3-3273456 Page Number : 4 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02,

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Issued Date : Oct. 02, 2018 Report Version : 01

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX
2.4-2.4835GHz	802.11g	20	1TX
2.4-2.4835GHz	802.11n HT20	20	1TX
2.4-2.4835GHz	802.11n HT40	40	1TX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	Wieson	GY196HT701-001	PIFA antenna	i-Pex	-0.34

For 2.4GHz function:

For IEEE 802.11 b/g/n mode (1TX/1RX)

Only Ant.1 (port 1) can be used as transmitting/receiving antenna.

1.1.3 EUT Information

	Operational Condition						
EUT Power Type From host system							
EU	Γ Function	1	\boxtimes	Point-to-multipoi	nt		Point-to-point
Bea	ımforminç	Function		With beamforming	ng	X	Without beamforming
				Т	ype o	f EU	т
\boxtimes	Stand-alo	ne					
	Combine	d (EUT where	e the	radio part is fully	integra	atec	d within another device)
	Combined Equipment - Brand Name / Model No.:						
	Plug-in radio (EUT intended for a variety of host systems)						
	Host System - Brand Name / Model No.:						
	Other:						

TEL: 886-3-3273456 Page Number : 5 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

FCC Test Report

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.976	0.106	8.419m	300
802.11g	0.866	0.625	1.398m	1k
802.11n HT20	0.86	0.655	1.311m	1k
802.11n HT40	0.727	1.385	650u	3k

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- KDB 558074 D01 v05

1.3 Testing Location Information

	Testing Location							
\boxtimes	HWA YA	ADD	:	No. 52, Huaya 1st Rd.,	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456 FAX: 886-3-327-0973							
	Test site Designation No. TW1190 with FCC.							
	JHUBEI	ADD	:	No.8, Ln. 724, Bo'ai St	., Zhubei City, Hsinchu County, Taiwan (R.O.C.)			
	TEL: 886-3-656-9065 FAX: 886-3-656-9085							
	Test site Designation No. TW0006 with FCC.							

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Andy	24.5°C / 65%	27/Jul/2018
Radiated	03CH03-HY	Kevin	23.7°C / 53.6%	27/Jul/2018
AC Conduction	CO04-HY	Jeff	22.2°C / 51.8%	31/Jul/2018

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

TEL: 886-3-3273456 Page Number FAX: 886-3-3270973 Issued Date

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Issued Date : Oct. 02, 2018

: 6 of 22

Report No.: FR860505AC

Report Version : 01



Test Configuration of EUT 2

2.1 **Test Condition**

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	3.7V

2.2 **Test Channel Mode**

Test Software Version	MT7603 QA V0.0.0.71
------------------------------	---------------------

Mode	Power Setting
802.11b_Nss1,(1Mbps)_1TX	-
2412MHz	22
2437MHz	16
2462MHz	16
802.11g_Nss1,(6Mbps)_1TX	-
2412MHz	1C
2437MHz	1C
2462MHz	1D
802.11n HT20_Nss1,(MCS0)_1TX	-
2412MHz	1A
2417MHz	1E
2437MHz	1E
2457MHz	1E
2462MHz	1A
802.11n HT40_Nss1,(MCS0)_1TX	-
2422MHz	15
2427MHz	17
2432MHz	1B
2437MHz	1F
2442MHz	1D
2447MHz	19
2452MHz	18

TEL: 886-3-3273456 : 7 of 22 Page Number FAX: 886-3-3270973

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

Report No.: FR860505AC

: Oct. 02, 2018 Issued Date

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests		
Tests Item	Tests Item AC power-line conducted emissions	
Condition	AC power-line conducted measurement for line and neutral	
Operating Mode	CTX	
1	USB Mode	

	The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands	
Test Condition	Conducted measurement at transmit chains	

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Fr	equency Bands	
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	СТХ		
1	USB Mode		
Operating Mode > 1GHz	CTX		
	X Plane	Y Plane	Z Plane
Orthogonal Planes of EUT			
Worst Planes of EUT			V

TEL: 886-3-3273456 Page Number : 8 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

FCC Test Report

2.4 Accessories

Accessories				
	Brand Name	AnMo	Model Name	IP652540-2P
Battery	Manufacturer	RPC		
	Power Rating	3.7Vdc, 1600mAh	Туре	Li-ion, Y
USB Cable	Brand Name	AnMo	In/Out door	In door
USB Cable	Cable 0.94meter, Shielded cable, w/o ferrite core		core	

Report No.: FR860505AC

Reminder: Regarding to more detail and other information, please refer to user manual.

2.5 Support Equipment

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	DC Power Supply	GW	GPS-3030DD	-

	Support Equipment – Radiated Emission			
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	HP	ProBook5220m	-
2	Adapter for NB	HP	PPP012H-S	-


	Support Equipment – AC Conduction			
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	HP	ProBook5220m	-
2	Adapter for NB	HP	PPP012H-S	-

TEL: 886-3-3273456 Page Number : 9 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01



2.6 Test Setup Diagram

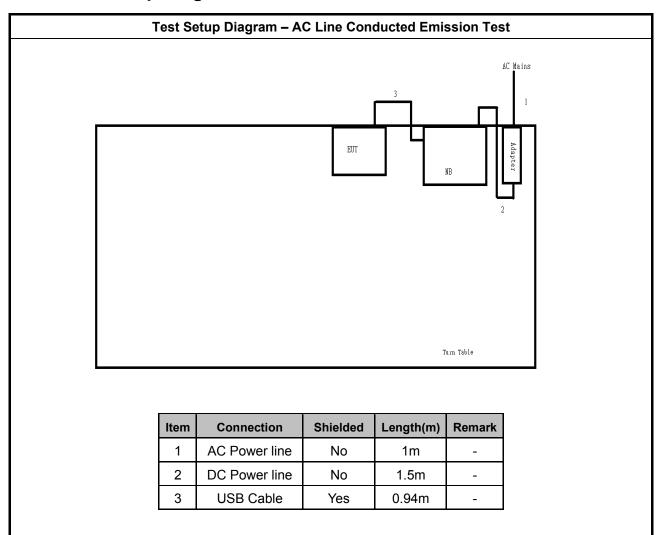


TEL: 886-3-3273456 Page Number : 10 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

FCC Test Report

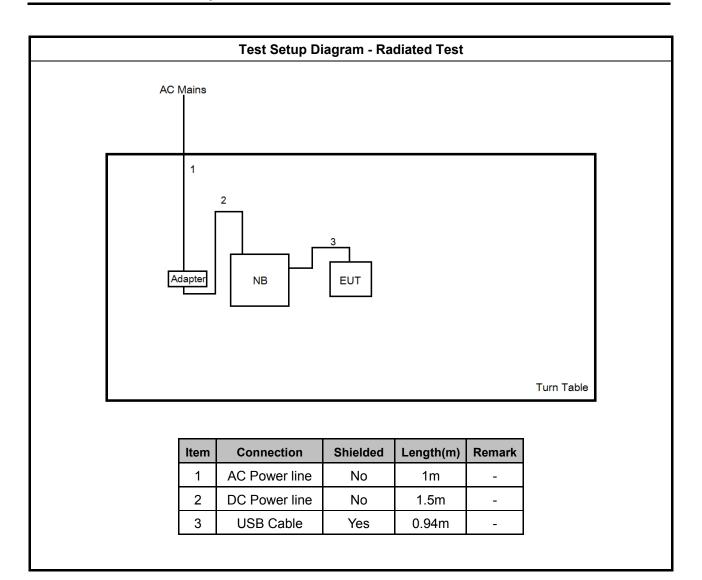

TEL: 886-3-3273456 Page Number : 11 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Issued Date : Oct Report Version : 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

Quasi-Peak	Average
66 - 56 *	56 - 46 *
56	46
60	50
	66 - 56 * 56

Report No.: FR860505AC


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
ı	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

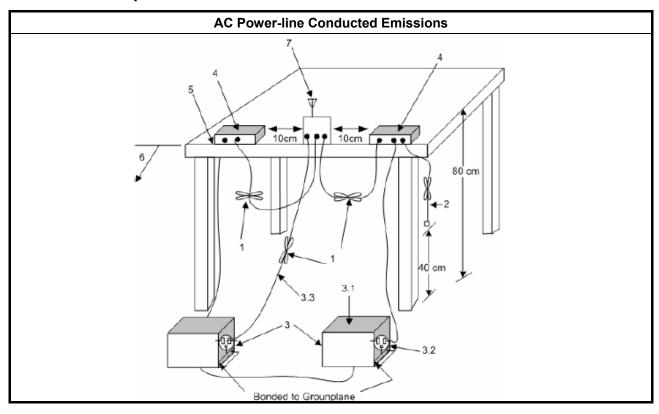

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

TEL: 886-3-3273456 Page Number : 12 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

FCC Test Report

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
■ 6 dB bandwidth ≥ 500 kHz.

Report No.: FR860505AC

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

	Test Method					
•	For the emission bandwidth shall be measured using one of the options below:					
	Refer as KDB 558074. clause 8.2 (11.9.2.2 of ANSI C63.10) DTS band	dwidth measurement.				
	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.					
	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.					

3.2.4 Test Setup

Emission Bandwidth				
Spectrum Analyzer				

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

TEL: 886-3-3273456 Page Number : 13 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Мах	imur	m Conducted Output Power Limit					
	•	If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W)					
	■ Point-to-multipoint systems (P2M): If G _{TX} > 6 dBi, then P _{Out} = 30 – (G _{TX} – 6) dBm						
	•	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
	•	Smart antenna system (SAS):					
		- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
		- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
		- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm					
e.i.r	.p. P	ower Limit:					
•	240	0-2483.5 MHz Band					
	•	Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W)					
	•	Point-to-point systems (P2P): $P_{eirp} \le MAX(36, [P_{Out} + G_{TX}]) dBm$					
	•	Smart antenna system (SAS)					
		- Single beam: P _{eirp} ≤ MAX(36, P _{Out} + G _{TX}) dBm					
		- Overlap beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$					
		- Aggregate power on all beams: $P_{eirp} \le MAX(36, [P_{Out} + G_{TX} + 8]) dBm$					
		aximum peak conducted output power or maximum conducted output power in dBm, e maximum transmitting antenna directional gain in dBi.					

Report No.: FR860505AC

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

TEL: 886-3-3273456 Page Number : 14 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018


Report Template No.: HE1-C8 Ver3.1 Report Version : 01

3.3.3 Test Procedures

	Test Method
•	Maximum Peak Conducted Output Power
	☐ Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
•	Maximum Average Conducted Output Power
	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
•	For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	■ If multiple transmit chains, EIRP calculation could be following as methods: P _{total} = P ₁ + P ₂ + + P _n (calculated in linear unit [mW] and transfer to log unit [dBm]) EIRP _{total} = P _{total} + DG

Report No.: FR860505AC

3.3.4 Test Setup

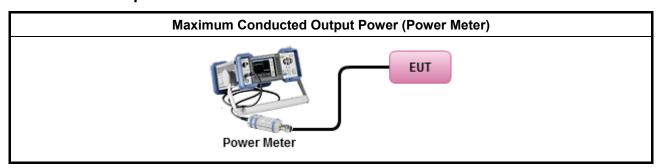

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

TEL: 886-3-3273456 Page Number : 15 of 22
FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit

Report No.: FR860505AC

Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method

- Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
 - Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
- For conducted measurement.
 - If The EUT supports multiple transmit chains using options given below:
 - Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

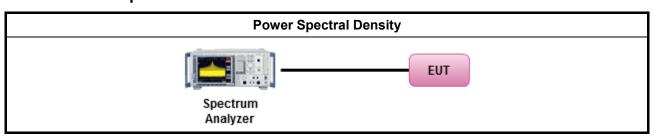

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

TEL: 886-3-3273456 Page Number : 16 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit				
RF output power procedure	Limit (dB)			
Peak output power procedure	20			
Average output power procedure	30			

Report No.: FR860505AC

- Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
- Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method ■ Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

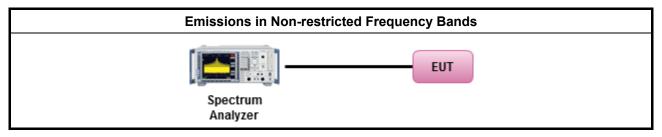

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

TEL: 886-3-3273456 Page Number : 17 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit								
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)					
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300					
0.490~1.705	24000/F(kHz)	33.8 - 23	30					
1.705~30.0	30	29	30					
30~88	100	40	3					
88~216	150	43.5	3					
216~960	200	46	3					
Above 960	500	54	3					

Report No.: FR860505AC

- Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
- Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.
- Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

TEL: 886-3-3273456 Page Number : 18 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01


3.6.3 Test Procedures

Test Method

Report No.: FR860505AC

- The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
- Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
- For the transmitter unwanted emissions shall be measured using following options below:
 - Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
- For the transmitter band-edge emissions shall be measured using following options below:
 - Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
 - Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
 - Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).

3.6.4 Test Setup

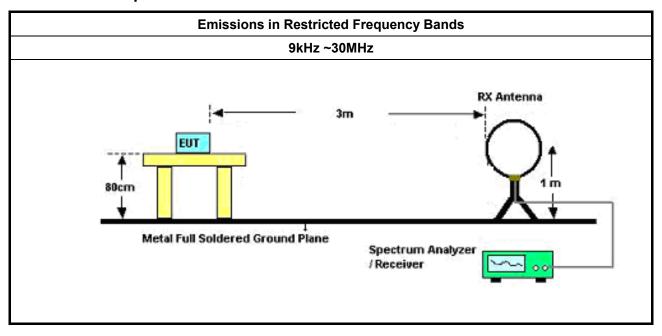

TEL: 886-3-3273456 Page Number : 19 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1 Report Version : 01

30MHz~1GHz **RX Antenna** Ant. feed EUT point 80cm Metal Full Soldered Ground Plane Spectrum Analyzer /Receiver **Above 1GHz** 4M 3M & 1M 1.5M Spectrum Analyzer

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

TEL: 886-3-3273456 Page Number FAX: 886-3-3270973 Issued Date

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Page Number : 20 of 22

Issued Date : Oct. 02, 2018

Report No.: FR860505AC

Report Version : 01



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	31/Oct/2017	30/Oct/2018
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	01/Nov/2017	31/Oct/2018
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	23/Apr/2018	19/Apr/2019
Microwave System Preamplifier	KEYSIGHT	83017A	MY53270196	1GHz ~ 26.5GHz	03/Jul/2018	02/Jul/2019
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	29/Jan/2018	28/Jan/2019
RF Cable-high	SUHNER	SUCOFLEX 106	CB222	1GHz ~ 40GHz	29/Jan/2018	28/Jan/2019
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMCI	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	06/Feb/ 2018	05/Feb/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1531	1GHz ~ 18GHz	18/Apr/ 2018	17/Apr/2019
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	31/Aug/2017	30/Aug/2018
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	28/Mar/2018	27/Mar/2019
RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY2579/2	100 kHz~40 GHz	13/Jun/2018	12/Jun/2019
RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY2580/2	100 kHz~40 GHz	10/May/2018	09/May/2019

TEL: 886-3-3273456 Page Number FAX: 886-3-3270973 Issued Date

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Issued Date : Oct. 02, 2018 Report Version : 01

: 21 of 22



FCC Test Report

Instrument for Conducted Test


Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
Power Sensor	Anritsu	MA2411B	1339407	300MHz ~ 40GHz	06/Nov/2017	05/Nov/2018
Power Meter	Anritsu	ML2495A	1517010	300MHz ~ 40GHz	06/Nov/2017	05/Nov/2018
RF Cable-1.5m	HUBER+SUHNER	SUCOFLEX_104	MY12582/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10710/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10709/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	26/Jul/2018	25/Jul/2019


TEL: 886-3-3273456 Page Number : 22 of 22 FAX: 886-3-3270973 Issued Date : Oct. 02, 2018

Report Template No.: HE1-C8 Ver3.1

FCC ID: 2ADVHWF20A

Report Version : 01

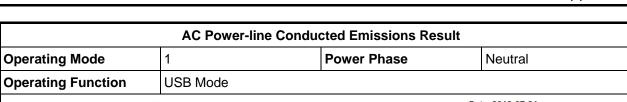

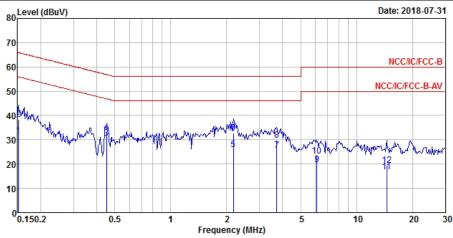


			0ver	Limit	Read	LISN	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	31.72	-24.19	55.91	22.05	9.63	0.04	Average
2	0.15	38.51	-27.40	65.91	28.84	9.63	0.04	QP
3 MAX	0.45	30.65	-16.20	46.85	20.95	9.61	0.09	Average
4	0.45	32.94	-23.91	56.85	23.24	9.61	0.09	QP
5	2.18	25.98	-20.02	46.00	16.34	9.63	0.01	Average
6	2.18	32.73	-23.27	56.00	23.09	9.63	0.01	QP
7	3.72	25.59	-20.41	46.00	15.87	9.64	0.08	Average
8	3.72	29.91	-26.09	56.00	20.19	9.64	0.08	QP
9	6.12	19.69	-30.31	50.00	9.89	9.66	0.14	Average
10	6.12	23.40	-36.60	60.00	13.60	9.66	0.14	QP
11	14.52	16.90	-33.10	50.00	7.19	9.70	0.01	Average
12	14.52	19.56	-40.44	60.00	9.85	9.70	0.01	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

TEL: 886-3-327-3456 Page Number : A1 of A2

FAX: 886-3-327-0973



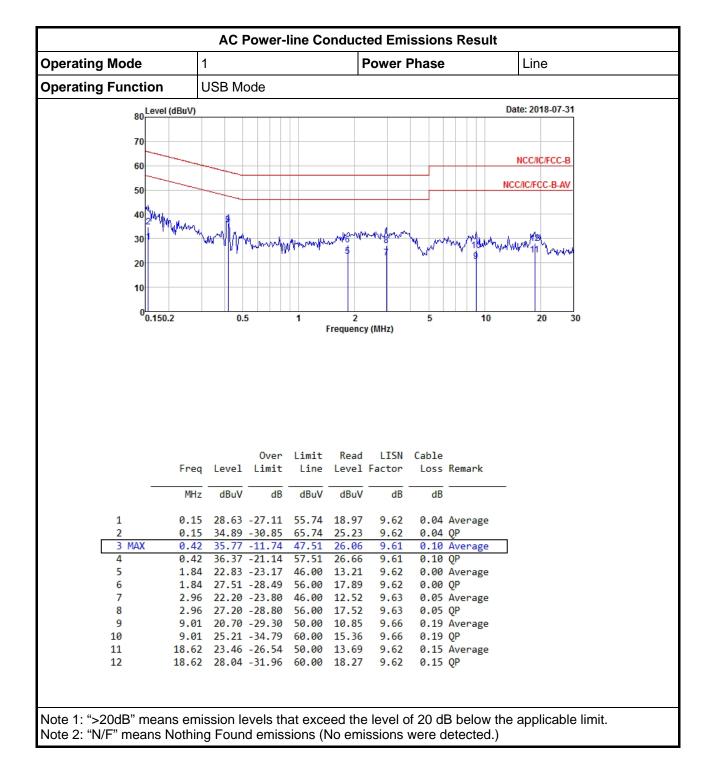

TEL: 886-3-327-3456 Page Number : A2 of A2

FAX: 886-3-327-0973



EBW Result Appendix B

Summary

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	10.05M	14.943M	14M9G1D	9.55M	14.143M
802.11g_Nss1,(6Mbps)_1TX	15.275M	16.392M	16M4D1D	14.975M	16.367M
802.11n HT20_Nss1,(MCS0)_1TX	15.025M	17.566M	17M6D1D	14.975M	17.516M
802.11n HT40_Nss1,(MCS0)_1TX	35M	35.982M	36M0D1D	30M	35.882M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth; **Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	10.05M	14.943M
2437MHz_TnomVnom	Pass	500k	10M	14.143M
2462MHz_TnomVnom	Pass	500k	9.55M	14.243M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	14.975M	16.367M
2437MHz_TnomVnom	Pass	500k	15.275M	16.392M
2462MHz_TnomVnom	Pass	500k	14.975M	16.367M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	14.975M	17.541M
2437MHz_TnomVnom	Pass	500k	15.025M	17.566M
2462MHz_TnomVnom	Pass	500k	15.025M	17.516M
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz_TnomVnom	Pass	500k	30M	35.882M
2437MHz_TnomVnom	Pass	500k	35M	35.982M
2452MHz_TnomVnom	Pass	500k	31.35M	35.882M


Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

SPORTON INTERNATIONAL INC. Page No. : B1 of B5


860505

TEL: 886-3-327-3456 FAX: 886-3-327-0973




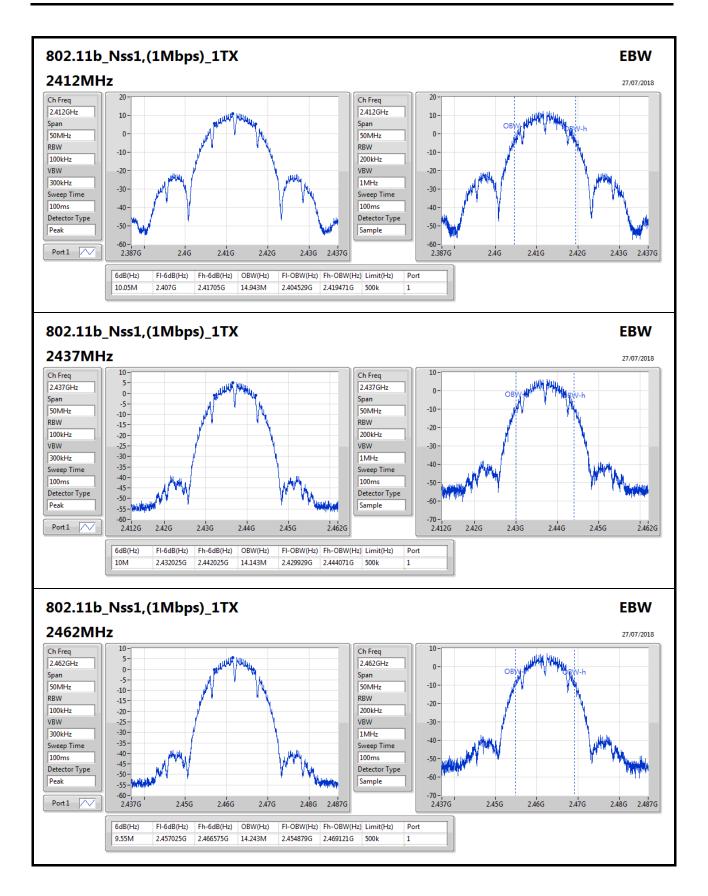

TEL: 886-3-327-3456 FAX: 886-3-327-0973

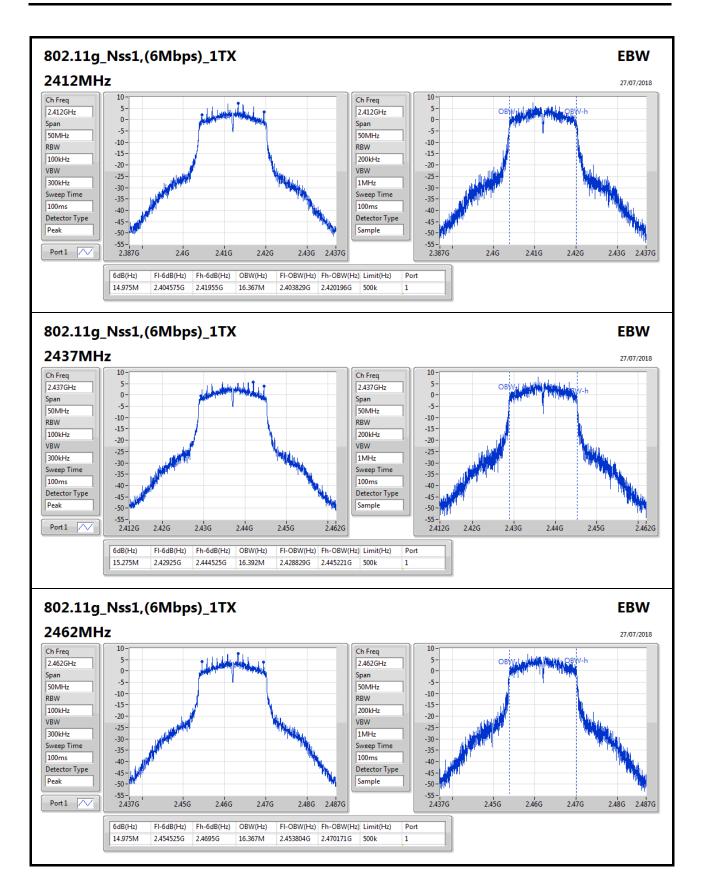


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : B3 of B5

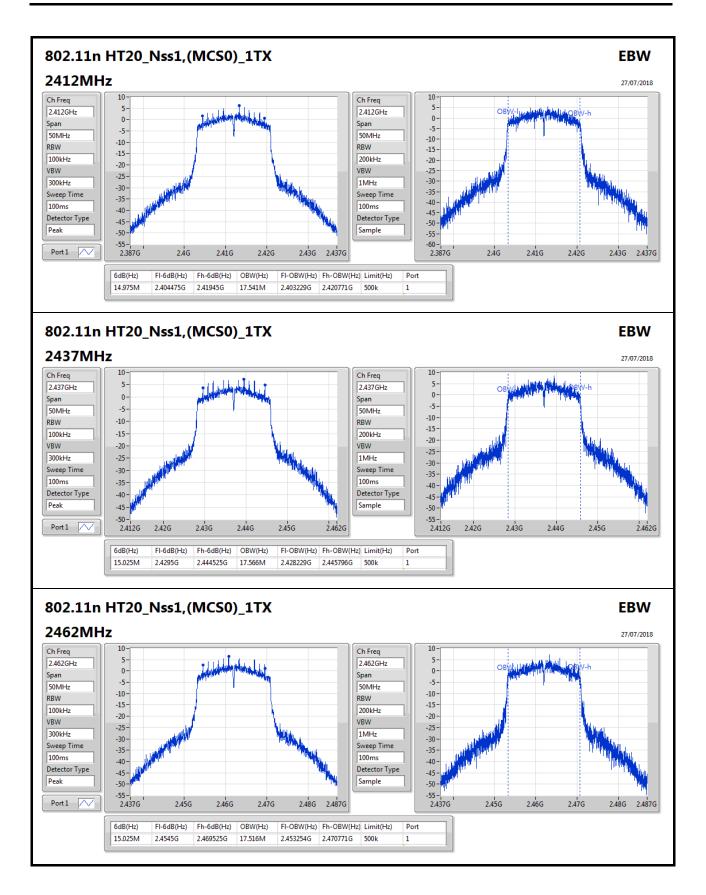

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : B4 of B5



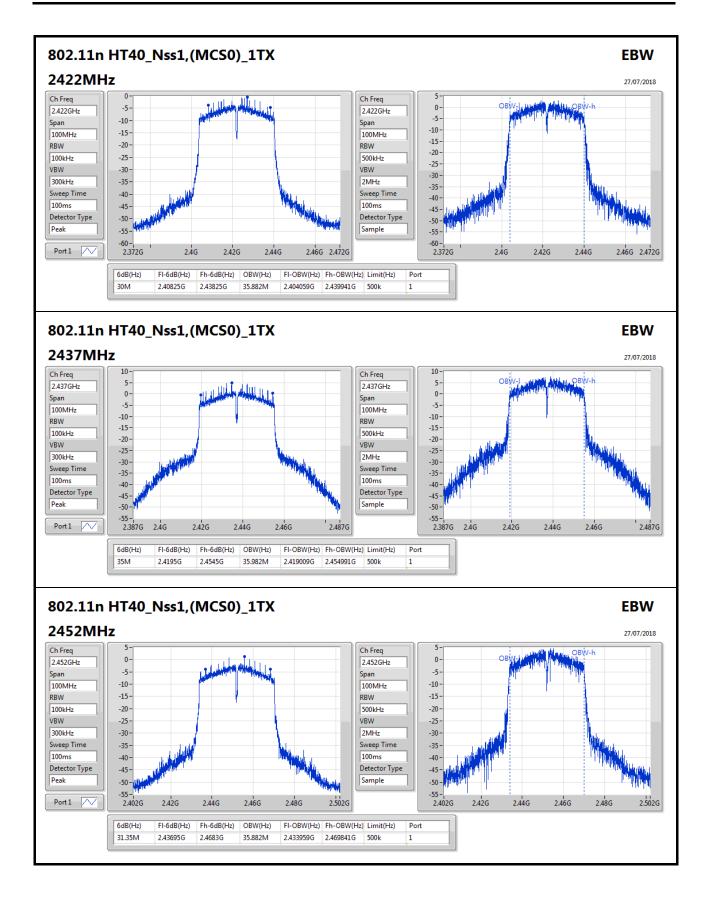

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : B5 of B5



Appendix C **AV Power Result**

Summary

Mode	Total Power	Total Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	20.67	0.11668
802.11g_Nss1,(6Mbps)_1TX	17.55	0.05689
802.11n HT20_Nss1,(MCS0)_1TX	17.66	0.05834
802.11n HT40_Nss1,(MCS0)_1TX	17.16	0.05200

Result

Mode	Result	DG	Port 1	Total Power	Power Limit
		(dBi)	(dBm)	(dBm)	(dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	20.67	20.67	30.00
2437MHz_TnomVnom	Pass	-0.34	14.73	14.73	30.00
2462MHz_TnomVnom	Pass	-0.34	15.36	15.36	30.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	16.92	16.92	30.00
2437MHz_TnomVnom	Pass	-0.34	16.87	16.87	30.00
2462MHz_TnomVnom	Pass	-0.34	17.55	17.55	30.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	15.85	15.85	30.00
2417MHz_TnomVnom	Pass	-0.34	17.66	17.66	30.00
2437MHz_TnomVnom	Pass	-0.34	17.61	17.61	30.00
2457MHz_TnomVnom	Pass	-0.34	17.53	17.53	30.00
2462MHz_TnomVnom	Pass	-0.34	16.11	16.11	30.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz_TnomVnom	Pass	-0.34	12.45	12.45	30.00
2427MHz_TnomVnom	Pass	-0.34	13.49	13.49	30.00
2432MHz_TnomVnom	Pass	-0.34	15.30	15.30	30.00
2437MHz_TnomVnom	Pass	-0.34	17.16	17.16	30.00
2442MHz_TnomVnom	Pass	-0.34	16.22	16.22	30.00
2447MHz_TnomVnom	Pass	-0.34	14.38	14.38	30.00
2452MHz_TnomVnom	Pass	-0.34	13.92	13.92	30.00

DG = Directional Gain; Port X = Port X output power
Note : Conducted average output power is for reference only

SPORTON INTERNATIONAL INC. Page No. : C1 of C1

860505

TEL: 886-3-327-3456 FAX: 886-3-327-0973



PSD Result Appendix D

Summary

Mode	PD
	(dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-5.46
802.11g_Nss1,(6Mbps)_1TX	-9.35
802.11n HT20_Nss1,(MCS0)_1TX	-9.04
802.11n HT40_Nss1,(MCS0)_1TX	-11.97

RBW=3kHz.

Result


Mode	Result	DG	Port 1	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	-5.46	-5.46	8.00
2437MHz_TnomVnom	Pass	-0.34	-10.16	-10.16	8.00
2462MHz_TnomVnom	Pass	-0.34	-10.33	-10.33	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	-10.24	-10.24	8.00
2437MHz_TnomVnom	Pass	-0.34	-10.51	-10.51	8.00
2462MHz_TnomVnom	Pass	-0.34	-9.35	-9.35	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	-0.34	-11.10	-11.10	8.00
2437MHz_TnomVnom	Pass	-0.34	-9.04	-9.04	8.00
2462MHz_TnomVnom	Pass	-0.34	-10.52	-10.52	8.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz_TnomVnom	Pass	-0.34	-17.02	-17.02	8.00
2437MHz_TnomVnom	Pass	-0.34	-11.97	-11.97	8.00
2452MHz_TnomVnom	Pass	-0.34	-14.95	-14.95	8.00

DG = Directional Gain; RBW=3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port Xpower density;

SPORTON INTERNATIONAL INC. Page No. : D1 of D5


TEL: 886-3-327-3456 FAX: 886-3-327-0973



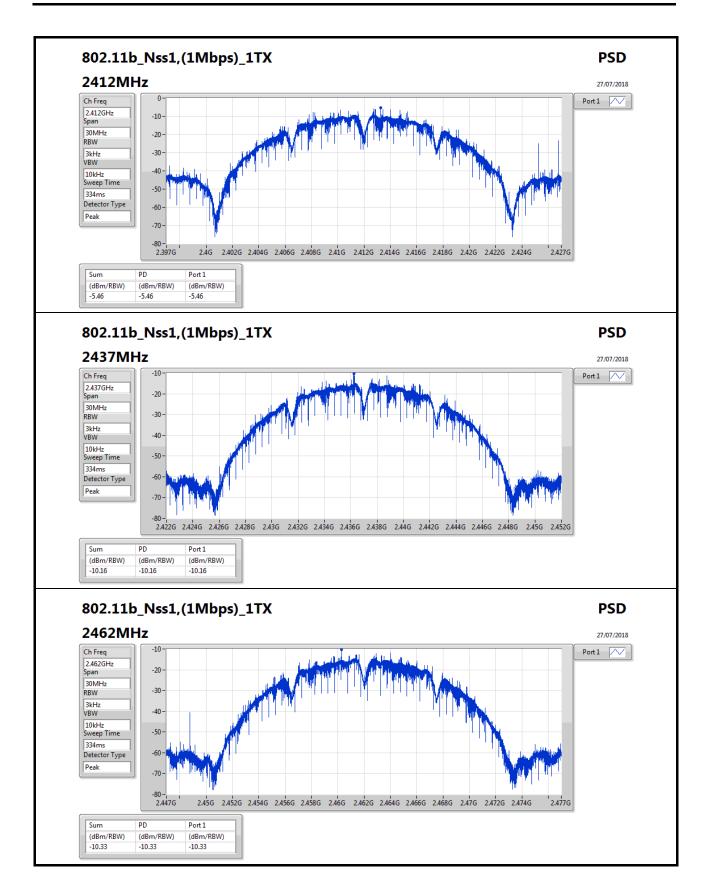


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : D2 of D5



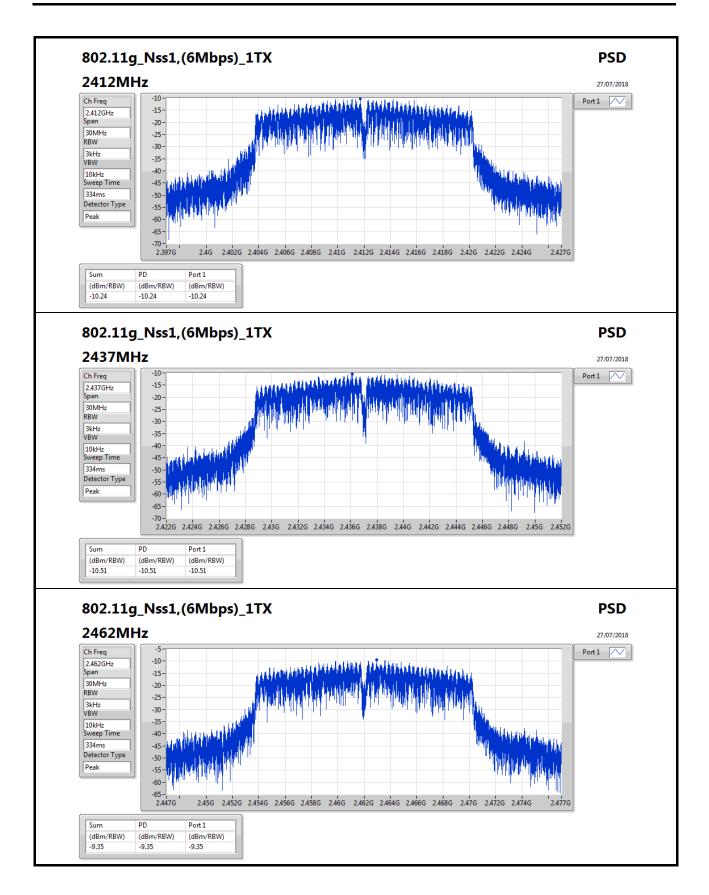


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : D3 of D5



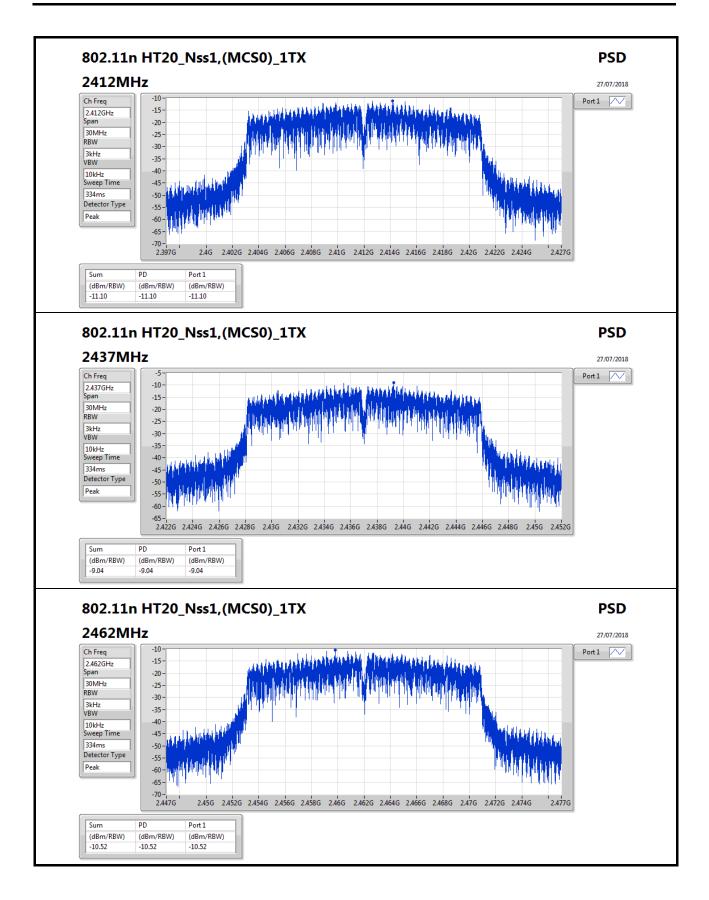

TEL: 886-3-327-3456 FAX: 886-3-327-0973



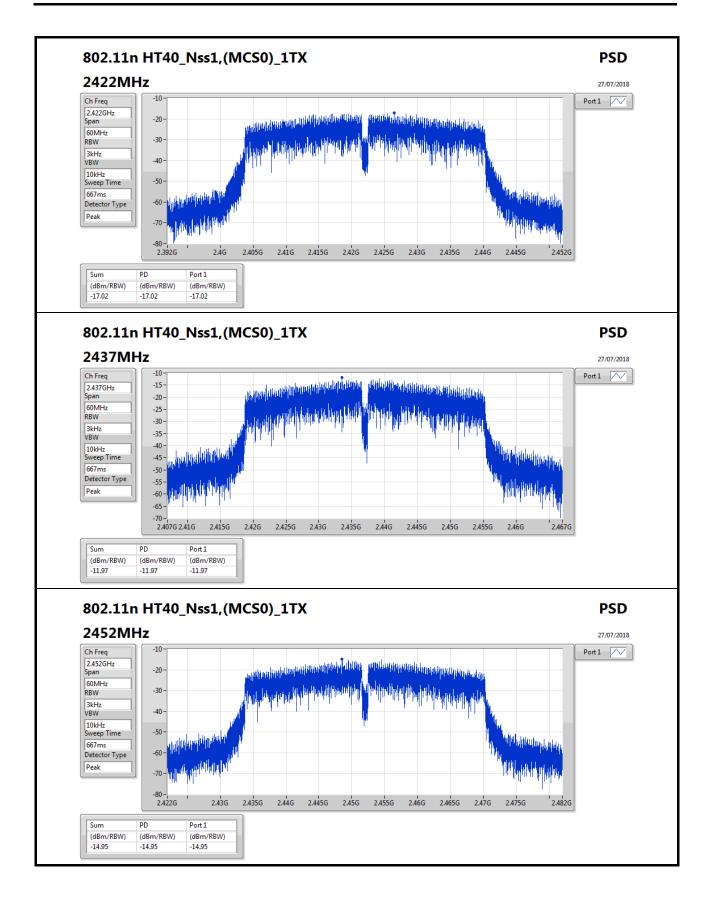

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : D5 of D5



CSE Non-restricted Band Result

Appendix E

Summary

Mode	Result	Ref	Ref	Limit	Freq	Level	Freq	Level	Freq	Level	Freq	Level	Port
		(Hz)	(dBm)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	
2.4-2.4835GHz	-		-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.413026G	10.79	-19.21	479.69M	-59.47	2.39856G	-22.00	2.4955G	-55.08	7.235136G	-47.45	1
802.11g_Nss1,(6Mbps)_1TX	Pass	2.460788G	7.90	-22.10	479.69M	-54.89	2.39992G	-23.49	2.48446G	-47.74	16.39712G	-54.92	1
802.11n HT20_Nss1,(MCS0)_1TX	Pass	2.437408G	4.19	-25.81	479.69M	-56.82	2.39992G	-26.03	2.50078G	-49.87	16.548836G	-53.89	1
802.11n HT40_Nss1,(MCS0)_1TX	Pass	2.434569G	4.92	-25.08	479.985M	-54.47	2.39888G	-34.37	2.48446G	-44.42	16.533026G	-54.99	1


Result

Mode	Result	Ref	Ref	Limit	Freq	Level	Freq	Level	Freq	Level	Freq	Level	Port
		(Hz)	(dBm)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	(Hz)	(dBm)	
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.413026G	10.79	-19.21	479.69M	-59.47	2.39856G	-22.00	2.4955G	-55.08	7.235136G	-47.45	1
2437MHz_TnomVnom	Pass	2.413026G	10.79	-19.21	479.69M	-58.48	2.39656G	-55.48	2.50302G	-55.58	24.775235G	-55.61	1
2462MHz_TnomVnom	Pass	2.413026G	10.79	-19.21	479.69M	-59.66	2.39008G	-57.78	2.49694G	-55.74	16.357786G	-54.76	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-		-		-	-	-	-	-
2412MHz_TnomVnom	Pass	2.460788G	7.90	-22.10	479.69M	-54.89	2.39992G	-23.49	2.48446G	-47.74	16.39712G	-54.92	1
2437MHz_TnomVnom	Pass	2.460788G	7.90	-22.10	479.69M	-55.97	2.39848G	-48.88	2.51574G	-48.85	16.242594G	-55.11	1
2462MHz_TnomVnom	Pass	2.460788G	7.90	-22.10	479.69M	-54.76	2.39088G	-48.02	2.48366G	-40.42	2.5235G	-53.38	1
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.437408G	4.19	-25.81	479.69M	-56.82	2.39992G	-26.03	2.50078G	-49.87	16.548836G	-53.89	1
2437MHz_TnomVnom	Pass	2.437408G	4.19	-25.81	2.307575G	-58.35	2.39704G	-48.73	2.4907G	-49.29	16.529169G	-55.10	1
2462MHz_TnomVnom	Pass	2.437408G	4.19	-25.81	479.69M	-56.44	2.3908G	-48.45	2.4839G	-40.83	2.5235G	-53.98	1
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	2.434569G	4.92	-25.08	479.985M	-53.98	2.39936G	-38.22	2.48558G	-52.54	16.409625G	-54.53	1
2437MHz_TnomVnom	Pass	2.434569G	4.92	-25.08	479.985M	-54.47	2.39888G	-34.37	2.48446G	-44.42	16.533026G	-54.99	1
2452MHz_TnomVnom	Pass	2.434569G	4.92	-25.08	479.985M	-52.69	2.39264G	-50.54	2.48446G	-39.67	16.37597G	-55.14	1

SPORTON INTERNATIONAL INC. Page No. : E1 of E5


TEL: 886-3-327-3456 FAX: 886-3-327-0973



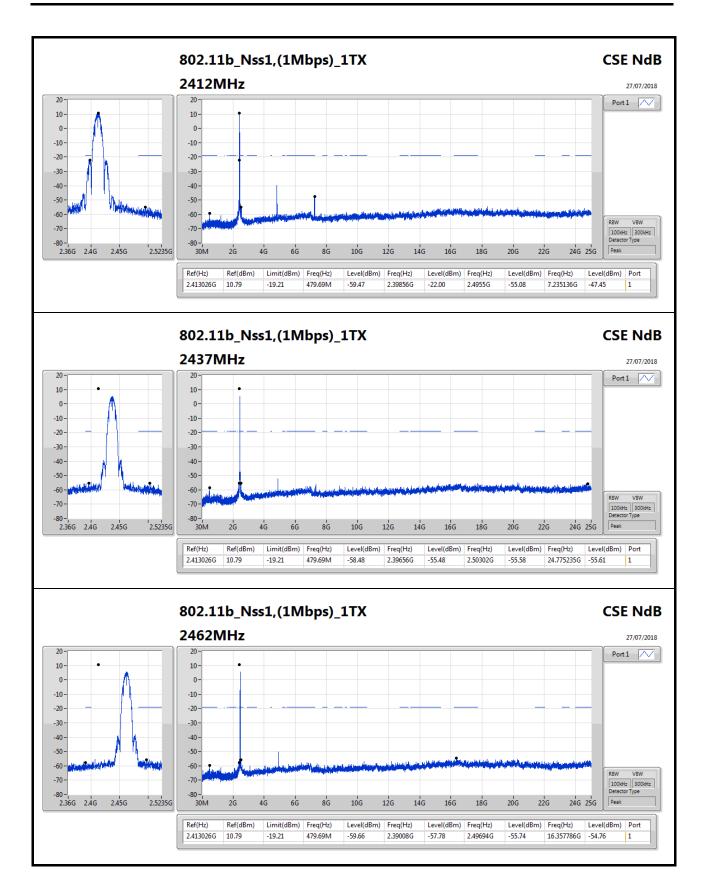


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : E2 of E5



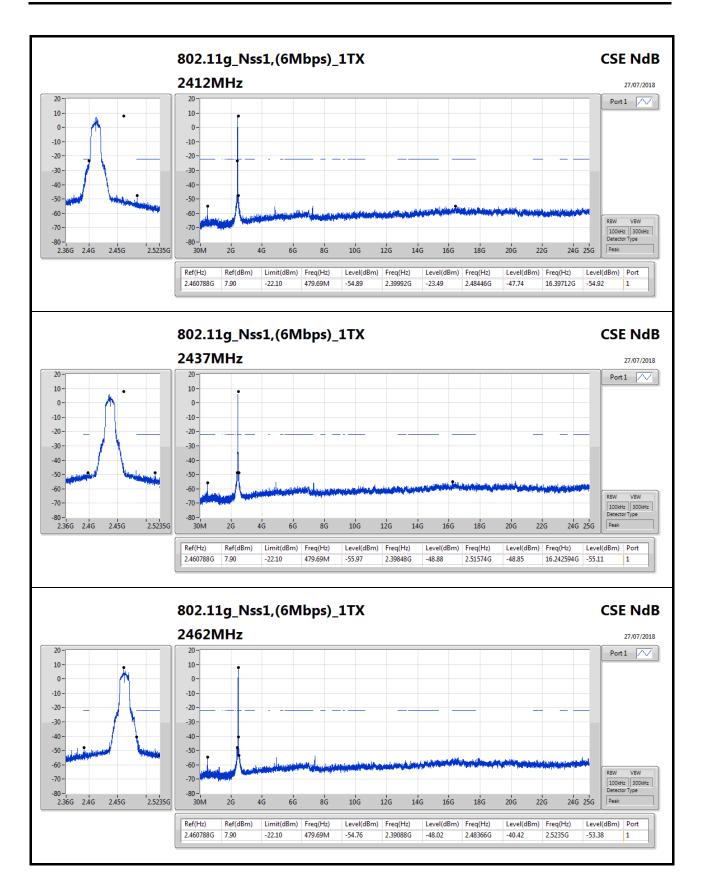


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : E3 of E5



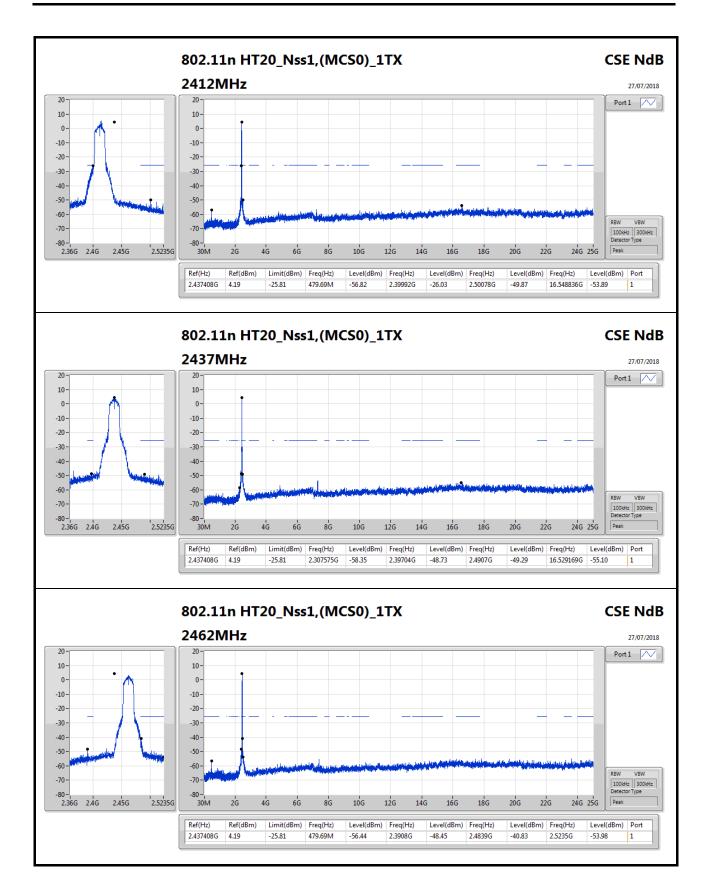

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : E4 of E5



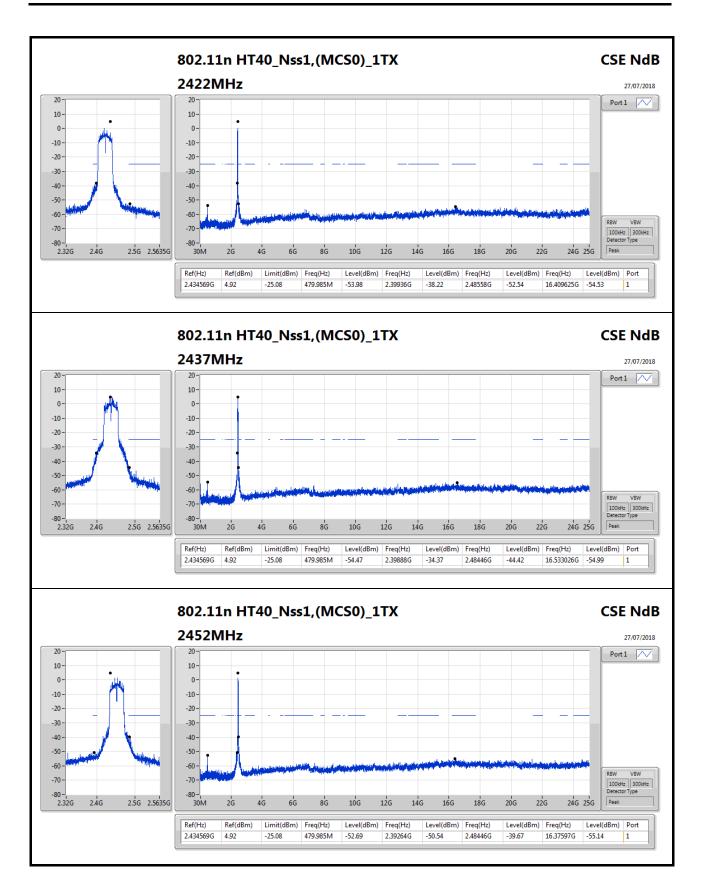

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : E5 of E5



RSE TX below 1GHz Result

Appendix F.1

860505

Summary

Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	PK	580.96M	30.95	46.00	-15.05	-11.01	3	Vertical	360	1.00	-

SPORTON INTERNATIONAL INC. Page No. : F1 of F4

TEL: 886-3-327-3456 FAX: 886-3-327-0973



RSE TX below 1GHz Result

Appendix F.1


Result

Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	PK	30M	24.68	40.00	-15.32	-13.40	3	Vertical	360	1.00	-
2437MHz	Pass	PK	243.4M	18.58	46.00	-27.42	-18.13	3	Vertical	360	1.00	-
2437MHz	Pass	PK	274.44M	19.10	46.00	-26.90	-16.68	3	Vertical	360	1.00	-
2437MHz	Pass	PK	480.08M	30.24	46.00	-15.76	-12.38	3	Vertical	360	1.00	-
2437MHz	Pass	PK	580.96M	30.95	46.00	-15.05	-11.01	3	Vertical	360	1.00	-
2437MHz	Pass	PK	776.9M	28.13	46.00	-17.87	-8.12	3	Vertical	360	1.00	-
2437MHz	Pass	PK	30M	18.89	40.00	-21.11	-13.40	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	125.06M	27.38	43.50	-16.12	-19.22	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	253.1M	24.74	46.00	-21.26	-16.68	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	499.48M	21.66	46.00	-24.34	-12.10	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	600.36M	23.29	46.00	-22.71	-10.88	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	776.9M	26.96	46.00	-19.04	-8.12	3	Horizontal	0	1.00	-

SPORTON INTERNATIONAL INC. Page No. : F2 of F4


TEL: 886-3-327-3456 FAX: 886-3-327-0973



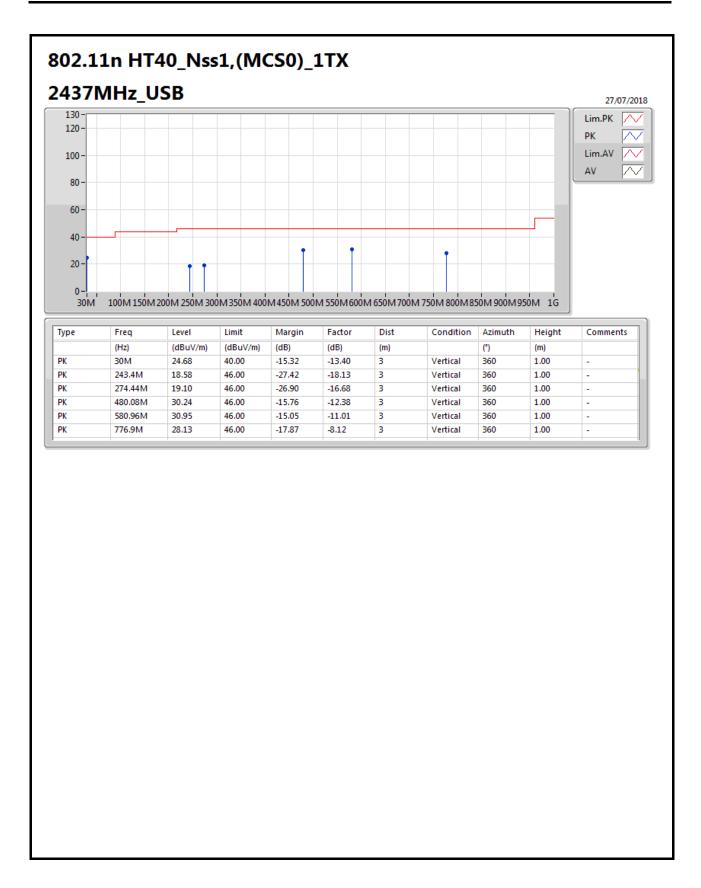

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F3 of F4



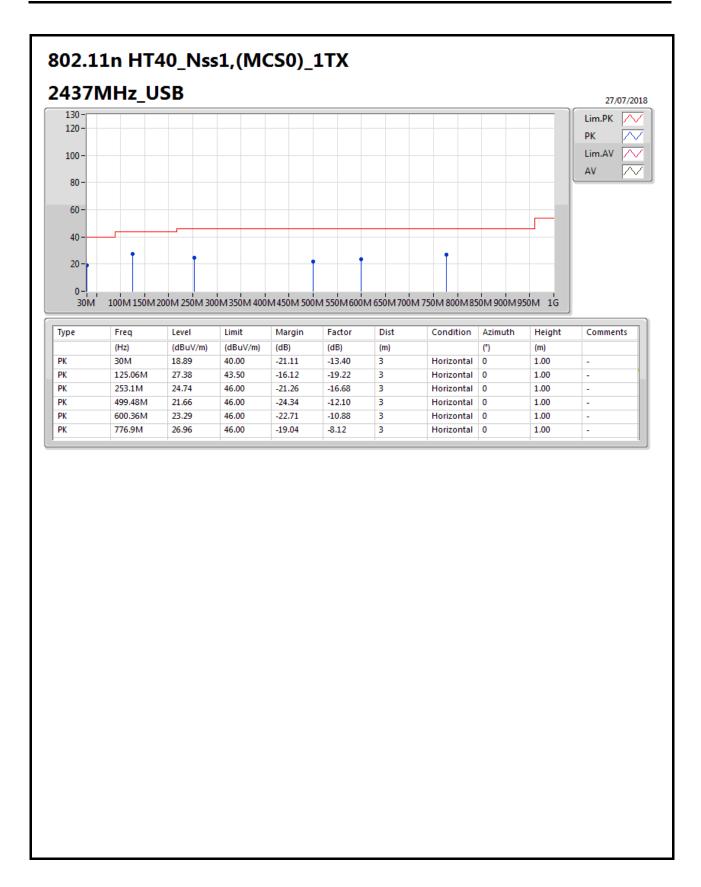

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F4 of F4



Appendix F.2

860505

Summary

Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	AV	4.82412G	53.64	54.00	-0.36	1.77	3	Vertical	84	2.35	-
802.11g_Nss1,(6Mbps)_1TX	Pass	AV	2.483502G	53.45	54.00	-0.55	31.31	3	Horizontal	200	1.50	-
802.11n HT20_Nss1,(MCS0)_1TX	Pass	AV	7.31076G	53.71	54.00	-0.29	7.80	3	Vertical	301	1.04	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	AV	2.3898G	53.73	54.00	-0.27	30.98	3	Horizontal	50	1.50	-

SPORTON INTERNATIONAL INC. Page No. : F1 of F66

TEL: 886-3-327-3456 FAX: 886-3-327-0973






Result

Result						•						
Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.3862G	49.33	54.00	-4.67	30.98	3	Vertical	123	1.44	-
2412MHz	Pass	AV	2.4128G	95.17	Inf	-Inf	31.06	3	Vertical	123	1.44	-
2412MHz	Pass	PK	2.3858G	59.87	74.00	-14.13	30.97	3	Vertical	123	1.44	-
2412MHz	Pass	PK	2.413G	97.89	Inf	-Inf	31.06	3	Vertical	123	1.44	-
2412MHz	Pass	AV	2.3862G	53.48	54.00	-0.52	30.98	3	Horizontal	1	1.50	-
2412MHz	Pass	AV	2.4114G	100.23	Inf	-Inf	31.06	3	Horizontal	1	1.50	-
2412MHz	Pass	PK	2.387G	61.90	74.00	-12.10	30.98	3	Horizontal	1	1.50	-
2412MHz	Pass	PK	2.4112G	102.84	Inf	-Inf	31.06	3	Horizontal	1	1.50	-
2412MHz	Pass	AV	4.82412G	53.64	54.00	-0.36	1.77	3	Vertical	84	2.35	-
2412MHz	Pass	PK	4.82412G	55.95	74.00	-18.05	1.77	3	Vertical	84	2.35	-
2412MHz	Pass	AV	4.82412G	52.38	54.00	-1.62	1.77	3	Horizontal	148	1.28	-
2412MHz	Pass	PK	4.82406G	55.00	74.00	-19.00	1.77	3	Horizontal	148	1.28	-
2437MHz	Pass	AV	2.3382G	45.73	54.00	-8.27	30.82	3	Vertical	168	1.54	-
2437MHz	Pass	AV	2.4378G	90.74	Inf	-Inf	31.15	3	Vertical	168	1.54	-
2437MHz	Pass	AV	2.4982G	46.49	54.00	-7.51	31.36	3	Vertical	168	1.54	-
2437MHz	Pass	PK	2.3518G	58.64	74.00	-15.36	30.86	3	Vertical	168	1.54	-
2437MHz	Pass	PK	2.4378G	93.15	Inf	-Inf	31.15	3	Vertical	168	1.54	-
2437MHz	Pass	PK	2.4882G	58.75	74.00	-15.25	31.32	3	Vertical	168	1.54	-
2437MHz	Pass	AV	2.3382G	45.73	54.00	-8.27	30.82	3	Horizontal	207	2.33	-
2437MHz	Pass	AV	2.4378G	92.51	Inf	-Inf	31.15	3	Horizontal	207	2.33	-
2437MHz	Pass	AV	2.4986G	46.49	54.00	-7.51	31.36	3	Horizontal	207	2.33	-
2437MHz	Pass	PK	2.381G	57.99	74.00	-16.01	30.95	3	Horizontal	207	2.33	_
2437MHz	Pass	PK	2.4378G	95.11	Inf	-Inf	31.15	3	Horizontal	207	2.33	_
2437MHz	Pass	PK	2.4846G	58.89	74.00	-15.11	31.31	3	Horizontal	207	2.33	_
2437MHz	Pass	AV	7.31034G	53.21	54.00	-0.79	7.80	3	Vertical	303	1.01	-
2437MHz	Pass	PK	7.31058G	58.71	74.00	-15.29	7.80	3	Vertical	303	1.01	_
2437MHz	Pass	AV	7.3119G	51.81	54.00	-2.19	7.80	3	Horizontal	76	1.07	-
2437MHz	Pass	PK	7.31106G	57.81	74.00	-16.19	7.80	3	Horizontal	76	1.07	
2462MHz	Pass	AV	2.4612G	91.29	Inf	-Inf	31.23	3	Vertical	169	1.20	-
2462MHz	Pass	AV	2.4982G	46.49	54.00	-7.51	31.36	3	Vertical	169	1.20	-
2462MHz	Pass	PK	2.4612G	93.89	Inf	-Inf	31.23	3	Vertical	169	1.20	
2462MHz	Pass	PK	2.494G	59.52	74.00	-14.48	31.33	3	Vertical	169	1.20	
2462MHz	Pass	AV	2.4612G	96.75	Inf	-Inf	31.23	3	Horizontal	200	1.66	
2462MHz	Pass	AV	2.4982G	46.49	54.00	-7.51	31.36	3	Horizontal	200	1.66	_
2462MHz	Pass	PK	2.4612G	99.37	Inf	-Inf	31.23	3	Horizontal	200	1.66	
2462MHz	Pass	PK	2.4966G	59.41	74.00	-14.59	31.35	3	Horizontal	200	1.66	
2462MHz	Pass	AV	7.38534G	53.64	54.00	-0.36	8.00	3	Vertical	313	1.00	-
2462MHz	Pass	PK	7.38582G	59.01	74.00	-14.99	8.00	3	Vertical	313	1.01	
2462MHz	Pass	AV	7.38534G	52.72	54.00	-14.77	8.00	3	Horizontal	74	1.02	
												
2462MHz	Pass	PK	7.3854G	58.32	74.00	-15.68	8.00	3	Horizontal -	74	1.02	<u> </u>
802.11g_Nss1,(6Mbps)_1TX	- Docc	- AV		- E1 72		2 27	20.00	-		- 00	2/0	
2412MHz	Pass		2.389998G	51.73	54.00	-2.27	30.98	3	Vertical	80	2.69	
2412MHz	Pass	AV	2.411G	93.53	Inf	-Inf	31.06	3	Vertical	80	2.69	-
2412MHz	Pass	PK	2.3894G	65.55	74.00	-8.45	30.98	3	Vertical	80	2.69	•
2412MHz	Pass	PK	2.4072G	101.96	Inf	-Inf	31.04	3	Vertical	80	2.69	-
2412MHz	Pass	AV	2.389998G	53.36	54.00	-0.64	30.98	3	Horizontal	204	1.50	-
2412MHz	Pass	AV	2.4112G	96.68	Inf	-Inf	31.06	3	Horizontal	204	1.50	-

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F2 of F66






Mode 2412MHz 2412MHz 2412MHz 2412MHz	Result Pass	Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
2412MHz 2412MHz	Pass		(U-)									
2412MHz 2412MHz	Pass		(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2412MHz		PK	2.3894G	67.74	74.00	-6.26	30.98	3	Horizontal	204	1.50	-
	Pass	PK	2.4134G	105.00	Inf	-Inf	31.07	3	Horizontal	204	1.50	-
2412MHz	Pass	AV	4.82214G	37.63	54.00	-16.37	1.77	3	Vertical	91	2.34	-
	Pass	PK	4.82394G	49.82	74.00	-24.18	1.77	3	Vertical	91	2.34	-
2412MHz	Pass	AV	4.82202G	37.38	54.00	-16.62	1.77	3	Horizontal	151	1.16	-
2412MHz	Pass	PK	4.8237G	50.00	74.00	-24.00	1.77	3	Horizontal	151	1.16	-
2437MHz	Pass	AV	2.3382G	46.59	54.00	-7.41	30.82	3	Vertical	57	2.32	-
2437MHz	Pass	AV	2.4382G	92.45	Inf	-Inf	31.15	3	Vertical	57	2.32	-
2437MHz	Pass	AV	2.499G	47.07	54.00	-6.93	31.36	3	Vertical	57	2.32	-
2437MHz	Pass	PK	2.3634G	58.56	74.00	-15.44	30.90	3	Vertical	57	2.32	-
2437MHz	Pass	PK	2.4386G	100.82	Inf	-Inf	31.15	3	Vertical	57	2.32	-
2437MHz	Pass	PK	2.4886G	58.61	74.00	-15.39	31.32	3	Vertical	57	2.32	-
2437MHz	Pass	AV	2.3878G	46.83	54.00	-7.17	30.98	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	2.4382G	95.53	Inf	-Inf	31.15	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	2.4914G	47.58	54.00	-6.42	31.33	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.3442G	58.52	74.00	-15.48	30.84	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.4382G	103.69	Inf	-Inf	31.15	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.4978G	58.63	74.00	-15.37	31.35	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	7.3101G	53.07	54.00	-0.93	7.80	3	Vertical	301	1.04	-
2437MHz	Pass	PK	7.31454G	65.70	74.00	-8.30	7.81	3	Vertical	301	1.04	-
2437MHz	Pass	AV	7.31064G	49.64	54.00	-4.36	7.80	3	Horizontal	359	1.02	-
2437MHz	Pass	PK	7.31496G	63.17	74.00	-10.83	7.81	3	Horizontal	359	1.02	-
2462MHz	Pass	AV	2.4628G	92.98	Inf	-Inf	31.23	3	Vertical	54	2.23	-
2462MHz	Pass	AV	2.483502G	50.26	54.00	-3.74	31.31	3	Vertical	54	2.23	-
2462MHz	Pass	PK	2.4634G	101.30	Inf	-Inf	31.24	3	Vertical	54	2.23	-
2462MHz	Pass	PK	2.4848G	62.92	74.00	-11.08	31.31	3	Vertical	54	2.23	-
2462MHz	Pass	AV	2.4612G	96.15	Inf	-Inf	31.23	3	Horizontal	200	1.50	-
2462MHz	Pass	AV	2.483502G	53.45	54.00	-0.55	31.31	3	Horizontal	200	1.50	-
2462MHz	Pass	PK	2.4602G	104.45	Inf	-Inf	31.22	3	Horizontal	200	1.50	-
2462MHz	Pass	PK	2.4844G	67.32	74.00	-6.68	31.31	3	Horizontal	200	1.50	-
2462MHz	Pass	AV	7.38822G	53.04	54.00	-0.96	8.01	3	Vertical	309	1.02	-
2462MHz	Pass	PK	7.3899G	66.06	74.00	-7.94	8.01	3	Vertical	309	1.02	-
2462MHz	Pass	AV	7.38582G	50.45	54.00	-3.55	8.00	3	Horizontal	356	1.01	-
2462MHz	Pass	PK	7.39002G	63.47	74.00	-10.53	8.01	3	Horizontal	356	1.01	-
802.11n HT20_Nss1,(MCS0)_1TX				-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.3896G	51.73	54.00	-2.27	30.98	3	Vertical	80	2.69	-
2412MHz	Pass	AV	2.4106G	92.11	Inf	-Inf	31.06	3	Vertical	80	2.69	-
2412MHz	Pass	PK	2.389G	67.30	74.00	-6.70	30.98	3	Vertical	80	2.69	-
2412MHz	Pass	PK	2.4106G	100.21	Inf	-Inf	31.06	3	Vertical	80	2.69	-
2412MHz	Pass	AV	2.389998G	53.48	54.00	-0.52	30.98	3	Horizontal	204	1.50	-
2412MHz	Pass	AV	2.4108G	95.28	Inf	-Inf	31.06	3	Horizontal	204	1.50	-
2412MHz	Pass	PK	2.3892G	68.04	74.00	-5.96	30.98	3	Horizontal	204	1.50	
2412MHz	Pass	PK	2.4108G	103.65	Inf	-Inf	31.06	3	Horizontal	204	1.50	-
2412MHz	Pass	AV	4.82208G	35.37	54.00	-18.63	1.77	3	Vertical	88	2.51	-
2412MHz	Pass	PK	4.82502G	48.50	74.00	-25.50	1.78	3	Vertical	88	2.51	-
2412MHz	Pass	AV	4.8183G	32.77	54.00	-21.23	1.76	3	Horizontal	151	2.69	_
2412MHz	Pass	PK	4.82106G	44.44	74.00	-29.56	1.77	3	Horizontal	151	2.69	_
2417MHz	Pass	AV	2.3892G	47.05	54.00	-6.95	30.77	3	Vertical	91	1.00	-
2417MHz	Pass	AV	2.416G	92.10	Inf	-0.95 -Inf	30.77	3	Vertical	91	1.00	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F3 of F66





Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2417MHz	Pass	PK	2.3898G	60.31	74.00	-13.69	30.77	3	Vertical	91	1.00	-
2417MHz	Pass	PK	2.4156G	98.46	Inf	-Inf	30.87	3	Vertical	91	1.00	-
2417MHz	Pass	PK	2.3898G	65.77	74.00	-8.23	30.77	3	Horizontal	26	1.00	-
2417MHz	Pass	AV	2.389998G	50.60	54.00	-3.40	30.77	3	Horizontal	26	1.00	-
2417MHz	Pass	PK	2.4144G	105.68	Inf	-Inf	30.86	3	Horizontal	26	1.00	-
2417MHz	Pass	AV	2.416G	99.09	Inf	-Inf	30.87	3	Horizontal	26	1.00	-
2437MHz	Pass	AV	2.3454G	46.57	54.00	-7.43	30.84	3	Vertical	61	2.32	-
2437MHz	Pass	AV	2.4378G	93.10	Inf	-Inf	31.15	3	Vertical	61	2.32	-
2437MHz	Pass	AV	2.4922G	47.32	54.00	-6.68	31.33	3	Vertical	61	2.32	-
2437MHz	Pass	PK	2.3626G	58.43	74.00	-15.57	30.90	3	Vertical	61	2.32	-
2437MHz	Pass	PK	2.4382G	101.29	Inf	-Inf	31.15	3	Vertical	61	2.32	-
2437MHz	Pass	PK	2.4902G	59.25	74.00	-14.75	31.33	3	Vertical	61	2.32	-
2437MHz	Pass	AV	2.3582G	46.83	54.00	-7.17	30.89	3	Horizontal	349	1.74	-
2437MHz	Pass	AV	2.4386G	96.30	Inf	-Inf	31.15	3	Horizontal	349	1.74	-
2437MHz	Pass	AV	2.4986G	47.35	54.00	-6.65	31.36	3	Horizontal	349	1.74	_
2437MHz	Pass	PK	2.3814G	58.82	74.00	-15.18	30.96	3	Horizontal	349	1.74	_
2437MHz	Pass	PK	2.4358G	104.45	Inf	-Inf	31.14	3	Horizontal	349	1.74	_
2437MHz	Pass	PK	2.4942G	58.62	74.00	-15.38	31.34	3	Horizontal	349	1.74	
2437MHz	Pass	AV	7.31076G	53.71	54.00	-0.29	7.80	3	Vertical	301	1.04	
2437MHz	Pass	PK	7.30836G	67.66	74.00	-6.34	7.79	3	Vertical	301	1.04	-
2437MHz	Pass	AV	7.31088G	49.87	54.00	-4.13	7.80	3	Horizontal	1	1.01	
2437MHz	Pass	PK	7.3083G	63.14	74.00	-10.86	7.79	3	Horizontal	1	1.01	-
2457MHz	Pass	AV	2.458G	93.82	74.00 Inf	-10.60 -Inf	31.02	3	Vertical	233	2.52	-
2457MHz	Pass	AV	2.484G	47.06	54.00	-6.94	31.12	3		233	2.52	-
		PK						3	Vertical Vertical			-
2457MHz 2457MHz	Pass	PK	2.46G 2.484G	100.39 58.97	Inf	-Inf	31.03 31.12	3		233	2.52	-
	Pass				74.00	-15.03		3	Vertical		2.52	-
2457MHz	Pass	AV AV	2.458G	99.36	Inf	-Inf	31.02		Horizontal Horizontal	30	1.01	-
2457MHz	Pass	PK	2.483502G	48.47	54.00	-5.53	31.11	3		30	1.01	-
2457MHz	Pass		2.4564G	105.96	Inf	-Inf	31.01	3	Horizontal	30	1.01	-
2457MHz	Pass	PK	2.483502G	62.18	74.00	-11.82	31.11	3	Horizontal	30	1.01	-
2462MHz	Pass	AV	2.4634G	90.81	Inf	-Inf	31.24	3	Vertical	123	1.38	-
2462MHz	Pass	AV	2.483502G	50.06	54.00	-3.94	31.31	3	Vertical	123	1.38	-
2462MHz	Pass	PK	2.465G	98.80	Inf	-Inf	31.24	3	Vertical	123	1.38	-
2462MHz	Pass	PK	2.4836G	63.56	74.00	-10.44	31.31	3	Vertical	123	1.38	-
2462MHz	Pass	AV	2.4606G	94.86	Inf	-Inf	31.23	3	Horizontal	204	1.49	-
2462MHz	Pass	AV	2.483502G	53.45	54.00	-0.55	31.31	3	Horizontal	204	1.49	-
2462MHz	Pass	PK	2.4606G	103.22	Inf	-Inf	31.23	3	Horizontal	204	1.49	-
2462MHz	Pass	PK	2.483502G	67.45	74.00	-6.55	31.31	3	Horizontal	204	1.49	-
2462MHz	Pass	AV	7.38846G	49.78	54.00	-4.22	8.01	3	Vertical	306	1.23	-
2462MHz	Pass	PK	7.3839G	63.40	74.00	-10.60	8.00	3	Vertical	306	1.23	-
2462MHz	Pass	AV	7.3857G	47.96	54.00	-6.04	8.00	3	Horizontal	10	1.02	-
2462MHz	Pass	PK	7.3833G	61.73	74.00	-12.27	7.99	3	Horizontal	10	1.02	-
802.11n HT40_Nss1,(MCS0)_1TX	- Dono	- ^/	2 2000000	- F1 40			20.00	-	- Vertical	- 00	- 2/2	-
2422MHz	Pass	AV	2.389998G	51.42	54.00	-2.58	30.98	3	Vertical	82	2.63	-
2422MHz	Pass	AV	2.4236G	86.97	Inf	-Inf	31.10	3	Vertical	82	2.63	-
2422MHz	Pass	AV	2.4876G	47.83	54.00	-6.17	31.32	3	Vertical	82	2.63	-
2422MHz	Pass	PK	2.3896G	64.28	74.00	-9.72	30.98	3	Vertical	82	2.63	-
2422MHz	Pass	PK	2.4204G	94.12	Inf	-Inf	31.09	3	Vertical	82	2.63	-
2422MHz	Pass	PK	2.4916G	58.16	74.00	-15.84	31.33	3	Vertical	82	2.63	-

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F4 of F66






	l	-	_					B				١
Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	_		(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2422MHz	Pass	AV	2.3892G	52.98	54.00	-1.02	30.98	3	Horizontal	205	1.50	-
2422MHz	Pass	AV	2.4164G	89.32	Inf	-Inf	31.08	3	Horizontal	205	1.50	-
2422MHz	Pass	AV	2.499998G	47.87	54.00	-6.13	31.36	3	Horizontal	205	1.50	-
2422MHz	Pass	PK	2.3896G	67.28	74.00	-6.72	30.98	3	Horizontal	205	1.50	-
2422MHz	Pass	PK	2.4164G	97.31	Inf	-Inf	31.08	3	Horizontal	205	1.50	-
2422MHz	Pass	PK	2.4852G	59.24	74.00	-14.76	31.31	3	Horizontal	205	1.50	-
2422MHz	Pass	AV	4.83308G	34.03	54.00	-19.97	1.79	3	Vertical	82	2.56	-
2422MHz	Pass	PK	4.83368G	45.28	74.00	-28.72	1.79	3	Vertical	82	2.56	-
2422MHz	Pass	AV	4.84466G	33.77	54.00	-20.23	1.82	3	Horizontal	320	2.61	-
2422MHz	Pass	PK	4.84766G	45.20	74.00	-28.80	1.82	3	Horizontal	320	2.61	-
2427MHz	Pass	AV	2.3894G	48.67	54.00	-5.33	30.77	3	Vertical	162	2.11	-
2427MHz	Pass	AV	2.4258G	85.12	Inf	-Inf	30.90	3	Vertical	162	2.11	-
2427MHz	Pass	AV	2.4998G	45.93	54.00	-8.07	31.17	3	Vertical	162	2.11	-
2427MHz	Pass	PK	2.389G	59.28	74.00	-14.72	30.77	3	Vertical	162	2.11	-
2427MHz	Pass	PK	2.4242G	91.28	Inf	-Inf	30.90	3	Vertical	162	2.11	-
2427MHz	Pass	PK	2.489G	55.61	74.00	-18.39	31.13	3	Vertical	162	2.11	-
2427MHz	Pass	AV	2.3894G	53.44	54.00	-0.56	30.77	3	Horizontal	23	2.62	-
2427MHz	Pass	AV	2.4258G	91.82	Inf	-Inf	30.90	3	Horizontal	23	2.62	-
2427MHz	Pass	AV	2.4854G	46.32	54.00	-7.68	31.12	3	Horizontal	23	2.62	-
2427MHz	Pass	PK	2.3898G	65.16	74.00	-8.84	30.77	3	Horizontal	23	2.62	-
2427MHz	Pass	PK	2.4302G	97.93	Inf	-Inf	30.92	3	Horizontal	23	2.62	-
2427MHz	Pass	PK	2.499G	55.72	74.00	-18.28	31.17	3	Horizontal	23	2.62	-
2432MHz	Pass	AV	2.3892G	49.80	54.00	-4.20	30.77	3	Vertical	161	2.12	-
2432MHz	Pass	AV	2.4308G	86.84	Inf	-Inf	30.92	3	Vertical	161	2.12	-
2432MHz	Pass	AV	2.499998G	46.11	54.00	-7.89	31.17	3	Vertical	161	2.12	-
2432MHz	Pass	PK	2.3884G	60.31	74.00	-13.69	30.77	3	Vertical	161	2.12	-
2432MHz	Pass	PK	2.4264G	93.16	Inf	-Inf	30.91	3	Vertical	161	2.12	-
2432MHz	Pass	PK	2.4956G	56.67	74.00	-17.33	31.16	3	Vertical	161	2.12	-
2432MHz	Pass	AV	2.389998G	52.72	54.00	-1.28	30.77	3	Horizontal	21	1.12	-
2432MHz	Pass	AV	2.434G	93.94	Inf	-Inf	30.93	3	Horizontal	21	1.12	_
2432MHz	Pass	AV	2.4892G	46.97	54.00	-7.03	31.13	3	Horizontal	21	1.12	_
2432MHz	Pass	PK	2.389998G	63.64	74.00	-10.36	30.77	3	Horizontal	21	1.12	
2432MHz	Pass	PK	2.4356G	99.98	Inf	-Inf	30.94	3	Horizontal	21	1.12	
2432MHz	Pass	PK	2.4896G	55.81	74.00	-18.19	31.13	3	Horizontal	21	1.12	_
2437MHz	Pass	AV	2.3894G	49.71	54.00	-4.29	30.98	3	Vertical	59	2.31	
2437MHz	Pass	AV	2.3894G 2.4382G	91.09	54.00 Inf	-4.29 -Inf	31.15	3	Vertical	59	2.31	
								3				
2437MHz	Pass	AV	2.483502G	49.01	54.00	-4.99	31.31		Vertical	59	2.31	-
2437MHz	Pass	PK	2.3898G	61.72	74.00	-12.28	30.98	3	Vertical	59	2.31	-
2437MHz	Pass	PK	2.439G	98.72	Inf	-Inf	31.15	3	Vertical	59	2.31	-
2437MHz	Pass	PK	2.483502G	59.83	74.00	-14.17	31.31	3	Vertical	59	2.31	-
2437MHz	Pass	AV	2.3898G	53.73	54.00	-0.27	30.98	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	2.4386G	94.01	Inf	-Inf	31.15	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	2.483502G	51.00	54.00	-3.00	31.31	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.3898G	66.85	74.00	-7.15	30.98	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.4354G	101.54	Inf	-Inf	31.14	3	Horizontal	50	1.50	-
2437MHz	Pass	PK	2.483502G	63.64	74.00	-10.36	31.31	3	Horizontal	50	1.50	-
2437MHz	Pass	AV	7.3152G	47.42	54.00	-6.58	7.81	3	Vertical	104	1.04	-
2437MHz	Pass	PK	7.31688G	58.75	74.00	-15.25	7.82	3	Vertical	104	1.04	-
2437MHz	Pass	AV	7.31532G	47.28	54.00	-6.72	7.81	3	Horizontal	1	1.22	-

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F5 of F66






Mode	Result	Туре	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
2437MHz	Pass	PK	7.31556G	58.16	74.00	-15.84	7.81	3	Horizontal	1	1.22	-
2442MHz	Pass	AV	2.388G	46.03	54.00	-7.97	30.77	3	Vertical	95	1.17	-
2442MHz	Pass	AV	2.4432G	87.46	Inf	-Inf	30.97	3	Vertical	95	1.17	-
2442MHz	Pass	AV	2.483502G	48.20	54.00	-5.80	31.11	3	Vertical	95	1.17	-
2442MHz	Pass	PK	2.3868G	54.85	74.00	-19.15	30.76	3	Vertical	95	1.17	-
2442MHz	Pass	PK	2.4456G	93.79	Inf	-Inf	30.97	3	Vertical	95	1.17	-
2442MHz	Pass	PK	2.484G	57.39	74.00	-16.61	31.12	3	Vertical	95	1.17	-
2442MHz	Pass	AV	2.3884G	46.96	54.00	-7.04	30.77	3	Horizontal	15	2.69	-
2442MHz	Pass	AV	2.4436G	95.37	Inf	-Inf	30.97	3	Horizontal	15	2.69	-
2442MHz	Pass	AV	2.483502G	53.11	54.00	-0.89	31.11	3	Horizontal	15	2.69	-
2442MHz	Pass	PK	2.389998G	58.81	74.00	-15.19	30.77	3	Horizontal	15	2.69	-
2442MHz	Pass	PK	2.4448G	101.46	Inf	-Inf	30.97	3	Horizontal	15	2.69	-
2442MHz	Pass	PK	2.484G	63.05	74.00	-10.95	31.12	3	Horizontal	15	2.69	-
2447MHz	Pass	AV	2.3746G	45.30	54.00	-8.70	30.72	3	Vertical	67	1.50	-
2447MHz	Pass	AV	2.4442G	84.34	Inf	-Inf	30.97	3	Vertical	67	1.50	-
2447MHz	Pass	AV	2.483502G	46.69	54.00	-7.31	31.11	3	Vertical	67	1.50	-
2447MHz	Pass	PK	2.3594G	55.32	74.00	-18.68	30.67	3	Vertical	67	1.50	-
2447MHz	Pass	PK	2.4402G	90.53	Inf	-Inf	30.95	3	Vertical	67	1.50	-
2447MHz	Pass	PK	2.4954G	55.51	74.00	-18.49	31.16	3	Vertical	67	1.50	-
2447MHz	Pass	AV	2.3774G	45.98	54.00	-8.02	30.73	3	Horizontal	19	1.03	-
2447MHz	Pass	AV	2.4486G	93.38	Inf	-Inf	30.98	3	Horizontal	19	1.03	-
2447MHz	Pass	AV	2.483502G	52.89	54.00	-1.11	31.11	3	Horizontal	19	1.03	-
2447MHz	Pass	PK	2.3662G	55.96	74.00	-18.04	30.70	3	Horizontal	19	1.03	-
2447MHz	Pass	PK	2.4486G	99.90	Inf	-Inf	30.98	3	Horizontal	19	1.03	-
2447MHz	Pass	PK	2.4846G	62.85	74.00	-11.15	31.12	3	Horizontal	19	1.03	-
2452MHz	Pass	AV	2.3584G	47.59	54.00	-6.41	30.89	3	Vertical	123	1.34	-
2452MHz	Pass	AV	2.4536G	86.12	Inf	-Inf	31.20	3	Vertical	123	1.34	-
2452MHz	Pass	AV	2.483502G	50.82	54.00	-3.18	31.31	3	Vertical	123	1.34	-
2452MHz	Pass	PK	2.3716G	57.85	74.00	-16.15	30.93	3	Vertical	123	1.34	-
2452MHz	Pass	PK	2.4556G	93.59	Inf	-Inf	31.21	3	Vertical	123	1.34	-
2452MHz	Pass	PK	2.483502G	62.50	74.00	-11.50	31.31	3	Vertical	123	1.34	-
2452MHz	Pass	AV	2.3816G	47.33	54.00	-6.67	30.96	3	Horizontal	202	1.50	-
2452MHz	Pass	AV	2.4504G	89.94	Inf	-Inf	31.19	3	Horizontal	202	1.50	-
2452MHz	Pass	AV	2.483502G	53.32	54.00	-0.68	31.31	3	Horizontal	202	1.50	-
2452MHz	Pass	PK	2.3576G	57.56	74.00	-16.44	30.88	3	Horizontal	202	1.50	-
2452MHz	Pass	PK	2.4492G	97.68	Inf	-Inf	31.19	3	Horizontal	202	1.50	-
2452MHz	Pass	PK	2.4848G	67.61	74.00	-6.39	31.31	3	Horizontal	202	1.50	-
2452MHz	Pass	AV	7.35306G	45.35	54.00	-8.65	7.91	3	Vertical	315	1.04	-
2452MHz	Pass	PK	7.344G	56.15	74.00	-17.85	7.89	3	Vertical	315	1.04	-
2452MHz	Pass	AV	7.35972G	44.59	54.00	-9.41	7.93	3	Horizontal	69	1.19	-
2452MHz	Pass	PK	7.36044G	56.16	74.00	-17.84	7.93	3	Horizontal	69	1.19	-

SPORTON INTERNATIONAL INC. Page No. : F6 of F66


TEL: 886-3-327-3456 FAX: 886-3-327-0973



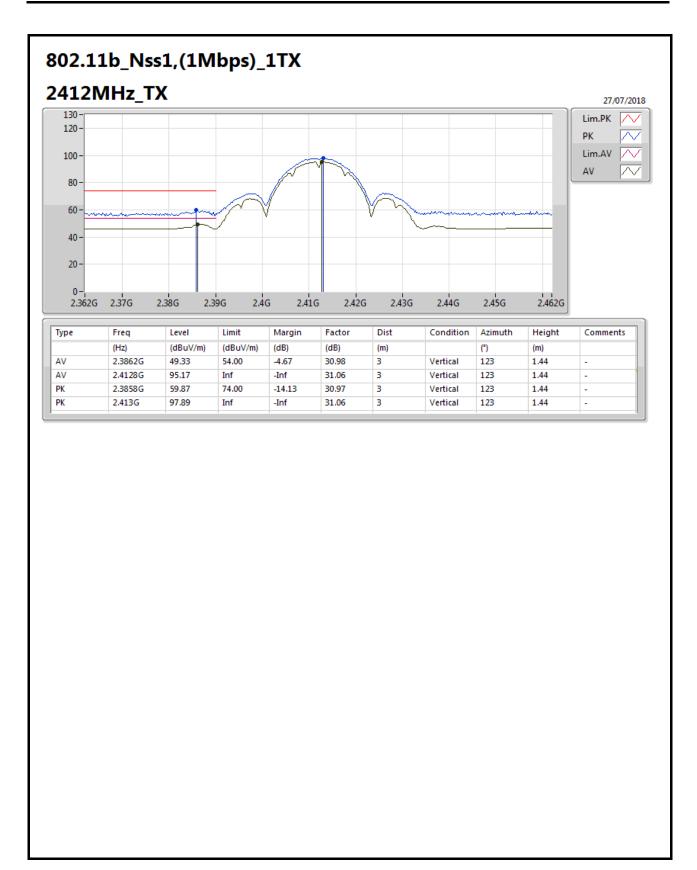


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F7 of F66



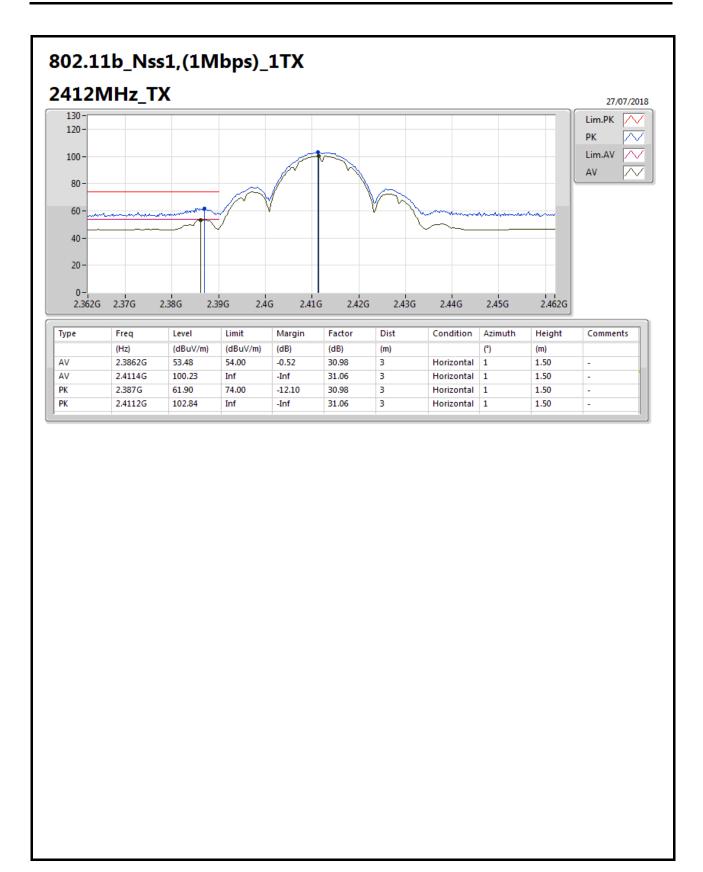


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F8 of F66



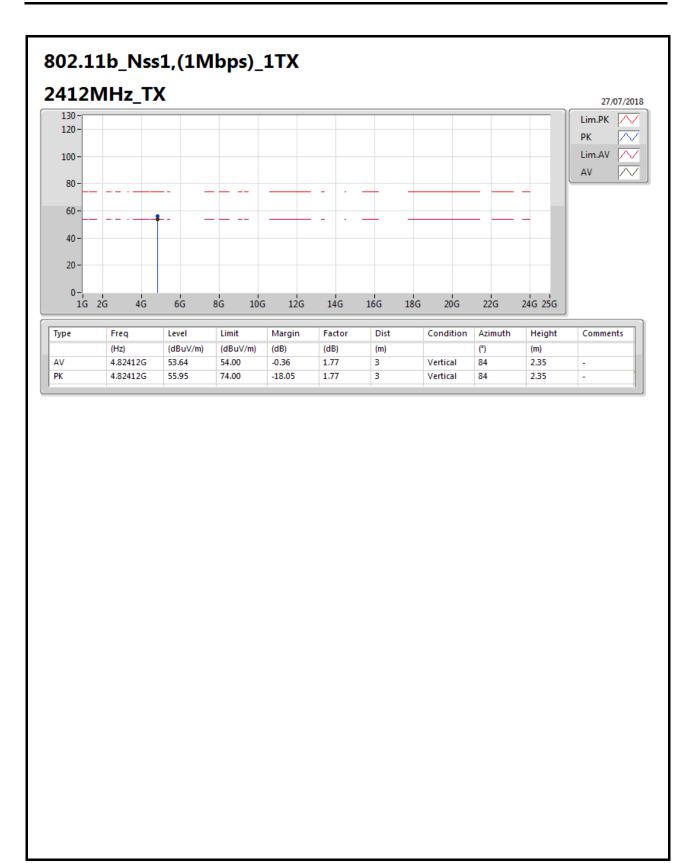


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F9 of F66



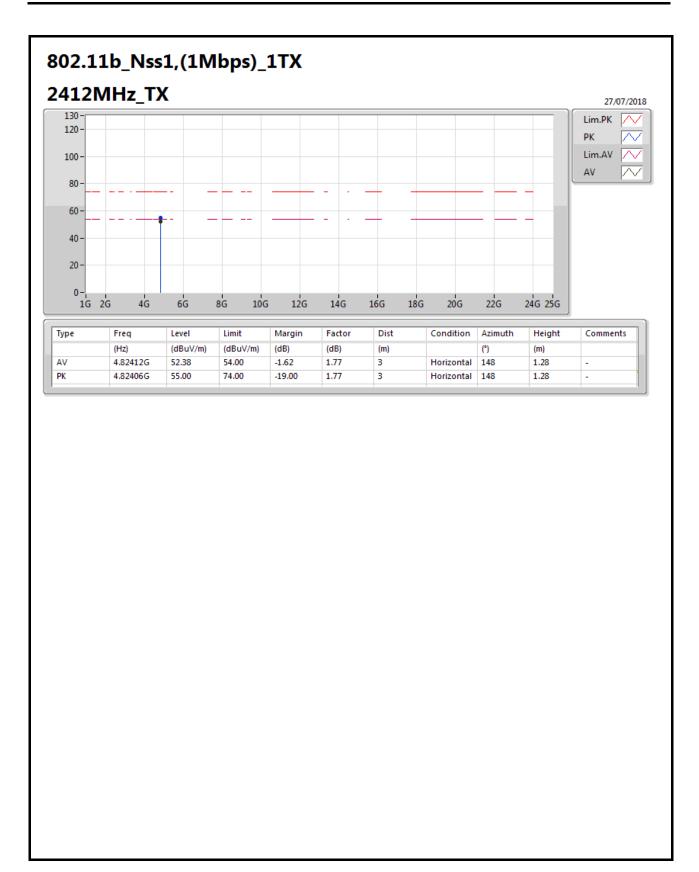


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F10 of F66



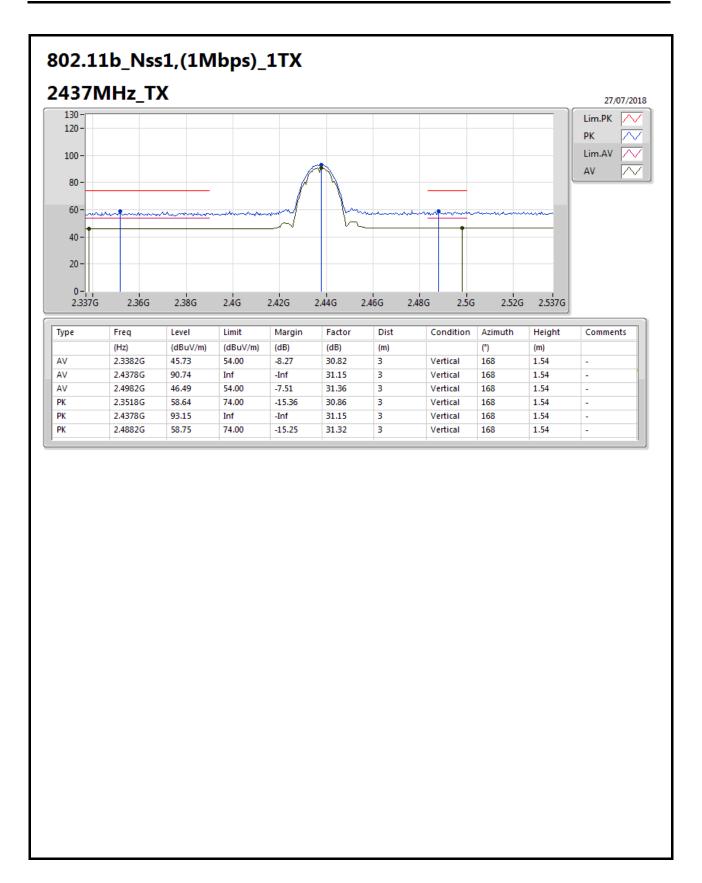


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F11 of F66



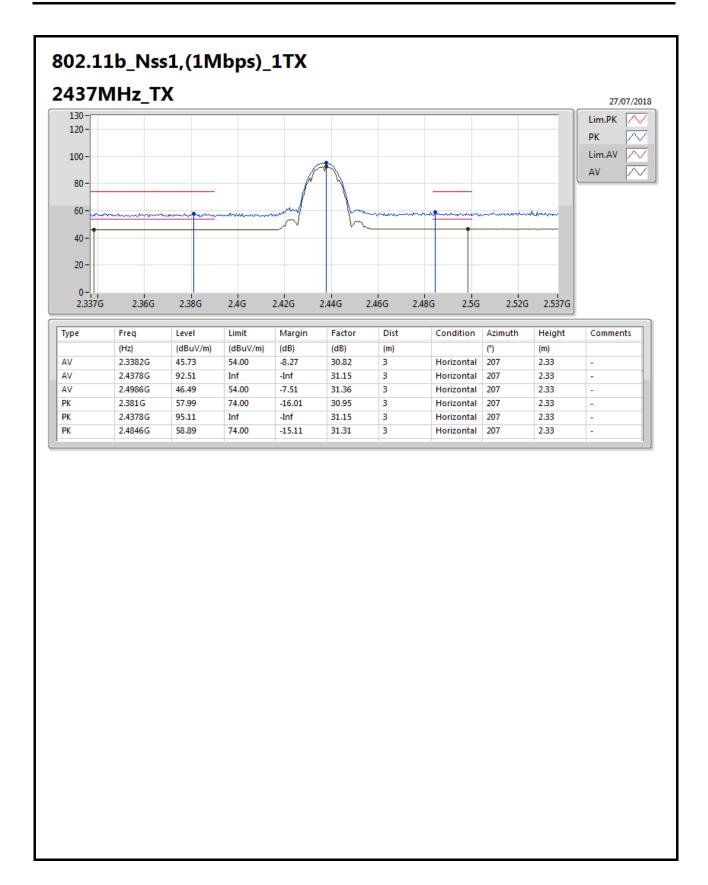


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F12 of F66



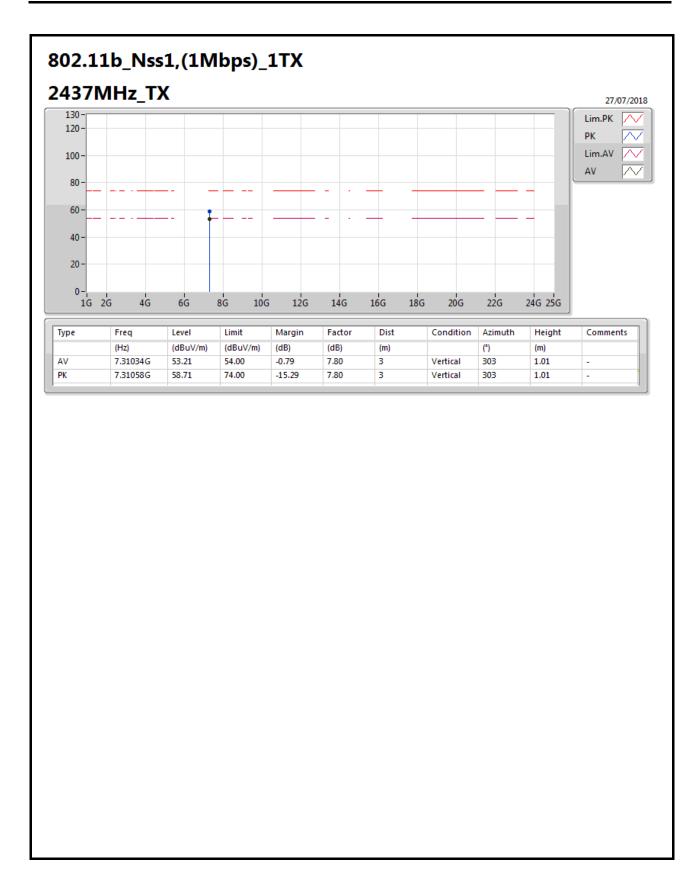


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F13 of F66



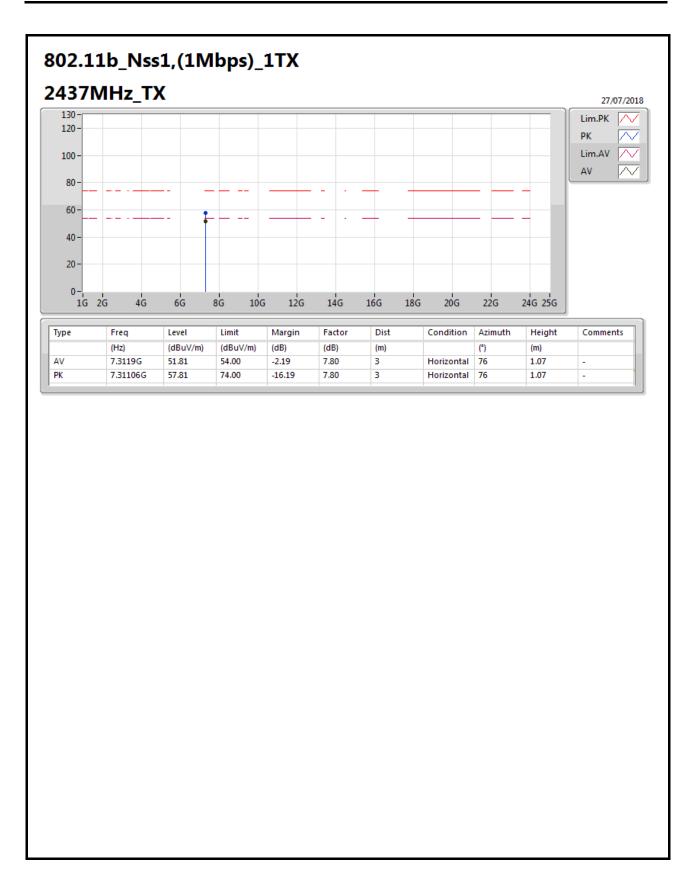


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F14 of F66



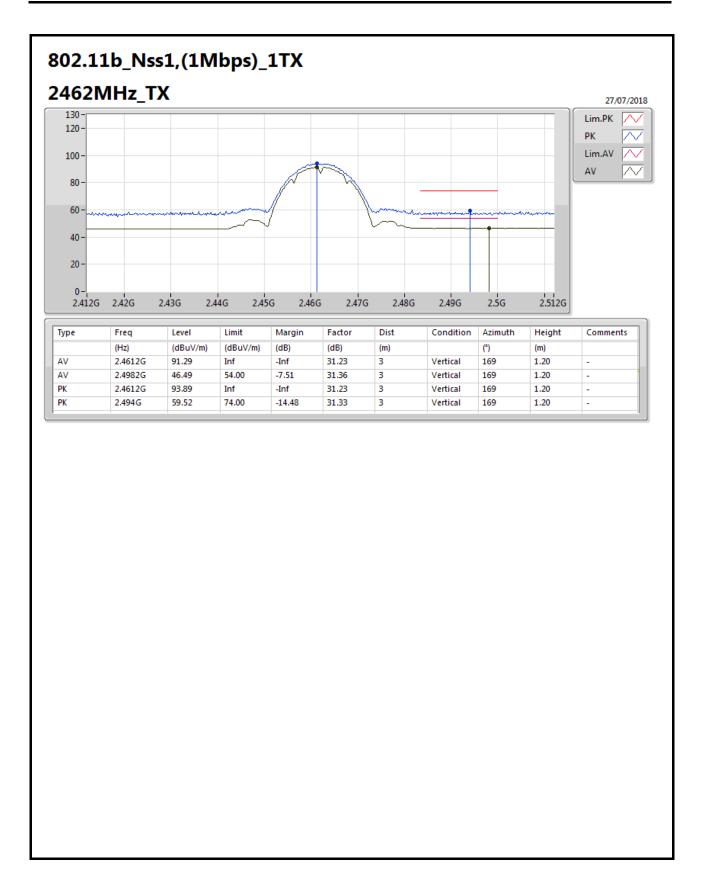


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F15 of F66



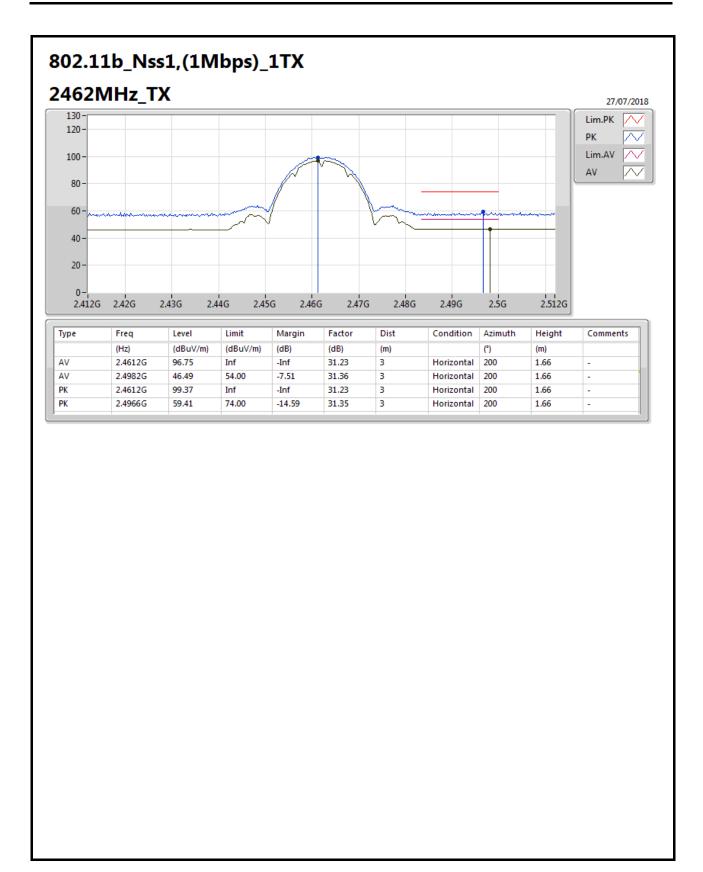


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F16 of F66



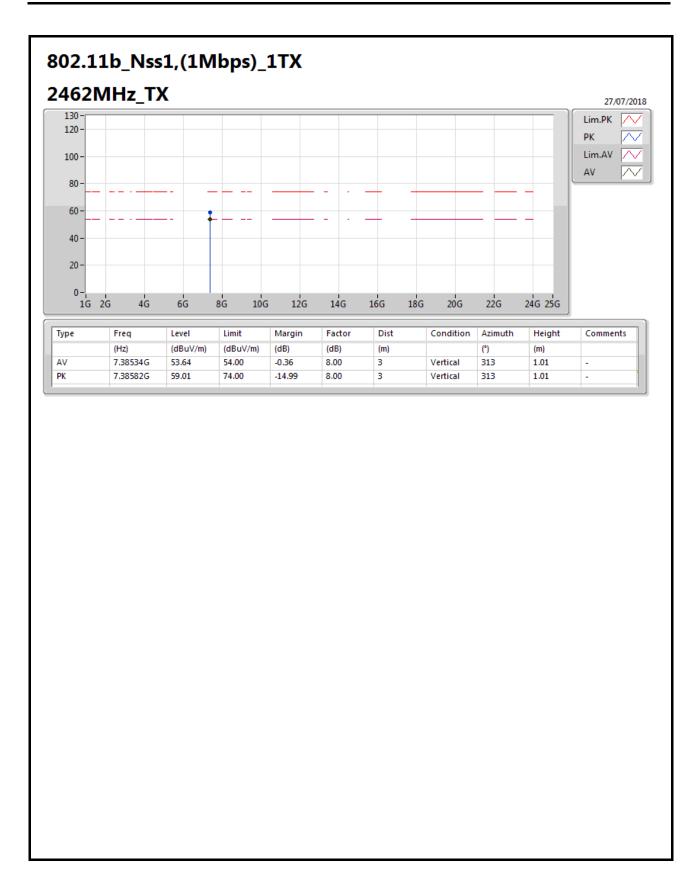


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F17 of F66



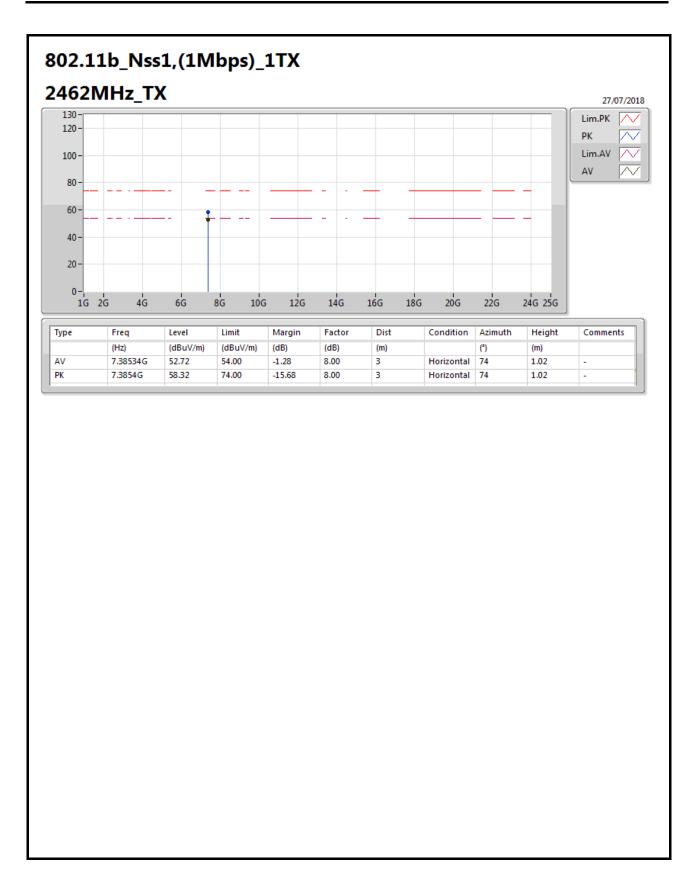


TEL: 886-3-327-3456 FAX: 886-3-327-0973



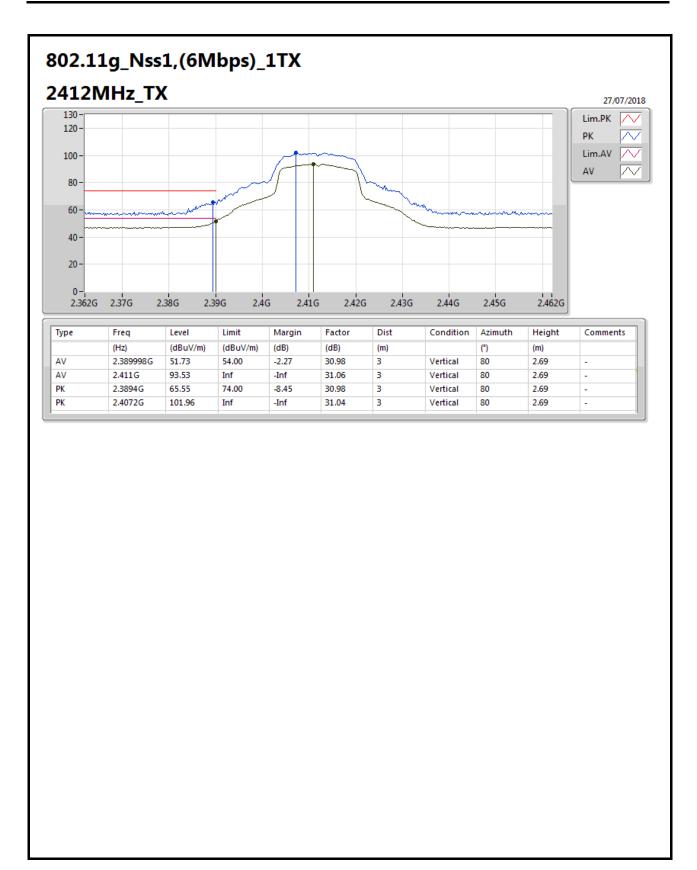


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F19 of F66



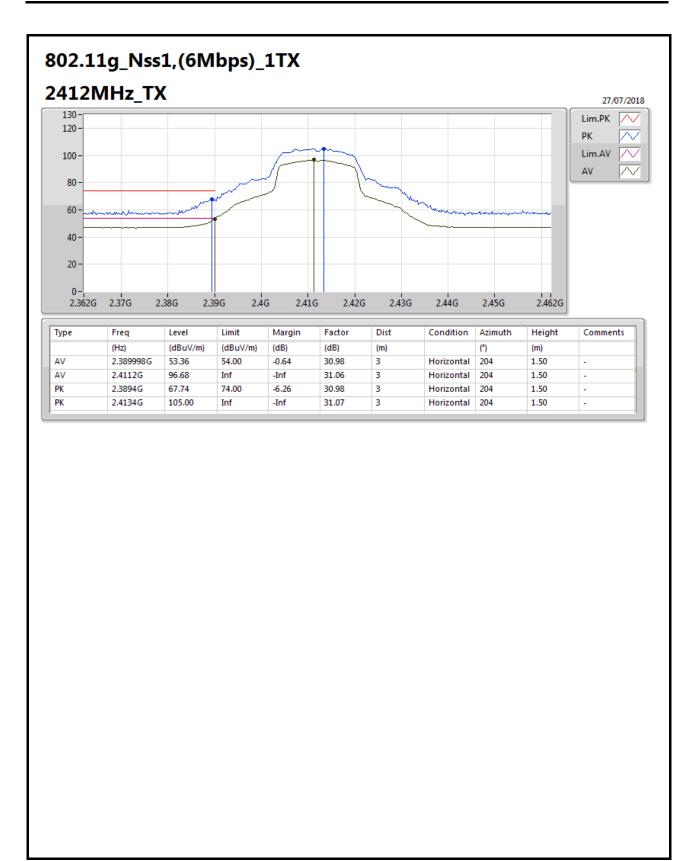


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F20 of F66



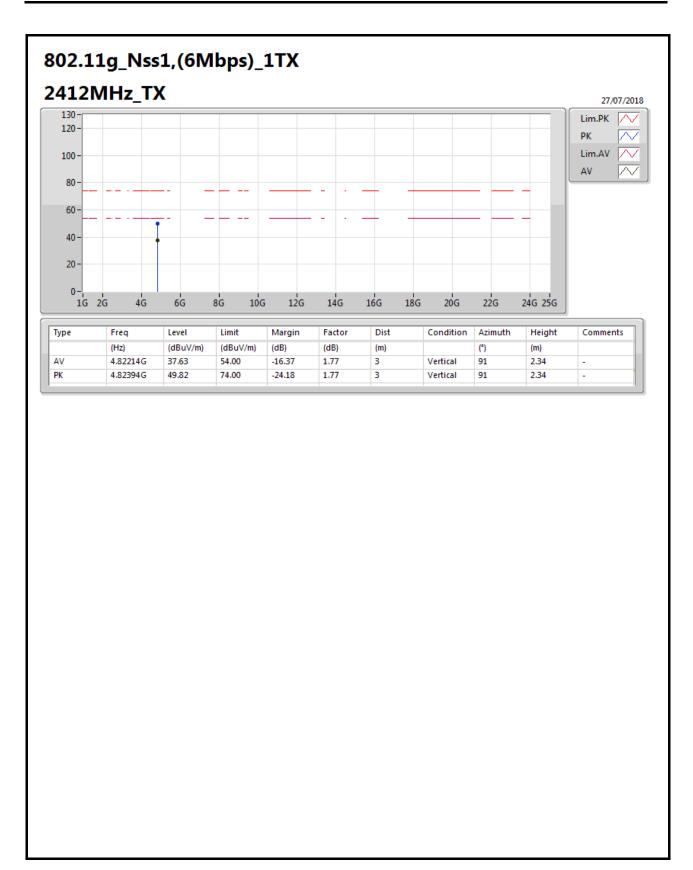


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F21 of F66



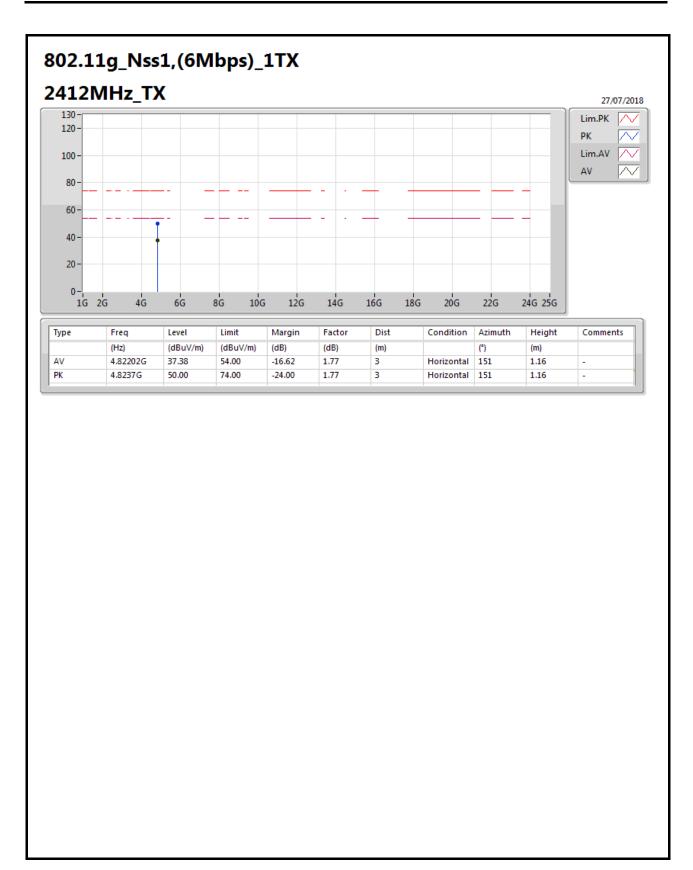


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F22 of F66



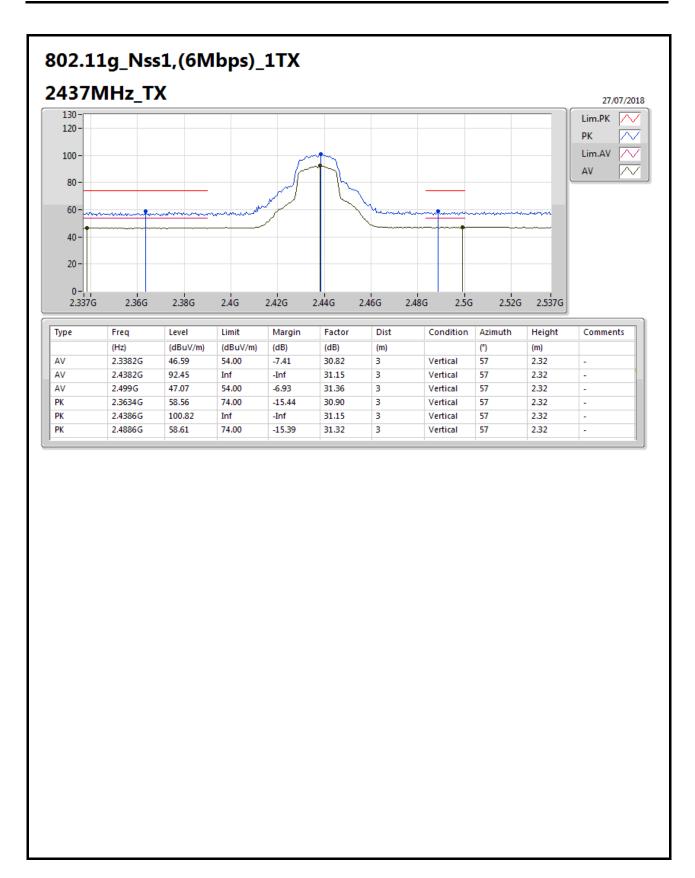


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F23 of F66



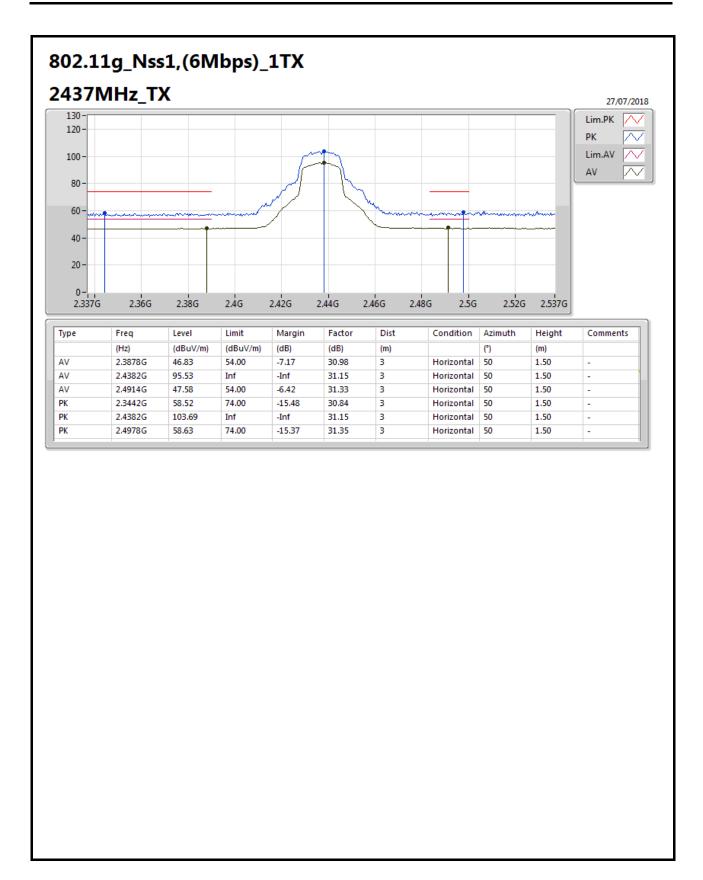


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F24 of F66



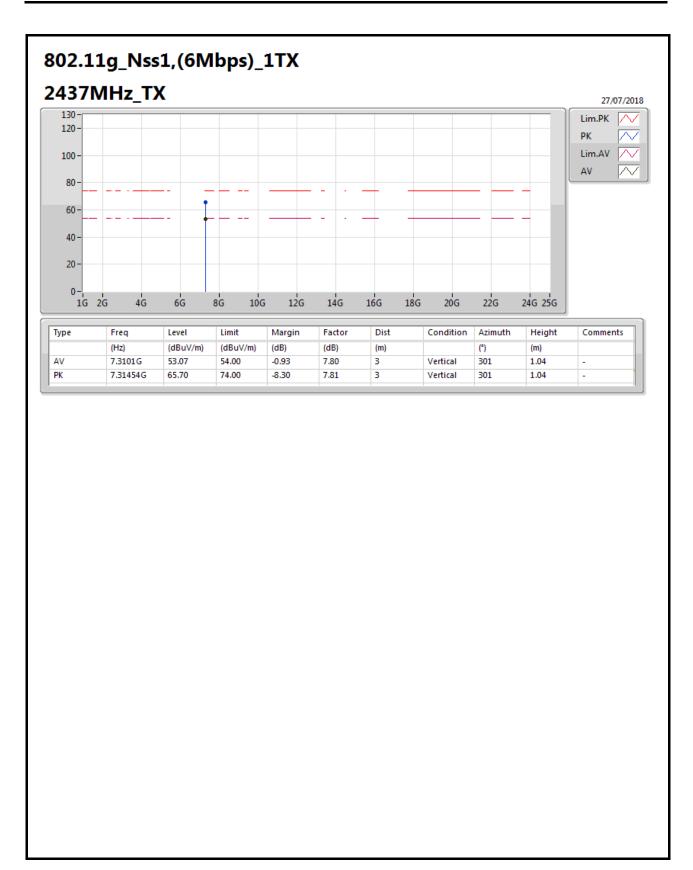


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F25 of F66



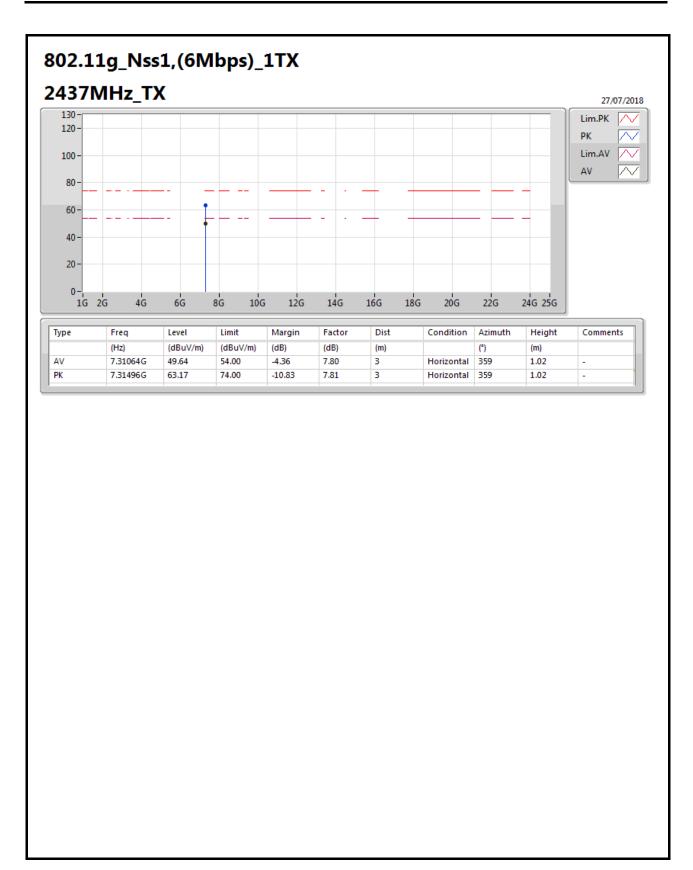


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F26 of F66



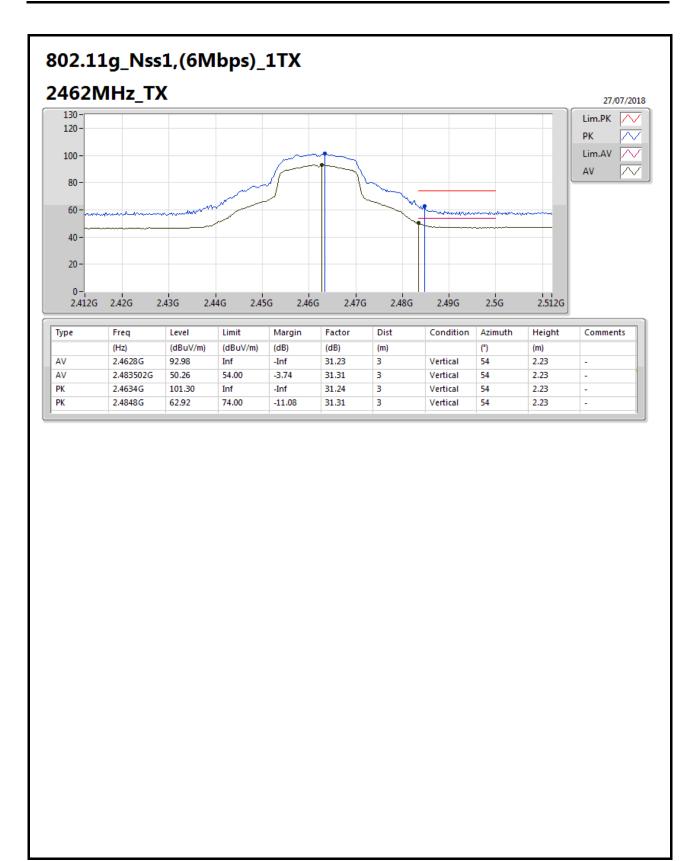


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F27 of F66



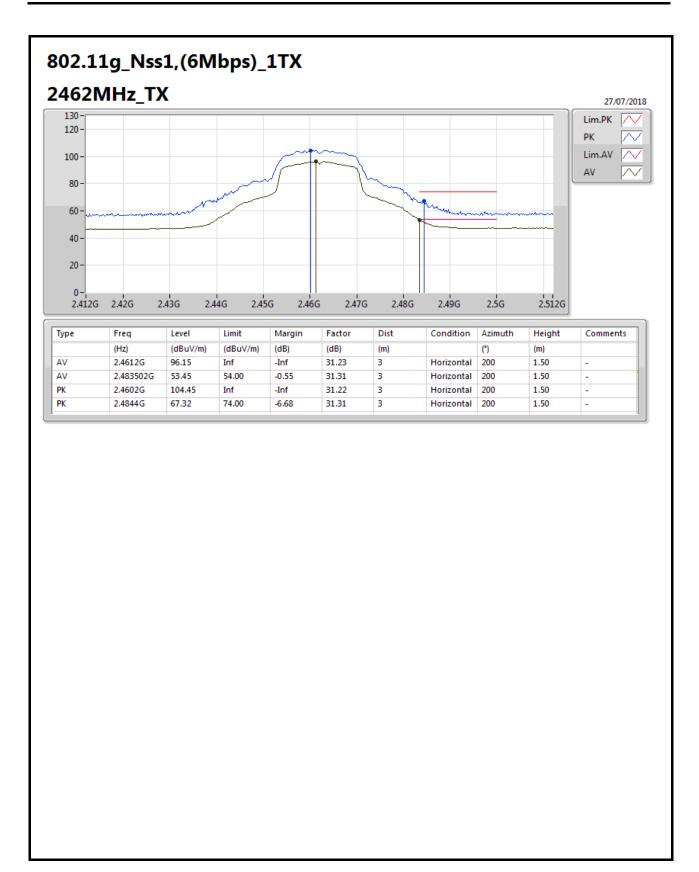


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F28 of F66



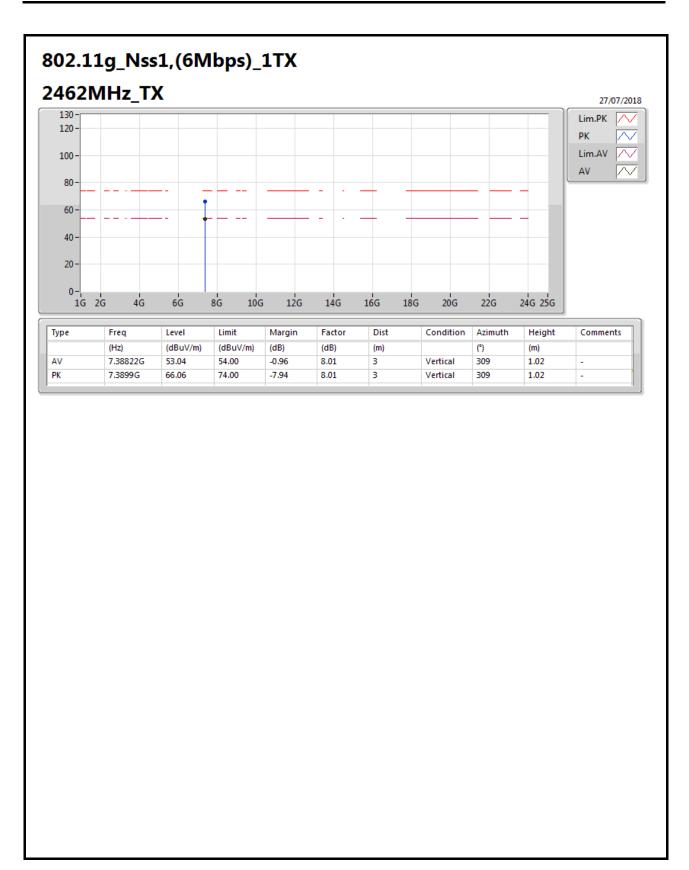


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F29 of F66



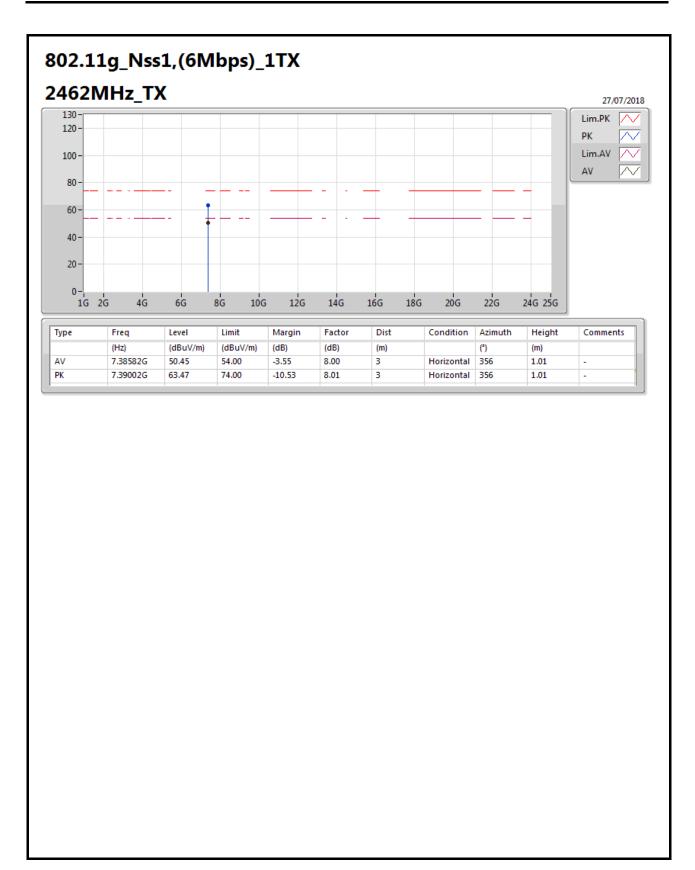


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F30 of F66



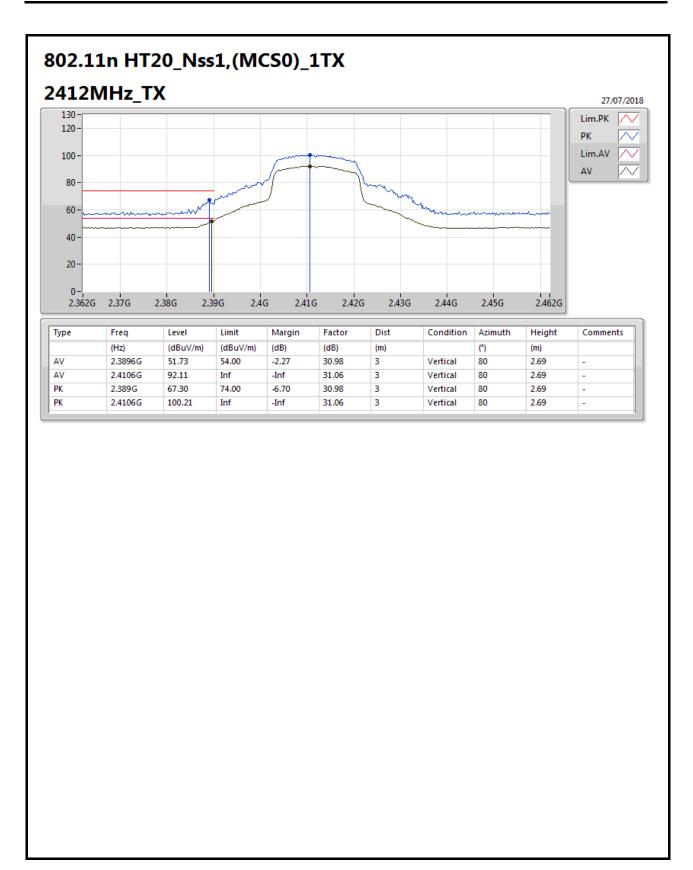


TEL: 886-3-327-3456 FAX: 886-3-327-0973



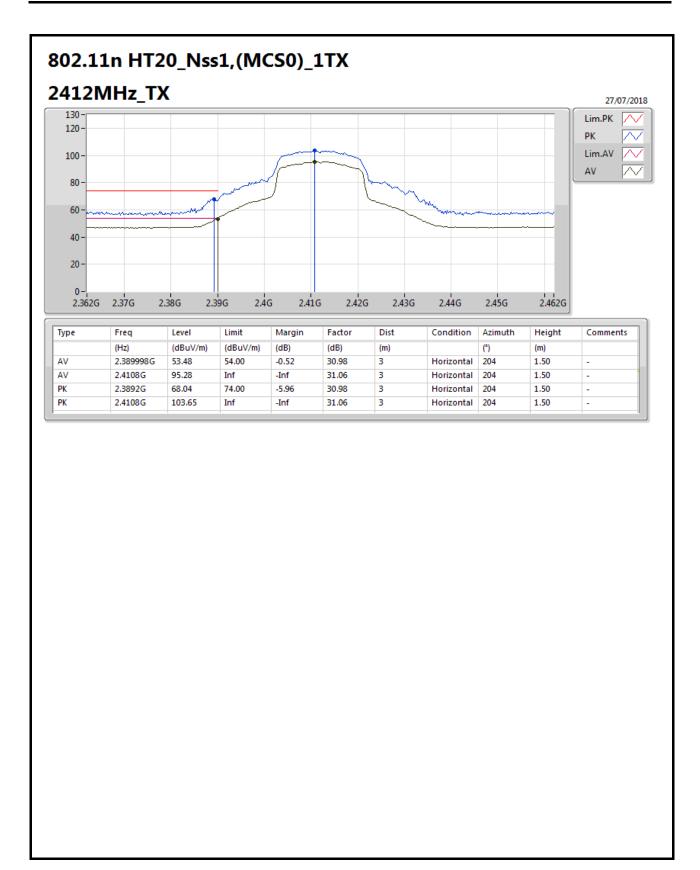


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F32 of F66



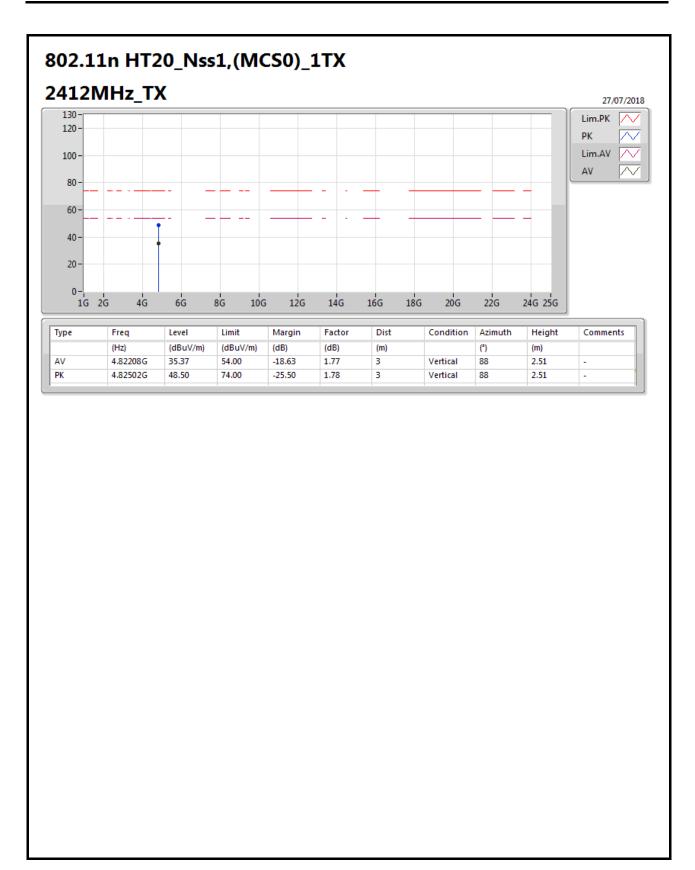


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F33 of F66



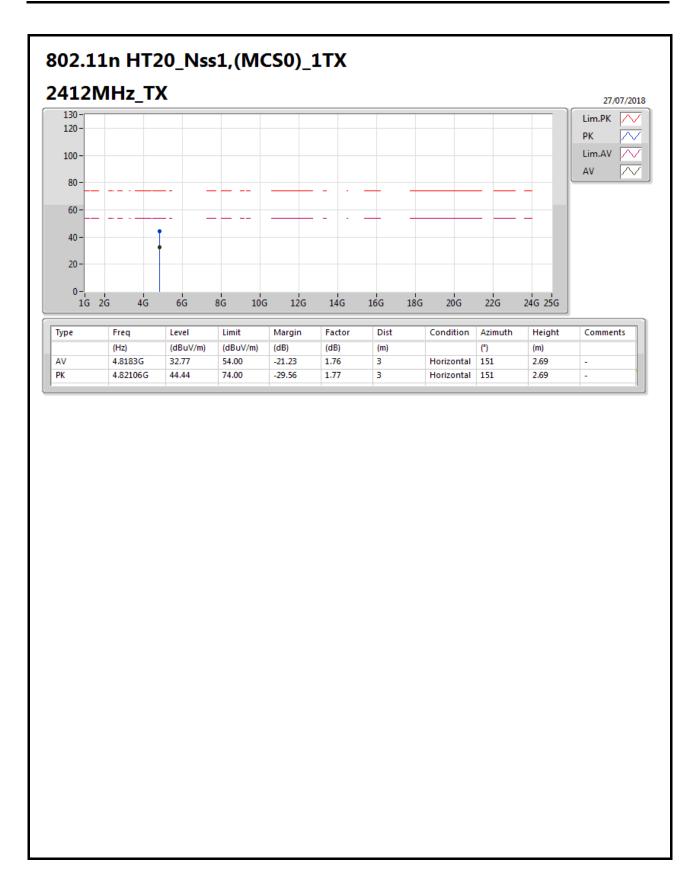


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F34 of F66



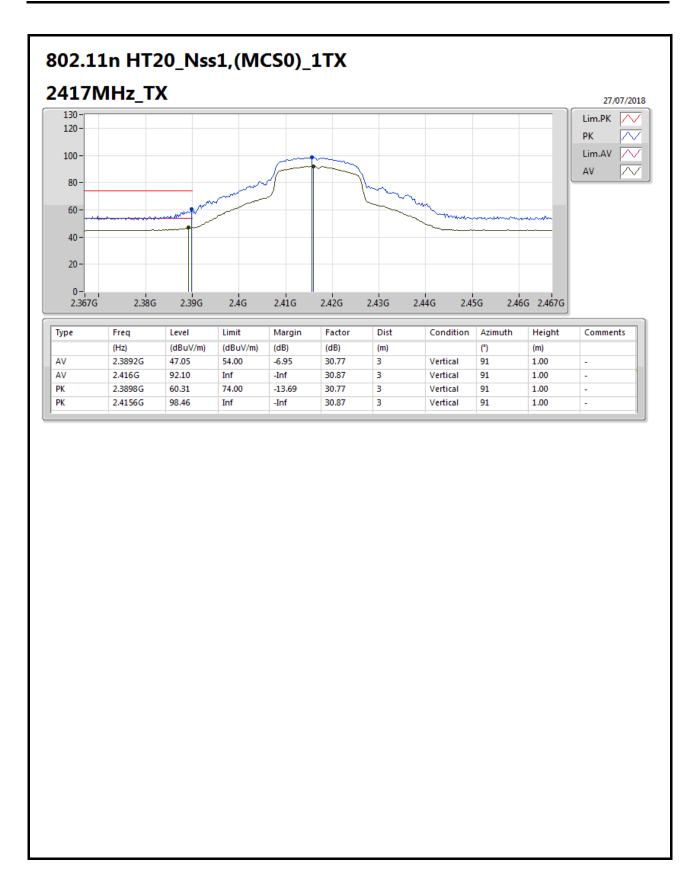


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F35 of F66



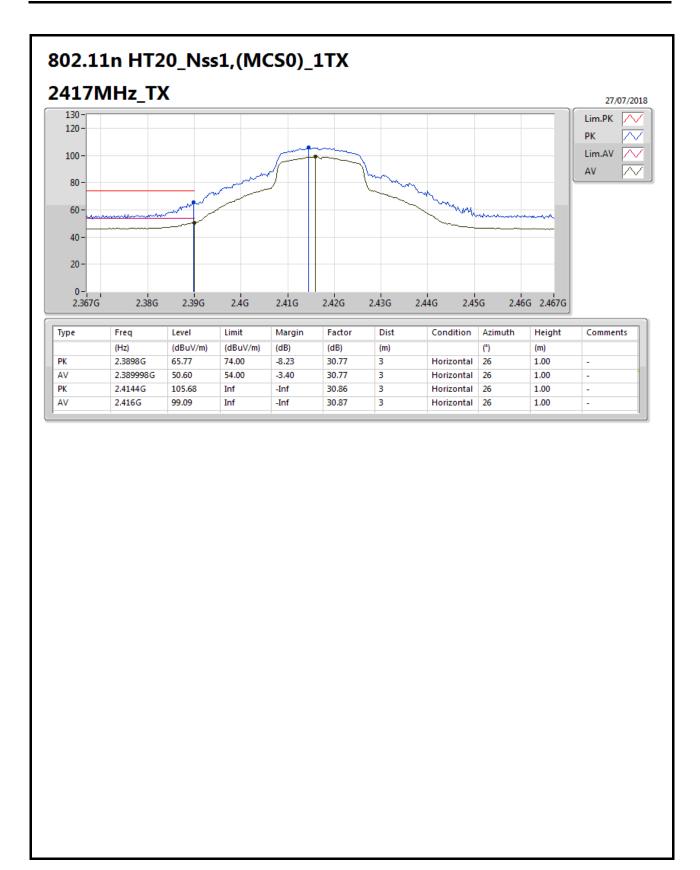


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F36 of F66



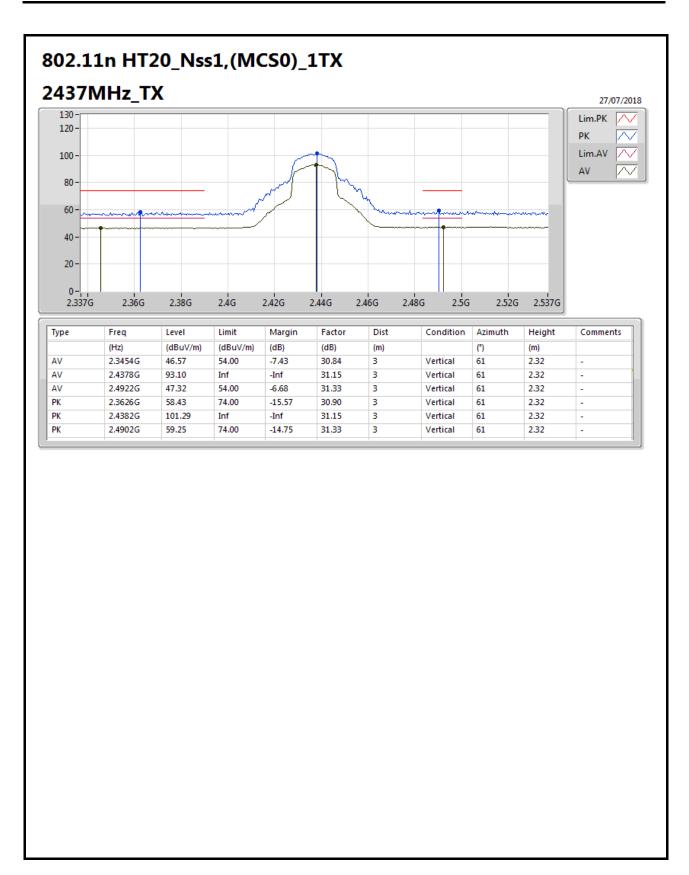


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F37 of F66



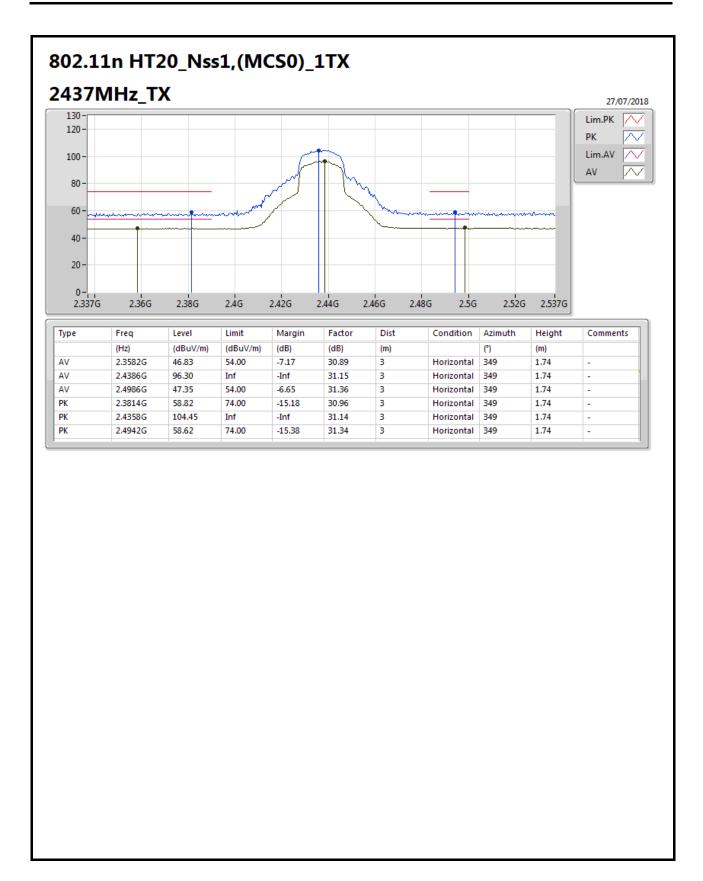


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F38 of F66



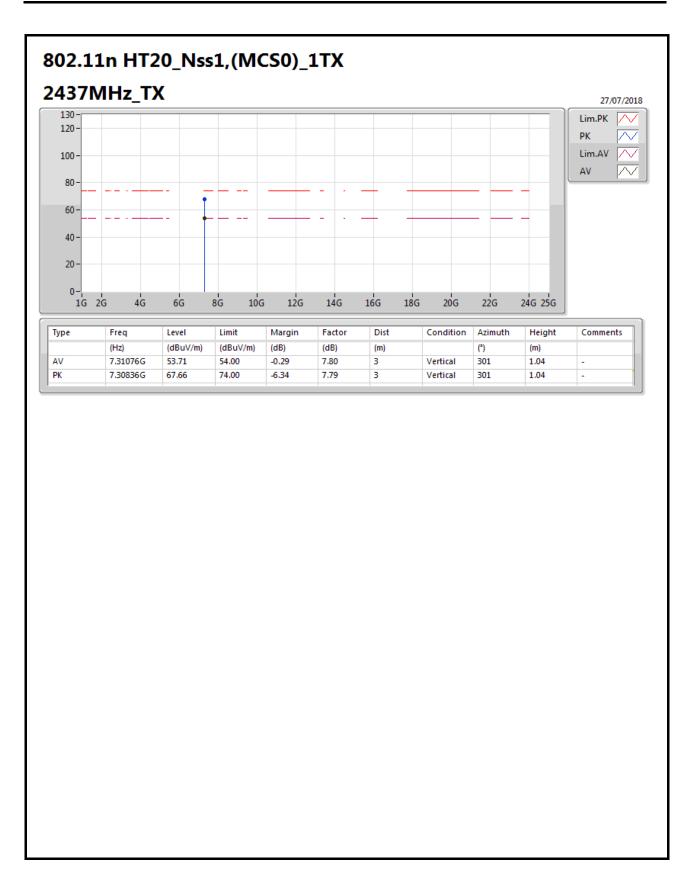


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F39 of F66



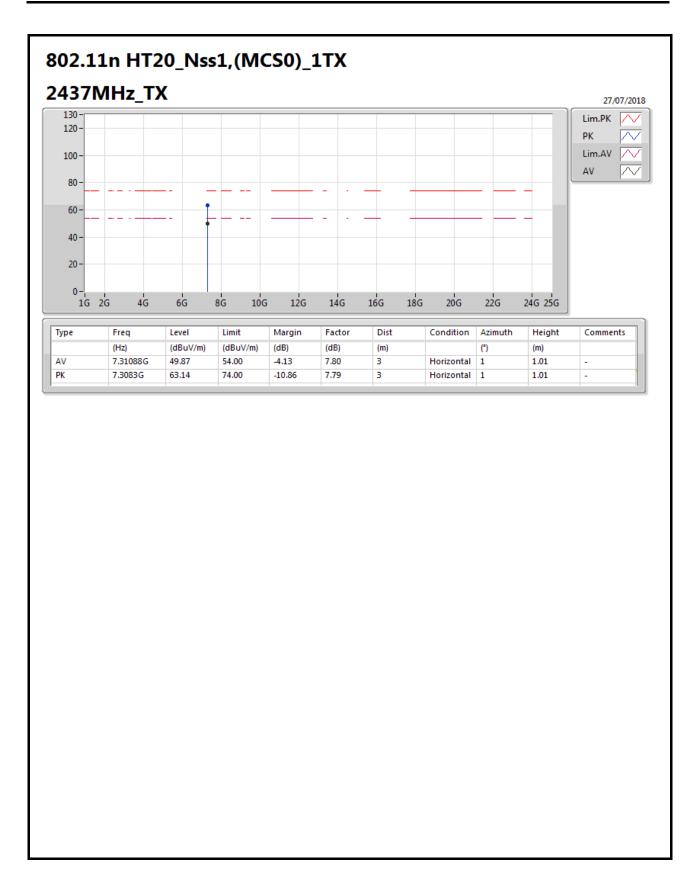


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F40 of F66



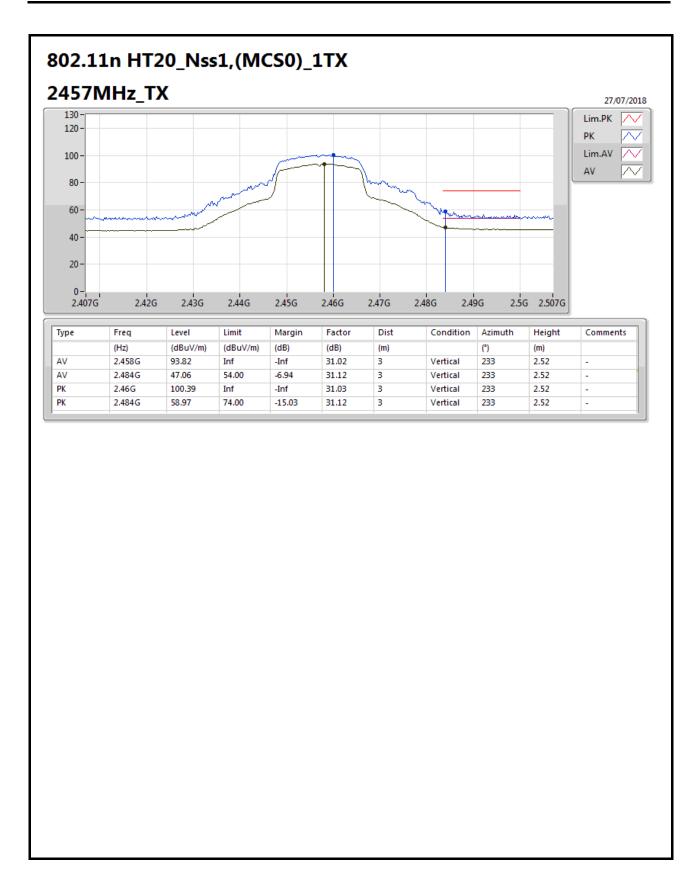


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F41 of F66



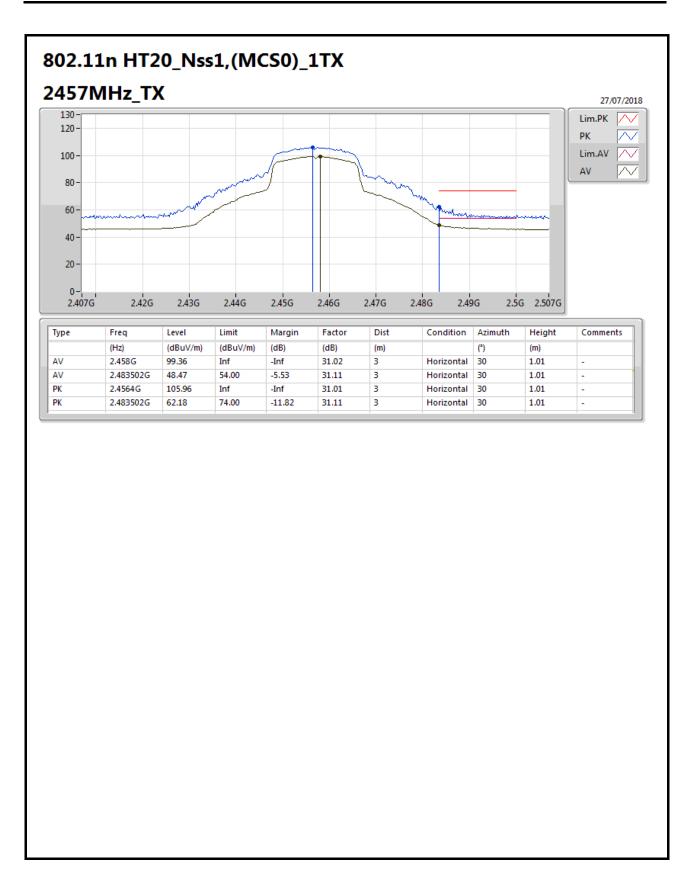


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F42 of F66



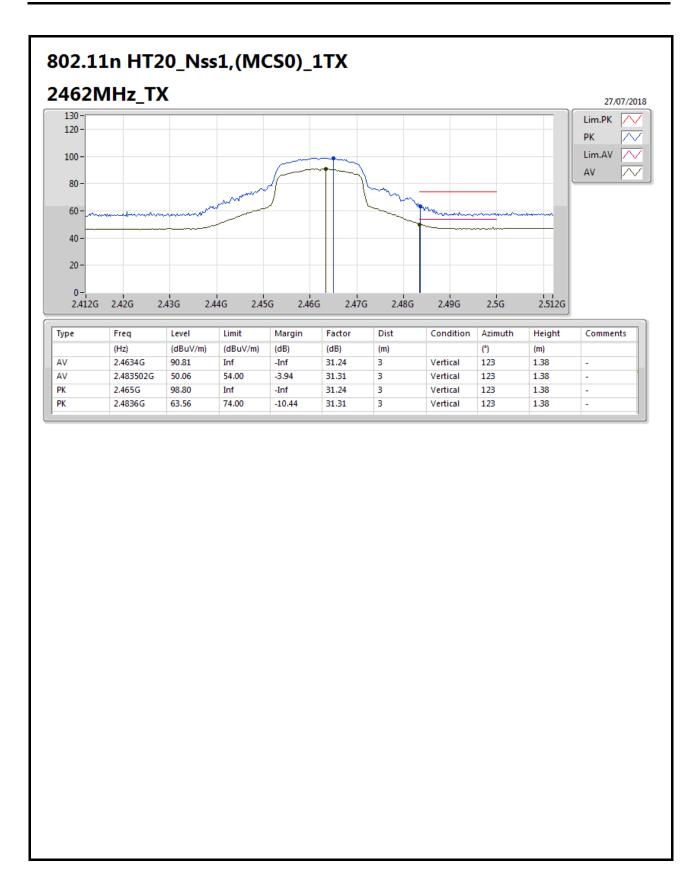


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F43 of F66



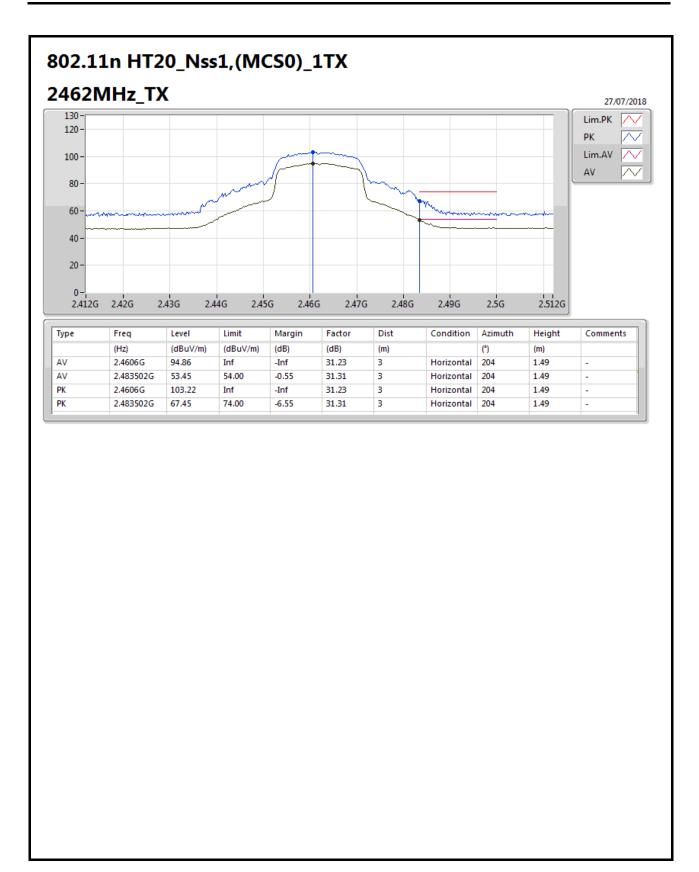


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F44 of F66



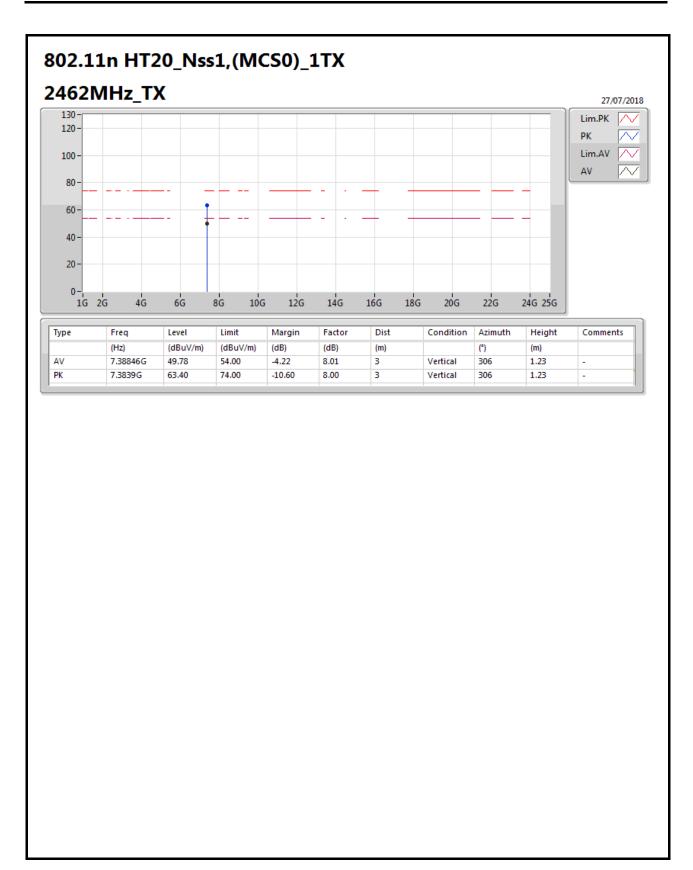


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F45 of F66



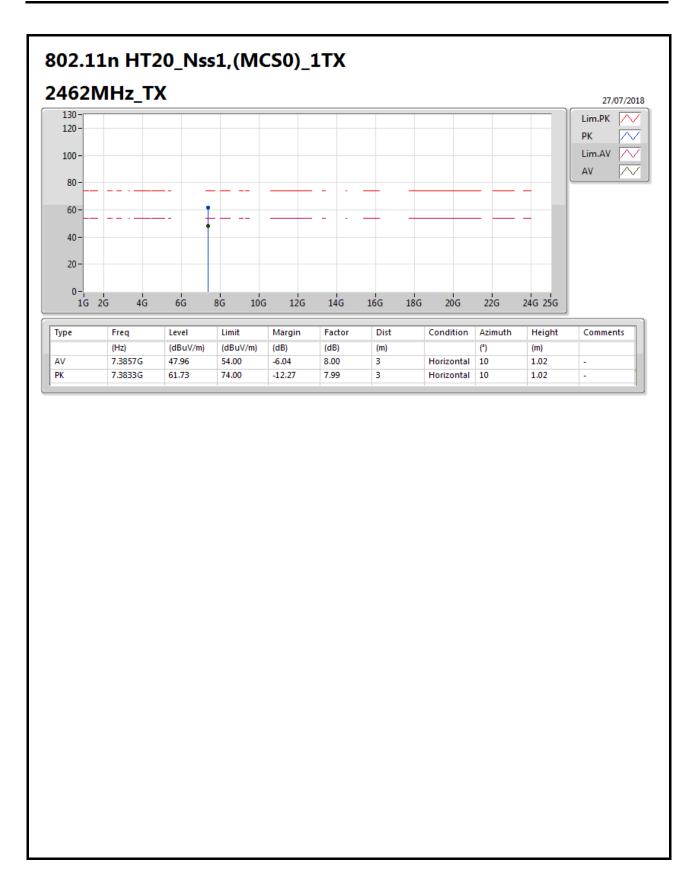


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F46 of F66



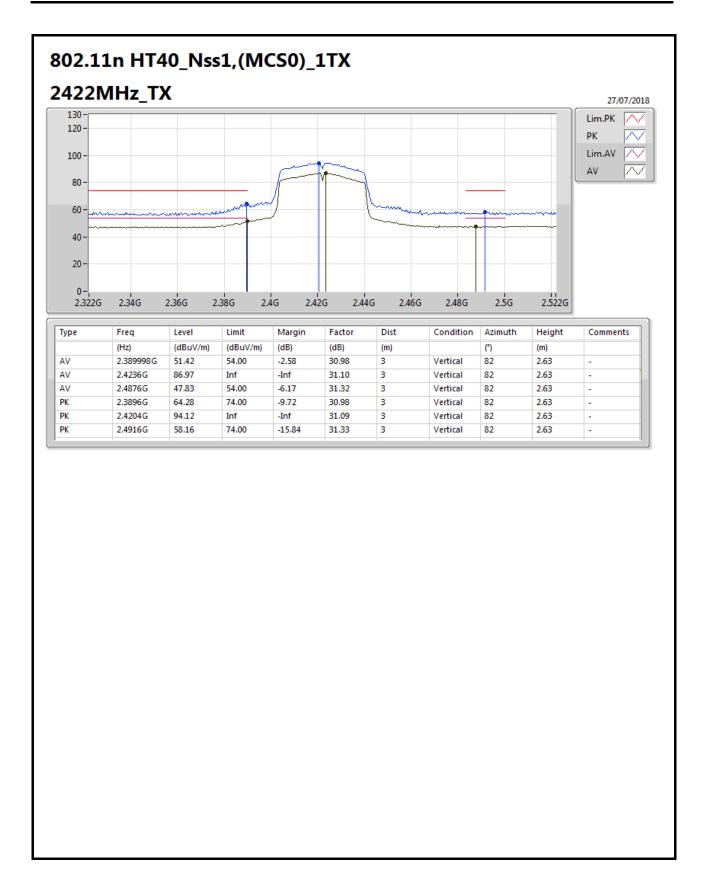


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F47 of F66



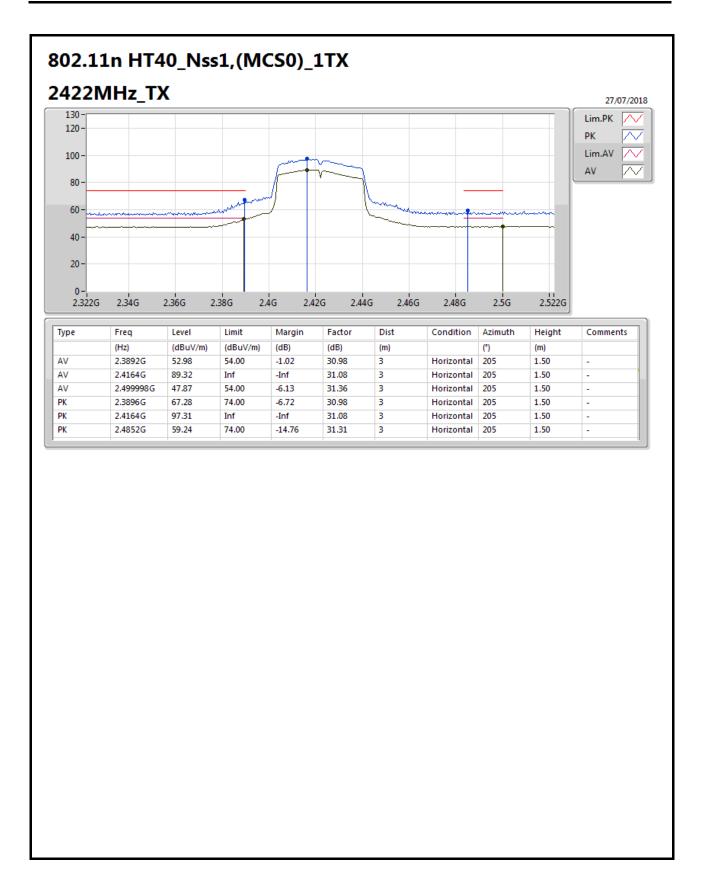


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F48 of F66



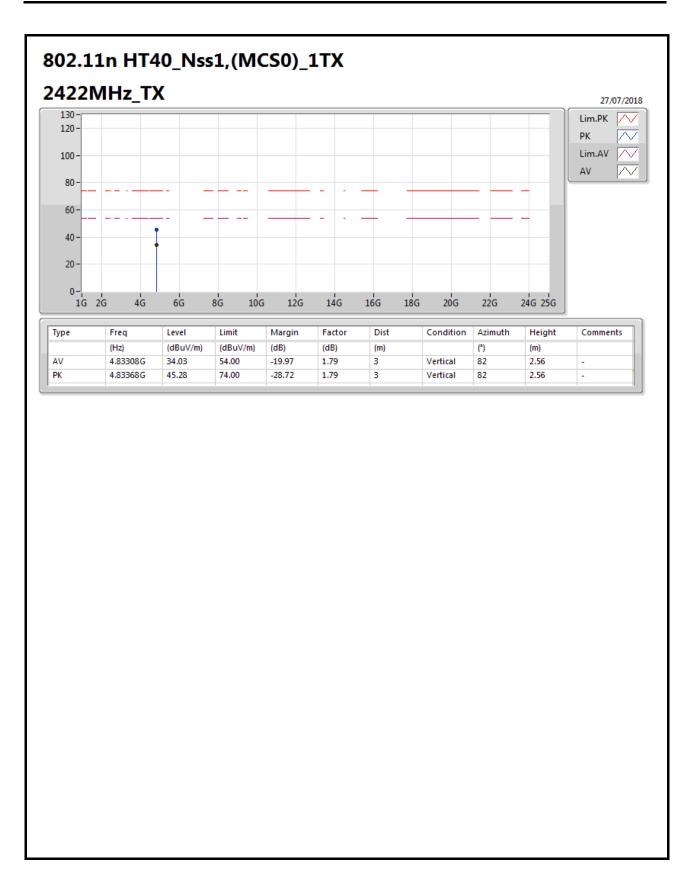


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F49 of F66



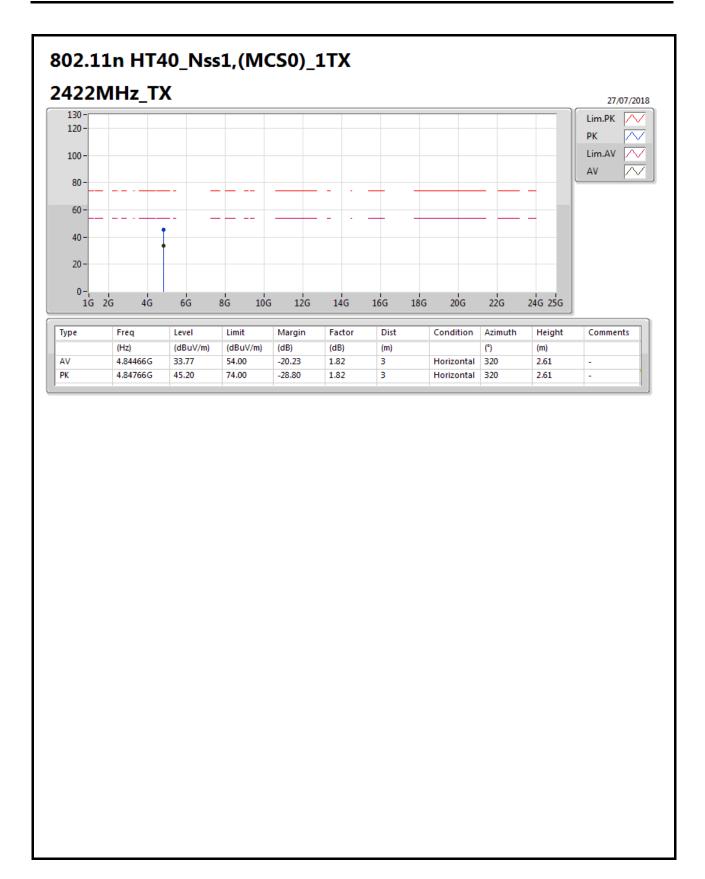


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F50 of F66



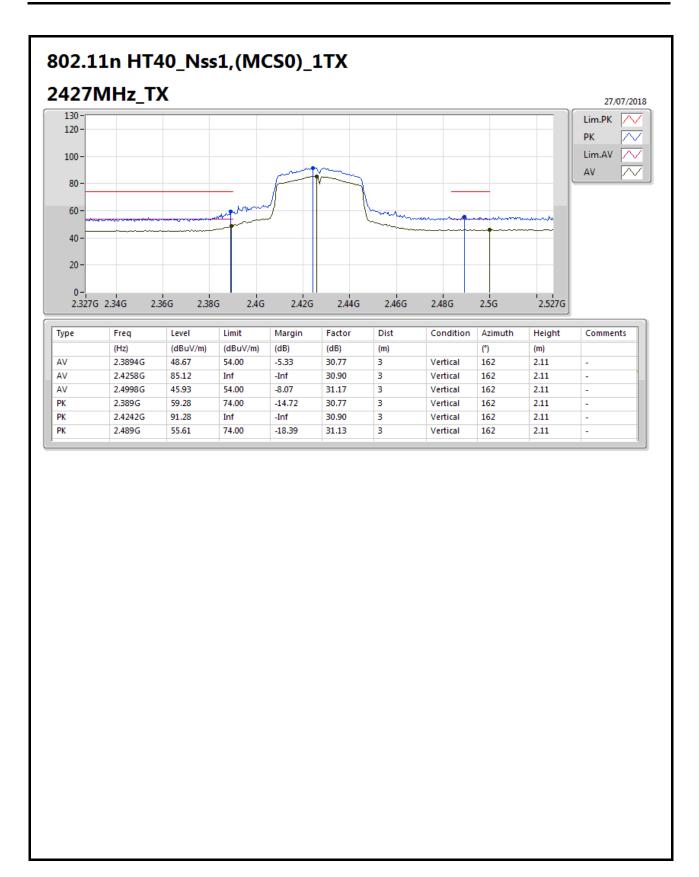


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F51 of F66



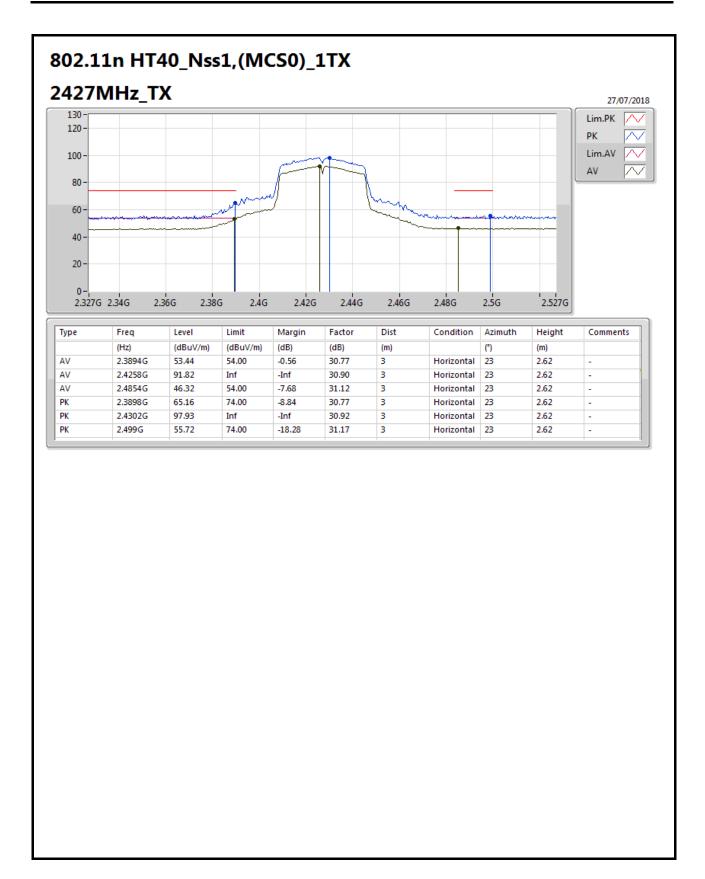


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F52 of F66



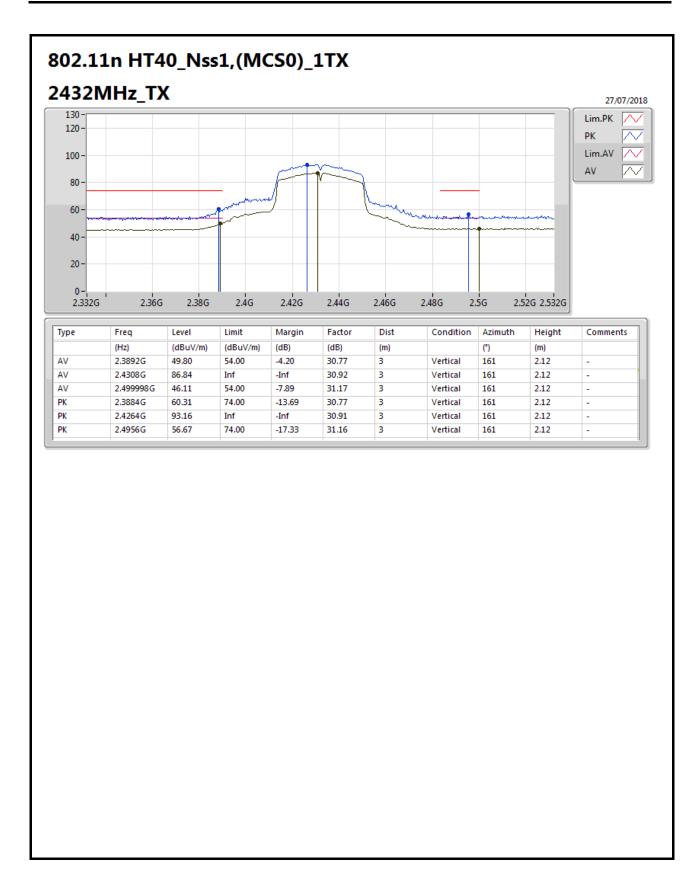


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F53 of F66



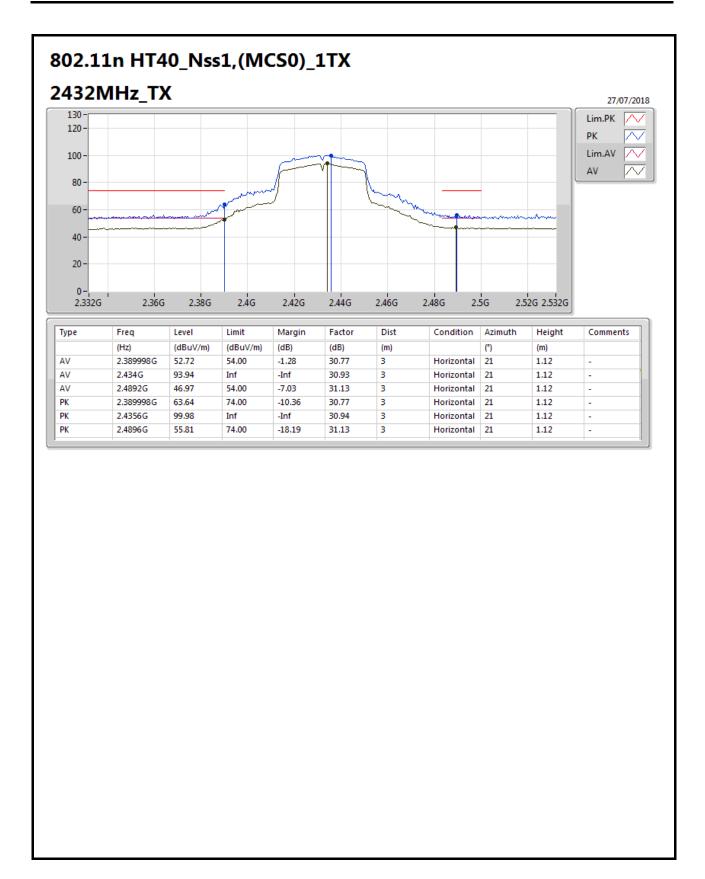


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F54 of F66



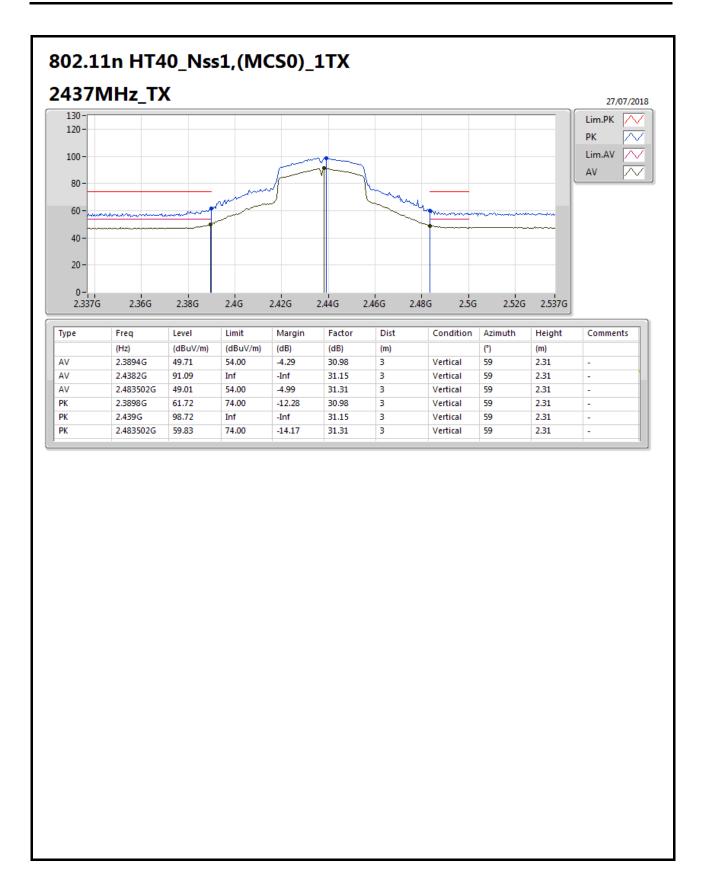


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F55 of F66



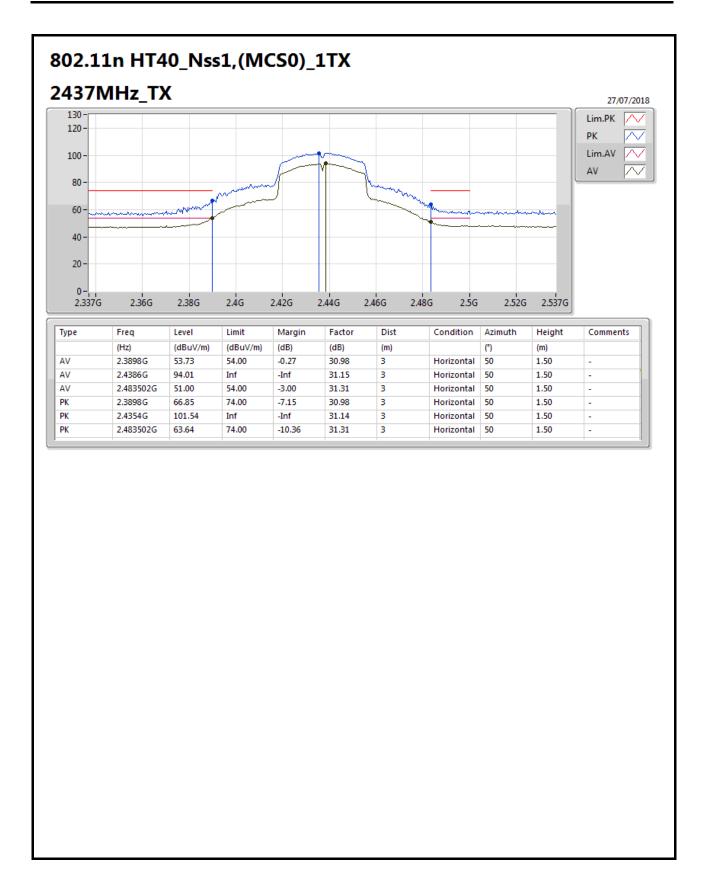


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F56 of F66



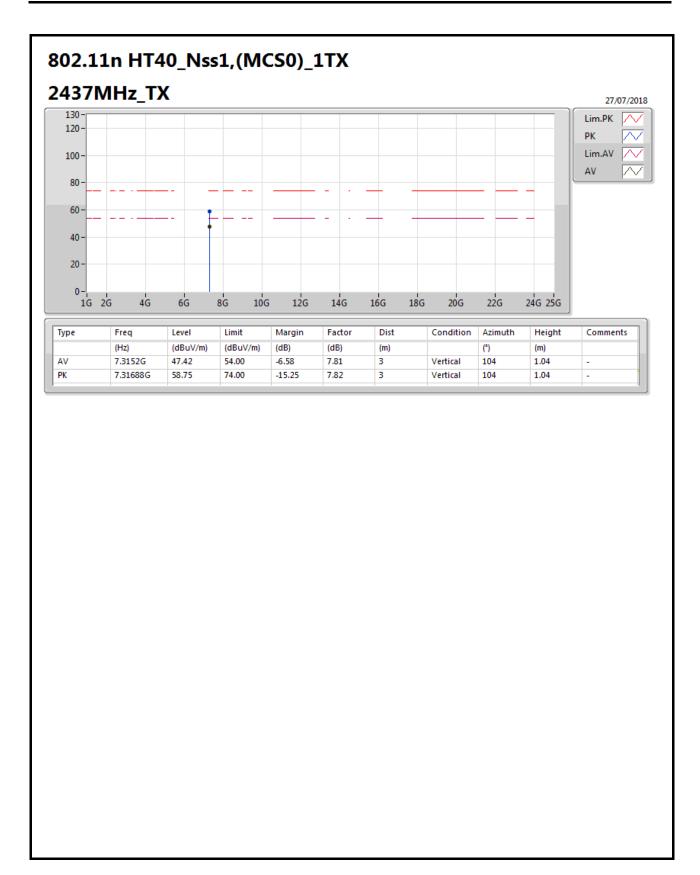


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F57 of F66



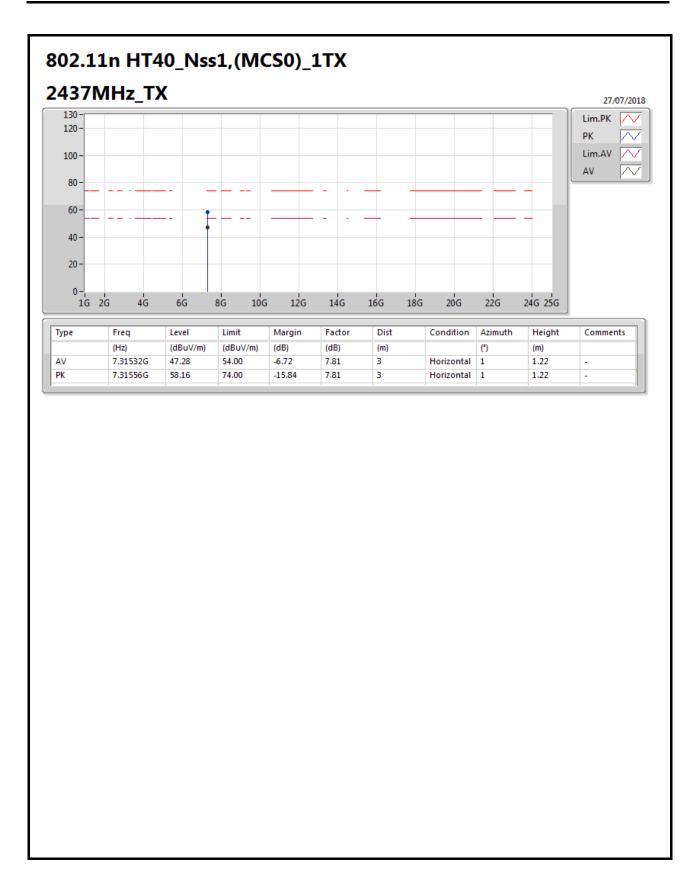


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F58 of F66



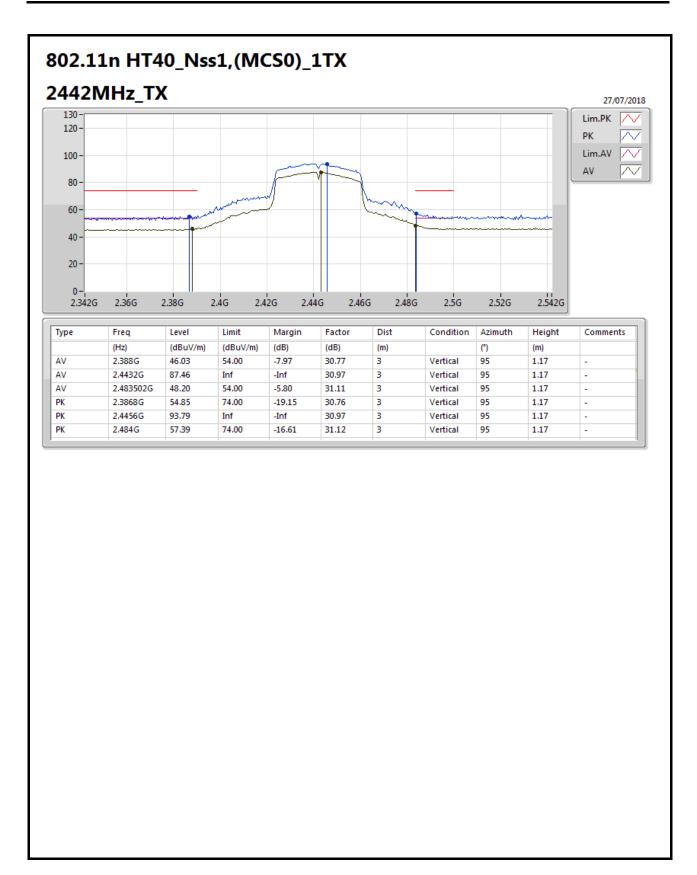


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F59 of F66



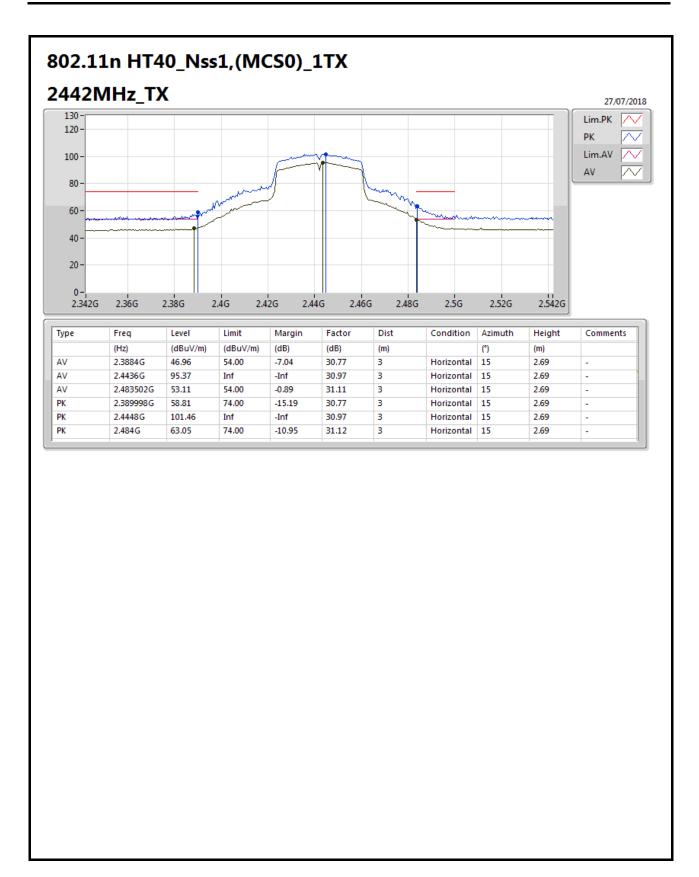


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F60 of F66



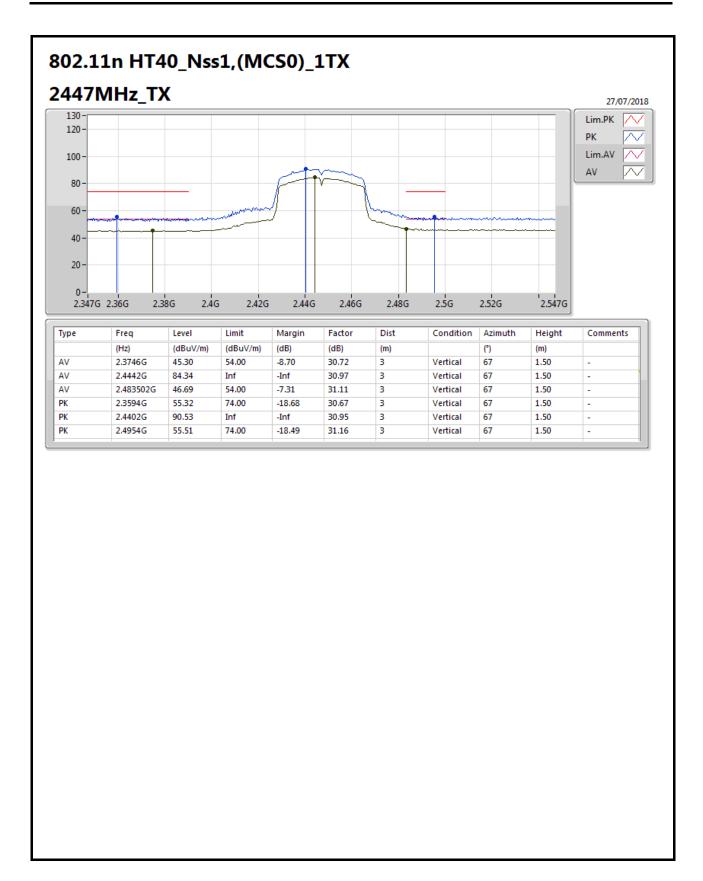


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F61 of F66



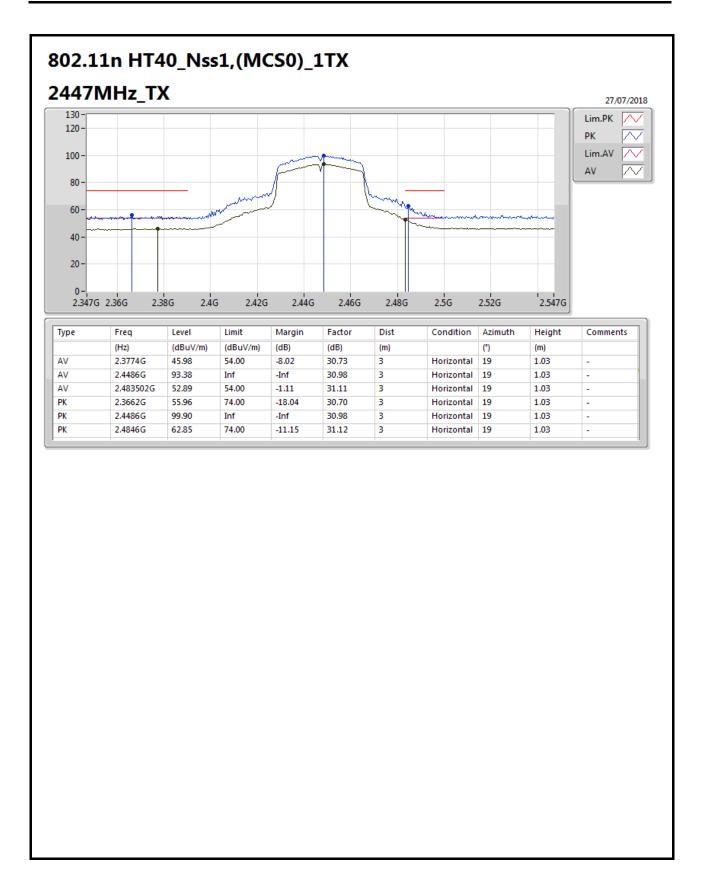

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F62 of F66



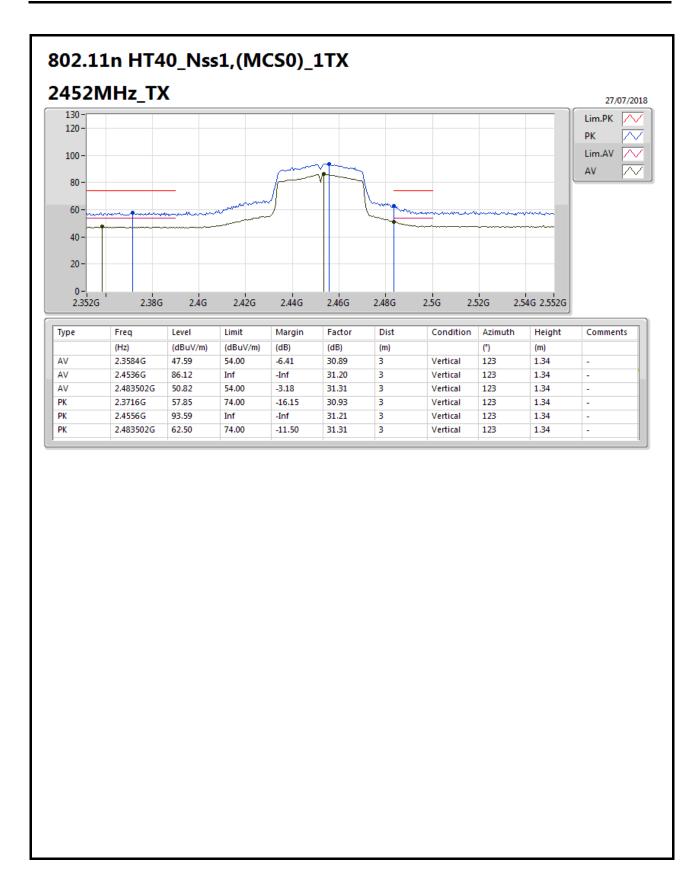


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F63 of F66






TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F64 of F66



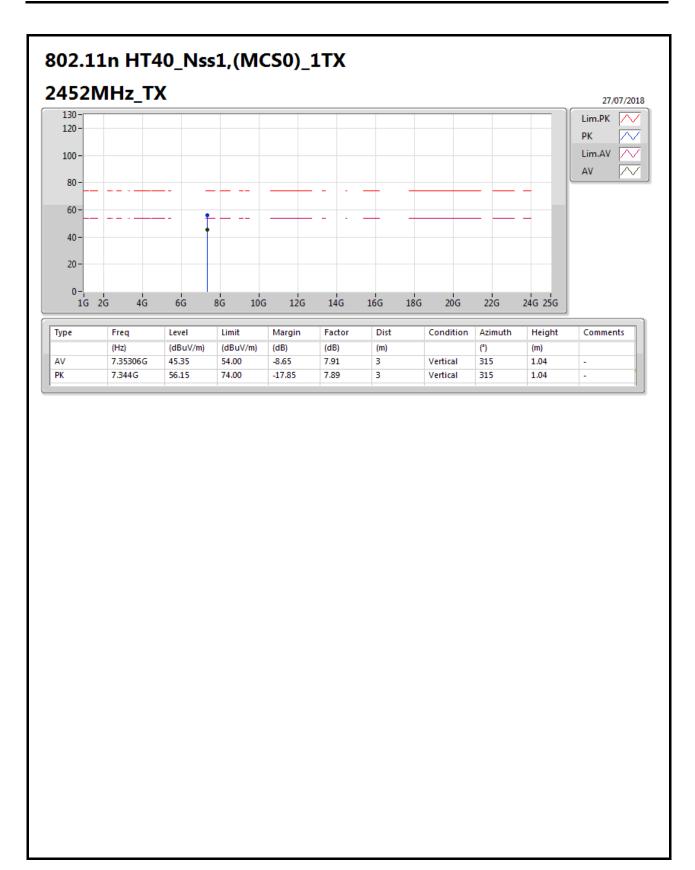

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F65 of F66



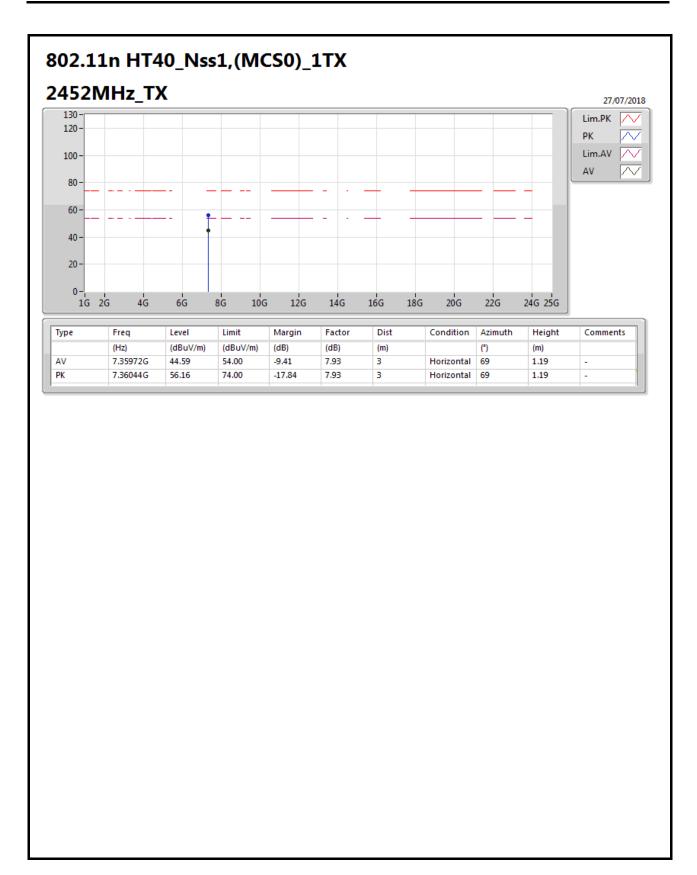

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : F66 of F66