

Date: 2016-01-21 Page 1 of 82

No.: DM122275

Applicant: SHENZHEN TEKSUN TECHNOLOGY CO., LTD

3F, Bldg F7, F518 Idea Land, Baoyuan Road, Xixiang

Avenue, Bao'an District, Shenzhen, China

Manufacturer: SHENZHEN TEKSUN TECHNOLOGY CO., LTD

3F, Bldg F7, F518 Idea Land, Baoyuan Road, Xixiang

Avenue, Bao'an District, Shenzhen, China

**Description of Sample(s):** Product: Bluetooth Speaker

Brand Name: N/A

Model Number: 5B158BT

FCC ID: 2ADXM5B158BT

Date Sample(s) Received: 2016-01-13

**Date Tested:** 2016-01-18 to 2016-01-21

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10: 2013 for

FCC Certification.

**Conclusion(s):** The submitted product <u>COMPLIED</u> with the requirements

of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remark(s): ---



ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



ate: 2016-01-21	Page 2 of 82
No.: DM122275	

#### **CONTENT:**

	Cover Content	Page 1 of 82 Page 2 of 82
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 82
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 82
1.3	Date of Order	Page 3 of 82
1.4	Submitted Sample	Page 3 of 82
1.5	Test Duration	Page 3 of 82
1.6	Country of Origin	Page 3 of 82
1.7	RF Module Details	Page 4 of 82
1.8	Antenna Details	Page 4 of 82
2.0	Technical Details	
2.1	Investigations Requested	Page 5 of 82
2.2	Test Standards and Results Summary	Page 5 of 82
2.3	Table for Test Modes	Page 6 of 82
<u>3.0</u>	Test Results	
3.1	Emission	Page 7 –78 of 82
	Appendix A List of Measurement Equipment	Page 79 of 82
	Appendix B Ancillary Equipment	Page 79 of 82
	Appendix C Photographs	Page 80-82 of 82



Date: 2016-01-21 Page 3 of 82

No.: DM122275

#### 1.0 General Details

#### 1.1 Test Laboratory

STC (Dongguan) Company Limited

**EMC Laboratory** 

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

# 1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Bluetooth Speaker

Manufacturer: SHENZHEN TEKSUN TECHNOLOGY CO., LTD

3F, Bldg F7, F518 Idea Land, Baoyuan Road, Xixiang

Avenue, Bao'an District, Shenzhen, China

Brand Name: N/A Model Number: 5B158BT

Rating: 5.0Vd.c. (Powered by USB port) / Li-ion rechargeable

battery x1 = 3.7 Vd.c

#### 1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Bluetooth Speaker. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

#### 1.3 Date of Order

2016-01-13

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2016-01-18 to 2016-01-20

#### 1.6 Country of Origin

China



Date: 2016-01-21 Page 4 of 82

No.: DM122275

#### 1.7 RF Module Details

Module Model Number: CW6685X

Module FCC ID:

Module Transmission Type: Bluetooth V2.1

Modulation: FHSS (GFSK /  $\pi$ /4-DQPSK/ 8DPSK)

Data Rates: 1MBps: GFSK

2 MBps: π/4-DQPSK 3 MBps: 8DPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 Antenna Details

Antenna Type: PCB antenna Antenna Gain: 1.2dBi



Date: 2016-01-21 Page 5 of 82

No.: DM122275

#### 2.0 Technical Details

#### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

#### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition Test Requirement Test Method Class / Test Result									
	-		Severity						
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	FCC Pubic Notice DA 00-705	N/A						
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A						
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	$\boxtimes$					
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	FCC Pubic Notice DA 00-705	N/A						
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC Pubic Notice DA 00-705	N/A						
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	FCC Pubic Notice DA 00-705	N/A						
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	FCC Pubic Notice DA 00-705	N/A						
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A						
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	FCC Pubic Notice DA 00-705	N/A						
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	$\boxtimes$					
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	$\boxtimes$					

Note: N/A – Not Applicable



Date: 2016-01-21 Page 6 of 82

No.: DM122275

#### 2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK / 8DPSK	2MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	3MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK / 8DPSK	2MBps



Date: 2016-01-21 Page 7 of 82

No.: DM122275

#### 3.0 Test Results

#### 3.1 Emission

#### 3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: FCC Pubic Notice DA 00-705

Test Date: 2016-01-19 Mode of Operation: Tx mode


#### **Test Method:**

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz Detector = Peak, Trace = Max. hold

#### **Test Setup:**

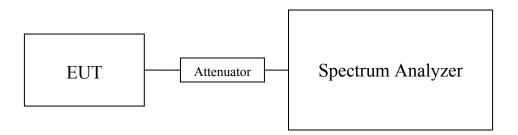

Note: a temporary antenna connector was soldered to the RF output.



Date: 2016-01-21 **Page 8 of 82** 

No.: DM122275

#### Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

#### Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)	
2402	0.000782	
<u></u>		
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)	
2441	0.000594	
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)	
2480	0.000451	

#### Results of Bluetooth Communication mode (π/4-DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000973
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000736
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000516

#### Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.001038
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
Transmitter Frequency (MHz) 2441	Maximum conducted output power (Watt) 0.000791

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000630

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

#### Remark:


- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.



Date: 2016-01-21 Page 9 of 82

No.: DM122275


# Test plot of Maximum Peak Conducted Output Power: Bluetooth Communication mode (GFSK, 2402MHz)



BMP

Date: 18.JAN.2016 16:20:26

#### Bluetooth Communication mode (GFSK, 2441MHz)



BMP


Date: 18.JAN.2016 16:22:55



Date: 2016-01-21 Page 10 of 82


No.: DM122275

#### Bluetooth Communication mode (GFSK, 2480MHz)



BMP Date: 18.JAN.2016 16:23:50

#### Bluetooth Communication mode (π/4-DQPSK, 2402MHz)




Date: 18.JAN.2016 16:20:51



Date: 2016-01-21 Page 11 of 82


No.: DM122275

#### Bluetooth Communication mode (π/4-DQPSK, 2441MHz)



BMP Date: 18.JAN.2016 16:22:24

#### Bluetooth Communication mode (π/4-DQPSK, 2480MHz)




Date: 18.JAN.2016 16:24:24




Date: 2016-01-21 Page 12 of 82 No.: DM122275

### **Bluetooth Communication mode (8DPSK, 2402MHz)**



BMP Date: 18.JAN.2016 16:21:13

#### Bluetooth Communication mode (8DPSK, 2441MHz)




BMP Date: 18.JAN.2016 16:21:58



Date: 2016-01-21 Page 13 of 82

No.: DM122275

#### Bluetooth Communication mode (8DPSK, 2480MHz)



BMP

Date: 18.JAN.2016 16:25:03



Date: 2016-01-21 Page 14 of 82

No.: DM122275

#### 3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209 Test Method: ANSI C63.10: 2013

Test Date: 2016-01-20 Mode of Operation: Tx mode

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2016-01-21 Page 15 of 82

No.: DM122275

#### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 3MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

#### **Test Setup:**

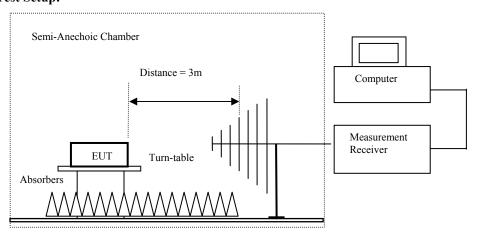

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30 MHz to 1000 MHz made with Bi-log antennas, above 1000 MHz horn antennas are used, 9 kHz to 30 MHz loop antennas are used.



Date: 2016-01-21 Page 16 of 82

No.: DM122275

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emits for Radiated Emissions [Fee 47 CFR 13.207 Class b].				
Frequency Range	Quasi-Peak Limits			
[MHz]	$[\mu V/m]$			
0.009-0.490	2400/F (kHz)			
0.490-1.705	24000/F (kHz)			
1.705-30	30			
30-88	100			
88-216	150			
216-960	200			
Above960	500			

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Result of 1x mode (2402.0 MHz) (GFSK mode) (9KHz – 30MHz): Pass								
Field Strength of Spurious Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level Factor Strength Strength Polarity							
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions	detected are r	nore than 20	dB below the	FCC Limits			

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

Field Strength of Spurious Emissions							
	Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
4804.0	16.4	41.5	57.9	74.0	16.1	Vertical	
4804.0	11.8	42.4	54.2	74.0	19.8	Horizontal	
7206.0	10.6	45.1	55.7	74.0	18.3	Vertical	
7206.0	7.5	46.2	53.7	74.0	20.3	Horizontal	
9608.0	8.6	48.0	56.6	74.0	17.4	Vertical	
9608.0	5.3	48.8	54.1	74.0	19.9	Horizontal	
12010.0	1.8	51.8	53.6	74.0	20.4	Vertical	
12010.0	-0.5	52.4	51.9	74.0	22.1	Horizontal	



Date: 2016-01-21 Page 17 of 82

No.: DM122275

#### Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m	C	Polarity	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m		
4804.0	0.2	41.5	41.7	54.0	12.3	Vertical	
4804.0	-4.5	42.4	37.9	54.0	16.1	Horizontal	
7206.0	-5.7	45.1	39.4	54.0	14.6	Vertical	
7206.0	-7.7	46.2	38.5	54.0	15.5	Horizontal	
9608.0	-7.6	48.0	40.4	54.0	13.6	Vertical	
9608.0	-11.0	48.8	37.8	54.0	16.2	Horizontal	
12010.0	-14.5	51.8	37.3	54.0	16.7	Vertical	
12010.0	-16.6	52.4	35.8	54.0	18.2	Horizontal	

#### Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
1	Level @3m	Factor	Strength	@3m	C	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	16.0	41.6	57.6	74.0	16.4	Vertical				
4882.0	11.3	42.5	53.8	74.0	20.2	Horizontal				
7323.0	2.3	53.2	55.5	74.0	18.5	Vertical				
7323.0	5.4	46.3	51.7	74.0	22.3	Horizontal				
9764.0	8.5	48.1	56.6	74.0	17.4	Vertical				
9764.0	3.8	48.9	52.7	74.0	21.3	Horizontal				
12205.0	4.0	51.6	55.6	74.0	18.4	Vertical				
12205.0	-0.1	52.5	52.4	74.0	21.6	Horizontal				



Date: 2016-01-21 Page 18 of 82

No.: DM122275

#### Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
		A	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.9	41.6	42.5	54.0	11.5	Vertical			
4882.0	-3.9	42.5	38.6	54.0	15.4	Horizontal			
7323.0	-5.0	45.2	40.2	54.0	13.8	Vertical			
7323.0	-9.7	46.3	36.6	54.0	17.4	Horizontal			
9764.0	-6.6	48.1	41.5	54.0	12.5	Vertical			
9764.0	-11.4	48.9	37.5	54.0	16.5	Horizontal			
12205.0	-11.1	51.6	40.5	54.0	13.5	Vertical			
12205.0	-15.2	52.5	37.3	54.0	16.7	Horizontal			

#### Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions		_		
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4960.0	15.5	41.4	56.9	74.0	17.1	Vertical		
4960.0	11.4	42.7	54.1	74.0	19.9	Horizontal		
7440.0	9.7	45.6	55.3	74.0	18.7	Vertical		
7440.0	6.2	46.5	52.7	74.0	21.3	Horizontal		
9920.0	7.2	48.6	55.8	74.0	18.2	Vertical		
9920.0	3.7	49.7	53.4	74.0	20.6	Horizontal		
12400.0	2.7	51.7	54.4	74.0	19.6	Vertical		
12400.0	-0.6	52.7	52.1	74.0	21.9	Horizontal		



Date: 2016-01-21 Page 19 of 82

No.: DM122275

#### Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	_	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.4	41.4	41.8	54.0	12.2	Vertical				
4960.0	-3.8	42.7	38.9	54.0	15.1	Horizontal				
7440.0	-5.6	45.6	40.0	54.0	14.0	Vertical				
7440.0	-8.9	46.5	37.6	54.0	16.4	Horizontal				
9920.0	-7.9	48.6	40.7	54.0	13.3	Vertical				
9920.0	-11.5	49.7	38.2	54.0	15.8	Horizontal				
12400.0	-12.6	51.7	39.1	54.0	14.9	Vertical				
12400.0	-15.7	52.7	37.0	54.0	17.0	Horizontal				

#### Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	15.4	41.5	56.9	74.0	17.1	Vertical				
4804.0	11.7	42.4	54.1	74.0	19.9	Horizontal				
7206.0	9.6	45.1	54.7	74.0	19.3	Vertical				
7206.0	6.3	46.2	52.5	74.0	21.5	Horizontal				
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical				
9608.0	4.4	48.8	53.2	74.0	20.8	Horizontal				
12010.0	2.5	51.8	54.3	74.0	19.7	Vertical				
12010.0	0.3	52.4	52.7	74.0	21.3	Horizontal				



Date: 2016-01-21 Page 20 of 82

No.: DM122275

#### Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	-0.7	41.5	40.8	54.0	13.2	Vertical			
4804.0	-4.5	42.4	37.9	54.0	16.1	Horizontal			
7206.0	-6.7	45.1	38.4	54.0	15.6	Vertical			
7206.0	-8.9	46.2	37.3	54.0	16.7	Horizontal			
9608.0	-8.7	48.0	39.3	54.0	14.7	Vertical			
9608.0	-11.9	48.8	36.9	54.0	17.1	Horizontal			
12010.0	-13.7	51.8	38.1	54.0	15.9	Vertical			
12010.0	-15.8	52.4	36.6	54.0	17.4	Horizontal			

#### Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2441.0 MHz) ( $\pi$ /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	15.6	41.6	57.2	74.0	16.8	Vertical				
4882.0	10.2	42.5	52.7	74.0	21.3	Horizontal				
7323.0	1.0	53.2	54.2	74.0	19.8	Vertical				
7323.0	5.7	46.3	52.0	74.0	22.0	Horizontal				
9764.0	7.7	48.1	55.8	74.0	18.2	Vertical				
9764.0	3.6	48.9	52.5	74.0	21.5	Horizontal				
12205.0	4.2	51.6	55.8	74.0	18.2	Vertical				
12205.0	0.1	52.5	52.6	74.0	21.4	Horizontal				



Date: 2016-01-21 Page 21 of 82

No.: DM122275

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

Kesuit of Tx inc	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.5	41.6	42.1	54.0	11.9	Vertical			
4882.0	-5.0	42.5	37.5	54.0	16.5	Horizontal			
7323.0	-6.4	45.2	38.8	54.0	15.2	Vertical			
7323.0	-9.4	46.3	36.9	54.0	17.1	Horizontal			
9764.0	-7.5	48.1	40.6	54.0	13.4	Vertical			
9764.0	-11.6	48.9	37.3	54.0	16.7	Horizontal			
12205.0	-10.9	51.6	40.7	54.0	13.3	Vertical			
12205.0	-15.0	52.5	37.5	54.0	16.5	Horizontal			

#### Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits			

#### Result of Tx mode (2480.0 MHz) ( $\pi$ /4-DQPSK mode) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	15.3	41.4	56.7	74.0	17.3	Vertical			
4960.0	11.0	42.7	53.7	74.0	20.3	Horizontal			
7440.0	9.6	45.6	55.2	74.0	18.8	Vertical			
7440.0	5.9	46.5	52.4	74.0	21.6	Horizontal			
9920.0	6.5	48.6	55.1	74.0	18.9	Vertical			
9920.0	3	49.7	52.7	74.0	21.3	Horizontal			
12400.0	2.8	51.7	54.5	74.0	19.5	Vertical			
12400.0	-0.6	52.7	52.1	74.0	21.9	Horizontal			



Date: 2016-01-21 Page 22 of 82

No.: DM122275

#### Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	٥	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.2	41.4	41.6	54.0	12.4	Vertical				
4960.0	-4.2	42.7	38.5	54.0	15.5	Horizontal				
7440.0	-5.7	45.6	39.9	54.0	14.1	Vertical				
7440.0	-9.2	46.5	37.3	54.0	16.7	Horizontal				
9920.0	-8.6	48.6	40.0	54.0	14.0	Vertical				
9920.0	-12.2	49.7	37.5	54.0	16.5	Horizontal				
12400.0	-12.5	51.7	39.2	54.0	14.8	Vertical				
12400.0	-15.7	52.7	37.0	54.0	17.0	Horizontal				

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	C	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	16.7	41.5	58.2	74.0	15.8	Vertical				
4804.0	12.9	42.4	55.3	74.0	18.7	Horizontal				
7206.0	10.4	45.1	55.5	74.0	18.5	Vertical				
7206.0	5.1	46.2	51.3	74.0	22.7	Horizontal				
9608.0	8.1	48.0	56.1	74.0	17.9	Vertical				
9608.0	5.5	48.8	54.3	74.0	19.7	Horizontal				
12010.0	3.5	51.8	55.3	74.0	18.7	Vertical				
12010.0	1.1	52.4	53.5	74.0	20.5	Horizontal				



Date: 2016-01-21 Page 23 of 82

No.: DM122275

#### Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	0.5	41.5	42.0	54.0	12.0	Vertical			
4804.0	-3.3	42.4	39.1	54.0	14.9	Horizontal			
7206.0	-5.9	45.1	39.2	54.0	14.8	Vertical			
7206.0	-10.1	46.2	36.1	54.0	17.9	Horizontal			
9608.0	-8.0	48.0	40.0	54.0	14.0	Vertical			
9608.0	-10.8	48.8	38.0	54.0	16.0	Horizontal			
12010.0	-12.7	51.8	39.1	54.0	14.9	Vertical			
12010.0	-15.0	52.4	37.4	54.0	16.6	Horizontal			

#### Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

		Field Strength of Spurious Emissions								
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	15.5	41.6	57.1	74.0	16.9	Vertical				
4882.0	11.0	42.5	53.5	74.0	20.5	Horizontal				
7323.0	2.3	53.2	55.5	74.0	18.5	Vertical				
7323.0	7.0	46.3	53.3	74.0	20.7	Horizontal				
9764.0	7.8	48.1	55.9	74.0	18.1	Vertical				
9764.0	3.3	48.9	52.2	74.0	21.8	Horizontal				
12205.0	3.7	51.6	55.3	74.0	18.7	Vertical				
12205.0	-0.8	52.5	51.7	74.0	22.3	Horizontal				



Date: 2016-01-21 Page 24 of 82

No.: DM122275

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

Result of 1x mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass									
	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.4	41.6	42.0	54.0	12.0	Vertical			
4882.0	-4.2	42.5	38.3	54.0	15.7	Horizontal			
7323.0	-5.1	45.2	40.1	54.0	13.9	Vertical			
7323.0	-8.2	46.3	38.1	54.0	15.9	Horizontal			
9764.0	-7.3	48.1	40.8	54.0	13.2	Vertical			
9764.0	-11.9	48.9	37	54.0	17.0	Horizontal			
12205.0	-11.4	51.6	40.2	54.0	13.8	Vertical			
12205.0	-15.9	52.5	36.6	54.0	17.4	Horizontal			

#### Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
			Peak Value			-			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	15.5	41.4	56.9	74.0	17.1	Vertical			
4960.0	10.9	42.7	53.6	74.0	20.4	Horizontal			
7440.0	9.9	45.6	55.5	74.0	18.5	Vertical			
7440.0	6.3	46.5	52.8	74.0	21.2	Horizontal			
9920.0	6.9	48.6	55.5	74.0	18.5	Vertical			
9920.0	2.3	49.7	52.0	74.0	22.0	Horizontal			
12400.0	2.6	51.7	54.3	74.0	19.7	Vertical			
12400.0	-0.7	52.7	52.0	74.0	22.0	Horizontal			



Date: 2016-01-21 Page 25 of 82

No.: DM122275

#### Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	0.4	41.4	41.8	54.0	12.2	Vertical			
4960.0	-4.3	42.7	38.4	54.0	15.6	Horizontal			
7440.0	-5.4	45.6	40.2	54.0	13.8	Vertical			
7440.0	-8.8	46.5	37.7	54.0	16.3	Horizontal			
9920.0	-8.3	48.6	40.3	54.0	13.7	Vertical			
9920.0	-12.9	49.7	36.8	54.0	17.2	Horizontal			
12400.0	-12.7	51.7	39.0	54.0	15.0	Vertical			
12400.0	-15.8	52.7	36.9	54.0	17.1	Horizontal			

#### Remarks:

Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2016-01-21 Page 26 of 82

No.: DM122275


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emility for Radiated Emissions [1 CC 47 CFR 13.207 Class D]:				
Frequency Range	Quasi-Peak Limits			
[MHz]	$[\mu V/m]$			
0.009-0.490	2400/F (kHz)			
0.490-1.705	24000/F (kHz)			
1.705-30	30			
30-88	100			
88-216	150			
216-960	200			
Above960	500			

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of TX mode (2402MHz, 8DPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

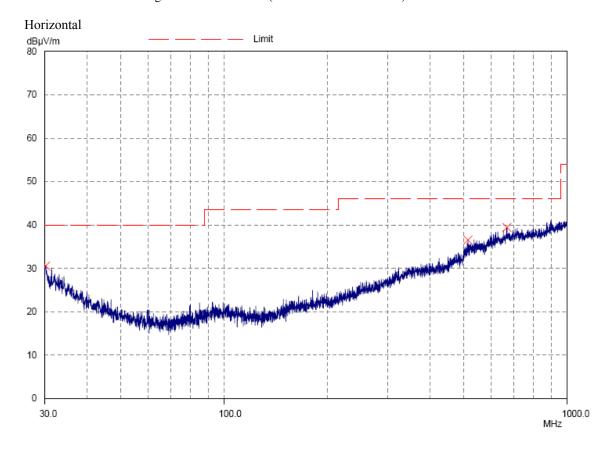



Date: 2016-01-21 Page 27 of 82

No.: DM122275

Result of TX mode (2402MHz, 8DPSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak						
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBμV/m	dBμV/m	μV/m	μV/m	
30.3	Horizontal	30.6	40.0	33.9	100	
514.8	Horizontal	36.5	46.0	66.8	200	
668.3	Horizontal	39.4	46.0	93.3	200	



Date: 2016-01-21 Page 28 of 82

No.: DM122275


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Limits for Radiated Emissions [FCC 47 CFR 13.209 Class B].				
Quasi-Peak Limits				
$[\mu V/m]$				
2400/F (kHz)				
24000/F (kHz)				
30				
100				
150				
200				
500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of TX mode (2402MHz, 8DPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

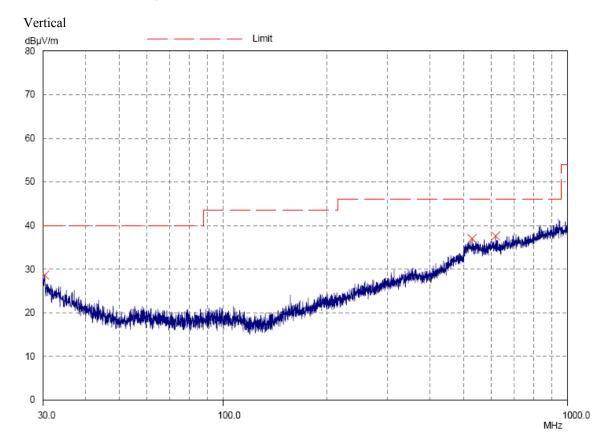



Date: 2016-01-21 Page 29 of 82

No.: DM122275

#### Result of TX mode (2402MHz, 8DPSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency MHz	Polarity	@3m dBµV/m	@3m dBµV/m	@3m µV/m	@3m µV/m
30.4	Vertical	28.7	40.0	27.2	100
528.7	Vertical	37.0	46.0	70.8	200
618.9	Vertical	37.6	46.0	75.9	200

#### Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2016-01-21 Page 30 of 82

No.: DM122275

#### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)


Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10: 2013

Test Date: 2016-01-20 Mode of Operation: TX mode Test Voltage: 120Va.c. 60Hz

#### **Test Method:**

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Test Setup:**

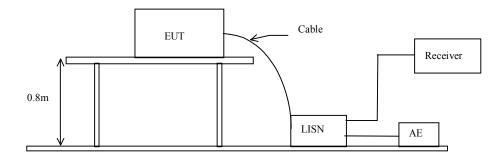



Date: 2016-01-21 Page 31 of 82

No.: DM122275

#### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of TX mode (L): PASS

Please refer to the following diagram for individual results.

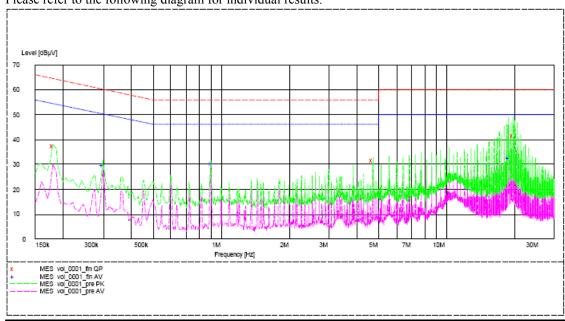

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.180	37.2	65.0	_*_	_*_
Live	4.715	31.9	56.0	_*_	_*_
Live	19.715	41.6	60.0	_*_	_*_
Live	0.300	_*_	_*_	29.8	50.0
Live	0.900	_*_	_*_	30.5	46.0
Live	18.860	_*_	_*_	32.7	50.0



Date: 2016-01-21 Page 32 of 82

No.: DM122275

#### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of TX mode (N): PASS

Please refer to the following diagram for individual results.

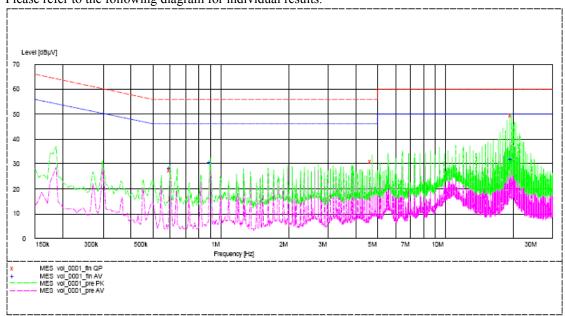

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.600	27.6	56.0	_*_	_*_
Neutral	4.720	31.2	56.0	_*_	_*_
Neutral	19.750	49.4	60.0	_*_	_*_
Neutral	0.600	_*_	_*_	28.6	46.0
Neutral	0.900	_*_	_*_	30.6	46.0
Neutral	19.735	_*_	_*_	32.3	50.0

#### Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

<sup>-\*-</sup> Emission(s) that is far below the corresponding limit line.



Date: 2016-01-21 Page 33 of 82

No.: DM122275

#### 3.1.4 Number of Hopping Frequency

#### **Limit of Number of Hopping Frequency**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

#### **Spectrum Analyzer Setting:**


RBW = 1MHz, VBW  $\ge$  RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

#### **Measurement Data:**

GFSK: 79 of 79 Channel

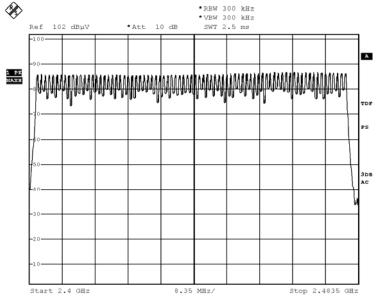


BMP

Date: 20.JAN.2016 09:50:50



Date: 2016-01-21 Page 34 of 82 No.: DM122275

#### Pi/4 DQPSK: 79 of 79 Channel

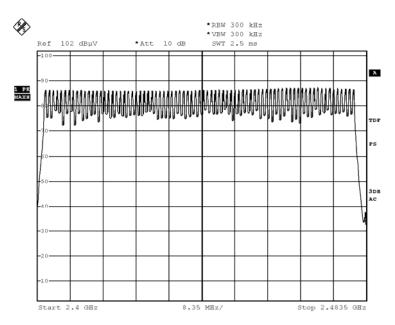

BMP


Date: 20.JAN.2016 09:58:56



Date: 2016-01-21 Page 35 of 82

No.: DM122275

8DPSK: 79 of 79 Channel

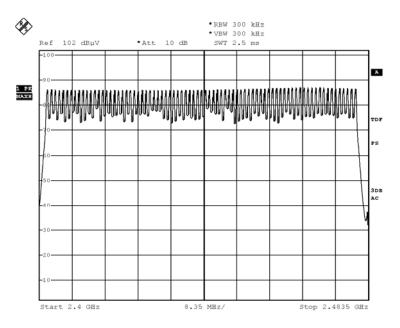

BMP

Date: 20.JAN.2016 10:04:10



Date: 2016-01-21 Page 36 of 82

No.: DM122275

#### 3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10: 2013

Test Date: 2016-01-18

Mode of Operation: Communication mode

#### Remark:

The result has been done on all the possible configurations for searching the worst cases.

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2016-01-21 Page 37 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.020	Within 2400-2483.5

### (Lowest Operating Frequency) - (GFSK)

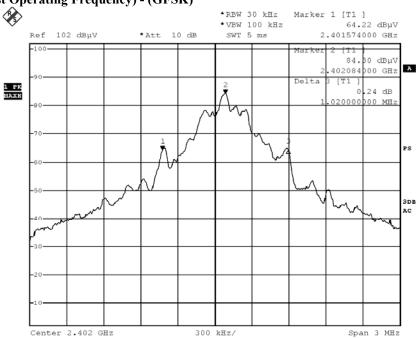

BMP

Date: 18.JAN.2016 15:39:51




Date: 2016-01-21 Page 38 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.020	Within 2400-2483.5

### (Middle Operating Frequency) - (GFSK)

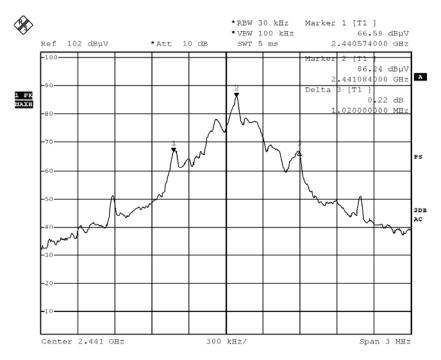

BMP

Date: 18.JAN.2016 15:47:38




Date: 2016-01-21 Page 39 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.026	Within 2400-2483.5

### (Highest Operating Frequency) - (GFSK)

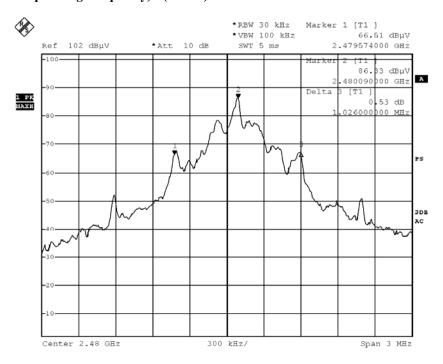

BMP

Date: 18.JAN.2016 15:48:51




Date: 2016-01-21 Page 40 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.092	Within 2400-2483.5

### (Lowest Operating Frequency) - (π/4-DQPSK)

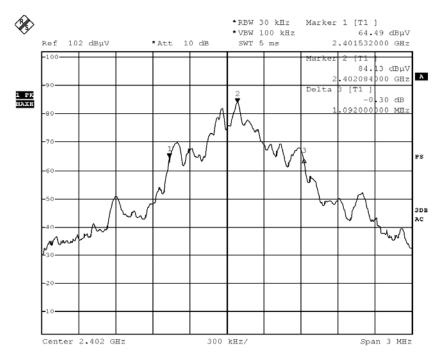

BMP

Date: 18.JAN.2016 15:42:00




Date: 2016-01-21 Page 41 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.092	Within 2400-2483.5

### (Middle Operating Frequency) - $(\pi/4 - DQPSK)$

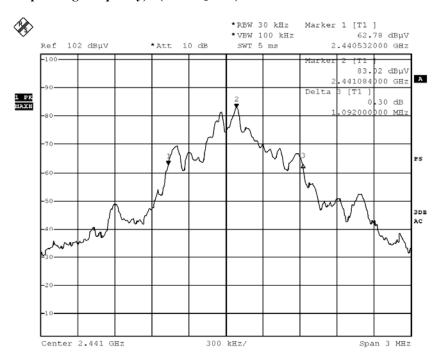

BMP

Date: 18.JAN.2016 15:45:45




Date: 2016-01-21 Page 42 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.092	Within 2400-2483.5

### (Highest Operating Frequency) - $(\pi/4 - DQPSK)$

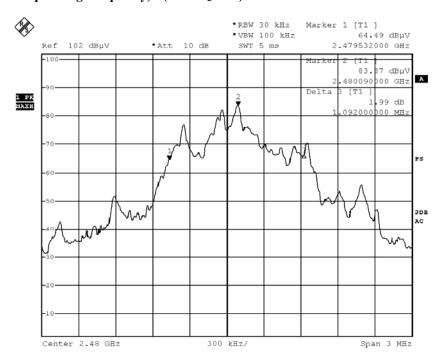

BMP

Date: 18.JAN.2016 15:49:56




Date: 2016-01-21 Page 43 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.146	Within 2400-2483.5

### (Lowest Operating Frequency) - (8DPSK)

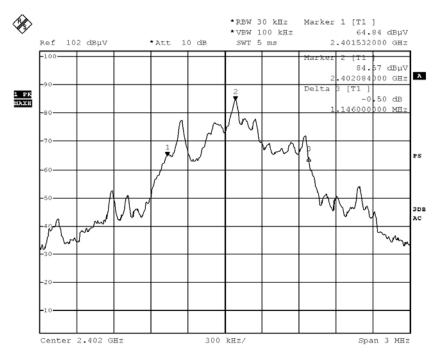

BMP

Date: 18.JAN.2016 15:42:53




Date: 2016-01-21 Page 44 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.152	Within 2400-2483.5

### (Middle Operating Frequency) - (8DPSK)

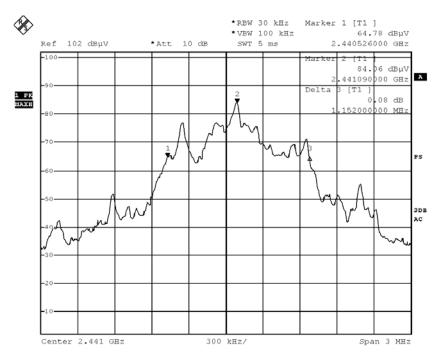

BMP

Date: 18.JAN.2016 15:44:40




Date: 2016-01-21 Page 45 of 82

No.: DM122275

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.152	Within 2400-2483.5

### (Highest Operating Frequency) - (8DPSK)

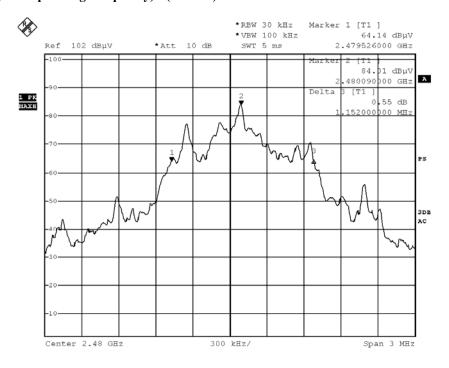

BMP

Date: 18.JAN.2016 15:50:54



Date: 2016-01-21 Page 46 of 82

No.: DM122275

#### 3.1.6 Hopping Channel Separation

#### **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Limit:

The measured maximum bandwidth \* 2/3 = 1.152MHz \* 2/3 = 768kHz




Date: 2016-01-21 Page 47 of 82

No.: DM122275

### Channel separation = 1MHz (>768kHz) (GFSK)



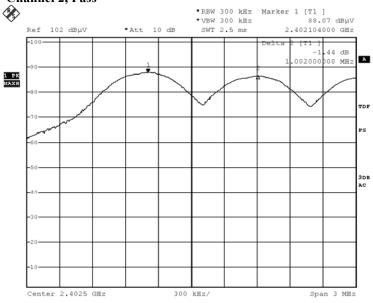


BMP

Date: 20.JAN.2016 10:07:34



Date: 2016-01-21 Page 48 of 82 No.: DM122275

#### Channel 39 - Channel 40, Pass

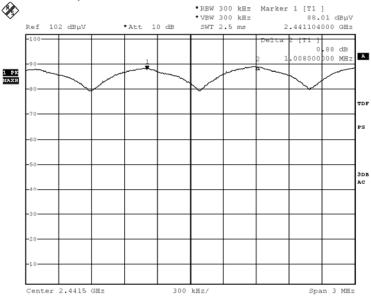


BMP

Date: 20.JAN.2016 10:16:19



Date: 2016-01-21 Page 49 of 82 No.: DM122275

#### Channel 78 - Channel 79, Pass

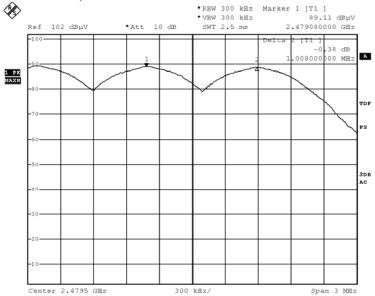

BMP

Date: 20.JAN.2016 10:17:13




Date: 2016-01-21 Page 50 of 82

No.: DM122275

### Channel separation = 1MHz (>768kHz) ( $\pi$ /4- DQPSK)



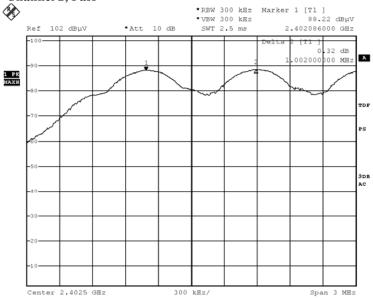


 ${\tt BMP}$ 

Date: 20.JAN.2016 10:09:50



Date: 2016-01-21 Page 51 of 82 No.: DM122275

#### Channel 39 - Channel 40, Pass

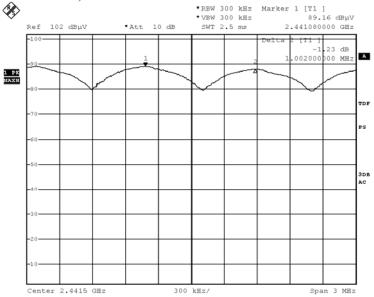


BMP

Date: 20.JAN.2016 10:14:52



Date: 2016-01-21 Page 52 of 82 No.: DM122275

Channel 78 - Channel 79, Pass

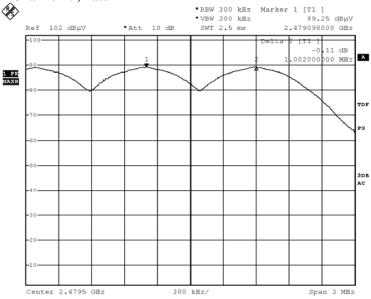

BMP


Date: 20.JAN.2016 10:18:12




Date: 2016-01-21 Page 53 of 82

No.: DM122275

### Channel separation = 1MHz (>768kHz) (8DPSK)



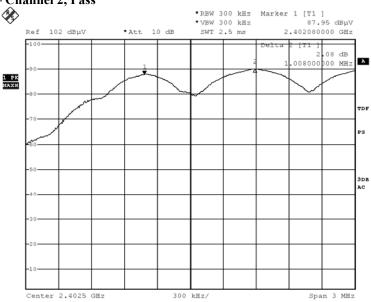


BMP

Date: 20.JAN.2016 10:11:16



Date: 2016-01-21 Page 54 of 82 No.: DM122275

#### Channel 39 - Channel 40, Pass

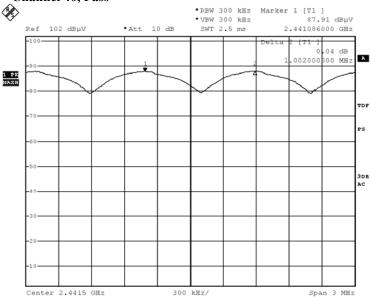


BMP

Date: 20.JAN.2016 10:13:16



Date: 2016-01-21 Page 55 of 82 No.: DM122275

#### Channel 78 - Channel 79, Pass

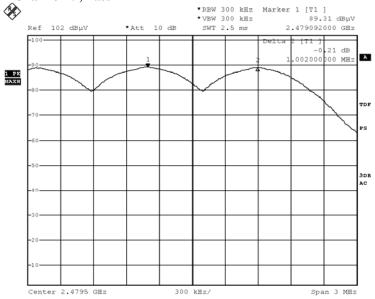

BMP

Date: 20.JAN.2016 10:19:17



Date: 2016-01-21 Page 56 of 82

No.: DM122275

### 3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:


#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	50.85



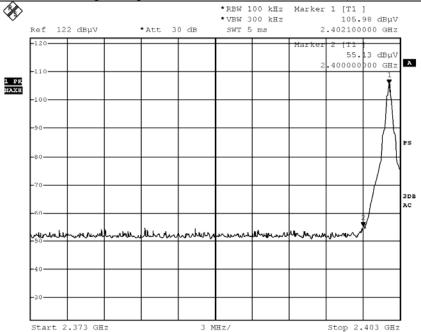

BMP

Date: 18.JAN.2016 16:29:14




Date: 2016-01-21 Page 57 of 82

No.: DM122275

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	50.19



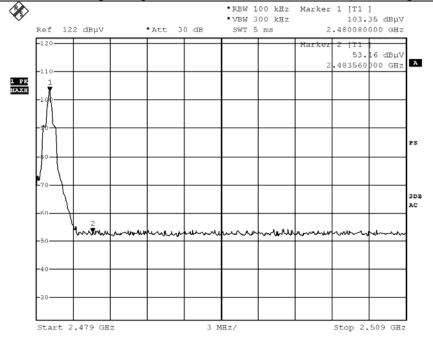

BMP

Date: 18.JAN.2016 16:36:24





Date: 2016-01-21 Page 58 of 82

No.: DM122275

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	53.15



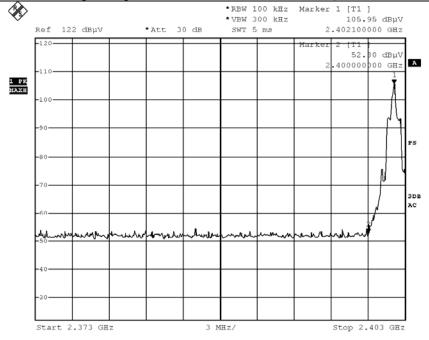

BMP

Date: 18.JAN.2016 16:30:16




Date: 2016-01-21 Page 59 of 82

No.: DM122275

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	50.56



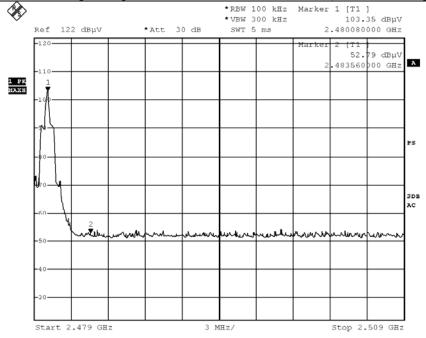

BMP

Date: 18.JAN.2016 16:33:38




Date: 2016-01-21 Page 60 of 82

No.: DM122275

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	51.36

### Band-edge Compliance of RF Conducted Emissions (8DPSK Lowest)

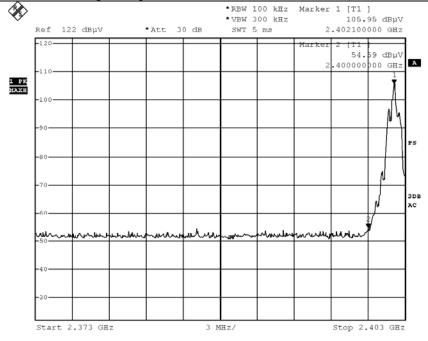

BMP

Date: 18.JAN.2016 16:31:03




Date: 2016-01-21 Page 61 of 82

No.: DM122275

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	49.96



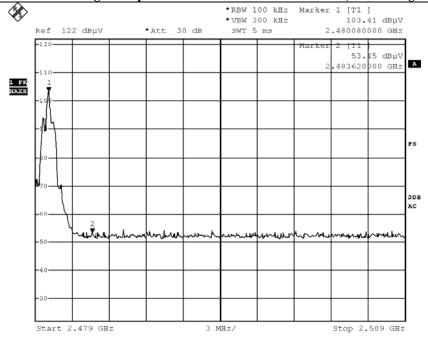

BMP

Date: 18.JAN.2016 16:32:36



Date: 2016-01-21 Page 62 of 82

No.: DM122275

### **Band-edge Compliance of RF Radiated Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Lowest)

	Suite Europe Companies of the Thursday Emissions (CT ST 20 West)						
	Field Strength of Band-edge Compliance						
			Peak Value				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2390.0	5.8	36.8	42.6	74.0	31.4	Vertical	
2390.0	5.2	36.4	41.6	74.0	32.4	Horizontal	

Field Strength of Band-edge Compliance								
		A	verage Valu	e				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	$dB\mu V$	dB/m	$dB\mu V/m$	dBμV/m	$dB\mu V/m$			
2390.0	-8.7	36.8	28.1	54.0	25.9	Vertical		
2390.0	-9.3	36.4	27.1	54.0	26.9	Horizontal		

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Highest)

	Field Strength of Band-edge Compliance						
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
2483.5	17.9	36.8	54.7	74.0	19.3	Vertical	
2483.5	15.9	36.4	52.3	74.0	21.7	Horizontal	

Field Strength of Band-edge Compliance Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2483.5	3.7	36.8	40.5	54.0	13.5	Vertical	
2483.5	1.7	36.4	38.1	54.0	15.9	Horizontal	



Date: 2016-01-21 Page 63 of 82

No.: DM122275

Result: Band-edge Compliance of RF Radiated Emissions (π/4 -DQPSK Lowest)

Couit. Danu-ci	suit: Danu-euge Comphanice of Kr Kadiated Emissions (1/14-DQ1 5K Lowest)							
Field Strength of Band-edge Compliance								
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	$dB\mu V/m$			
2390.0	6.9	36.8	43.7	74.0	30.3	Vertical		
2390.0	4.1	36.4	40.5	74.0	33.5	Horizontal		

Field Strength of Band-edge Compliance							
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2390.0	-7.5	36.8	29.3	54.0	24.7	Vertical	
2390.0	-10.4	36.4	26.0	54.0	28.0	Horizontal	

### Result: Band-edge Compliance of RF Radiated Emissions (π/4 -DQPSK Highest)

Field Strength of Band-edge Compliance Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$		
2483.5	18.0	36.8	54.8	74.0	19.2	Vertical	
2483.5	15.4	36.4	51.8	74.0	22.2	Horizontal	

	Field Strength of Band-edge Compliance							
		A	verage Valu	e				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2483.5	3.9	36.8	40.7	54.0	13.3	Vertical		
2483.5	1.1	36.4	37.5	54.0	16.5	Horizontal		



Date: 2016-01-21 Page 64 of 82

No.: DM122275

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Lowest)

Court. Danu-ce	Suit: Dand-edge Comphance of Ki Kadiated Emissions (ODI 5K Lowest)							
Field Strength of Band-edge Compliance								
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2390.0	6.9	36.8	43.7	74.0	30.3	Vertical		
2390.0	5.0	36.4	41.4	74.0	32.6	Horizontal		

Field Strength of Band-edge Compliance Average Value							
Frequency Measured Correction Field Limit Margin E-Field							
	Level @3m	3m Factor Strength @		@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2390.0	-7.5	36.8	29.3	54.0	24.7	Vertical	
2390.0	-9.5	36.4	26.9	54.0	27.1	Horizontal	

### Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Highest)

Field Strength of Band-edge Compliance Peak Value							
Frequency	requency Measured Correction Field Limit Margin E-F						
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$		
2483.5	18.3	36.8	55.1	74.0	18.9	Vertical	
2483.5	17.0	36.4	53.4	74.0	20.6	Horizontal	

Field Strength of Band-edge Compliance								
	Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2483.5	4.1	36.8	40.9	54.0	13.1	Vertical		
2483.5	2.8	36.4	39.2	54.0	14.8	Horizontal		



Date: 2016-01-21 Page 65 of 82

No.: DM122275

### 3.1.8 Time of Occupancy (Dwell Time)

### **Requirements:**


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

**Dwell Time = Pulse Duration \* hop rate / number of channel \* observation duration** 

Observed duration:  $0.4s \times 79 = 31.6s$ 

**Measurement Data**:

#### Channel Occupied in 8DPSK: 79 of 79 Channel

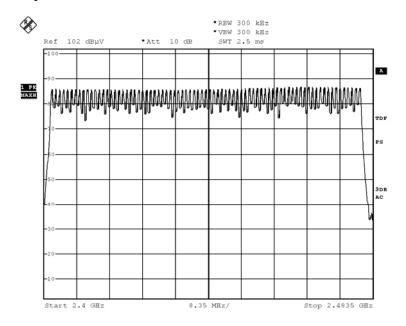

BMP

Date: 20.JAN.2016 09:50:50




Date: 2016-01-21 Page 66 of 82

No.: DM122275

#### **DH5 Packet:**

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

Fig. A [Pulse duration of Lowest Channel]

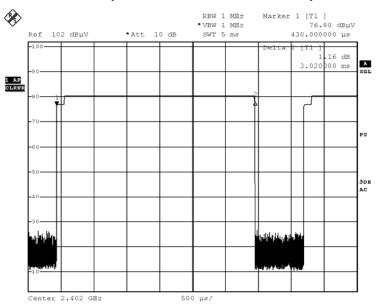

BMP


Date: 18.JAN.2016 10:35:54



Date: 2016-01-21 Page 67 of 82

No.: DM122275

Fig. B [Pulse duration of Middle Channel]

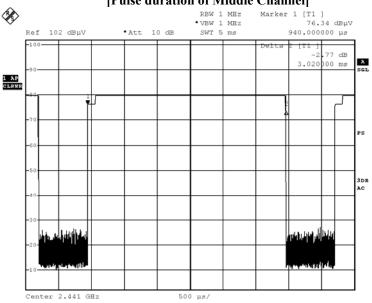


BMP


Date: 18.JAN.2016 10:35:05



Date: 2016-01-21 Page 68 of 82

No.: DM122275



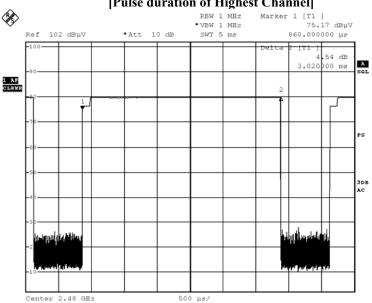

BMP

Date: 18.JAN.2016 10:39:31




Date: 2016-01-21 Page 69 of 82

No.: DM122275

#### **DH3 Packet:**

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds

Fig. D [Pulse duration of Lowest Channel]

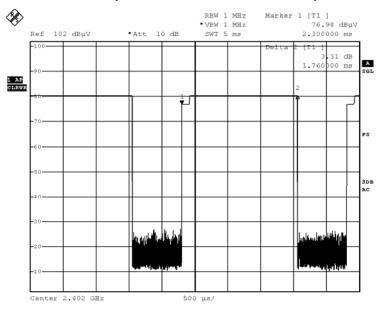

BMP


Date: 18.JAN.2016 10:36:34



Date: 2016-01-21 Page 70 of 82

No.: DM122275

Fig. E [Pulse duration of Middle Channel]

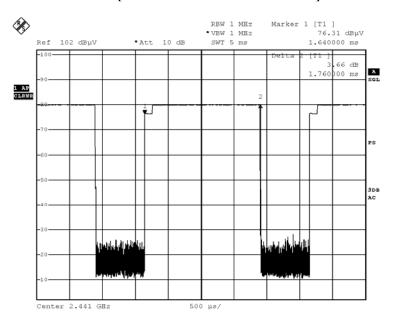

BMP


Date: 18.JAN.2016 10:34:23



Date: 2016-01-21 Page 71 of 82

No.: DM122275

Fig. F
[Pulse duration of Highest Channel]

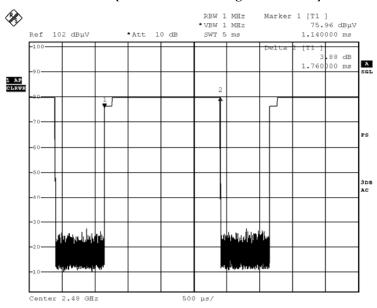

BMP

Date: 18.JAN.2016 10:38:49




Date: 2016-01-21 Page 72 of 82

No.: DM122275

#### **DH1 Packet:**

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

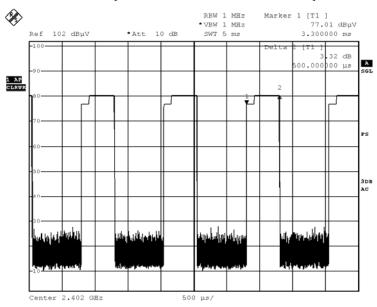


BMP


Date: 18.JAN.2016 10:37:12



Date: 2016-01-21 Page 73 of 82

No.: DM122275



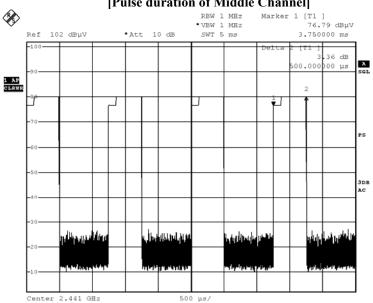

BMP


Date: 18.JAN.2016 10:32:10



Date: 2016-01-21 Page 74 of 82

No.: DM122275

Fig. I [Pulse duration of Highest Channel]

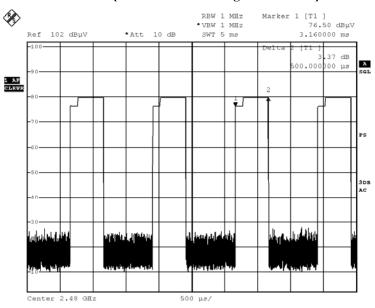

BMP

Date: 18.JAN.2016 10:38:11

#### Time of occupancy (Dwell Time):

Data Packet	Frequency	Pulse	<b>Dwell Time</b>	Limits	<b>Test Results</b>
	(MHz)	Duration (ms)	(s)	(s)	
DH5	2402	3.02	0.322	0.400	Complies
DH5	2441	3.02	0.322	0.400	Complies
DH5	2480	3.02	0.322	0.400	Complies
DH3	2402	1.76	0.281	0.400	Complies
DH3	2441	1.76	0.281	0.400	Complies
DH3	2480	1.76	0.281	0.400	Complies
DH1	2402	0.50	0.160	0.400	Complies
DH1	2441	0.50	0.160	0.400	Complies
DH1	2480	0.50	0.160	0.400	Complies

#### STC (Dongguan) Company Limited

Date: 2016-01-21 Page 75 of 82

No.: DM122275

#### 3.1.9 Channel Centre Frequency

#### **Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)



Date: 2016-01-21 Page 76 of 82

No.: DM122275

#### 3.1.10 Pseudorandom Hopping Algorithm

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

#### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date: 2016-01-21 Page 77 of 82

No.: DM122275

#### 3.1.11 Antenna Requirement

Test Requirements: § 15.203

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Inverted F antenna. There is no external antenna, the antenna gain = 1.2dBi. User is unable to remove or changed the Antenna.



Date: 2016-01-21 Page 78 of 82

No.: DM122275

#### 3.1.12 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2016-01-21 Mode of Operation: Tx mode

#### **Requirements:**

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter.

Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB447498 D01 General RF Exposure Guidance v06, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

#### **Test Results:**

For 100 MHz to 6 GHz and test separation distances  $\leq$  50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]  $\cdot [\sqrt{f_{(GHz)}}] \le 3.0$  for 1-g SAR, and  $\le 7.5$  for 10-g extremity SAR,where  $f_{(GHz)}$  is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below

The test exclusions are applicable only when the minimum test separation distance is  $\leq$  50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $\leq$  5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

#### **RF Exposure Evaluation**

 $[(1.038 \text{mW}) / (5 \text{ mm})] \times [\sqrt{(2.402)}] \le 3.0.$ 

Therefore. the SAR evaluation can be exempted.



Date: 2016-01-21 Page 79 of 82

No.: DM122275

### Appendix A

### **List of Measurement Equipment**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2015.3.24	2016.3.24
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2015.3.24	2016.3.24
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2015.3.24	2016.3.24
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2015.3.24	2016.3.24
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2015.3.24	2016.3.24
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2016.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2015.3.24	2016.3.24
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2015.3.24	2016.3.24
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2015.3.24	2016.3.24
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.04.09	2017.04.09
RE01	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27
RE02	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27

Remarks:-

N/A Not Applicable or Not Available

### Appendix B

### **Ancillary Equipment**

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	DELL COMPUTER	DMC	N/A	N/A



Page 80 of 82 Date: 2016-01-21

No.: DM122275

### Appendix C

### Photographs of EUT

Front View of the product



Inside View of the product



**Inner Circuit Bottom View** 



Rear View of the product



**Inner Circuit Top View** 







Date: 2016-01-21 Page 81 of 82

No.: DM122275

### Photographs of EUT

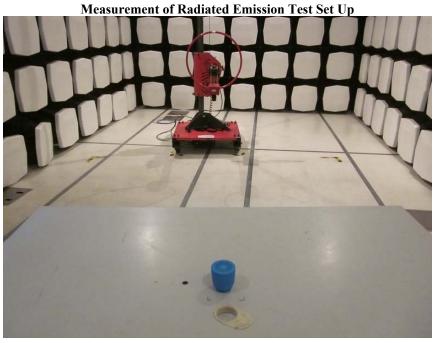

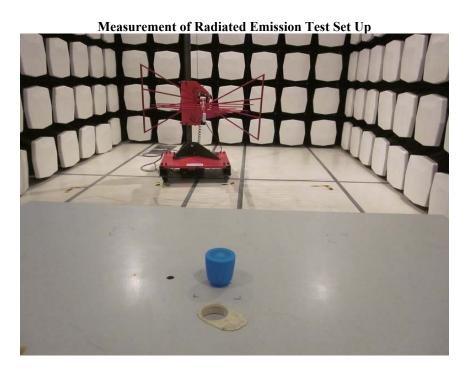

#### STC (Dongguan) Company Limited



Date: 2016-01-21 Page 82 of 82

No.: DM122275

### Photographs of EUT

Measurement of Conducted Emission Test Set Up



\*\*\*\*\* End of Test Report \*\*\*\*\*

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org