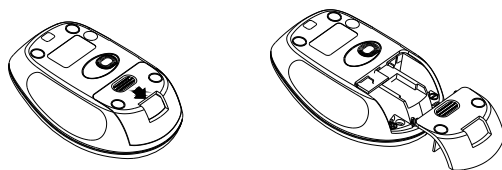## Installing the Batteries

The RF2.4GHz optical mouse use two AAA alkaline batteries.

Installing Batteries in the Mouse

Step 1. Open the battery compartment

Step 2. Insert the batteries as shown inside the battery compartment.

Step 3. Replace the cover.

## Connecting the Receiver

USB Port

Nano receiver

1.Connect the USB plug **ONLY** to USB port of the computer.

Nano receiver

USB port

Abtain the receiver on the mouse

1:when you want use the mouse ,you can take out the receiver to computer by the list 1 step;

2:when you need stop the work or to travel, you can store the receiver on the mouse for the moving by the list 2 step.

1 Take out the receiver   **2** Store the receiver

Dpi shift function

Your optical 3D button mouse is provide 800&1200&1600 dpi switch.

DPI Switch

Power-Save function:

* This mouse is equipped with Traveling-Power-Save function. When you are traveling with this mouse, the LED of the mouse will be switched off automatically for the purpose of power-save, but the pre-condition is that the receiver is disconnected with your notebook or PC.

* when your mouse no any clik or scroll or moving, the mouse will come to sleep state for the economize after about 8 seconds, for the wake up, you can scroll the wheel or click any button for this

Restoring factory default settings

When you find this set doesn't work, you can make the mouse in working condition by restoring the mouse back to factory default settings.

1: check the battery volume is normal; if the battery is used out, please replace new batteries. if the battery volume is normal, please take out the battery and insert again the battery into the mouse.

2: insert the nano receiver onto the USB port of PC or notebook, make sure that the mouse is close to the receiver for auto-matching.

1

2

Model:SM314AG

Instruction Manual

RF2.4GHz Optical Mouse
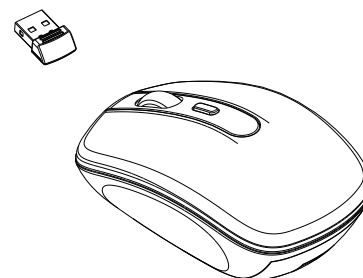
CAUTION: To use this device properly, please read the user's guide before installation.

3