



REPORT No. : SZ14120207W03

# FCC RF TEST REPORT

APPLICANT : Vensi, Inc.  
PRODUCT NAME : Gateway  
MODEL NAME : VCG001  
TRADE NAME : Gateway  
BRAND NAME : Vensi Connect  
FCC ID : 2ADYQ-VCG001  
STANDARD(S) : 47 CFR Part 15 Subpart C  
ISSUE DATE : 2015-03-12



**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.**

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555  
Http://www.morlab.com

Fax: 86-755-36698525  
E-mail: service@morlab.cn



## DIRECTORY

<b>TEST REPORT DECLARATION</b>	<b>4</b>
<b>1. TECHNICAL INFORMATION</b>	<b>5</b>
1.1 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2 TEST STANDARDS AND RESULTS	6
1.4 TEST ENVIRONMENT CONDITIONS	6
<b>2. 47 CFR PART 15C REQUIREMENTS</b>	<b>7</b>
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 PEAK OUTPUT POWER	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST RESULT	8
2.3 BANDWIDTH	10
2.3.1 REQUIREMENT	10
2.3.2 TEST DESCRIPTION	10
2.3.3 TEST RESULT	10
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	19
2.4.1 REQUIREMENT	19
2.4.2 TEST DESCRIPTION	19
2.4.3 TEST RESULT	19
2.5 POWER SPECTRAL DENSITY (PSD)	32
2.5.1 REQUIREMENT	32
2.5.2 TEST DESCRIPTION	32
2.5.3 TEST RESULT	33
2.6 RESTRICTED FREQUENCY BANDS	44
2.6.1 REQUIREMENT	44
2.6.2 TEST DESCRIPTION	44
2.6.3 TEST RESULT	45
2.7 CONDUCTED EMISSION	56
2.7.1 REQUIREMENT	56



2.7.2	TEST DESCRIPTION .....	56
2.7.3	TEST RESULT.....	57
<b>2.8</b>	<b>RADIATED EMISSION .....</b>	<b>59</b>
2.8.1	REQUIREMENT.....	59
2.8.2	TEST DESCRIPTION .....	60
2.8.3	TEST RESULT.....	62
<b>2.9</b>	<b>RF EXPOSURE EVALUATION .....</b>	<b>87</b>
<b>ANNEX A GENERAL INFORMATION.....</b>		<b>89</b>

Change History		
Issue	Date	Reason for change
1.0	2015-03-12	First edition





REPORT No. : SZ14120207W03

**TEST REPORT DECLARATION**

Applicant	Vensi, Inc.
Applicant Address	750 W Lake Cook Rd, Suite 490, Buffalo Grove, IL, USA, 60089
Manufacturer	Moko Technology Ltd
Manufacturer Address	4F, Buidling2, Guanghui Technology Park, MinQing Rd, Longhua, SZ, China 518109
Product Name	Gateway
Model Name	VCG001
Brand Name	Vensi Connect
HW Version	0.2
SW Version	1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-01-07 to 2015-01-21
Test Result	PASS

Tested by : Shen Senping  
Shen Senping

Reviewed by : Qiu Xiaojun  
Qiu Xiaojun

Approved by : Zeng Dexin  
Zeng Dexin



## 1. TECHNICAL INFORMATION

Note: Provide by applicant.

### 1.1 Equipment under Test (EUT) Description

Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Modulation Type:	DSSS, OFDM
Antenna Type:	Dedicated Antenna
Antenna Gain:	Ant1:5dBi Ant2:5dBi

#### NOTE:

The EUT is a Gateway, it contains WIFI Module operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$  ( $3 \leq n \leq 9$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

The EUT incorporates a 2\*2 MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R) for 2.4GHz band. ANT1 and ANT 2 could transmit/receive Simultaneously during 802.11n-20MHz mode, the specification of each antenna is the same.

Operation mode TX mode	1TX	2TX
802.11b	ANT1 or ANT2	
802.11g	ANT1 or ANT2	
802.11n(20MHz)		ANT1 & ANT2
802.11n(40MHz)	ANT1 or ANT2	

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.247(b)	Peak Output Power	<u>PASS</u>
3	15.247(a)	Bandwidth	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	<u>PASS</u>
6	15.207	Conducted Emission	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	<u>PASS</u>
9	15.247(i),1.1307&2.1093	RF exposure evaluation	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r02 (05/06/2014).

## 1.4 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Antenna requirement

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2 Result: Compliant

The maximum gain of antenna was defined by manufacture. The max gain is 5.0dBi. The antenna type is omni-directional antenna. For more information, please refer to the EUT internal photos.

### 2.2 Peak Output Power

#### 2.2.1 Requirement


According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.2.2 Test Description

KDB 558074 Section 9.1.3 was used in order to prove compliance.

The measured output power was calculated by the reading of the Power Meter and calibration.

#### A. Test Setup:

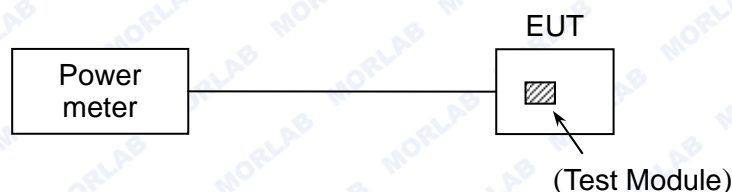

The EUT (Equipment under the test) which is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

**B. Equipments List:**

Please reference ANNEX A(1.4).

**2.2.3 Test Result**

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

**2.2.3.1 802.11b Test Mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.24	0.042073	30	1	PASS
6	2437	16.15	0.041210			PASS
11	2462	16.21	0.041780			PASS

**2.2.3.2 802.11g Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.67	0.046452	30	1	PASS
6	2437	16.48	0.044463			PASS
11	2462	16.37	0.043351			PASS

**2.2.3.3 802.11n-20MHz Test mode**

ANT 1:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	15.34	0.034198	30	1	PASS
6	2437	15.22	0.033266			PASS
11	2462	15.13	0.032580			PASS

ANT 2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.02	0.039994	30	1	PASS
6	2437	16.23	0.041976			PASS
11	2462	16.01	0.039902			PASS





Ant1+Ant2:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.70	0.074192	30	1	PASS
6	2437	18.76	0.075242			PASS
11	2462	18.60	0.072486			PASS

**2.2.3.4 802.11n-40MHz Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	8.23	0.006653	30	1	PASS
6	2437	8.27	0.006714			PASS
9	2452	8.13	0.006500			PASS

Note: Each antenna port was measured individually, and the aggregated power was summed mathematically.

Remark:

- 1) The MIMO test requirement, RF conducted output power shall measure each transmitter chain. And after obtain each individual transmitter chain power, then sum the output power by using the following formula;

$((\text{dBm}/\text{Chain } 1)/10^{\text{Log}}) + (\text{dBm}/\text{Chain } 2)/10^{\text{Log}} + (\text{dBm}/\text{Chain } N)/10^{\text{Log}} = \text{Combined peak output power in mW.}$


## 2.3 Bandwidth

### 2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Description

#### A. Test Set:

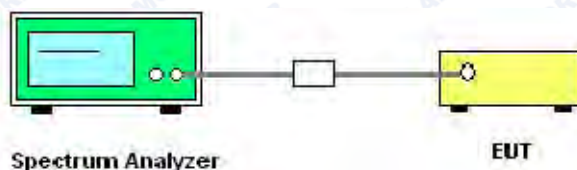

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

#### B. Equipments List:


Please reference ANNEX A(1.4).

### 2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.


**2.3.3.1 802.11b Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	10.098	≥500	PASS
6	2437	10.096	≥500	PASS
11	2462	10.005	≥500	PASS

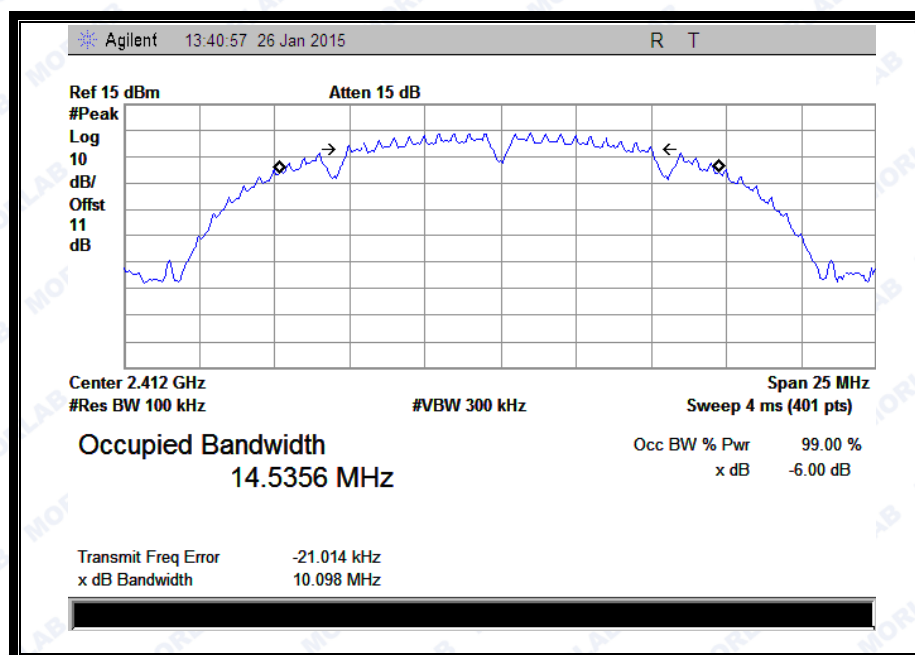
**B. Test Plots**

(Channel 1: 2412MHz @ 802.11b)



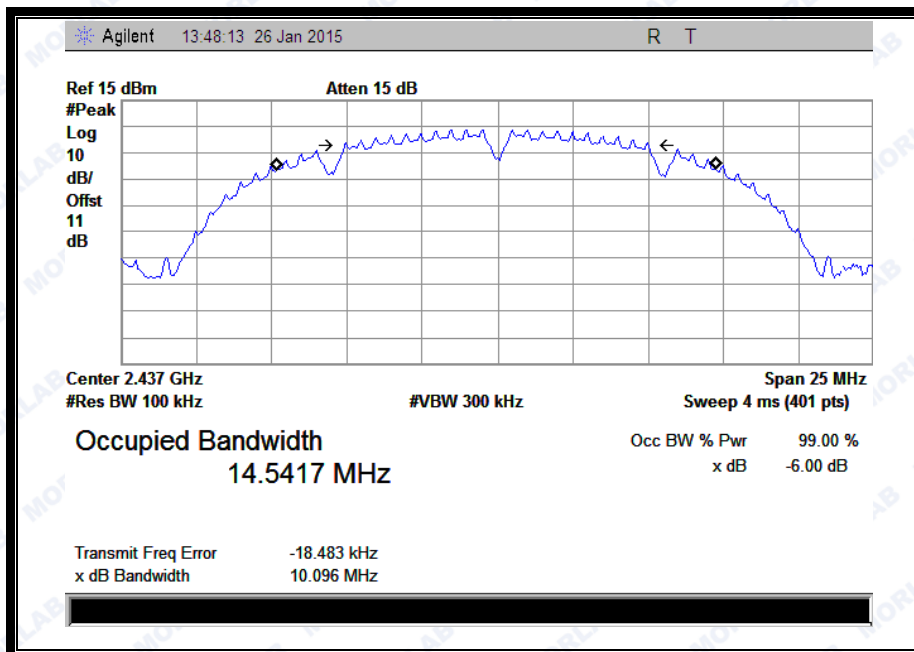


(Channel 6: 2437 MHz @ 802.11b)

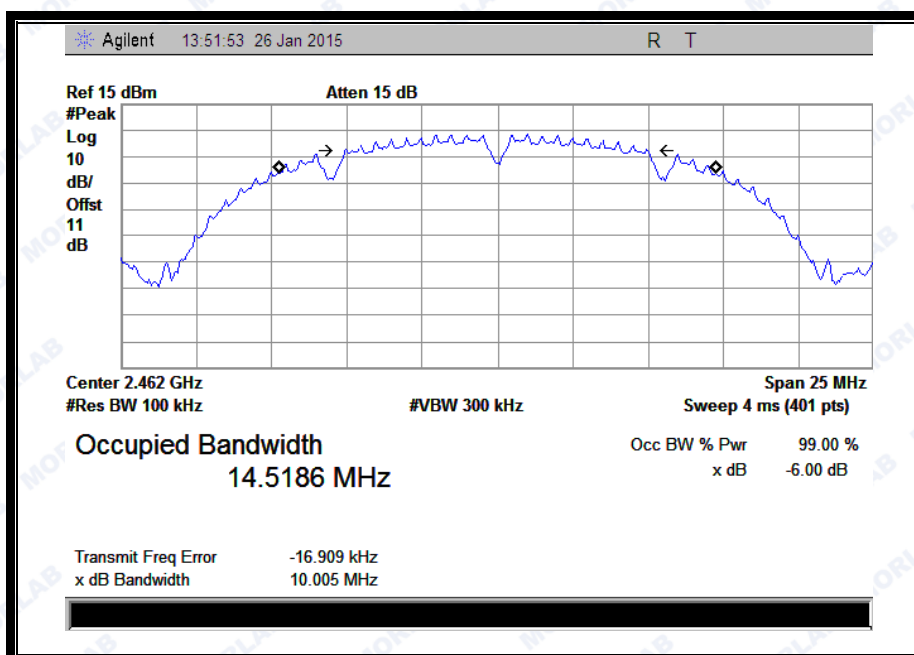

(Channel 11: 2462MHz @ 802.11b)

**2.3.3.2 802.11g Test mode****A. Test Verdict:**


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.198	≥500	PASS
6	2437	15.158	≥500	PASS
11	2462	15.069	≥500	PASS

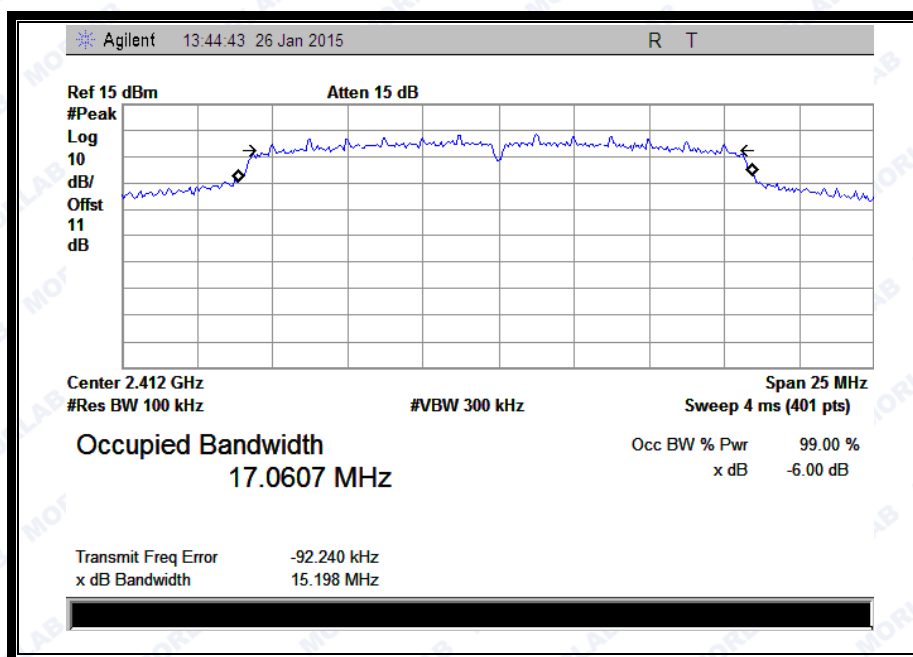**B. Test Plots:**


(Channel 1: 2412MHz @ 802.11g)



REPORT No. : SZ14120207W03

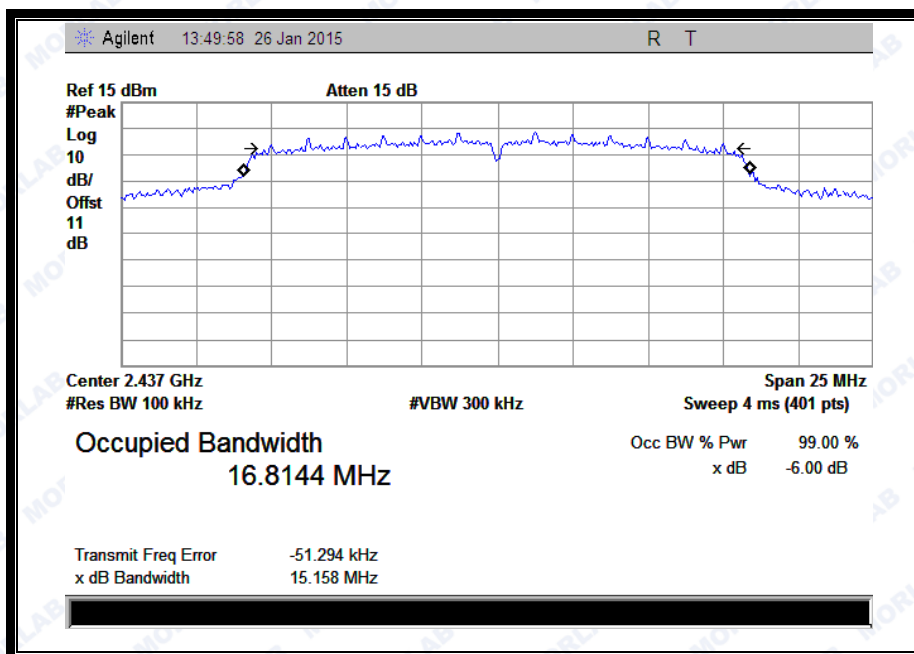

(Channel 6: 2437MHz @ 802.11g)

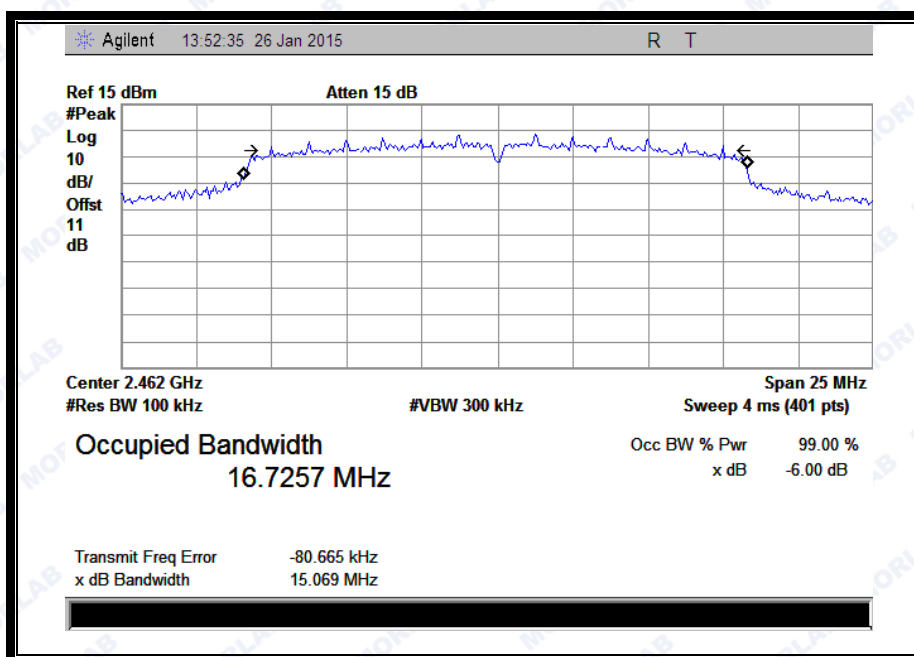

(Channel 11: 2462MHz @ 802.11g)






REPORT No. : SZ14120207W03

### 2.3.3.3 802.11n-20 Test mode

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.141	$\geq 500$	PASS
6	2437	15.095	$\geq 500$	PASS
11	2462	15.141	$\geq 500$	PASS


#### B. Test Plots:

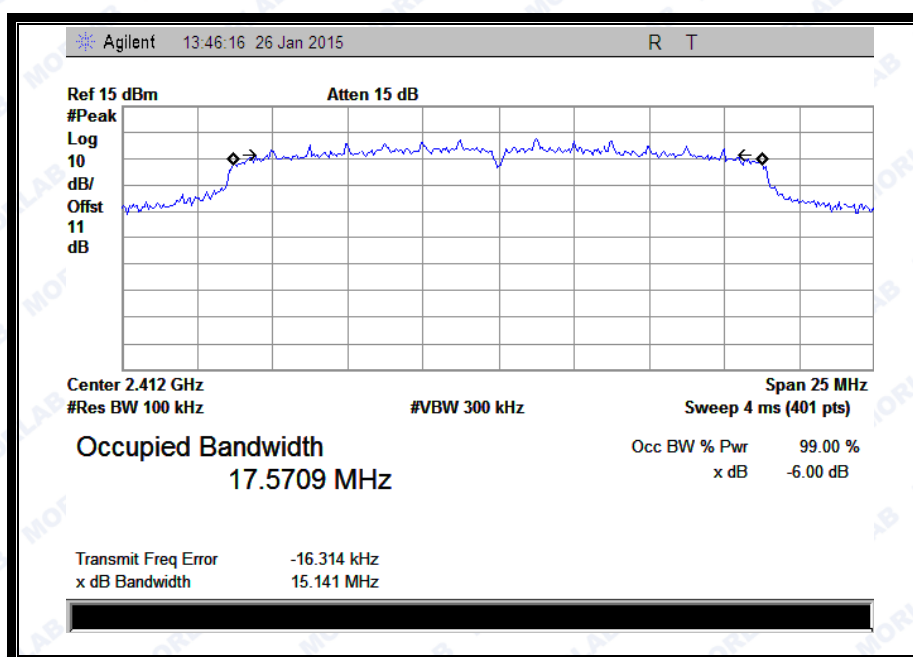


(Channel 1: 2412MHz @ 802.11n-20)



REPORT No. : SZ14120207W03

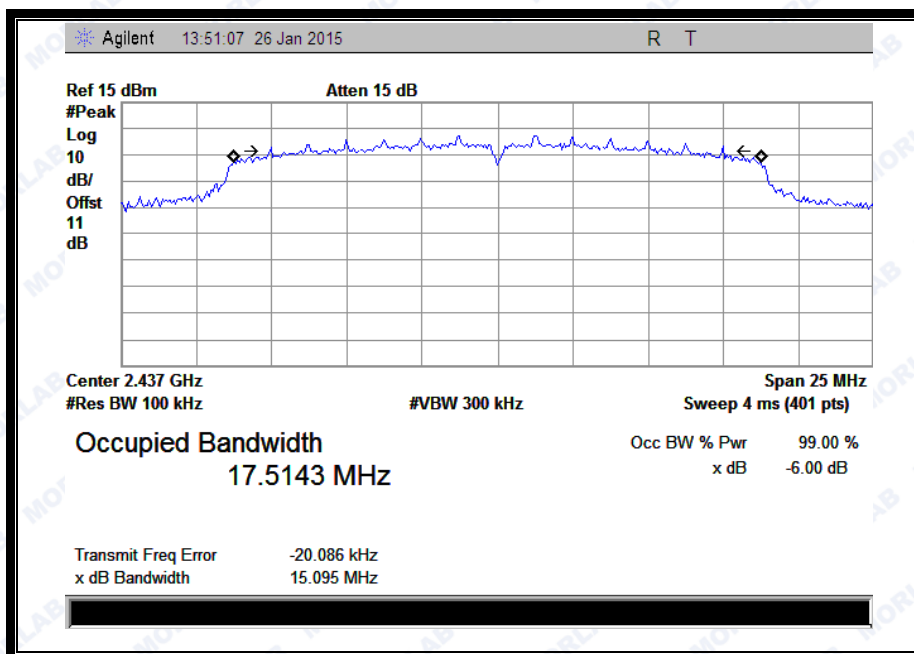


(Channel 6: 2437MHz @ 802.11n-20)

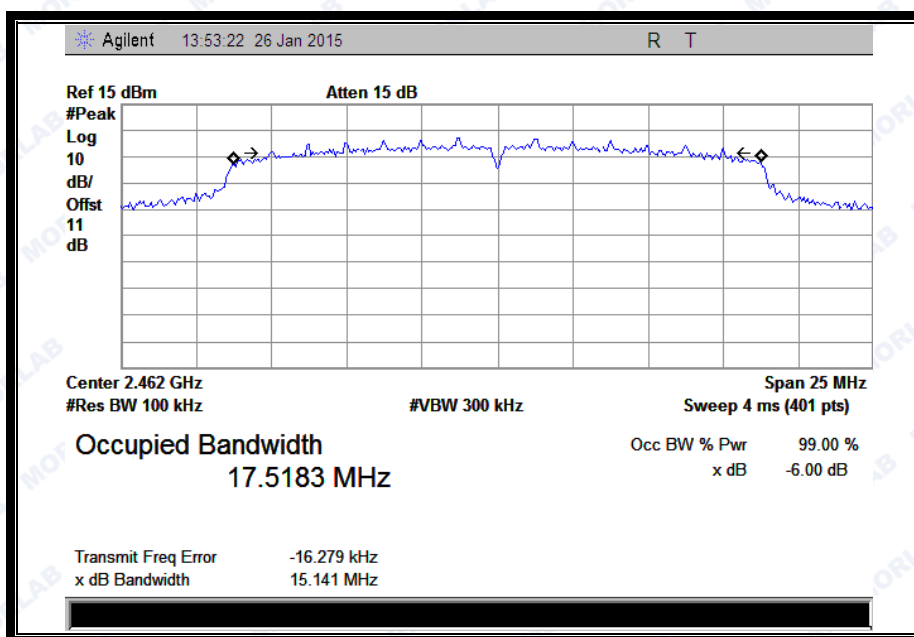

(Channel 11: 2462MHz @ 802.11n-20)


**2.3.3.4 802.11n-40 Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.148	≥500	PASS
6	2437	35.109	≥500	PASS
9	2452	35.123	≥500	PASS

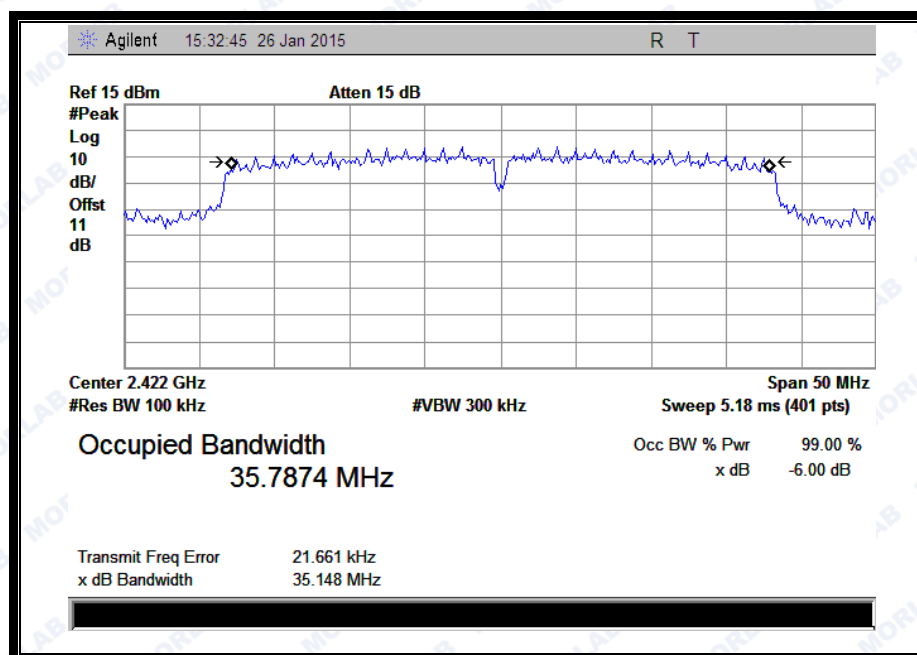
**B. Test Plots:**

(Channel 3: 2422MHz @ 802.11n-40)



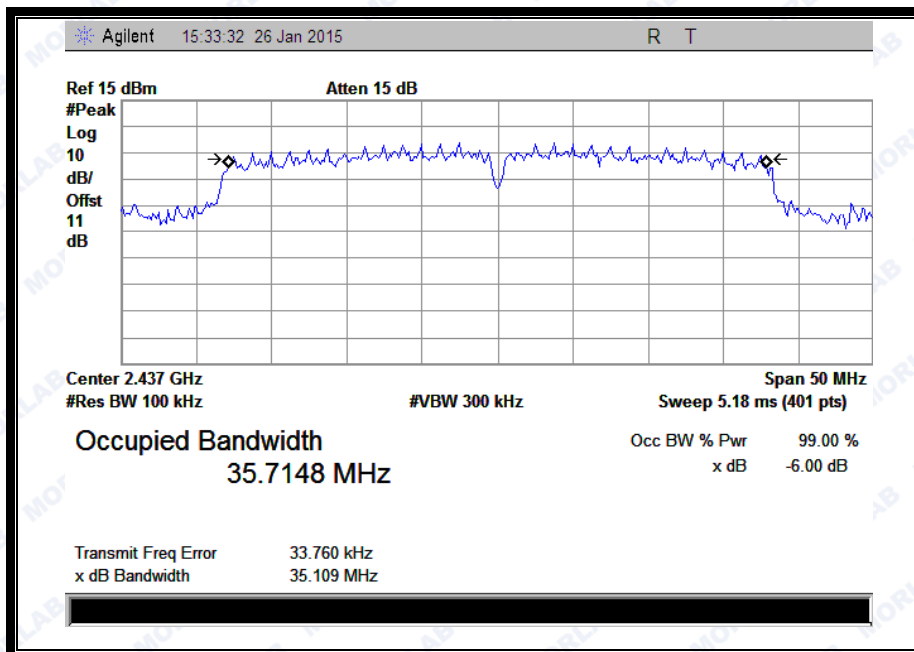

(Channel 6: 2437MHz @ 802.11n-40)

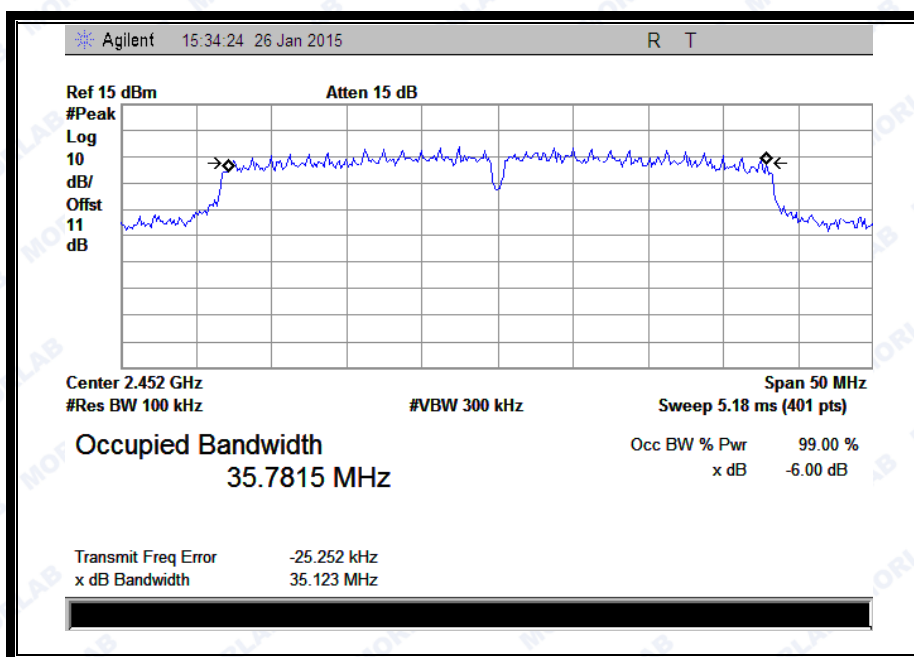

(Channel 9: 2452MHz @ 802.11n-40)


## 2.4 Conducted Spurious Emissions and Band Edge

### 2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2 Test Description

#### A. Test Set:

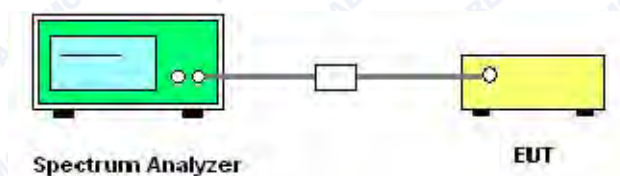

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




## 2.4.3.1 802.11b Test mode

## A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-46.29	3.180	-16.820	PASS
6	2437	-46.93	2.720	-17.280	PASS
11	2462	-46.26	3.667	-16.333	PASS


## B. Test Plots:

**Note:** the power of the Module transmitting frequency should be ignored.

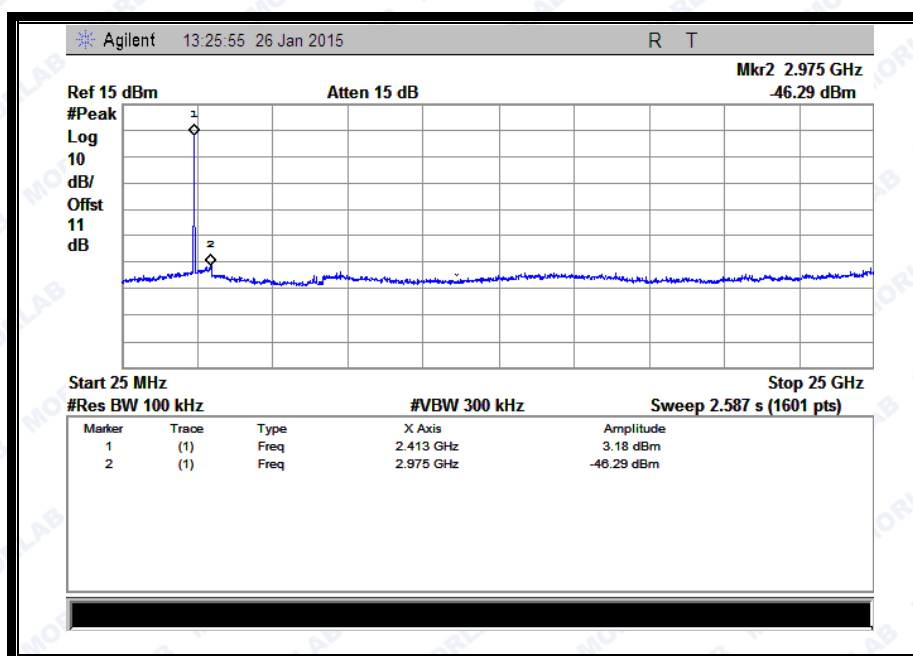


(Channel = 1, 30MHz to 25GHz)




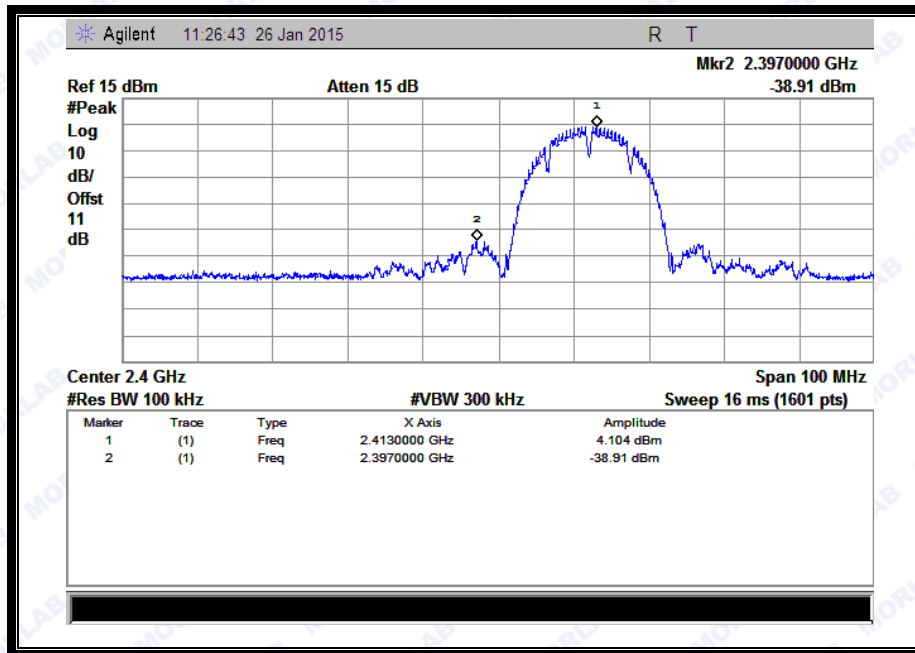


(Band Edge @ Channel = 1)

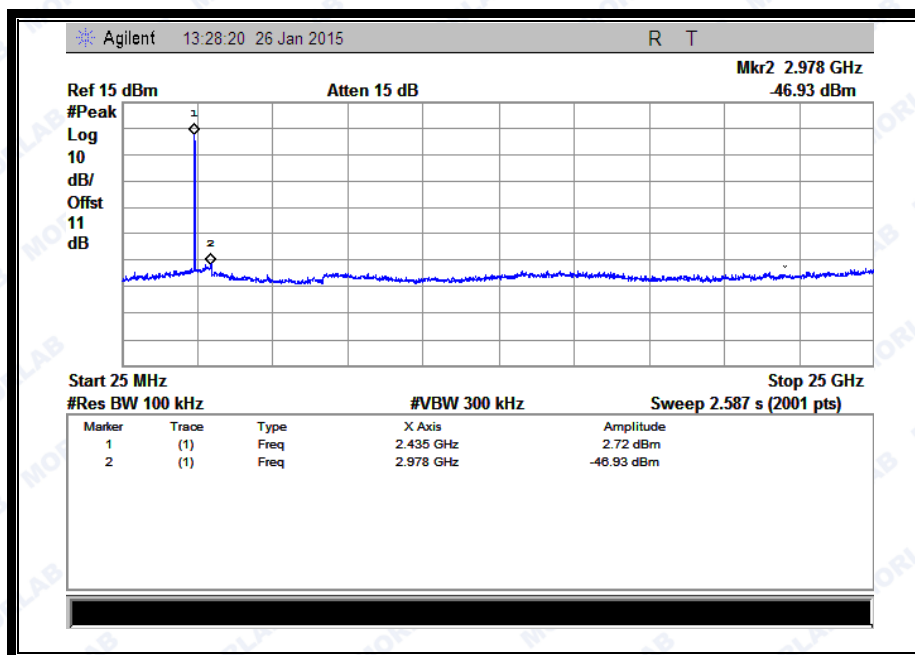

(Channel = 6, 30MHz to 25GHz)

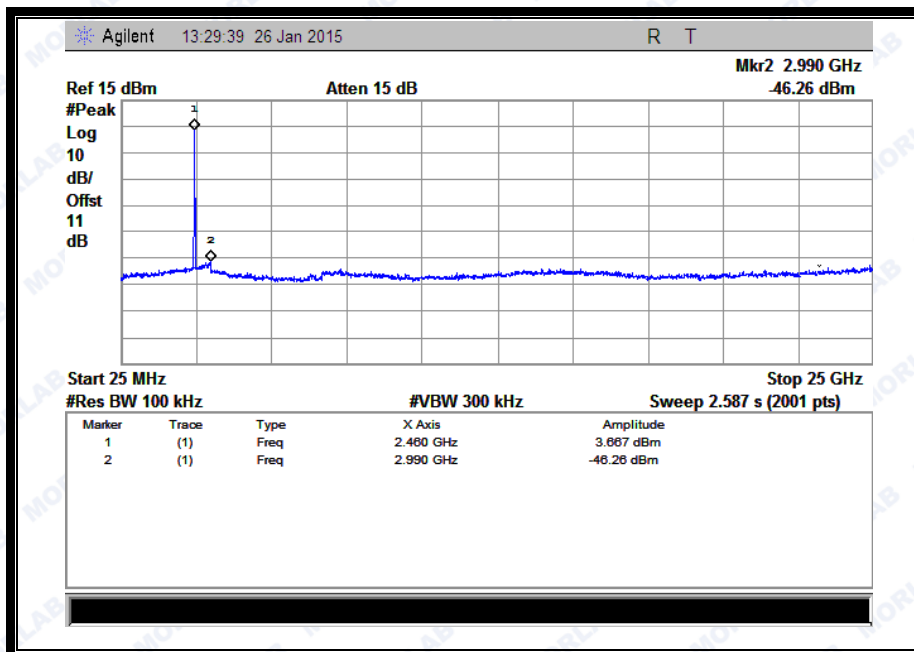

(Channel = 11, 30MHz to 25GHz)

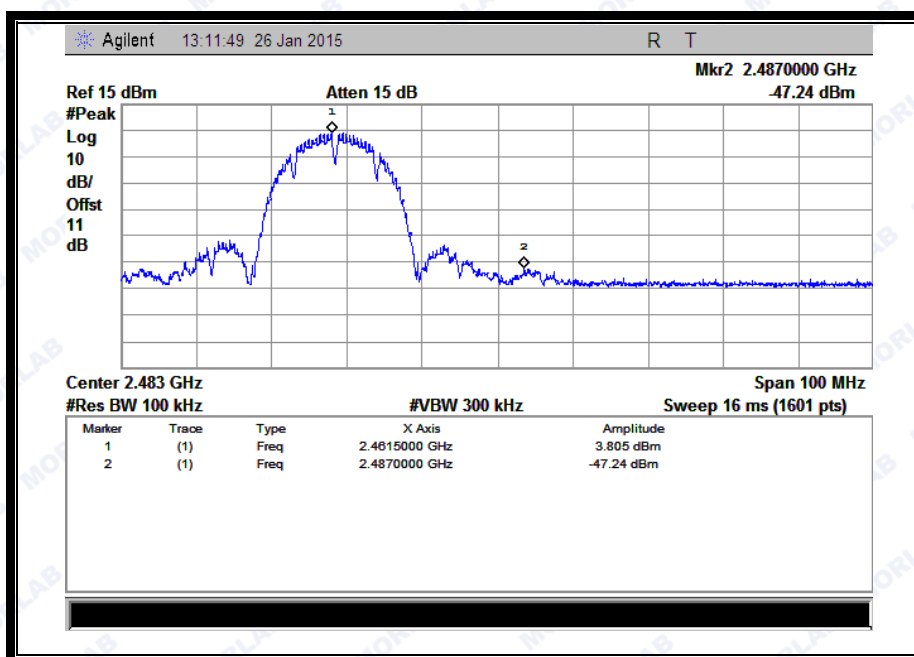


(Band Edge @ Channel = 11)

**2.4.3.2 802.11g Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.85	2.291	-17.709	PASS
6	2437	-46.73	0.540	-19.460	PASS
11	2462	-45.54	-0.488	-20.488	PASS


**B. Test Plots:**

**Note:** the power of the Module transmitting frequency should be ignored.

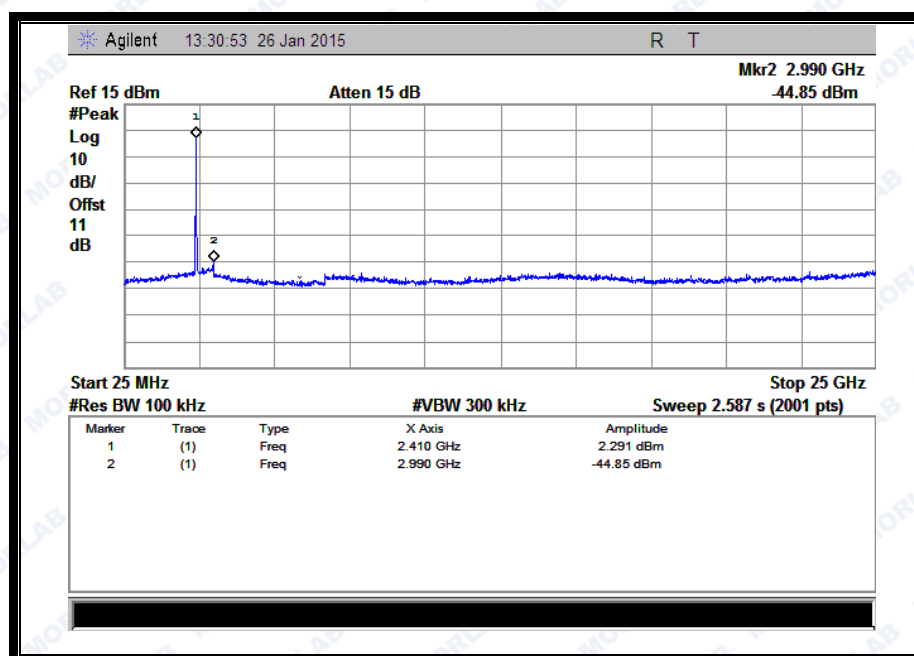


(Channel = 1, 30MHz to 25GHz)




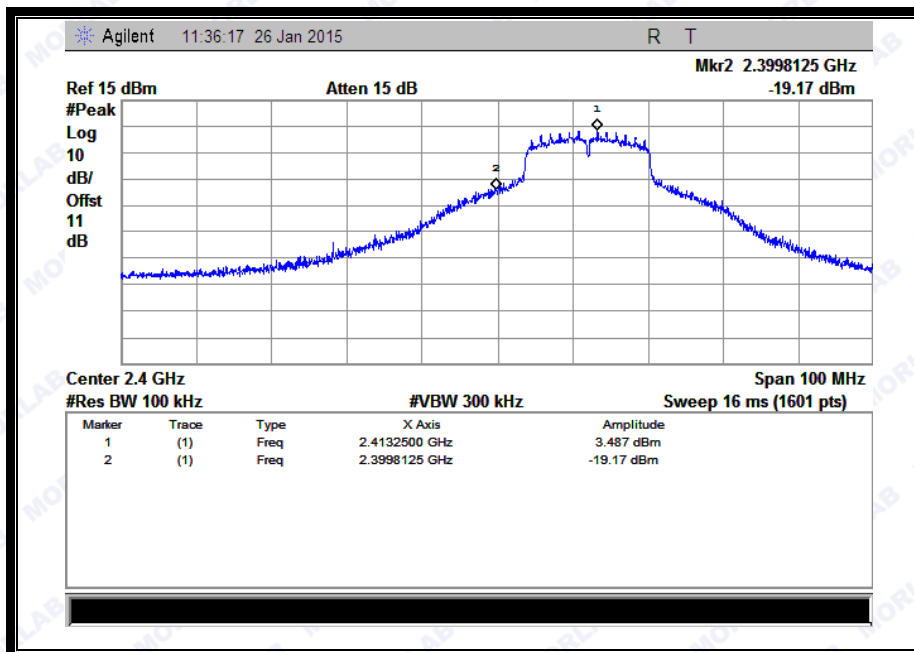


(Band Edge @ Channel = 1)

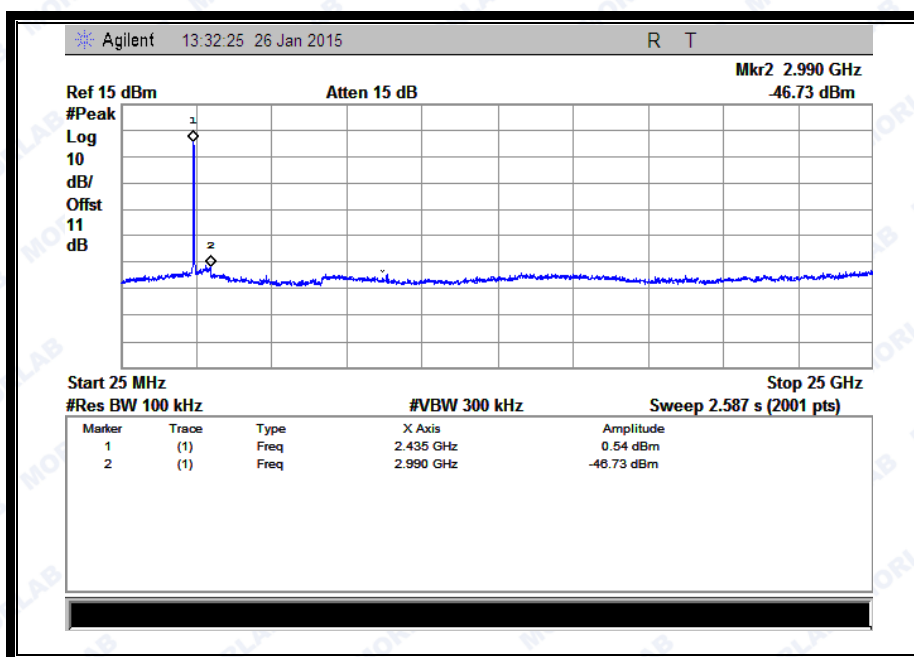

(Channel = 6, 30MHz to 25GHz)

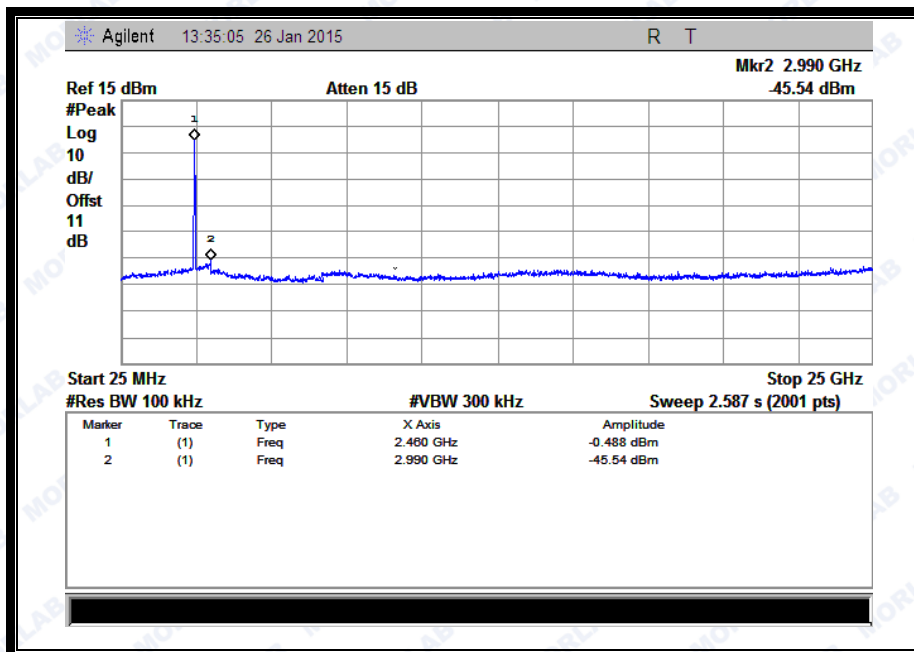

(Channel = 11, 30MHz to 25GHz)

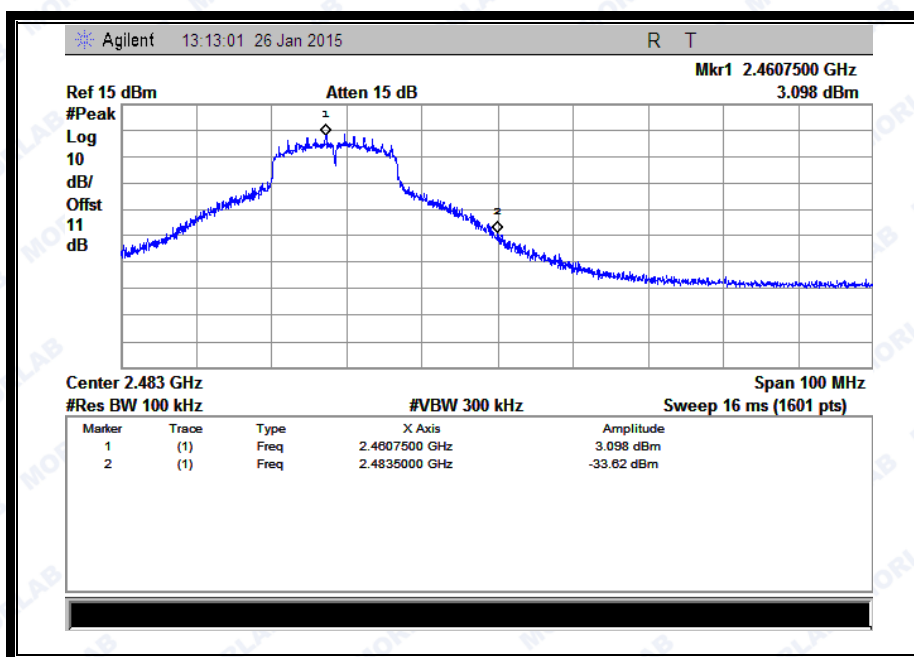


(Band Edge @ Channel = 11)

**2.4.3.3 802.11n -20MHz Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-46.48	-0.215	-20.215	PASS
6	2437	-46.63	-0.841	-20.841	PASS
11	2462	-45.79	2.244	-17.756	PASS

**B. Test Plots:**

**Note:** the power of the Module transmitting frequency should be ignored.

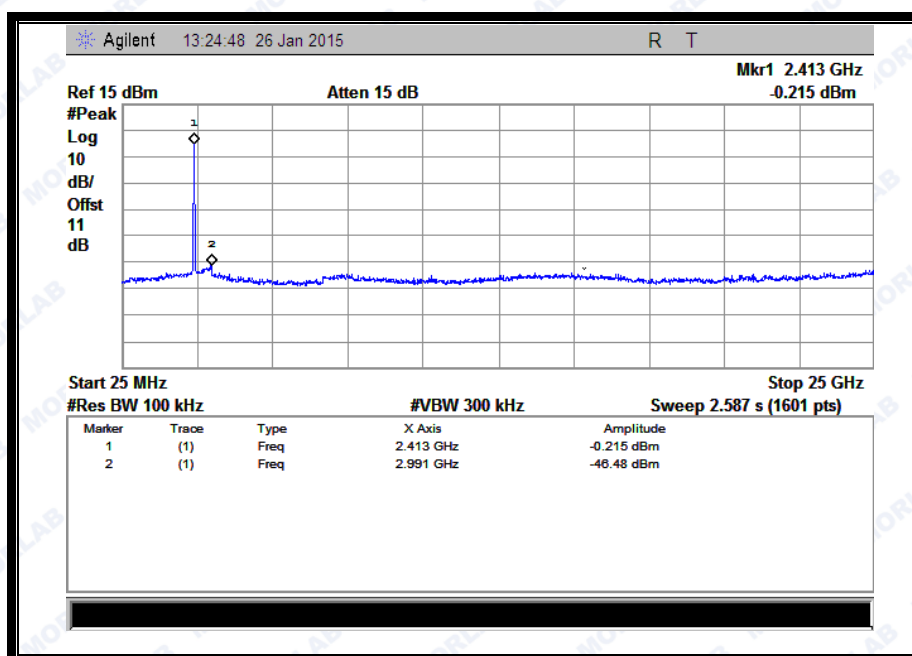


(Channel = 1, 30MHz to 25GHz)






REPORT No. : SZ14120207W03

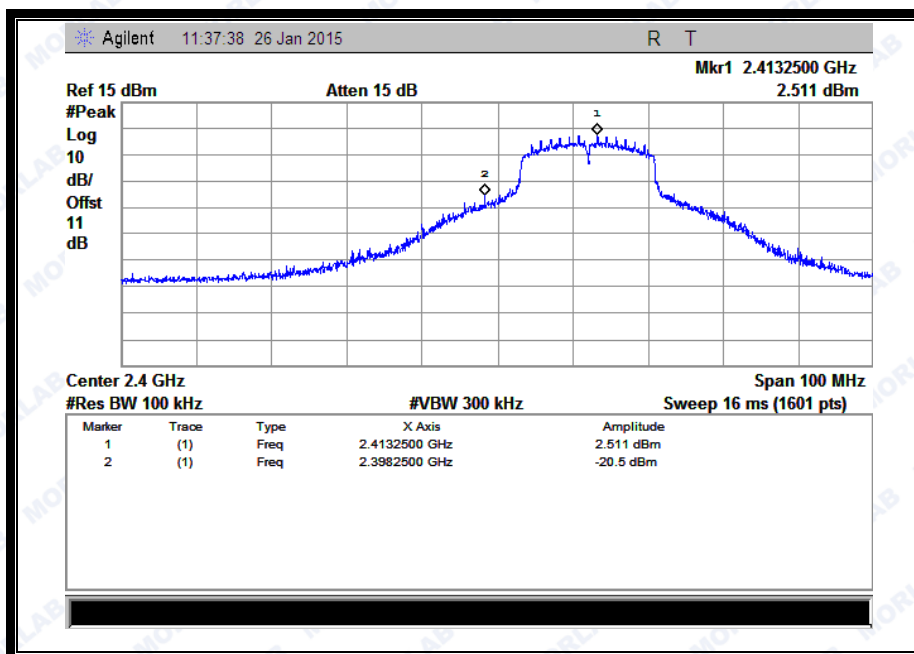


(Band Edge @ Channel = 1)

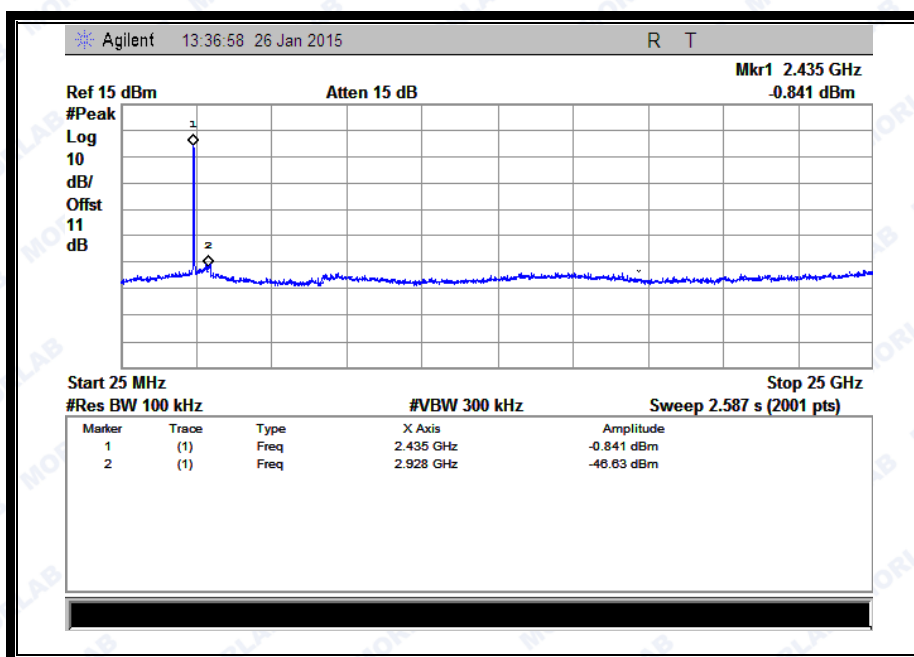


(Channel = 6, 30MHz to 25GHz)



REPORT No. : SZ14120207W03

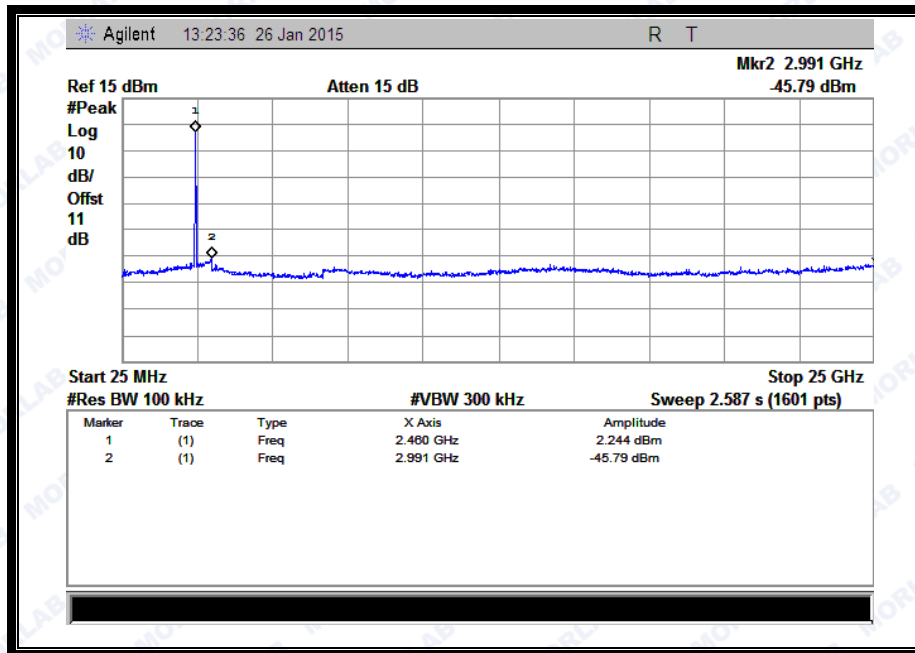

(Channel = 11, 30MHz to 25GHz)

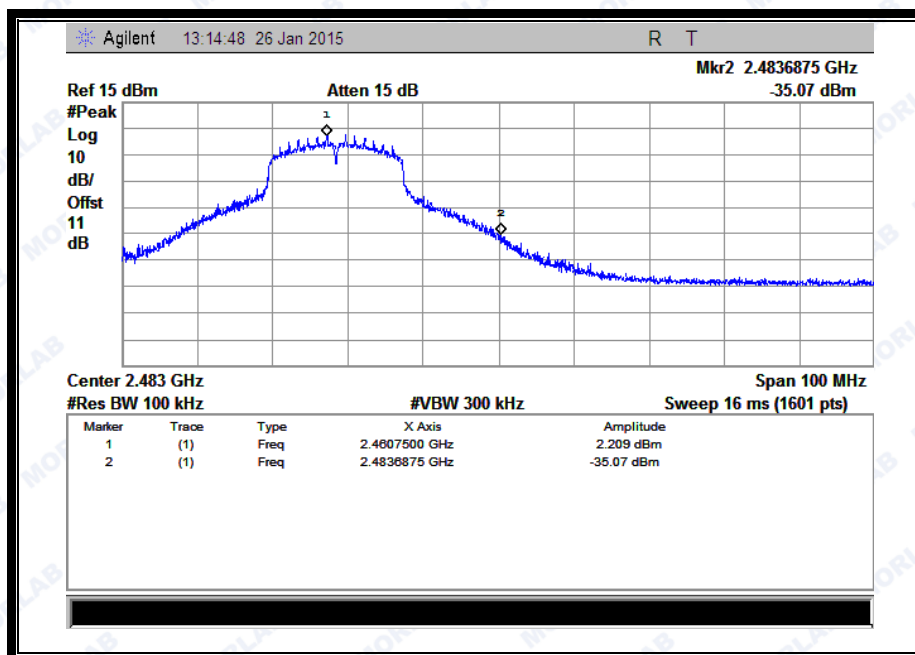


(Band Edge @ Channel = 11)

**2.4.3.4 802.11n -40MHz Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-46.63	-1.731	-21.731	PASS
6	2437	-46.32	-1.557	-21.557	PASS
9	2452	-46.52	-2.037	-22.037	PASS


**B. Test Plots:**

**Note:** the power of the Module transmitting frequency should be ignored.

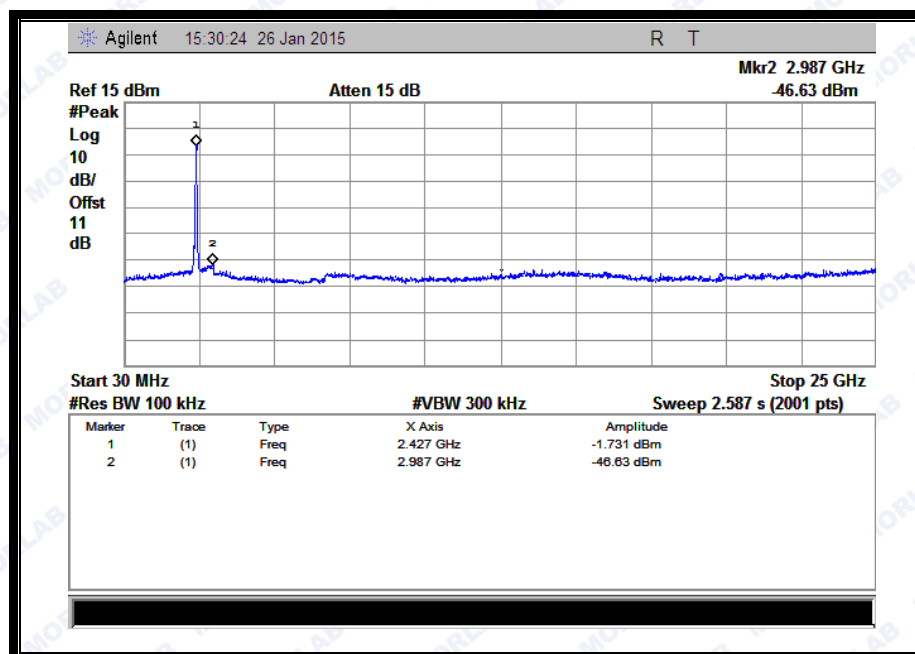


(Channel = 3, 30MHz to 25GHz)



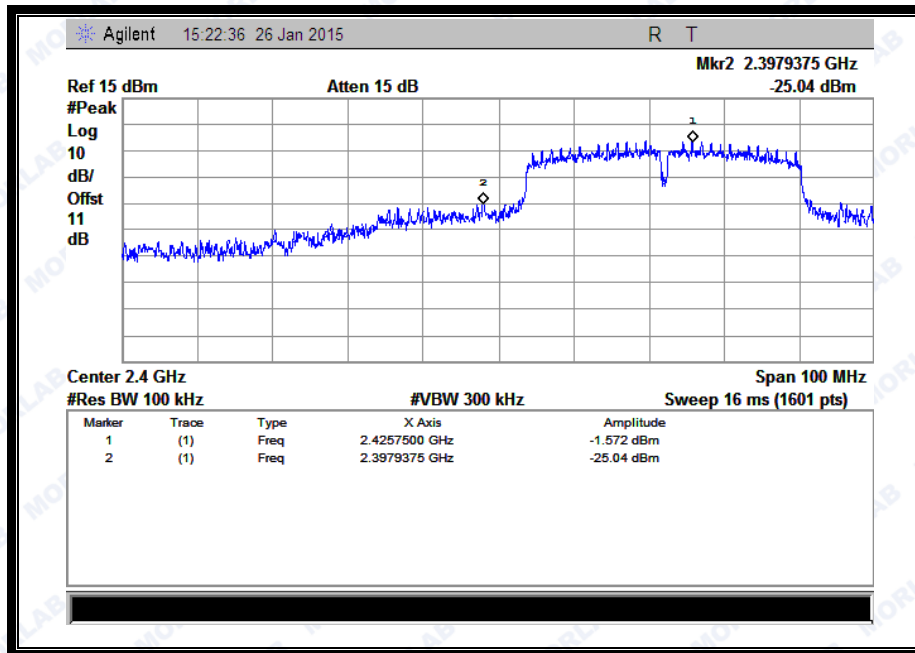


(Band Edge @ Channel = 3)

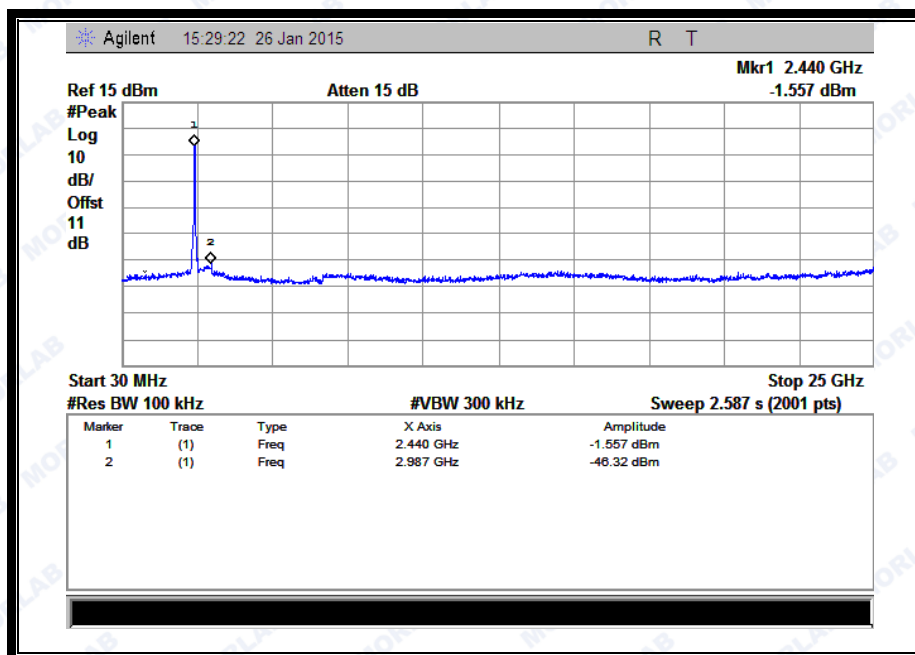


(Channel = 6, 30MHz to 25GHz)



REPORT No. : SZ14120207W03

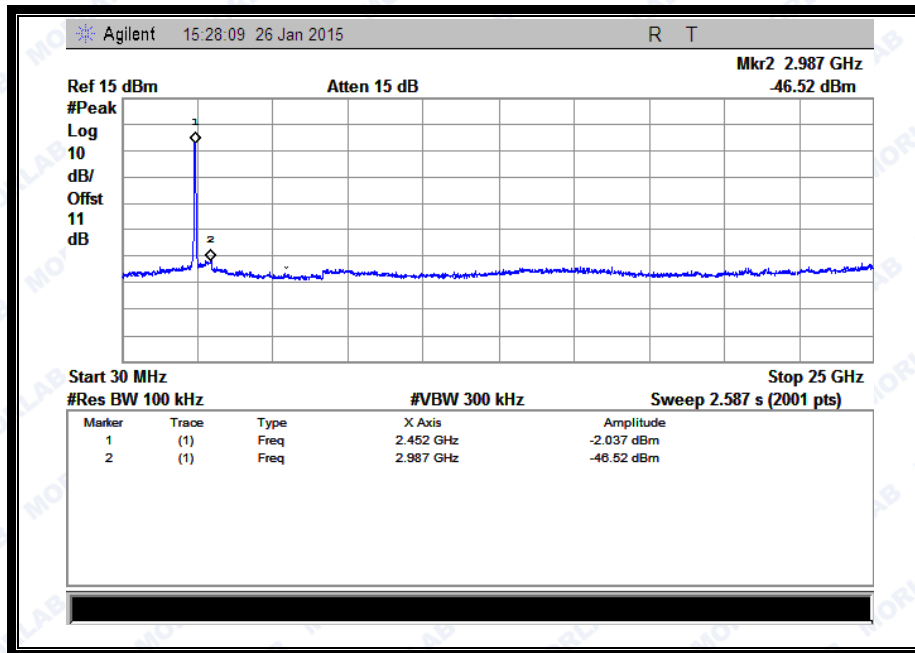

(Channel = 9, 30MHz to 25GHz)

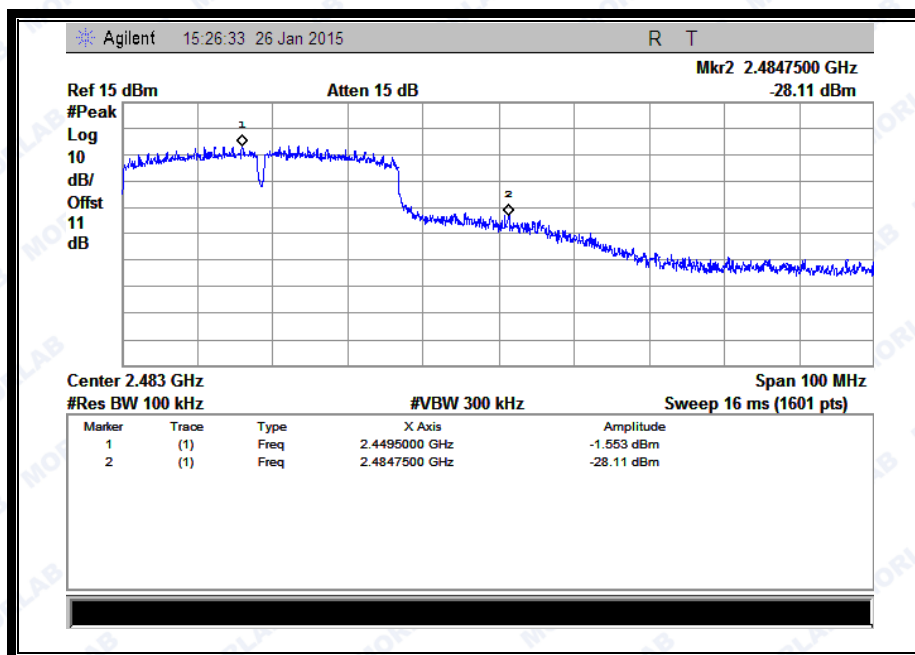

(Band Edge @ Channel = 9)


## 2.5 Power spectral density (PSD)

### 2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.5.2 Test Description

#### A. Test Set:

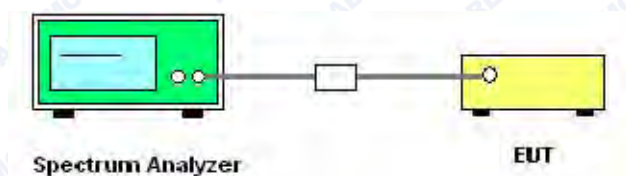

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).






### 2.5.3 Test Result

#### 2.5.3.1 802.11b Test mode

##### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.183	8	PASS
6	2437	-9.961	8	PASS
11	2462	-9.215	8	PASS
Measurement uncertainty: $\pm 1.3$ dB				


##### B. Test Plots:

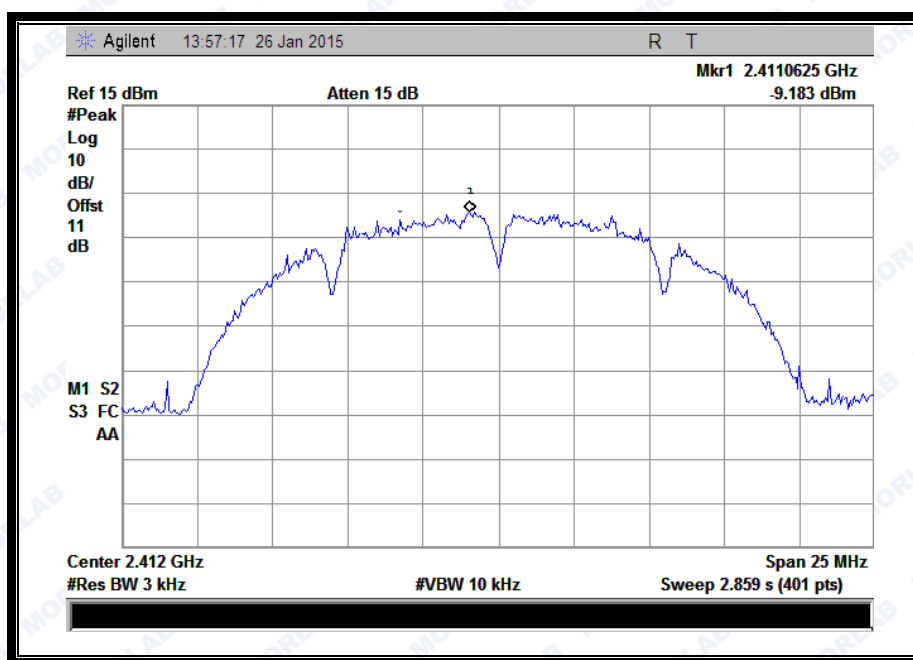


(Channel = 1 @ 802.11b)



REPORT No. : SZ14120207W03

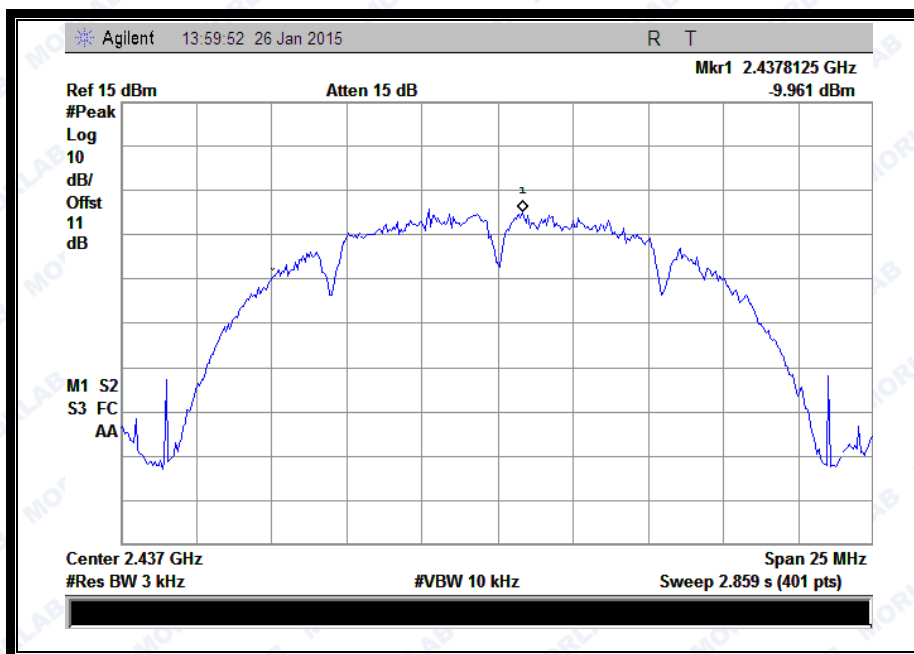

(Channel = 6 @ 802.11b)

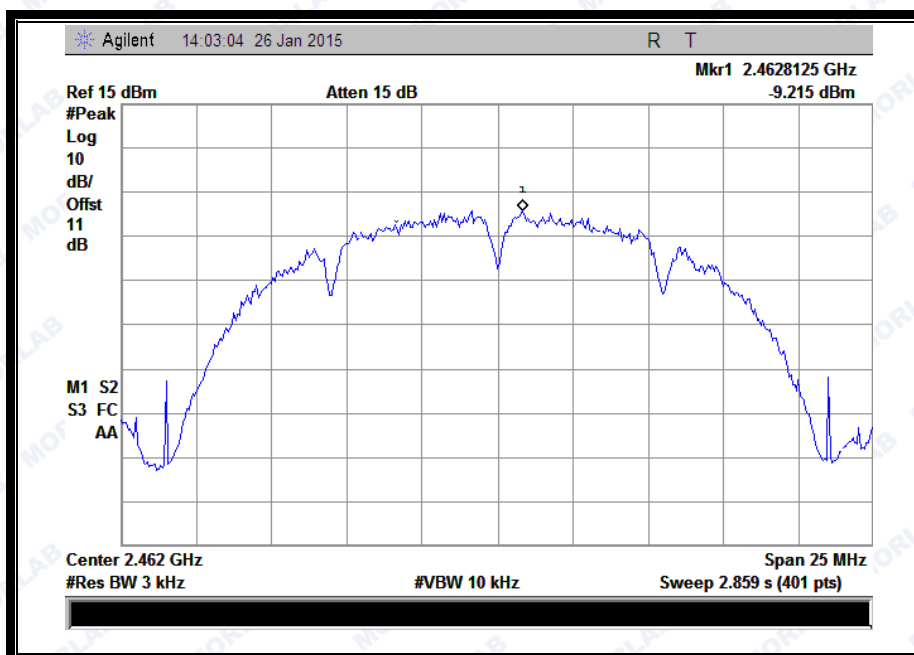

(Channel = 11 @ 802.11b)




## 2.5.3.2 802.11g Test mode

## A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-11.10	8	PASS
6	2437	-10.74	8	PASS
11	2462	-9.959	8	PASS
Measurement uncertainty: $\pm 1.3$ dB				

## B. Test Plots:

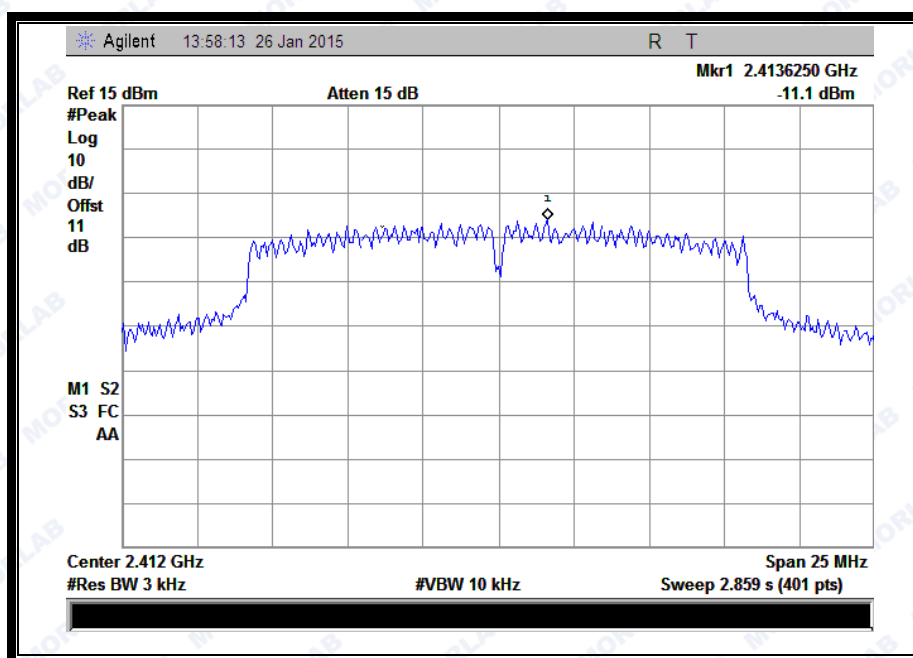


(Channel = 1 @ 802.11g)






REPORT No. : SZ14120207W03

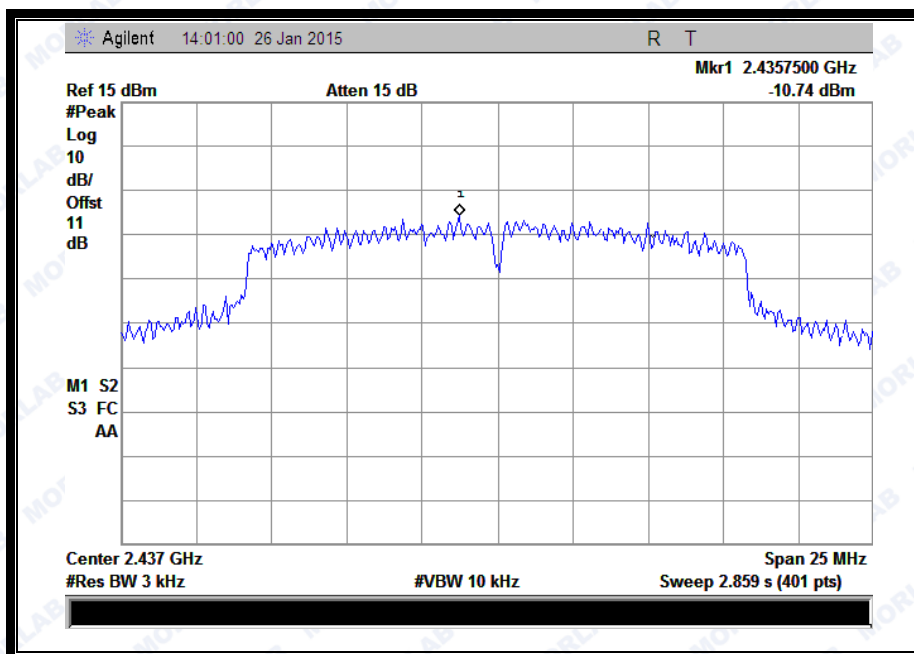

(Channel = 6 @ 802.11g)

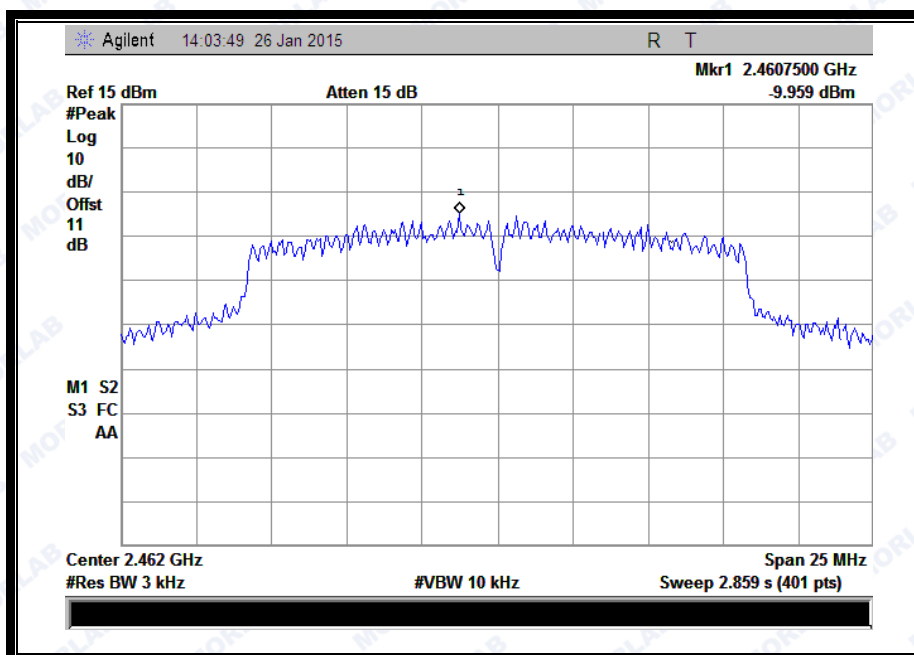

(Channel = 11 @ 802.11g)



REPORT No. : SZ14120207W03


### 2.5.3.3 802.11n-20MHz Test mode

ANT 1:

#### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-12.65	8	PASS
6	2437	-11.85	8	PASS
11	2462	-10.92	8	PASS
Measurement uncertainty: $\pm 1.3$ dB				


#### B. Test Plots:

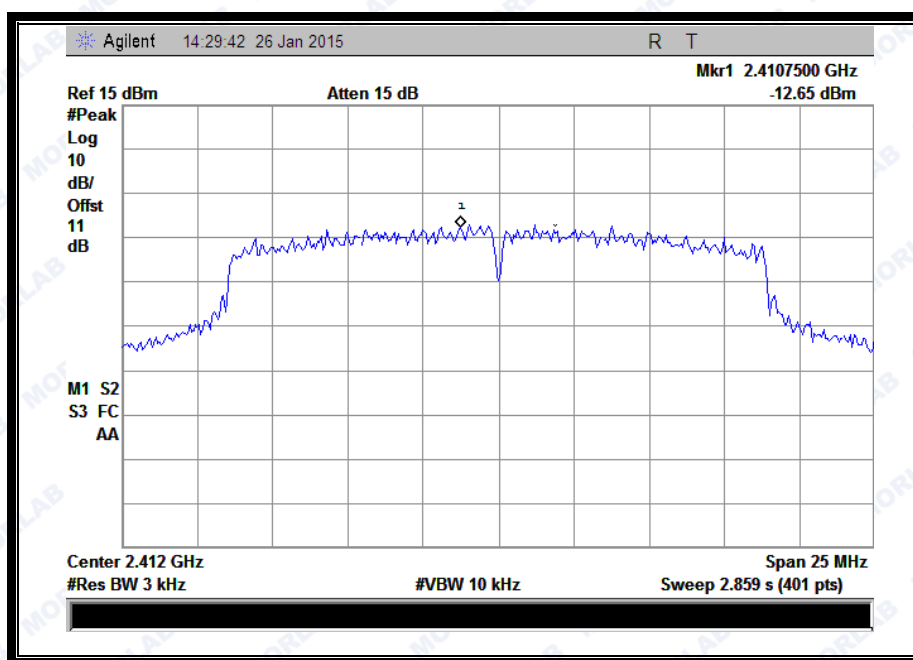


(Channel = 1 @ 802.11n-20MHz)



REPORT No. : SZ14120207W03

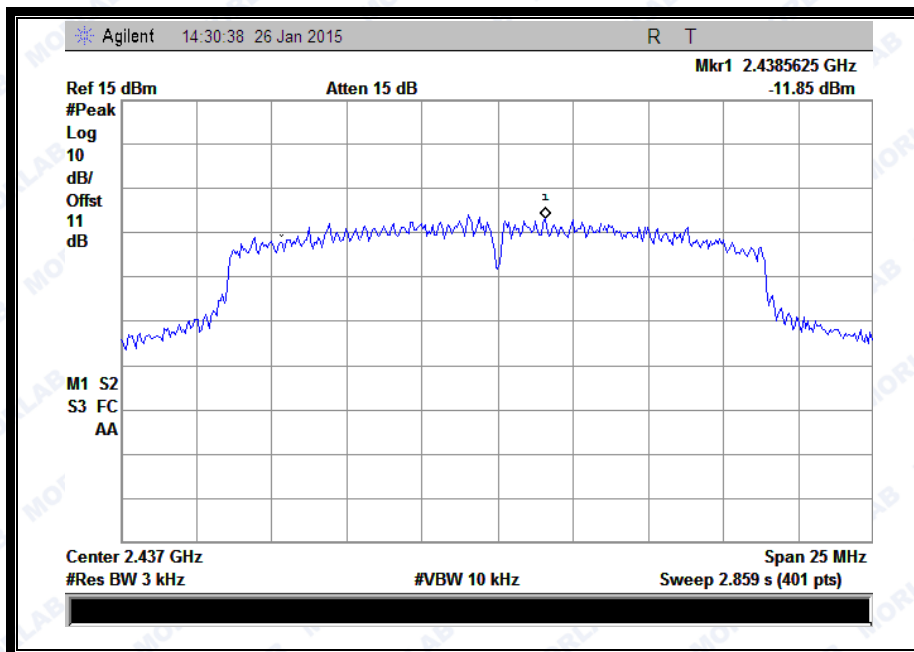

(Channel = 6 @ 802.11n-20MHz)

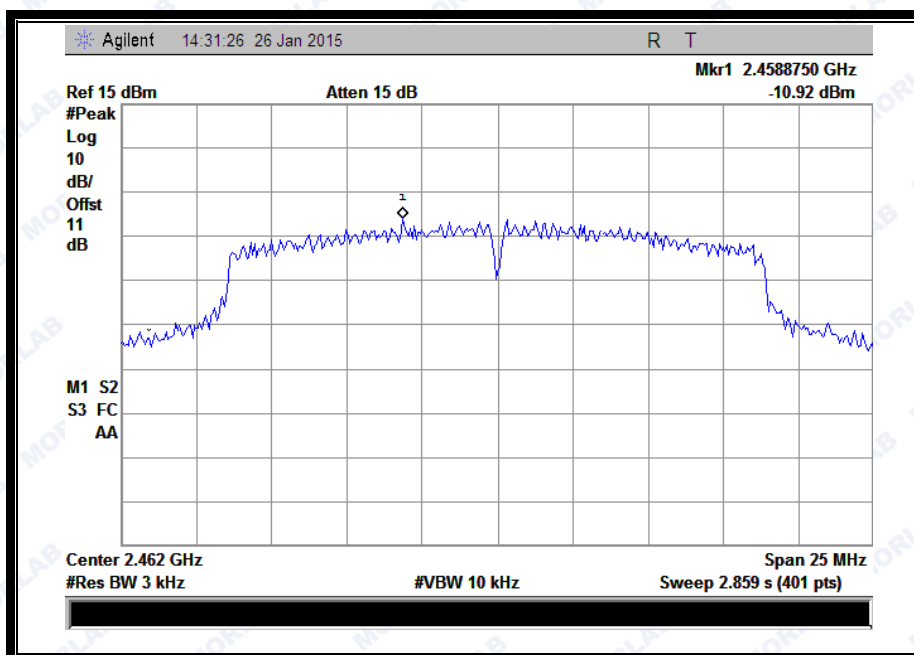


(Channel = 11 @ 802.11n-20MHz)



ANT 2:

**A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-12.67	8	PASS
6	2437	-12.08	8	PASS
11	2462	-12.15	8	PASS
Measurement uncertainty: $\pm 1.3$ dB				

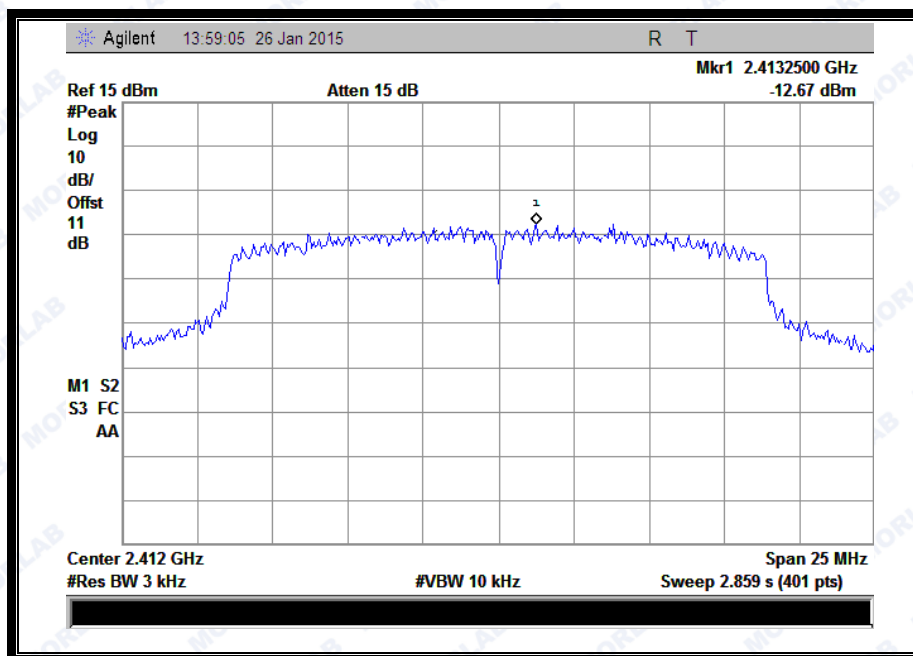
**B. Test Plots:**

(Channel = 1 @ 802.11n-20MHz)






REPORT No. : SZ14120207W03

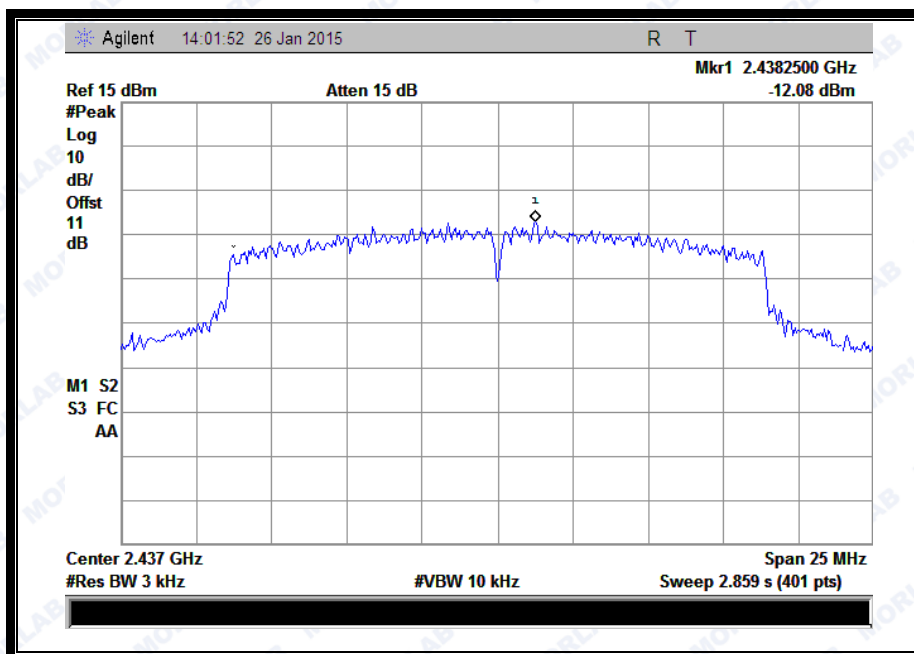

(Channel = 6 @ 802.11n-20MHz)

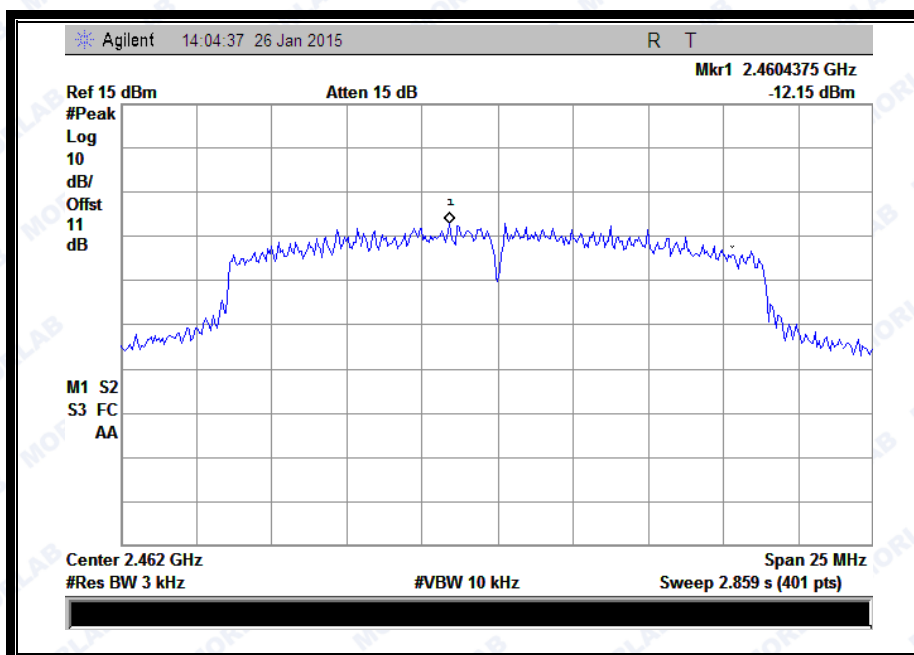

(Channel = 11 @ 802.11n-20MHz)



REPORT No. : SZ14120207W03

ANT 1 + ANT 2:

**A. Test Verdict:**


Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.65	8	PASS
6	2437	-8.95	8	PASS
11	2462	-8.48	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$				

**2.5.3.4 802.11n-40MHz Test mode****A. Test Verdict:**


Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-18.83	8	PASS
6	2437	-19.78	8	PASS
9	2452	-18.83	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$				



## B. Test Plots:

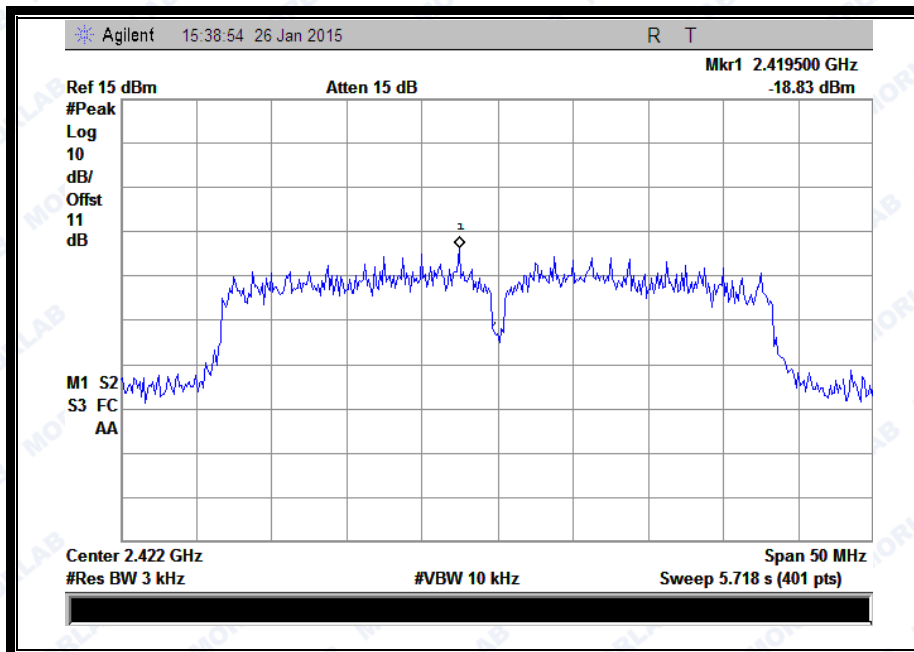


(Channel = 3 @ 802.11n-40MHz)

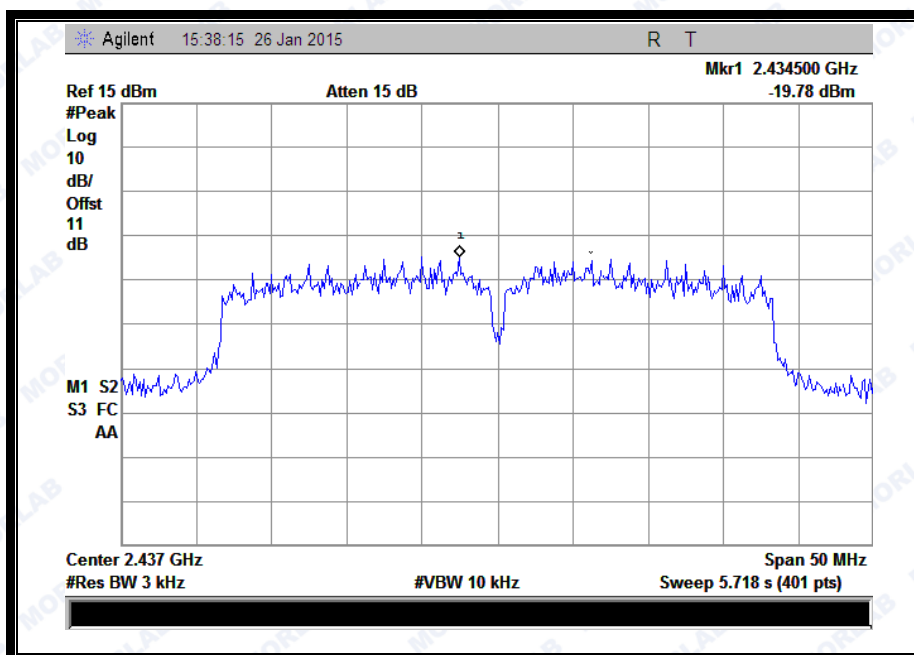

(Channel = 6 @ 802.11n-40MHz)



REPORT No. : SZ14120207W03

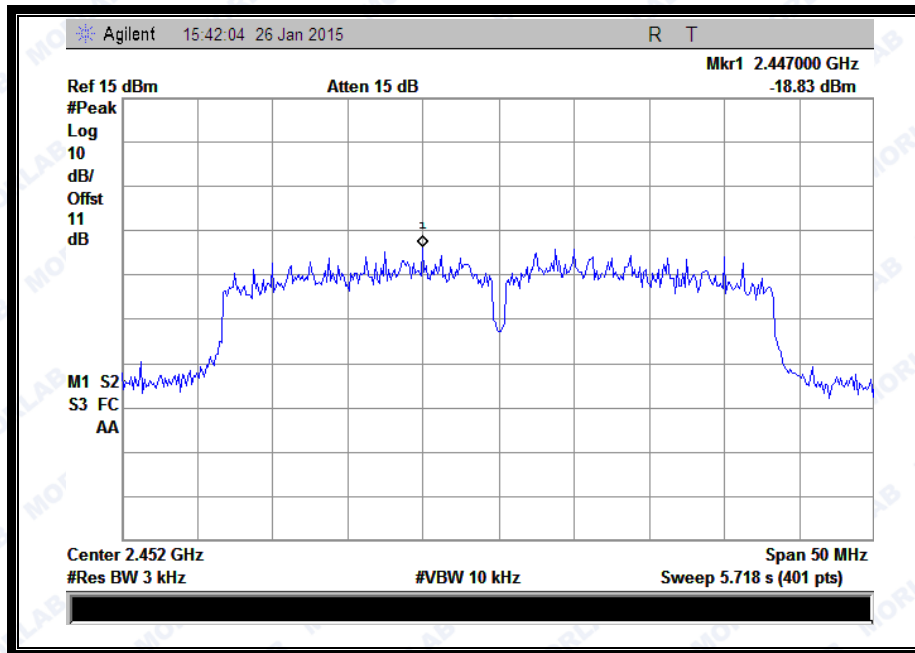

(Channel = 9 @ 802.11n-40MHz)




## 2.6 Restricted Frequency Bands

### 2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.6.2 Test Description

#### A. Test Setup

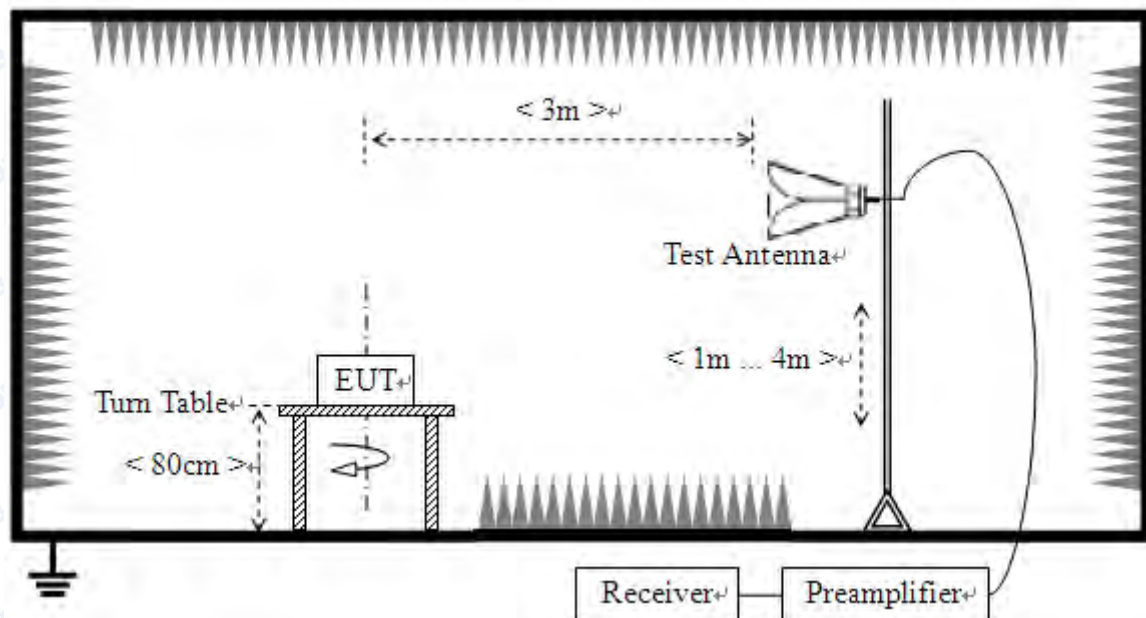

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).



### 2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### 2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


##### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2364.41	PK	47.00	-24.63	32.56	54.93	74	Pass
1	2355.58	AV	34.74	-24.63	32.56	42.67	54	Pass
11	2485.45	PK	46.79	-24.18	32.5	55.11	74	Pass
11	2484.21	AV	34.30	-24.18	32.5	42.62	54	Pass


##### B. Test Plots:



REPORT No. : SZ14120207W03

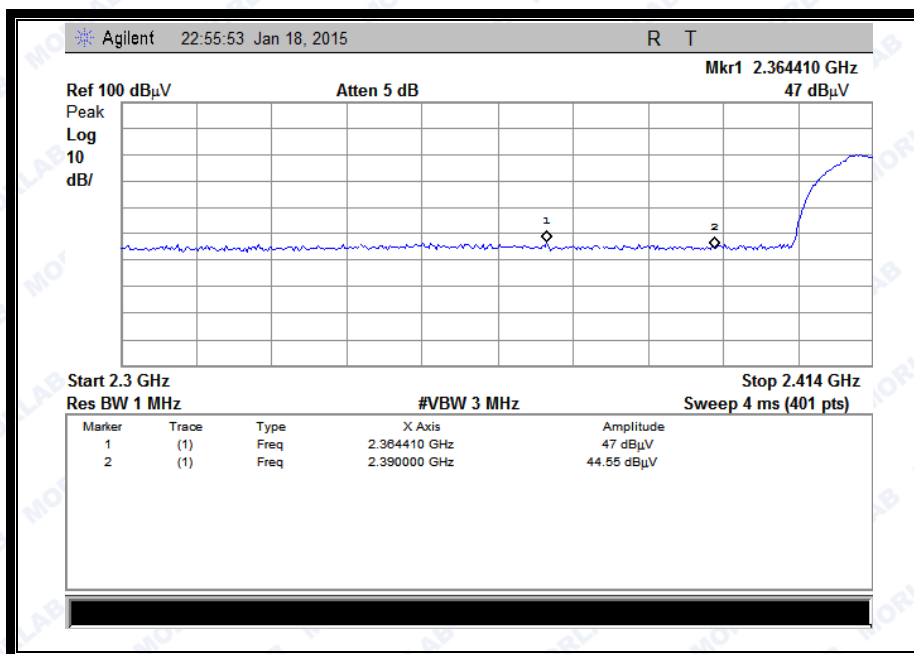


(Plot A1: Channel = 1 PEAK @ 802.11b)

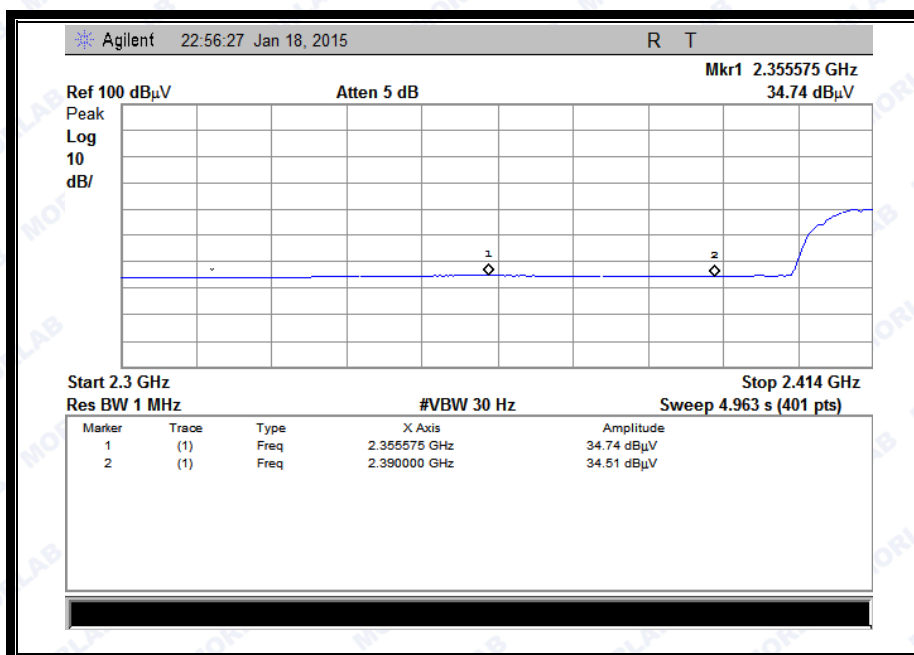


(Plot A2: Channel = 1 AVG @ 802.11b)



REPORT No. : SZ14120207W03

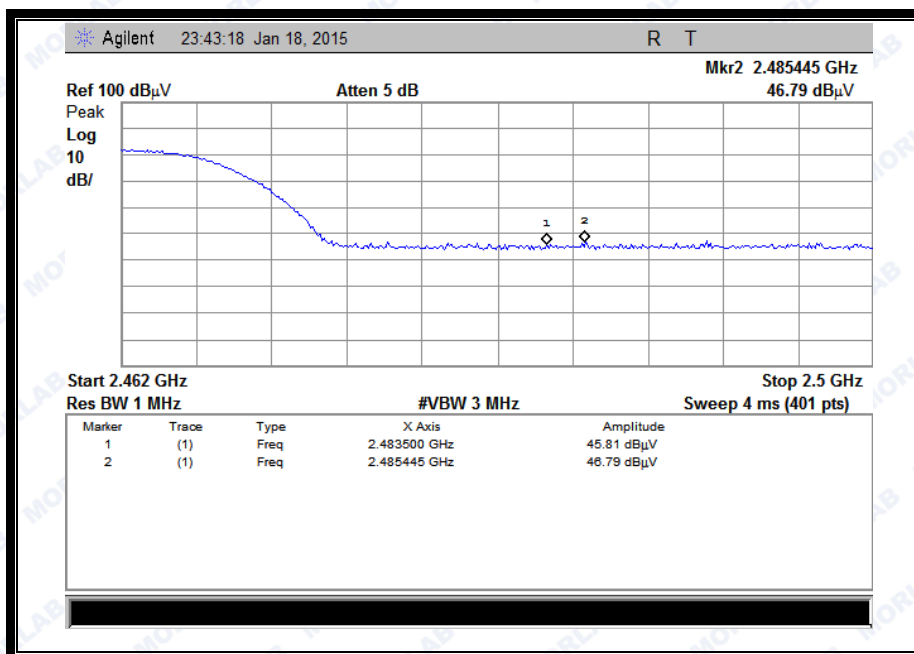

(Plot B1: Channel = 11 PEAK @ 802.11b)

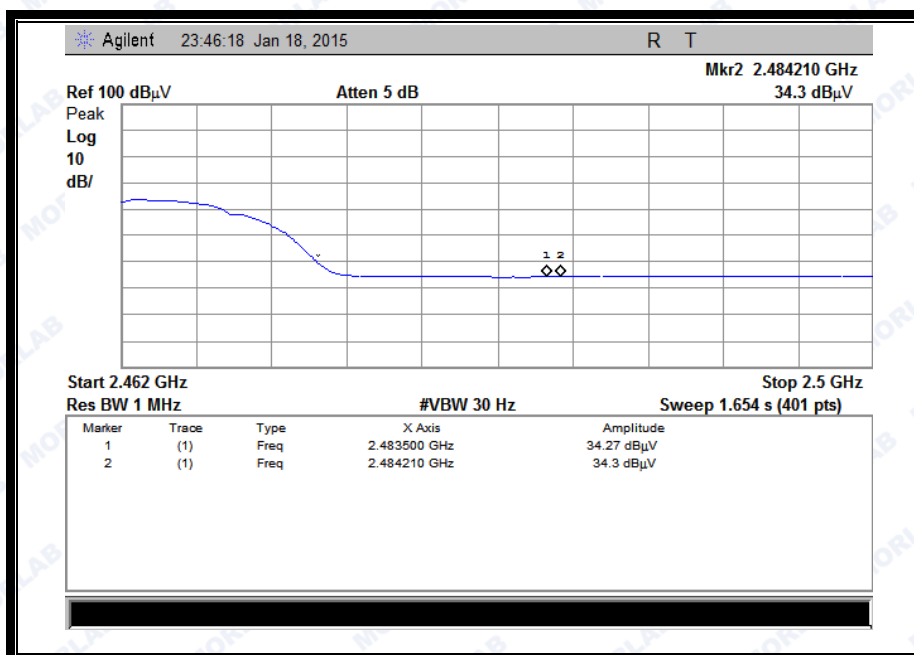

(Plot B2: Channel = 11 AVG @ 802.11b)




**2.6.3.2 802.11g Test mode**

The lowest and highest channels are tested to verify the band edge emissions.

**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2376.67	PK	45.87	-24.63	32.56	53.80	74	Pass
1	2390.00	AV	34.36	-24.63	32.56	42.29	54	Pass
11	2486.40	PK	46.62	-24.18	32.5	54.94	74	Pass
11	2483.50	AV	34.59	-24.18	32.5	42.91	54	Pass

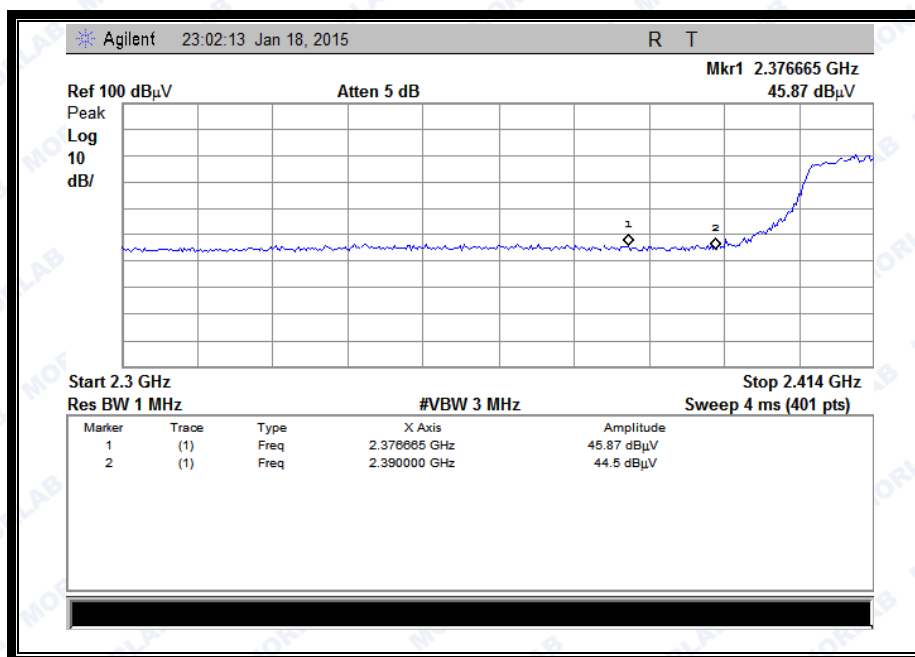**B. Test Plots:**


(Plot C1: Channel = 1 PEAK @ 802.11g)



REPORT No. : SZ14120207W03

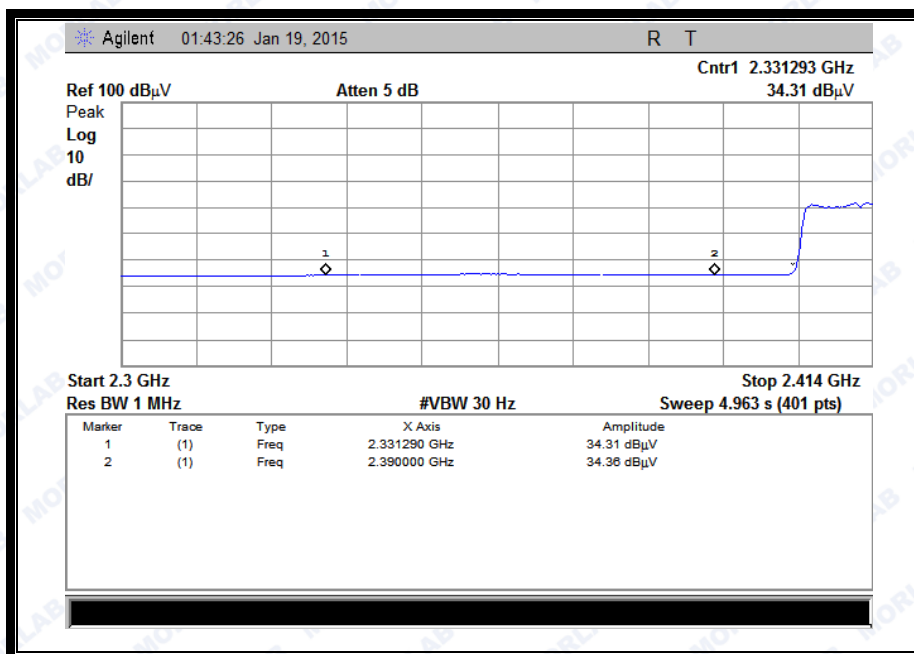


(Plot C2: Channel = 1 AVG @ 802.11g)

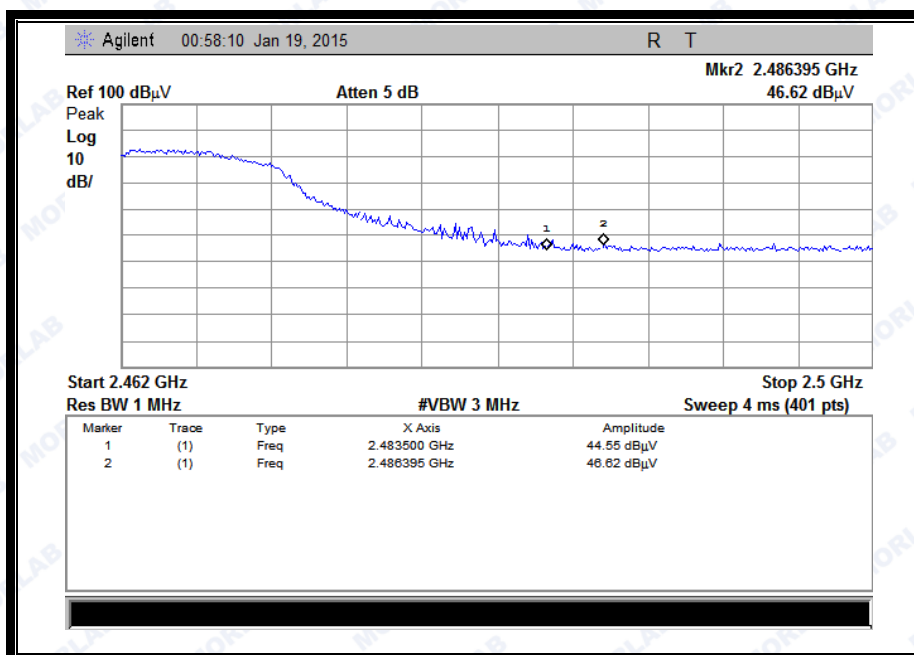

(Plot D1: Channel = 11 PEAK @ 802.11g)



REPORT No. : SZ14120207W03

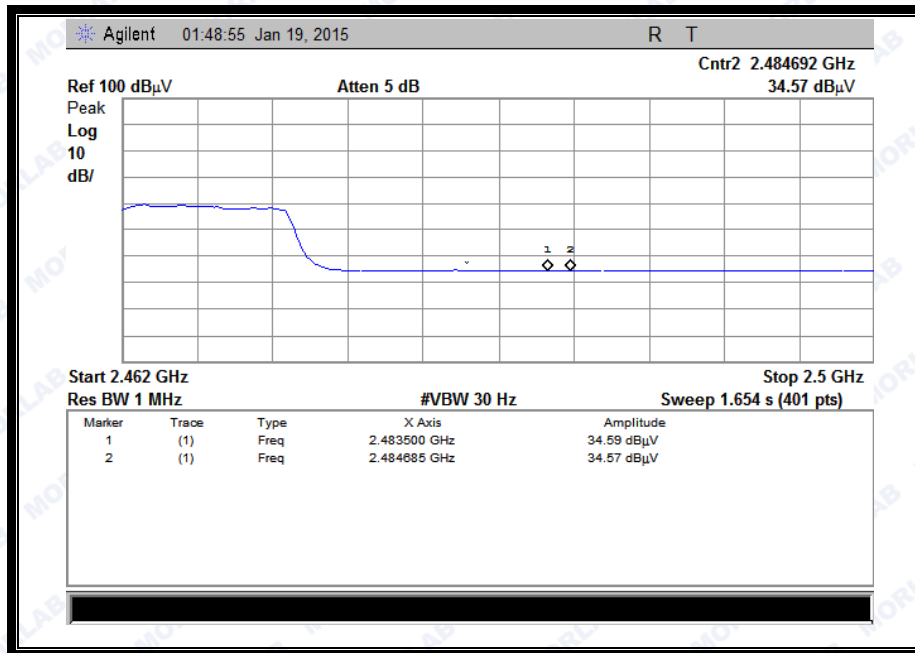

(Plot D2: Channel = 11 AVG @ 802.11g)




### 2.6.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.

#### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2362.70	PK	46.29	-24.63	32.56	54.22	74	Pass
1	2487.44	AV	34.37	-24.63	32.56	42.30	54	Pass
11	2483.50	PK	46.82	-24.18	32.5	55.14	74	Pass
11	2483.50	AV	34.60	-24.18	32.5	42.92	54	Pass

#### B. Test Plots:

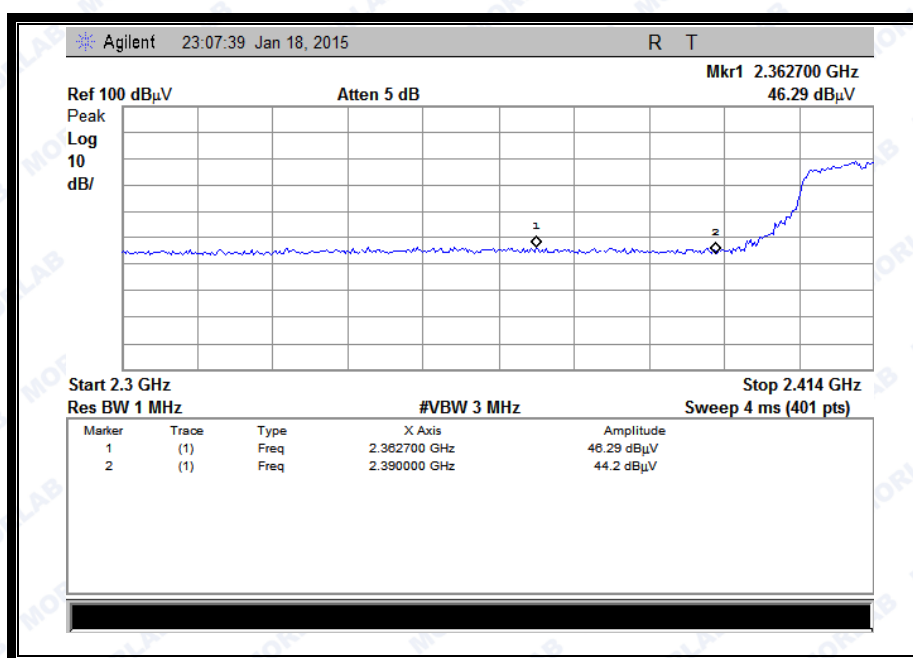


(Plot E1: Channel = 1 PEAK @ 802.11n-20)







REPORT No. : SZ14120207W03

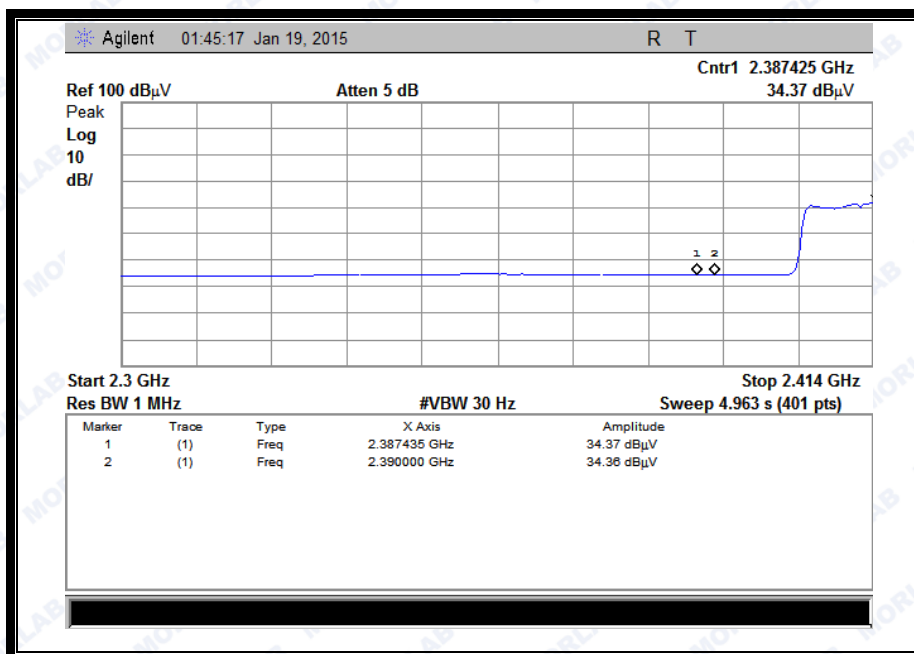

(Plot E2: Channel = 1 AVG @ 802.11n-20)

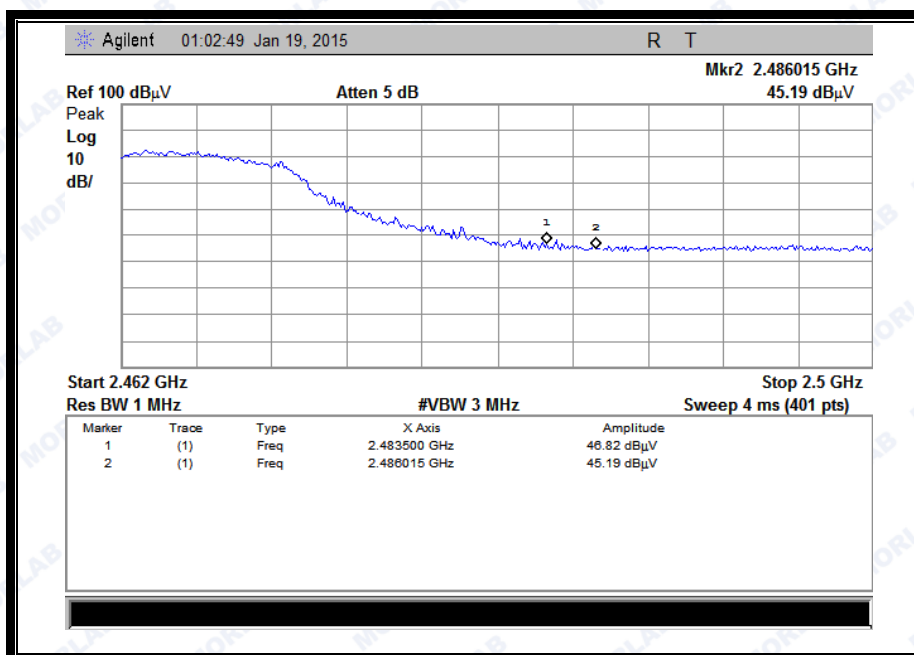

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

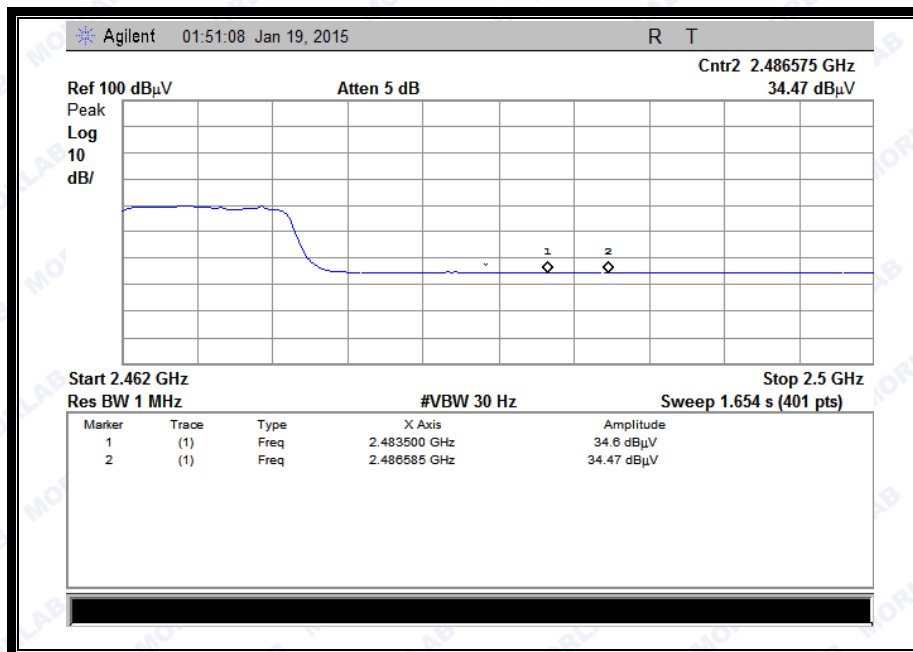

(Plot F2: Channel = 11 AVG @ 802.11n-20)

#### 2.6.3.4 802.11n-40MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


##### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2363.36	PK	45.80	-24.63	32.56	53.73	74	Pass
3	2390.00	AV	34.30	-24.63	32.56	42.23	54	Pass
9	2486.99	PK	47.87	-24.18	32.5	56.19	74	Pass
9	2483.50	AV	34.64	-24.18	32.5	42.96	54	Pass


##### B. Test Plots:



REPORT No. : SZ14120207W03

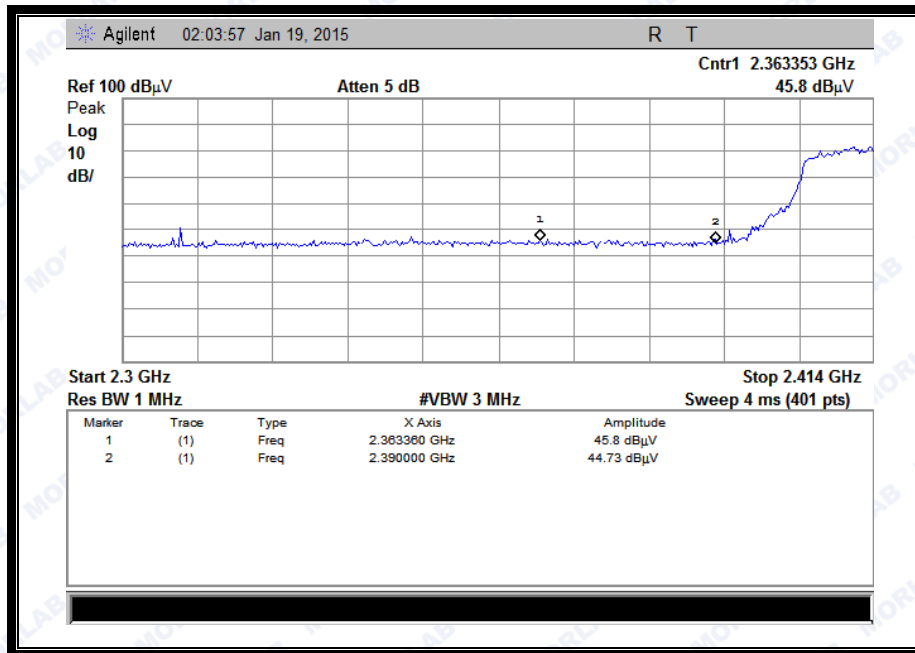


(Plot E1: Channel = 3 PEAK @ 802.11n-40)

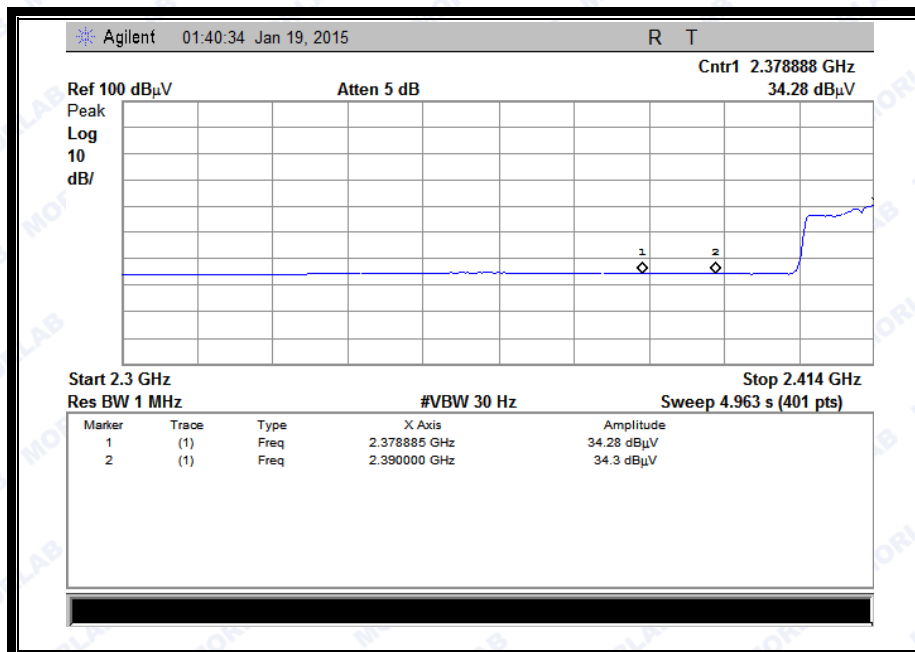


(Plot E2: Channel = 3 AVG @ 802.11n-40)



REPORT No. : SZ14120207W03

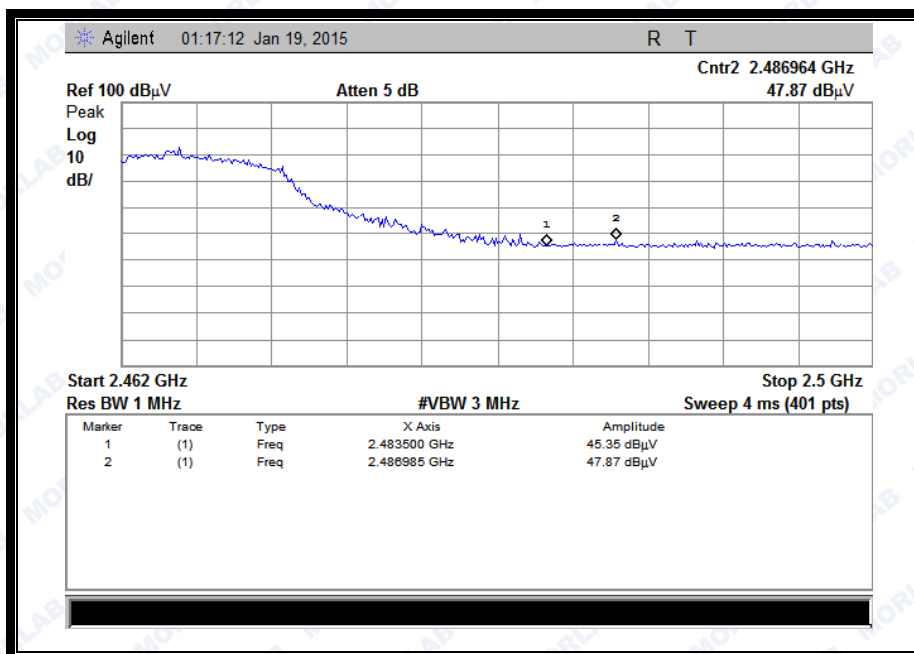

(Plot F1: Channel = 9 PEAK @ 802.11n-40)

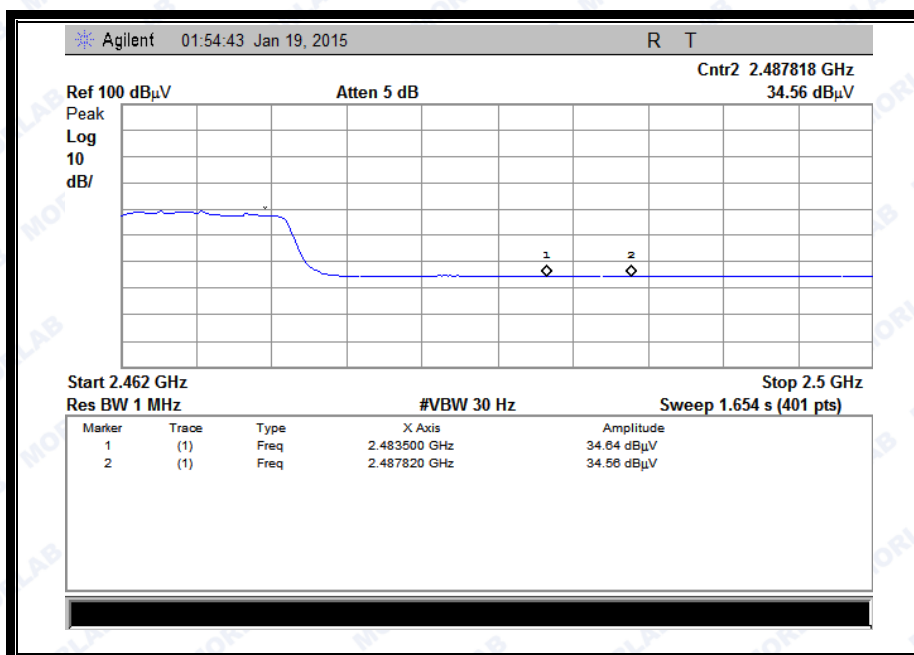

(Plot F2: Channel = 9 AVG @ 802.11n-40)



## 2.7 Conducted Emission

### 2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

#### NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2 Test Description

#### A. Test Setup:

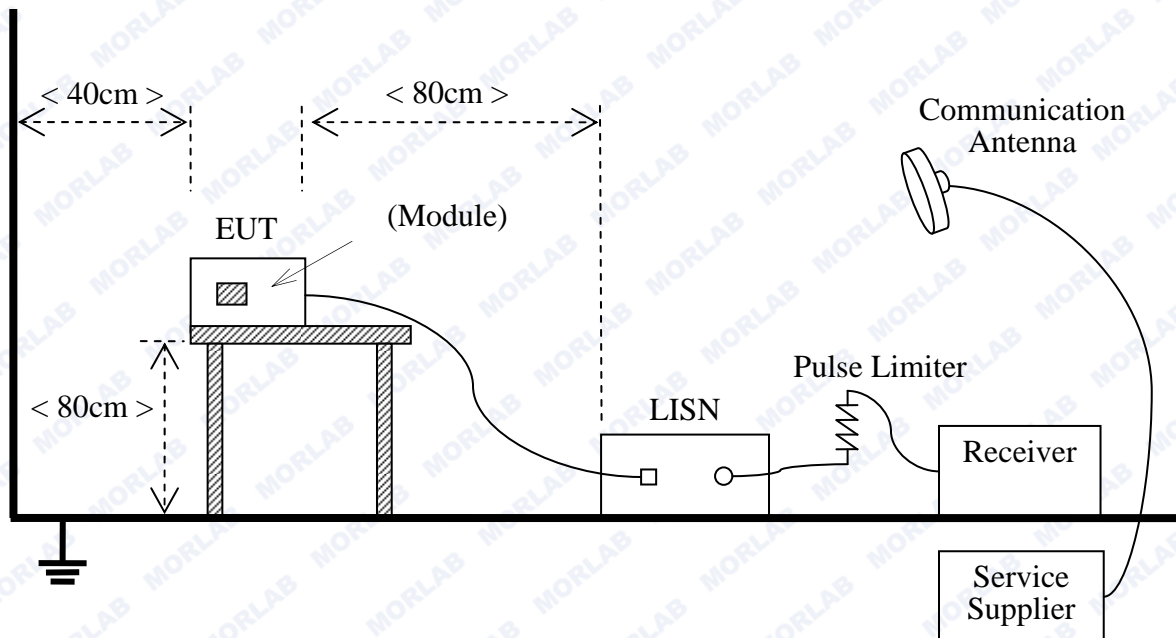

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009



## B. Equipments List:

Please reference ANNEX A(1.4).

### 2.7.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: All test modes are performed, only the worst case is recorded in this report.


#### A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

#### B. Test Plots:

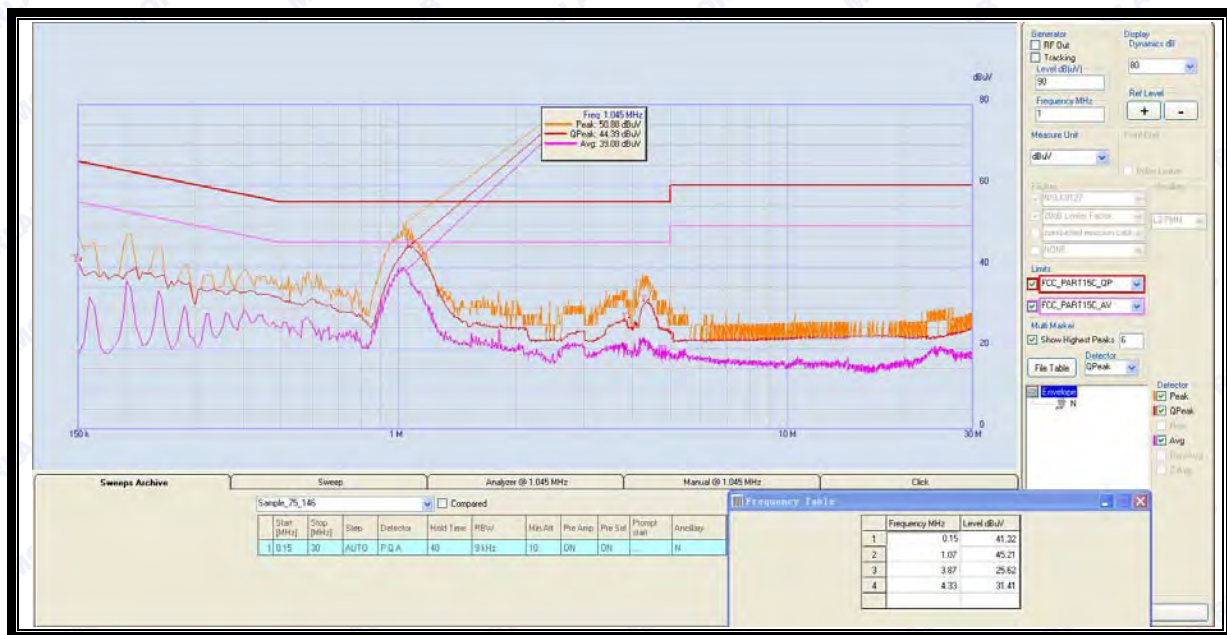

(Plot A: L Phase)

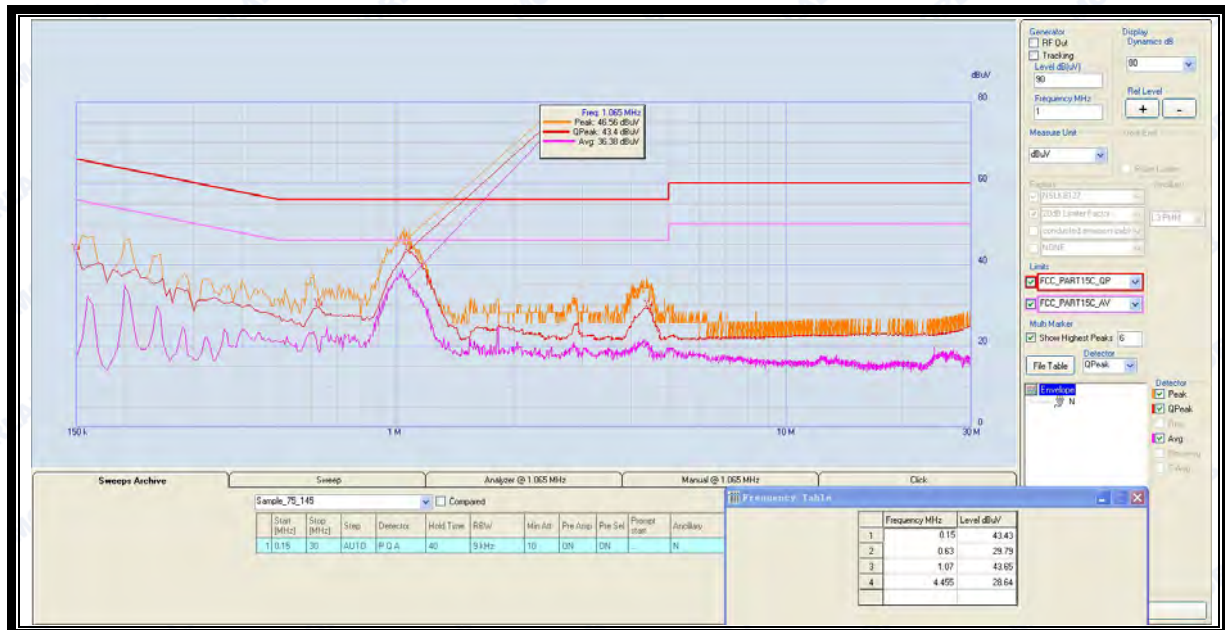

(Plot B: N Phase)





## 2.8 Radiated Emission

### 2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)




## 2.8.2 Test Description

### A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

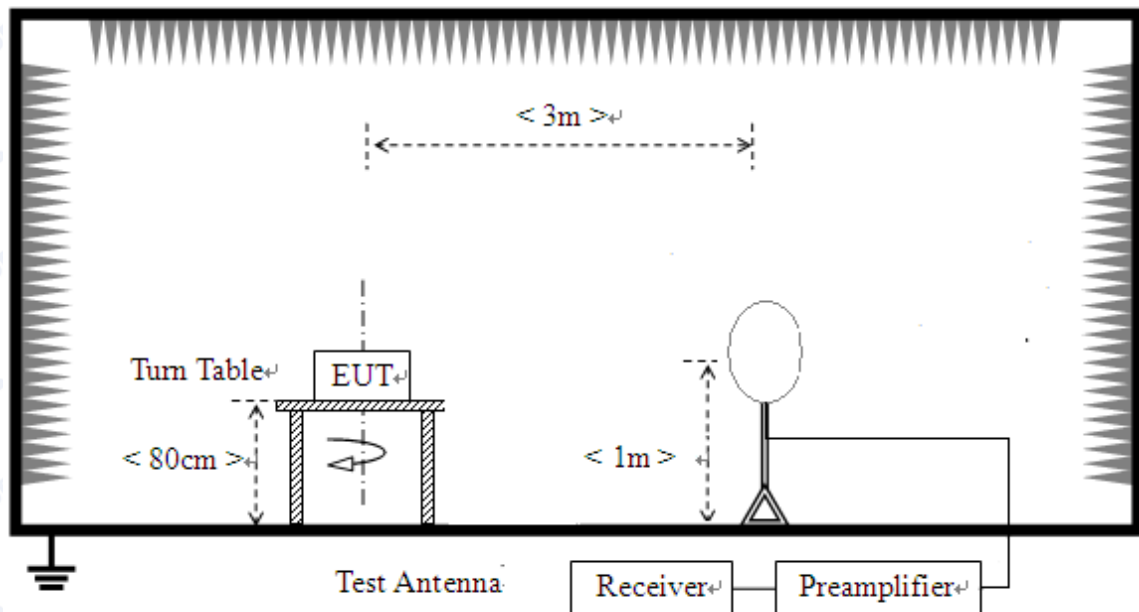

- 2) For radiated emissions from 30MHz to 1GHz

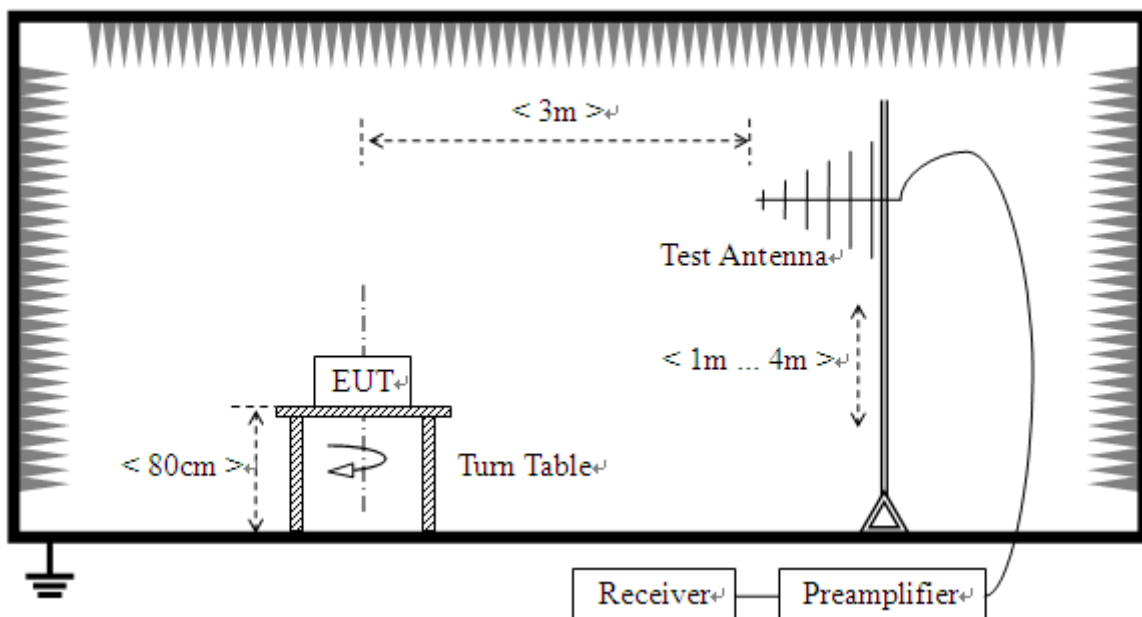

### 3) For radiated emissions above 1GHz

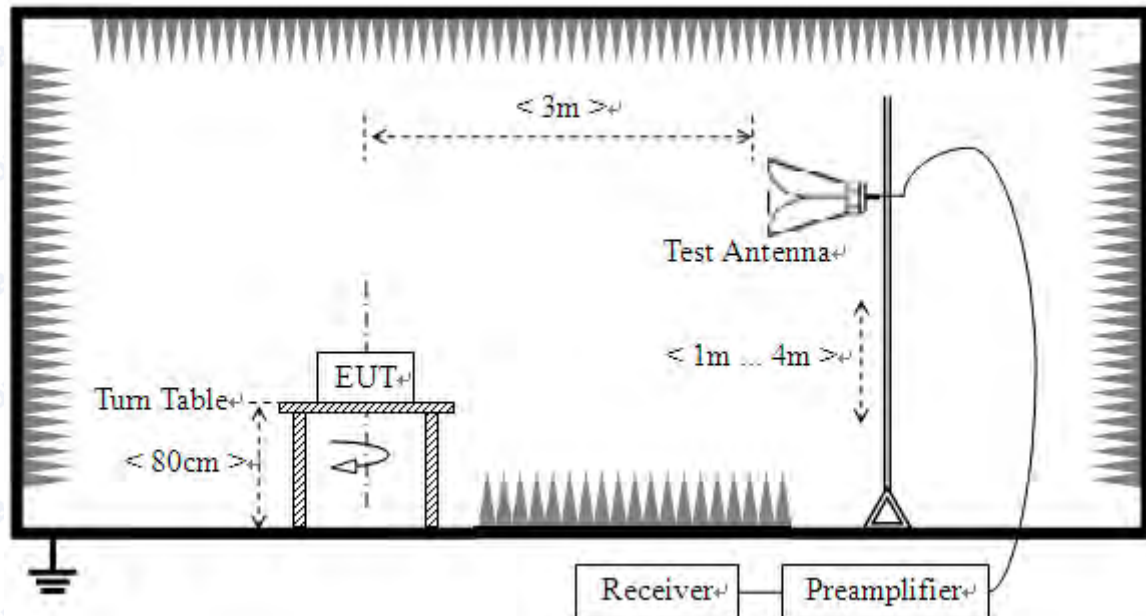

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### B. Equipments List:

Please reference ANNEX A(1.4).



### 2.8.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**2.8.3.1 802.11b Test mode****A. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

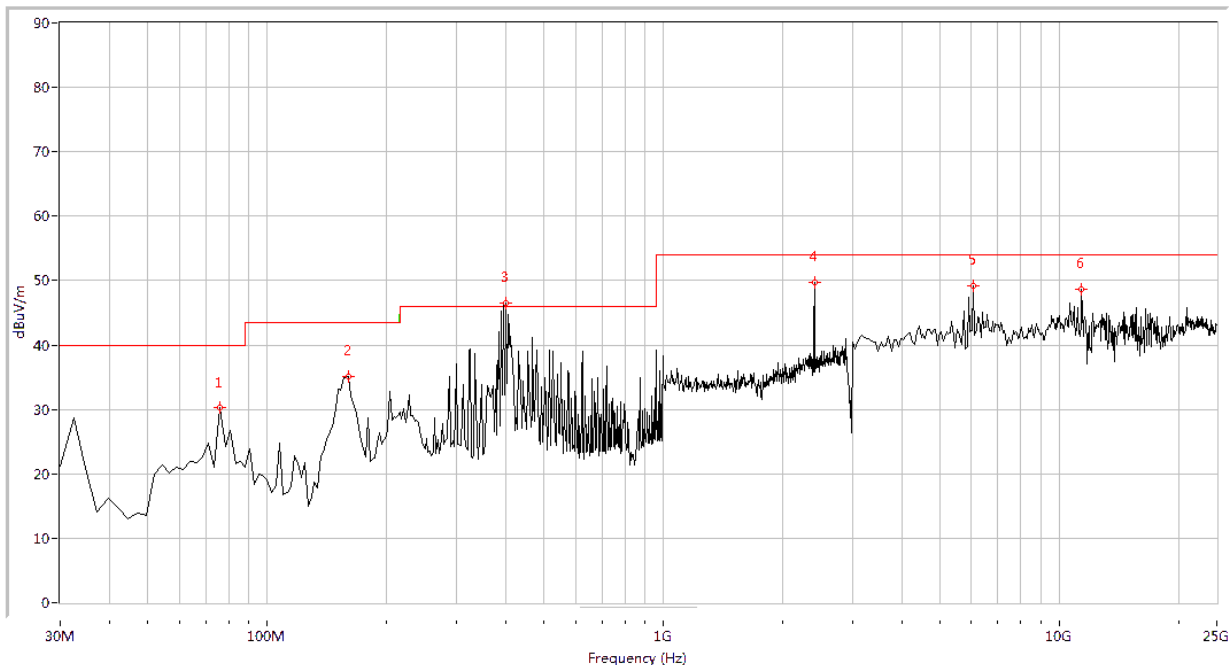

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
75.960	30.37	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
160.623	35.17	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	46.60	43.35	N.A	N.A	46.0	N.A	Horizontal	PASS
2412.000	49.69	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	49.27	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	48.64	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



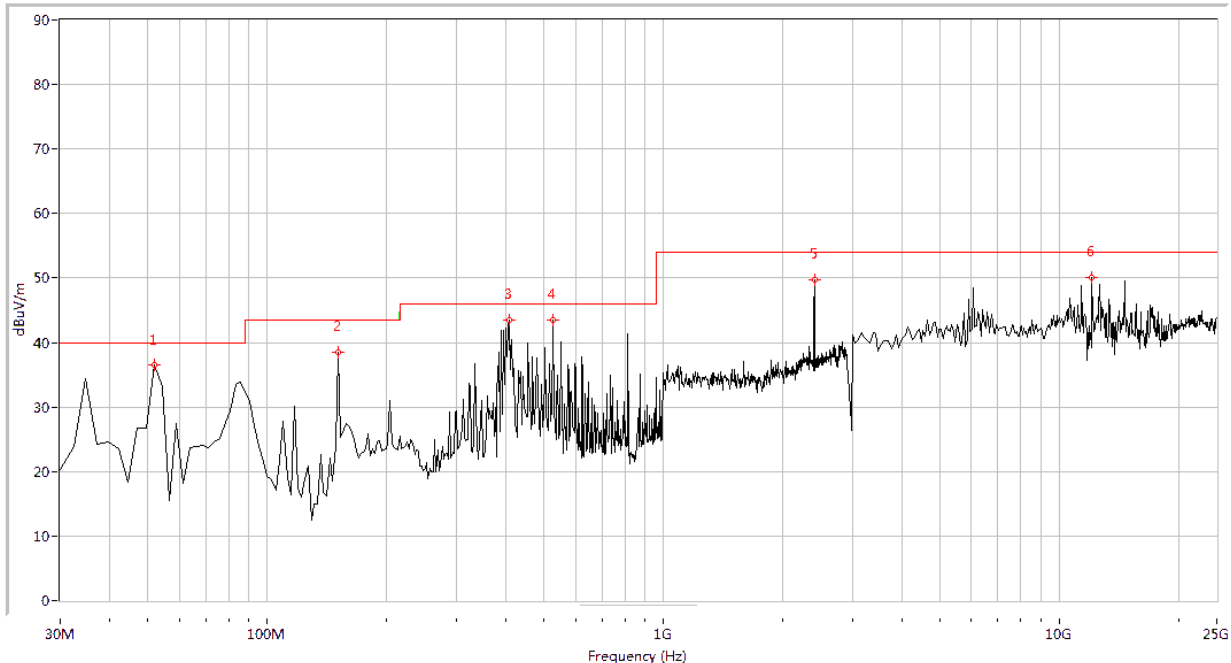


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
51.771	36.45	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
150.948	38.45	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
409.776	43.45	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	43.49	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2412.000	49.68	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
12107.232	50.15	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 6

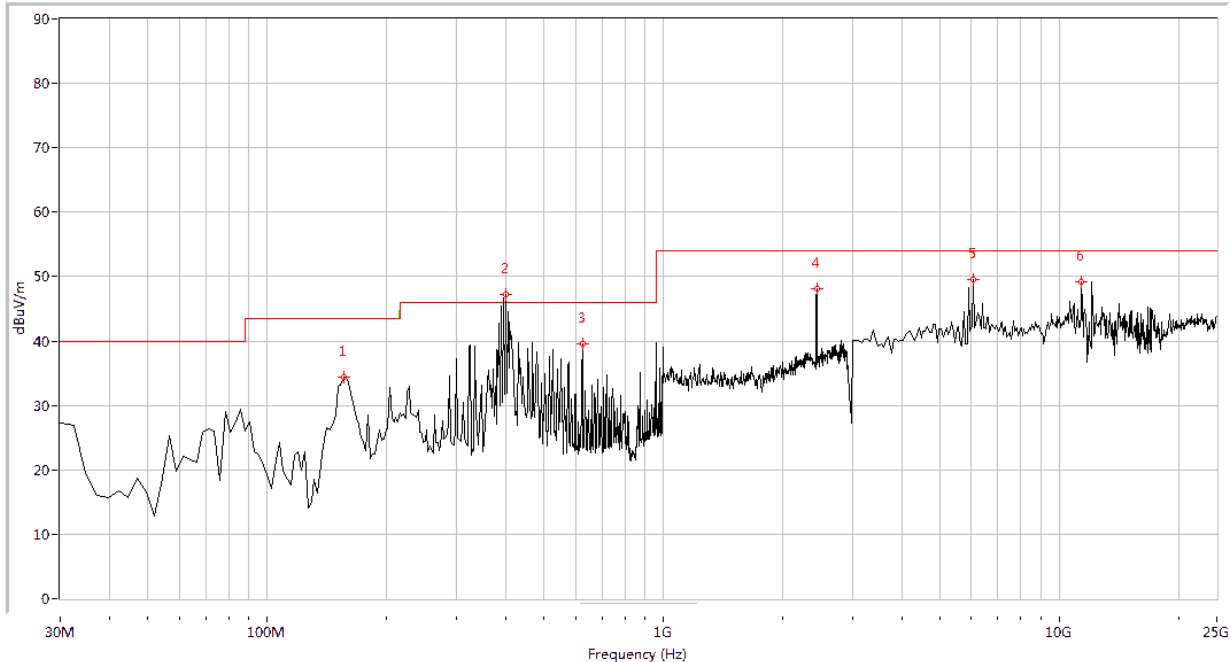

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
155.786	34.31	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.19	42.38	N.A	N.A	46.0	N.A	Horizontal	PASS
625.062	39.51	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	48.19	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	49.54	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	49.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

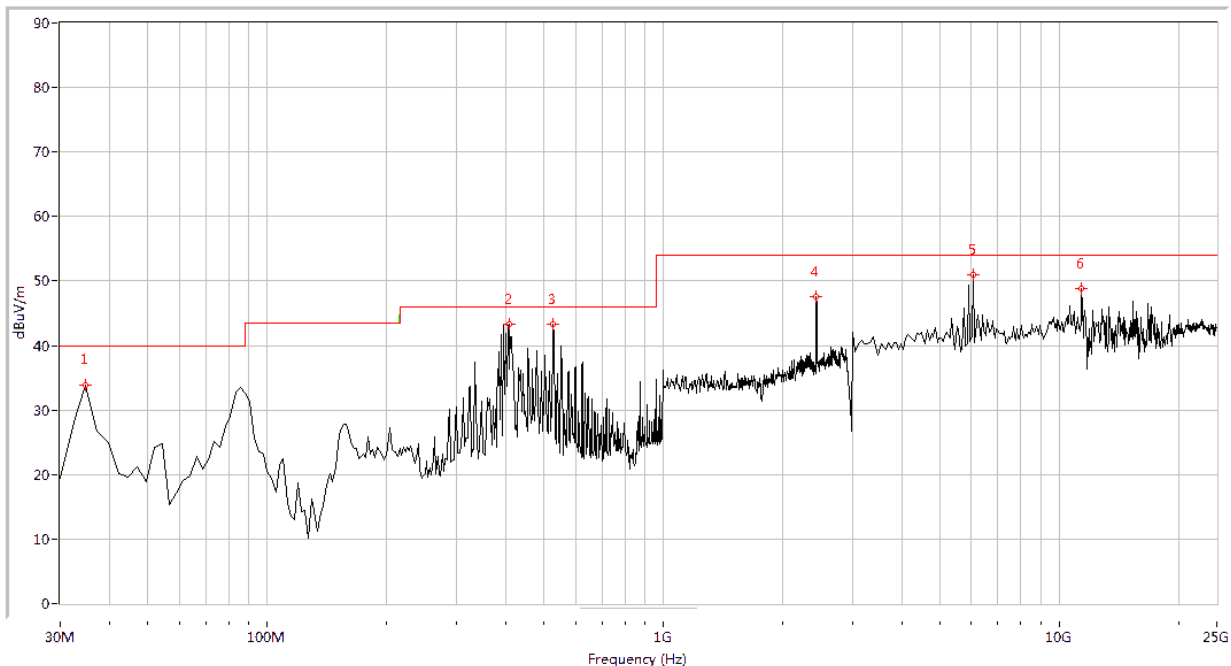


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	33.88	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
409.776	43.26	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	43.34	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2437.000	47.55	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
6072.319	51.03	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11394.015	48.89	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 11

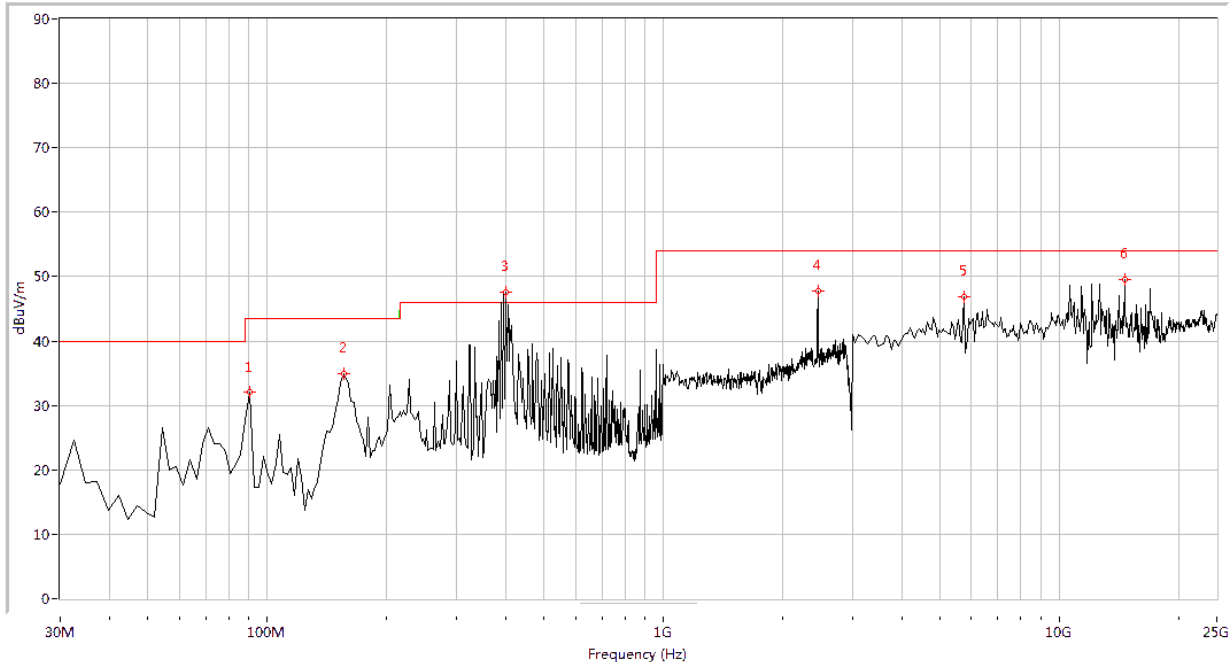

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
90.474	32.02	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
155.786	34.87	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.62	43.27	N.A	N.A	46.0	N.A	Horizontal	PASS
2462.000	47.69	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
5743.142	46.80	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
14630.923	49.59	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



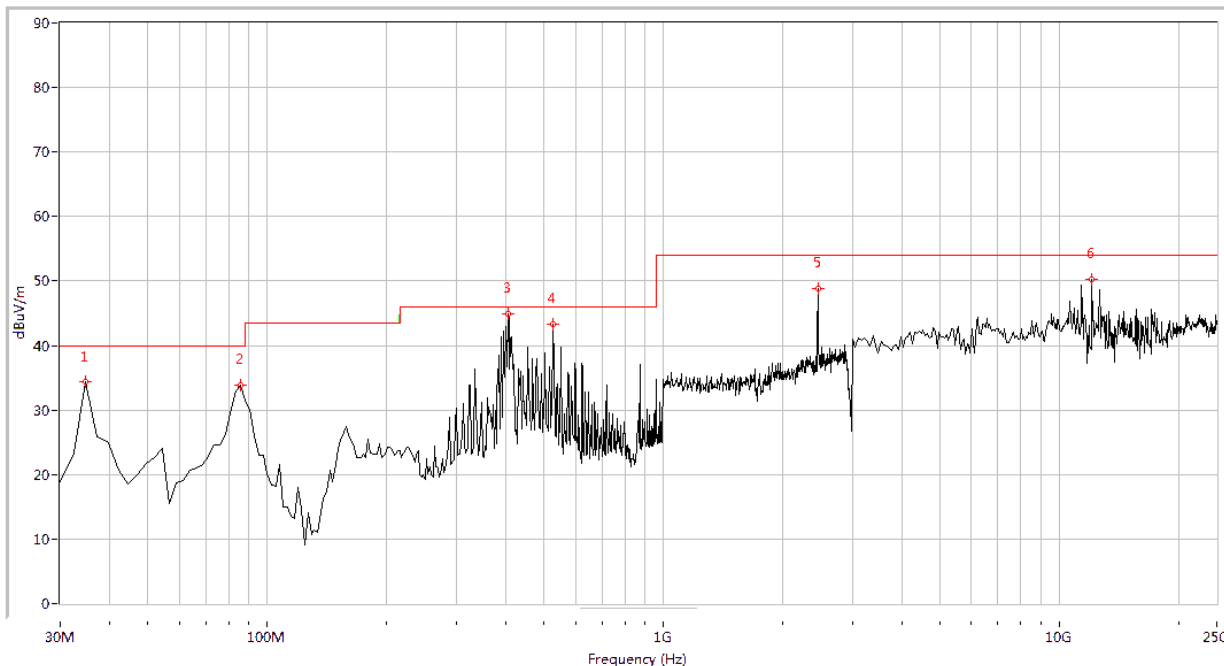


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	34.48	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
85.636	33.80	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
404.938	44.84	41.09	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	43.27	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2462.000	48.85	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
12107.232	50.18	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**2.8.3.2 802.11g Test mode****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 1

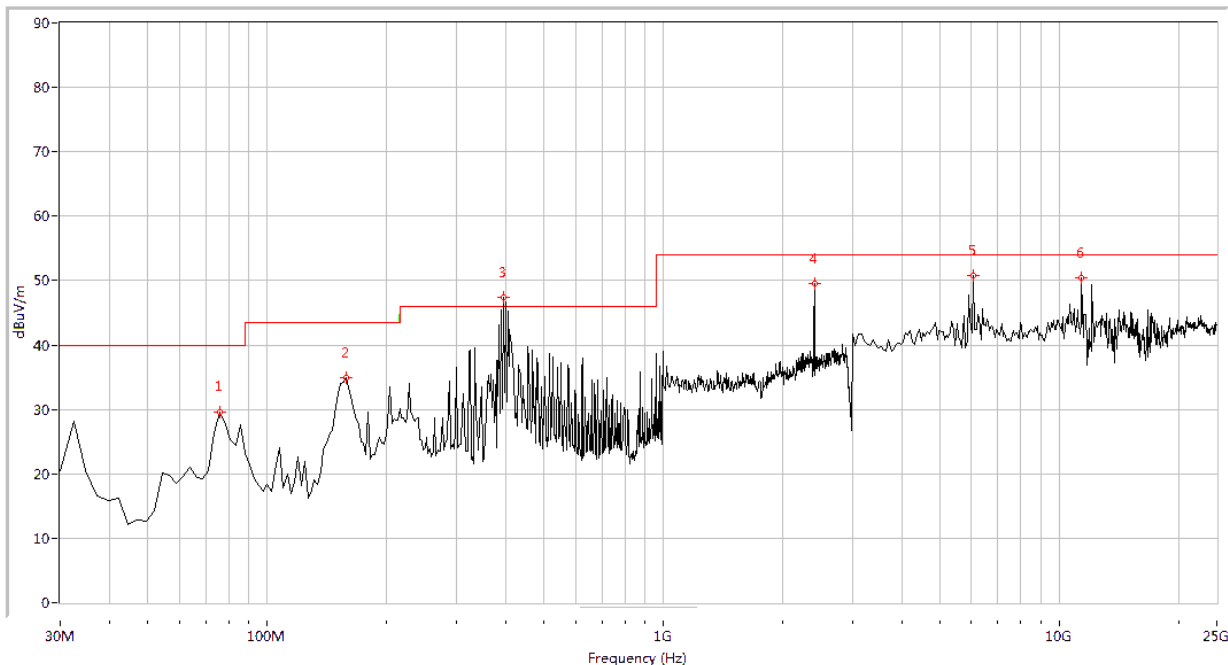

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
75.960	29.66	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
158.204	34.99	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
395.262	47.45	43.62	N.A	N.A	46.0	N.A	Horizontal	PASS
2412.000	49.50	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	50.88	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	50.49	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

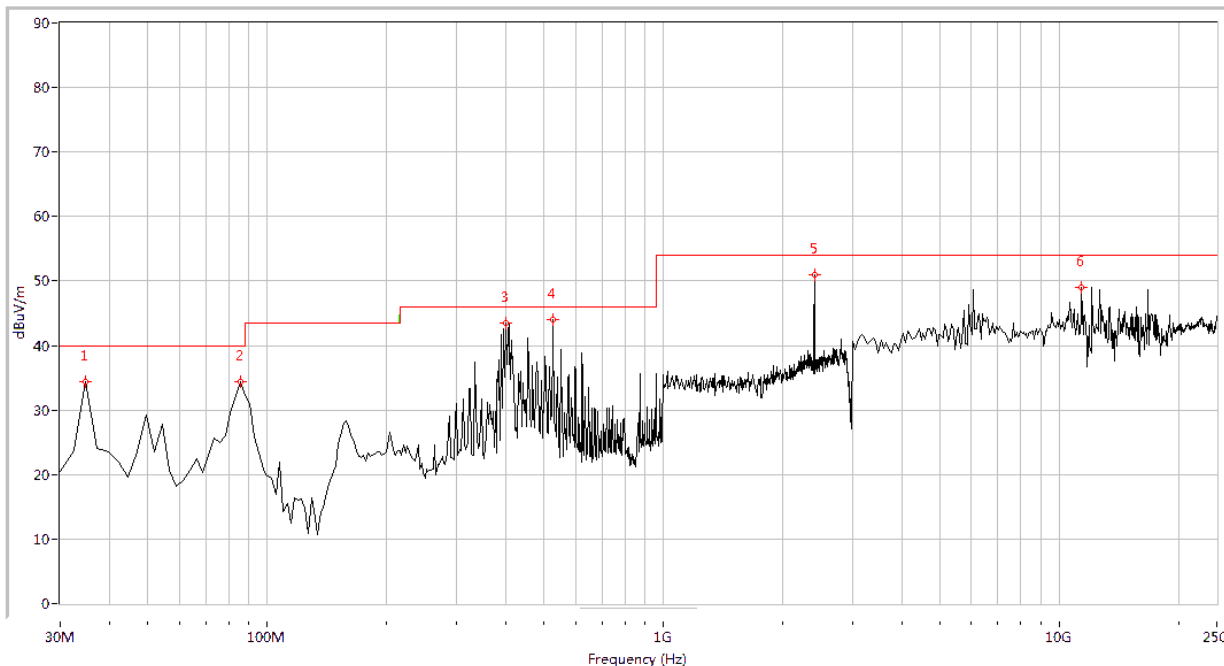


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	34.35	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
85.636	34.42	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
400.100	43.57	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	44.09	42.65	N.A	N.A	46.0	N.A	Vertical	PASS
2412.000	50.91	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
11394.015	48.93	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 6

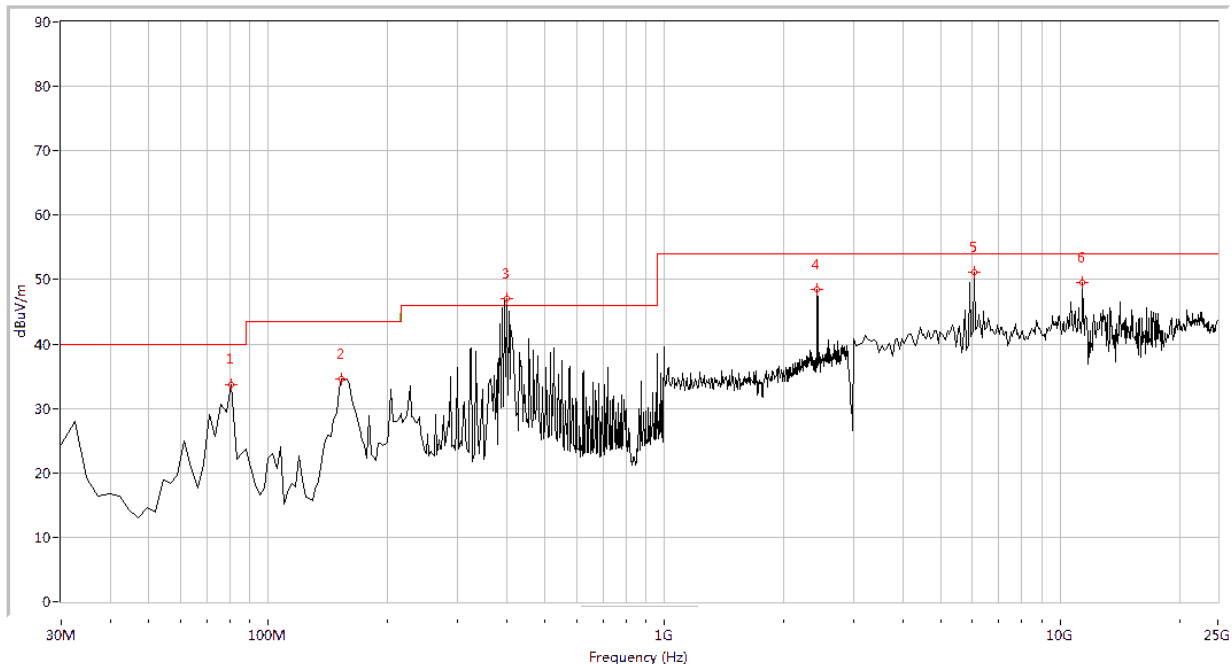

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
80.798	33.64	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
153.367	34.64	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.07	43.72	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	48.49	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	51.18	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	49.53	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



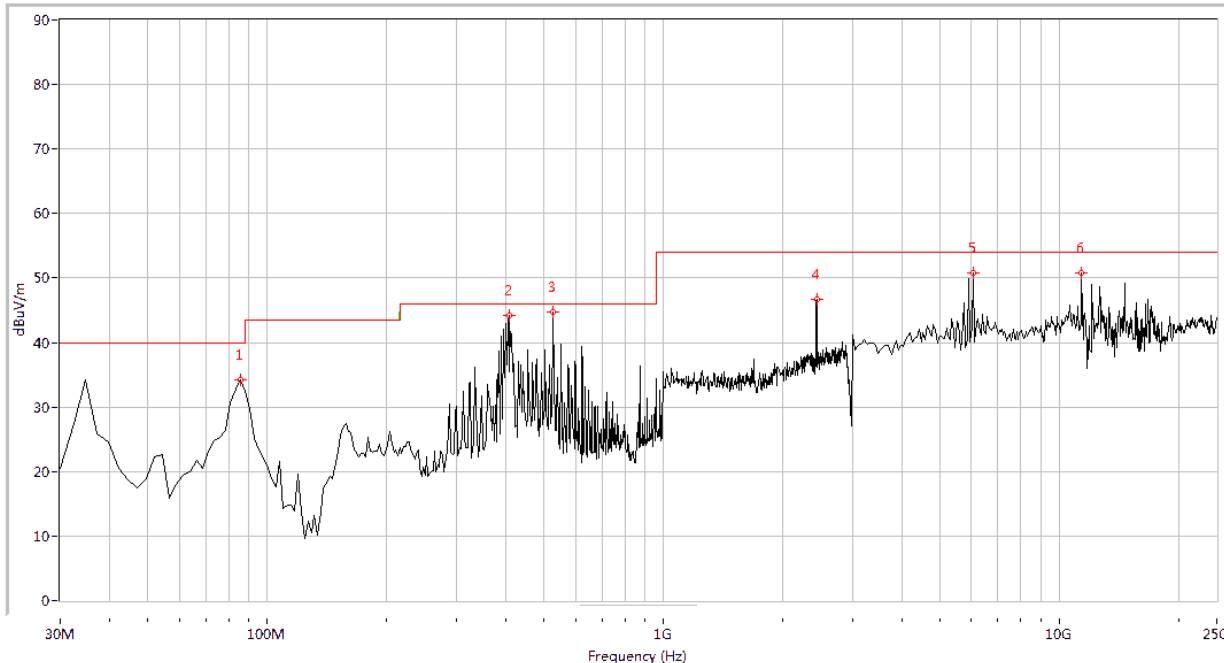


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.636	34.18	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
409.776	44.14	43.07	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	44.67	43.38	N.A	N.A	46.0	N.A	Vertical	PASS
2437.000	46.64	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
6072.319	50.80	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11394.015	50.71	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 11

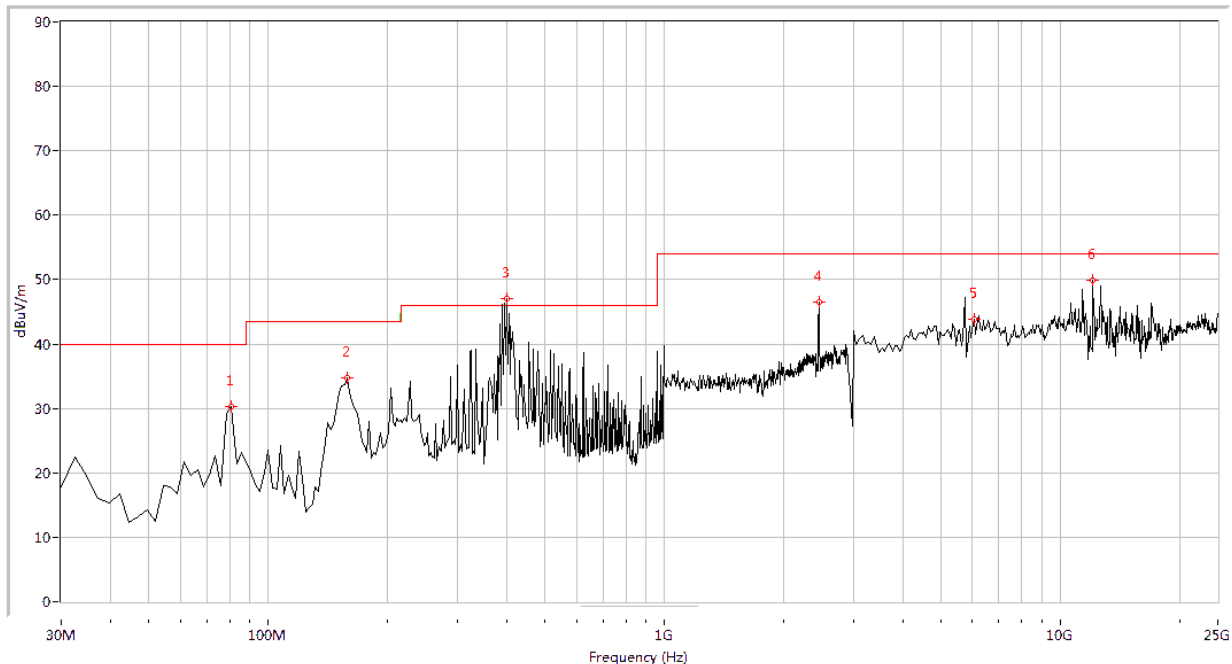


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
80.798	30.23	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
158.204	34.77	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.11	42.87	N.A	N.A	46.0	N.A	Horizontal	PASS
2462.000	46.55	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	43.87	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12107.232	49.98	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

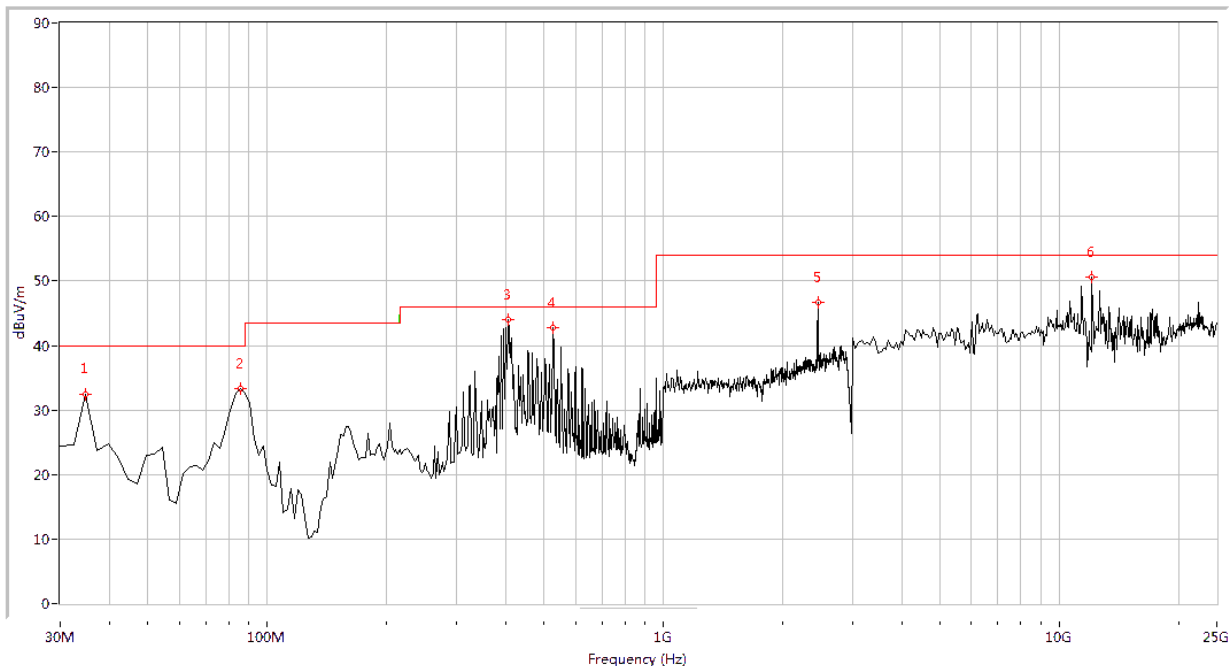

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	32.51	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
85.636	33.34	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
404.938	43.99	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	42.80	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2462.000	46.69	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
12107.232	50.64	N.A	N.A	74.0	N.A	54.0	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

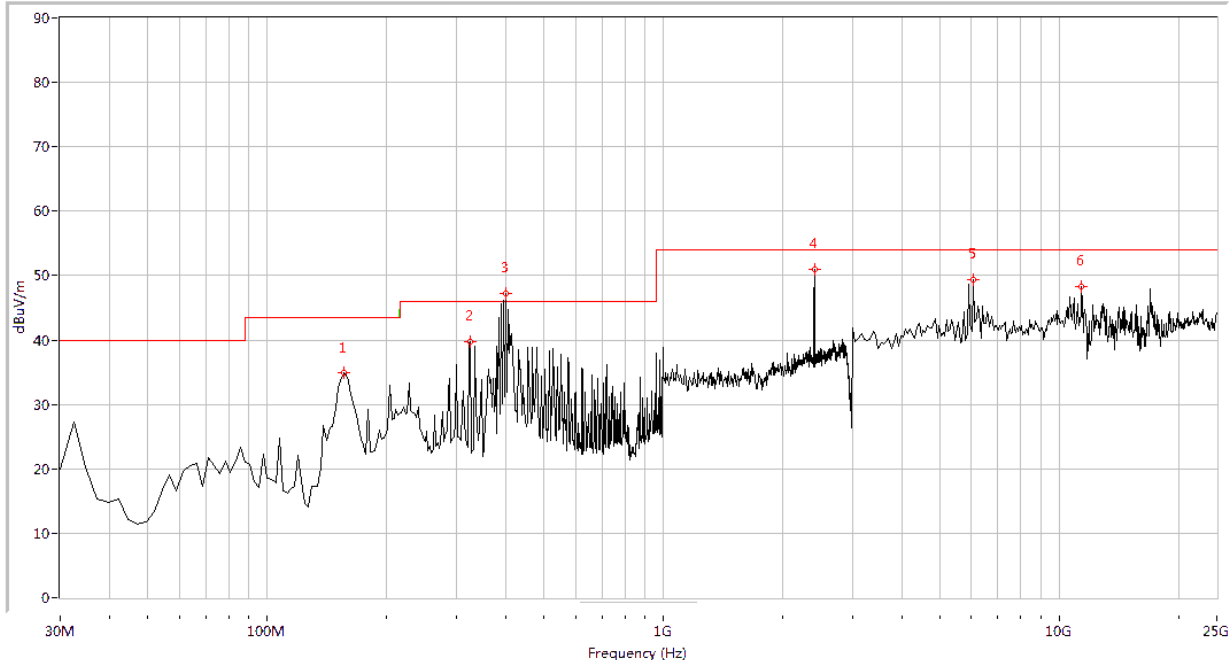**2.8.3.3 802.11n-20MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 1

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
155.786	34.88	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
325.112	39.69	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
400.100	47.28	45.07	N.A	N.A	46.0	N.A	Horizontal	PASS
2412.000	50.96	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	49.45	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	48.38	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



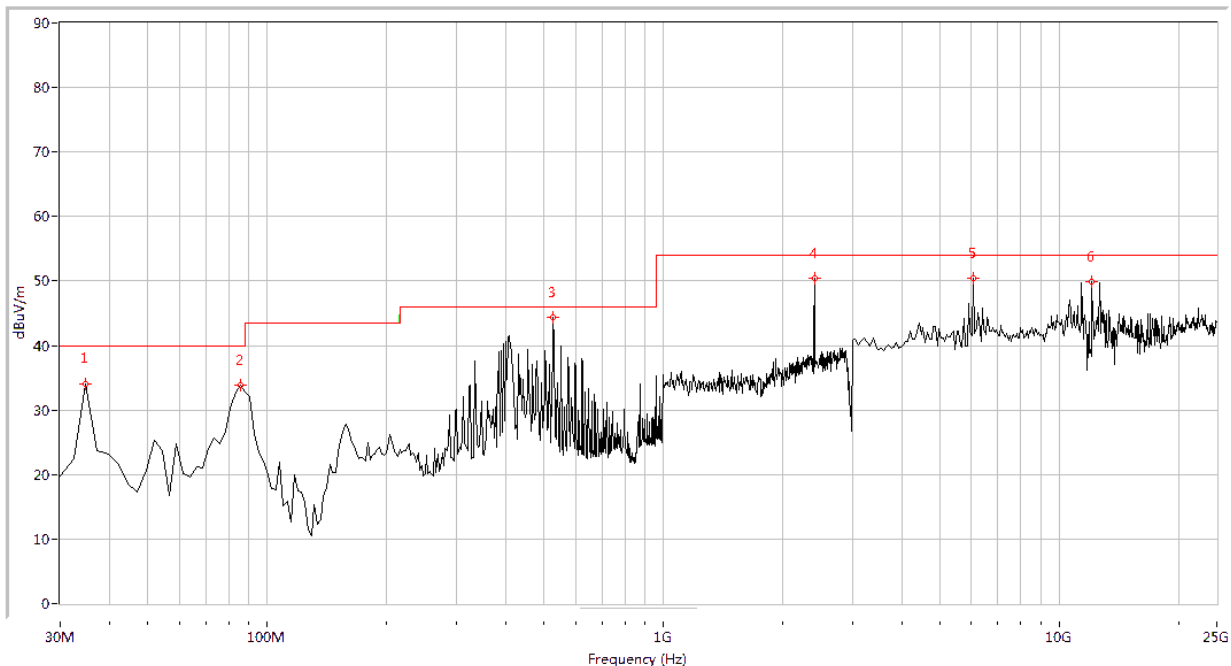


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	33.98	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
85.636	33.81	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
528.304	44.37	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2412.000	50.41	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
6072.319	50.41	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12107.232	49.95	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 6

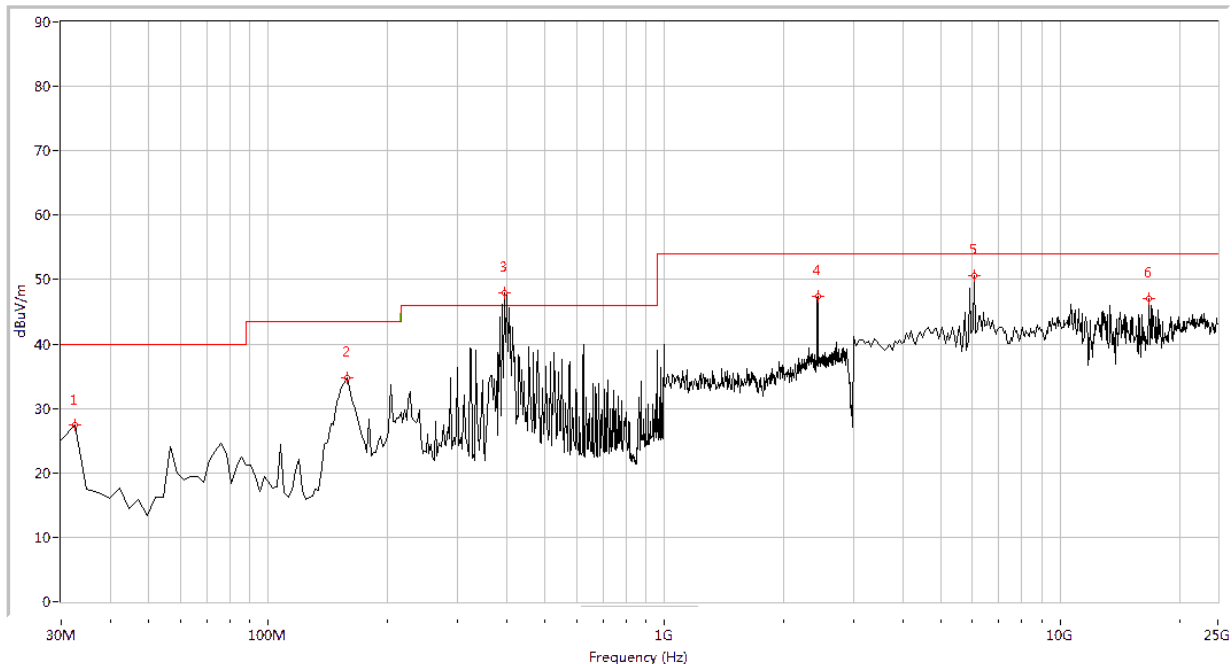

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	27.51	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
158.204	34.67	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
395.262	47.88	43.65	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	47.48	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
6072.319	50.58	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16770.574	47.10	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

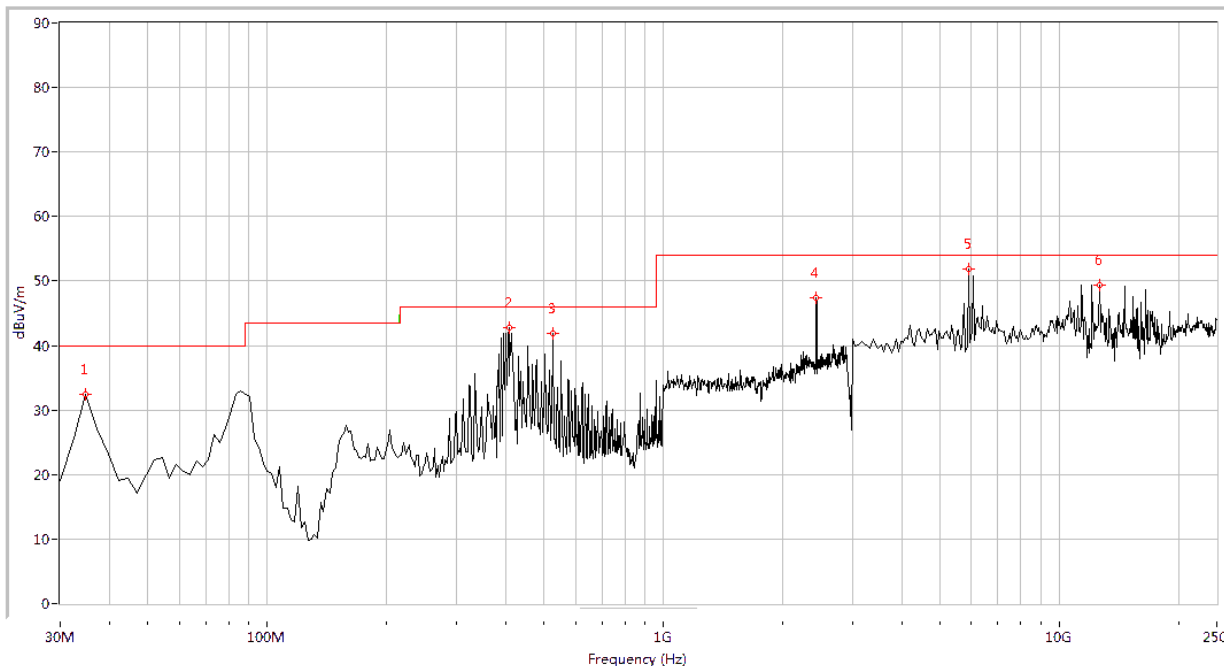


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	32.39	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
409.776	42.81	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	41.84	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2437.000	47.48	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
5907.731	51.88	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12655.860	49.30	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 11

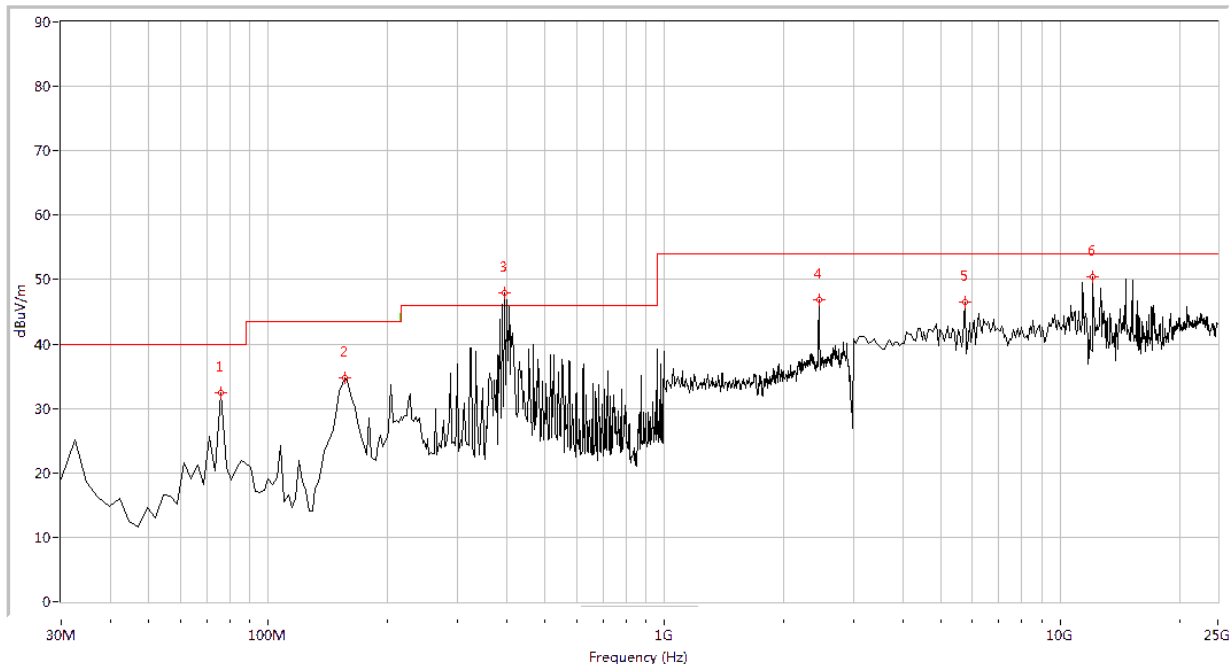

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
75.960	32.40	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
155.786	34.72	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
395.262	47.87	43.18	N.A	N.A	46.0	N.A	Horizontal	PASS
2462.000	46.91	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
5743.142	46.44	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12107.232	50.45	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



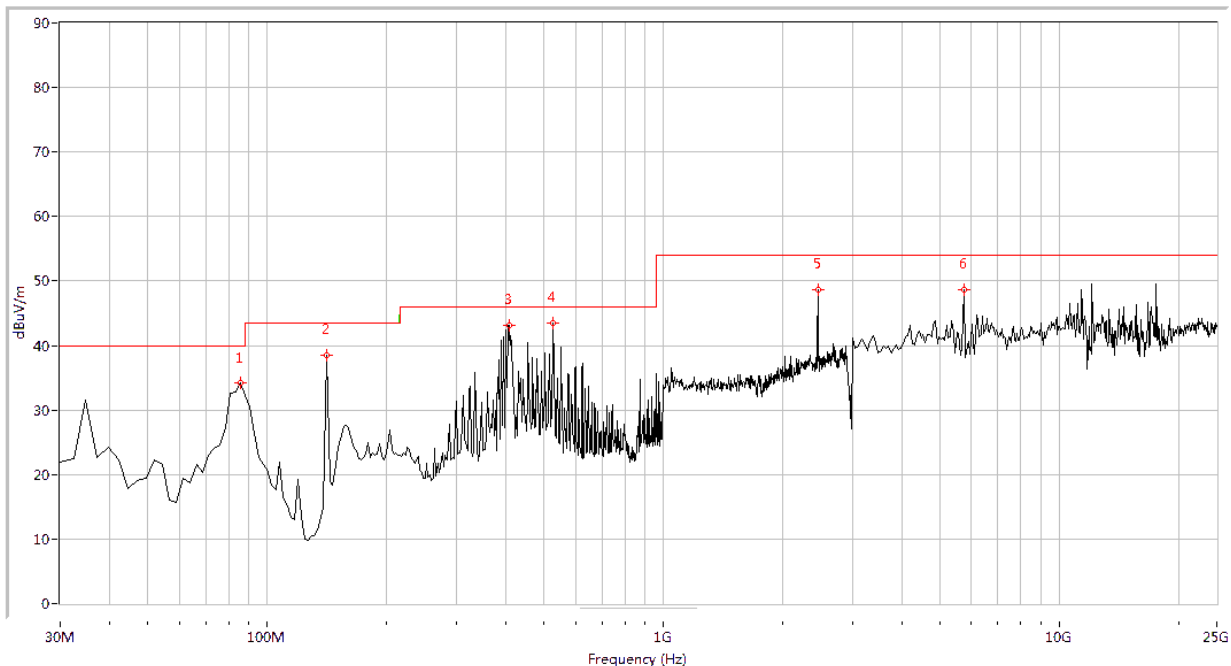


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.636	34.18	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
141.272	38.55	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
409.776	43.05	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	43.50	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2462.000	48.62	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
5743.142	48.60	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**2.8.3.4 802.11n-40MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 3

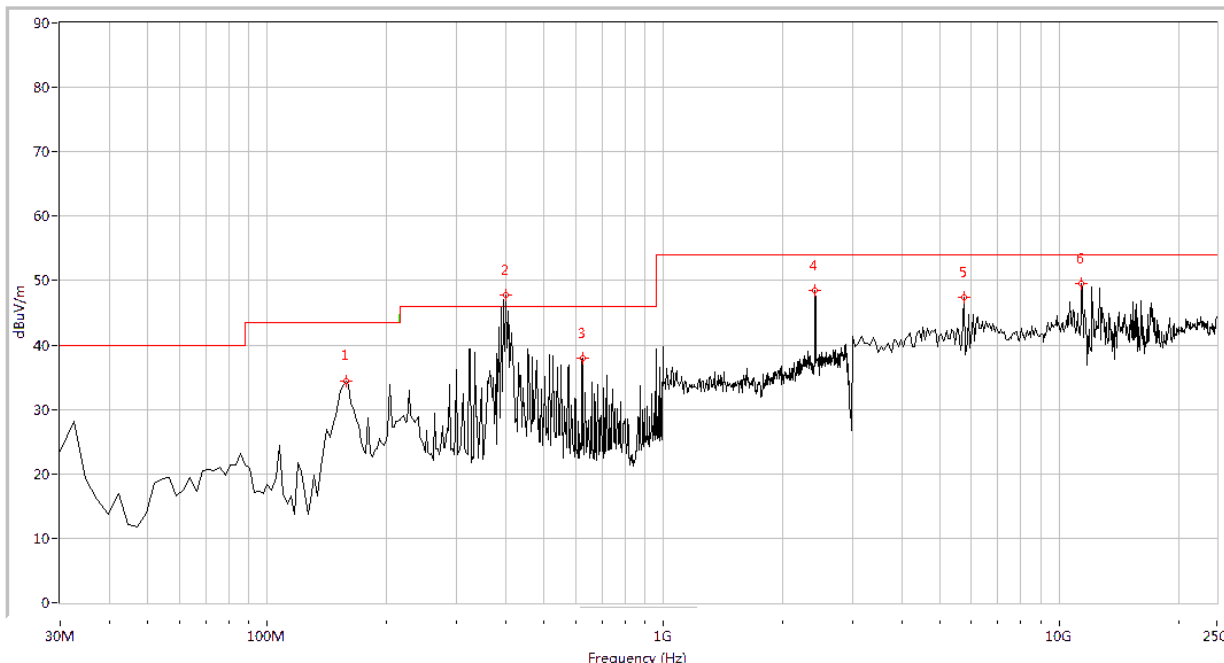

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
158.204	34.44	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.83	42.86	N.A	N.A	46.0	N.A	Horizontal	PASS
625.062	38.00	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2422.000	48.55	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
5743.142	47.39	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	49.52	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

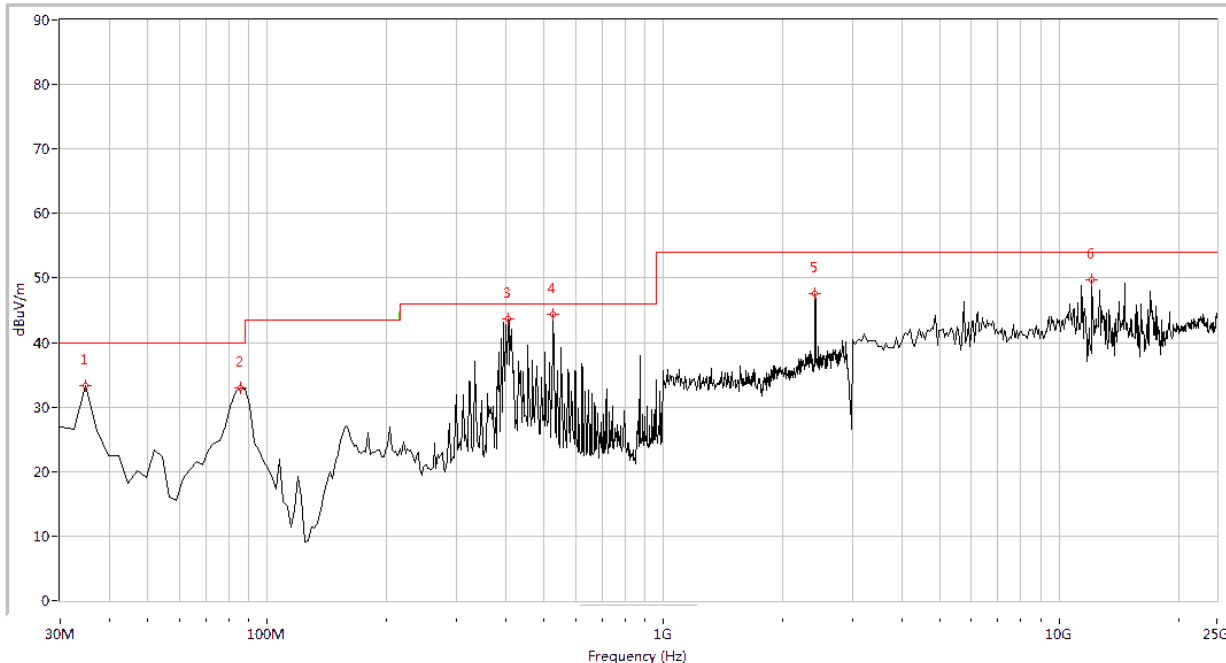


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	33.27	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
85.636	32.95	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
404.938	43.59	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	44.29	43.08	N.A	N.A	46.0	N.A	Vertical	PASS
2422.000	47.62	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
12107.232	49.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)




## Plots for Channel = 6

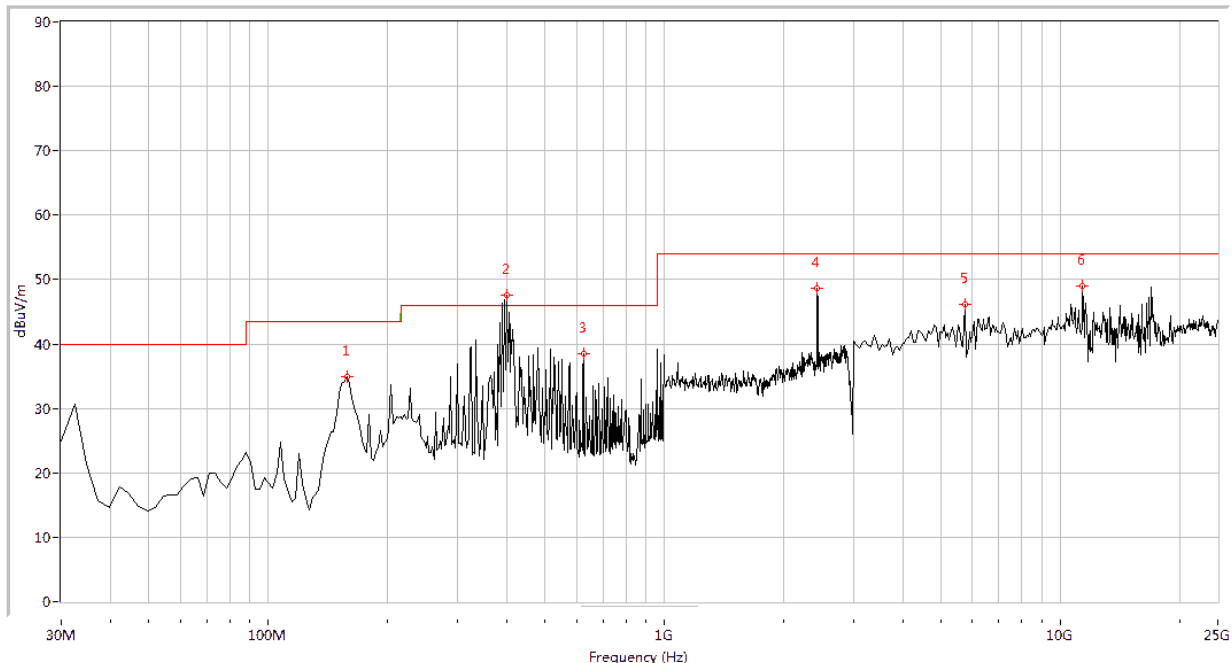

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
158.204	34.97	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
400.100	47.59	43.28	N.A	N.A	46.0	N.A	Horizontal	PASS
625.062	38.48	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	48.62	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
5743.142	46.08	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11394.015	48.99	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)



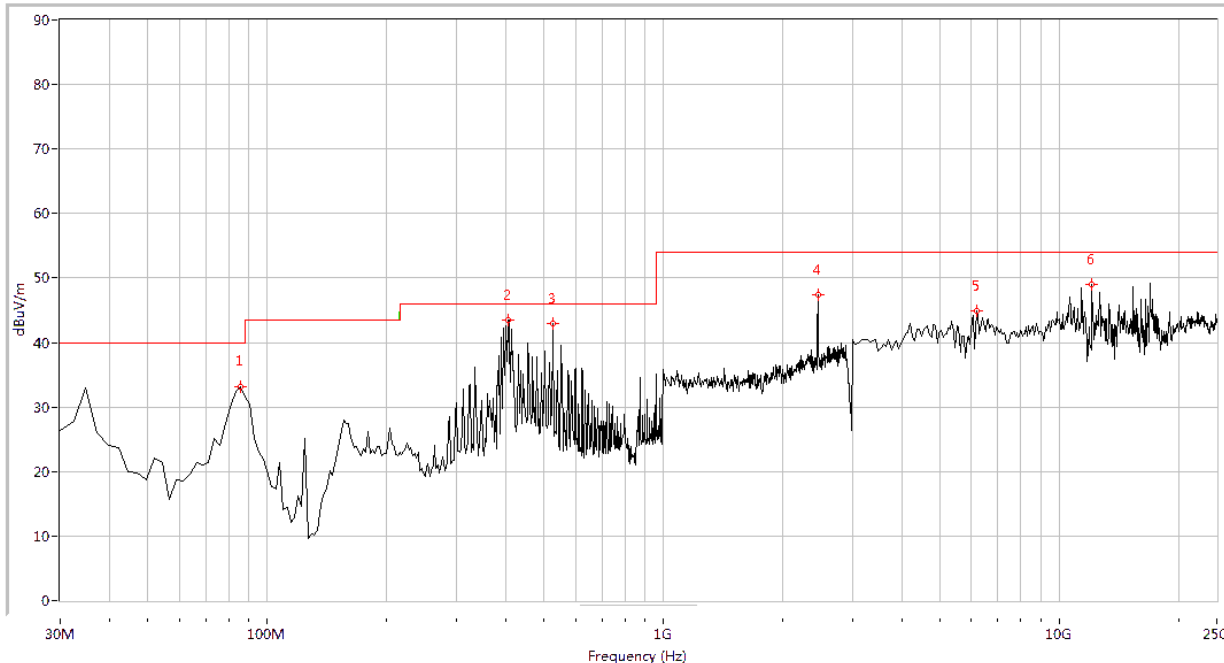


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.636	33.19	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
404.938	43.49	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	43.01	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2437.000	47.48	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
6182.045	44.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12107.232	49.07	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)




## Plots for Channel = 9

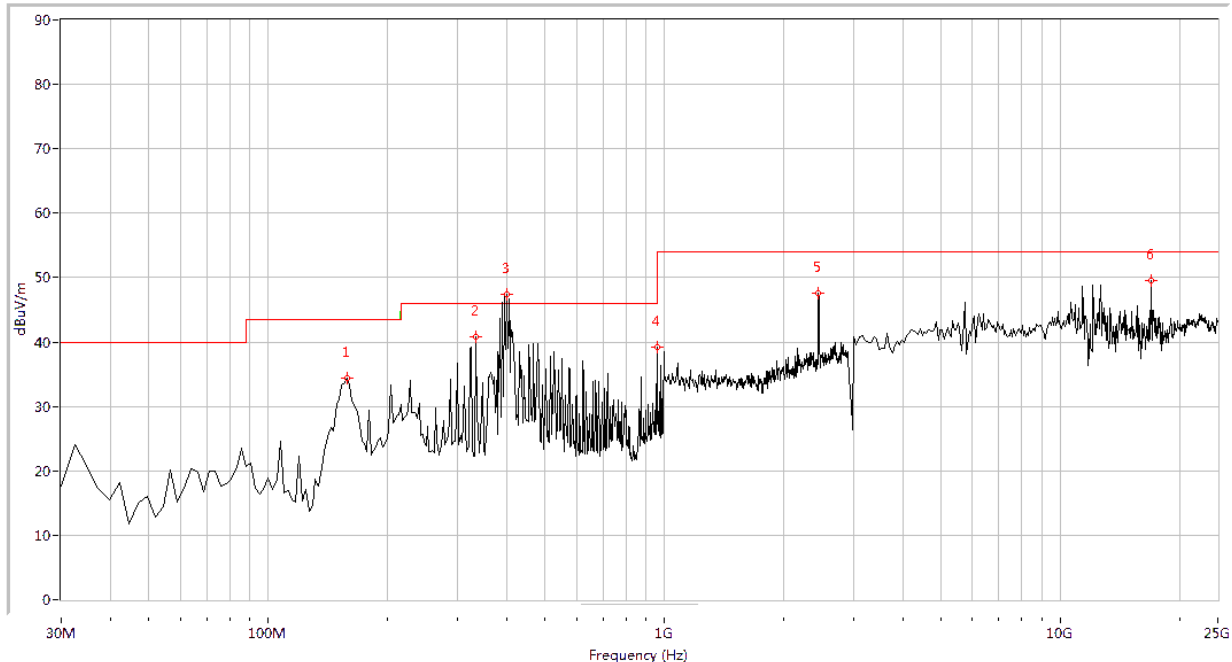

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
158.204	34.38	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
334.788	40.80	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
400.100	47.38	43.74	N.A	N.A	46.0	N.A	Horizontal	PASS
958.878	39.17	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2452.000	47.55	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
16935.162	49.52	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

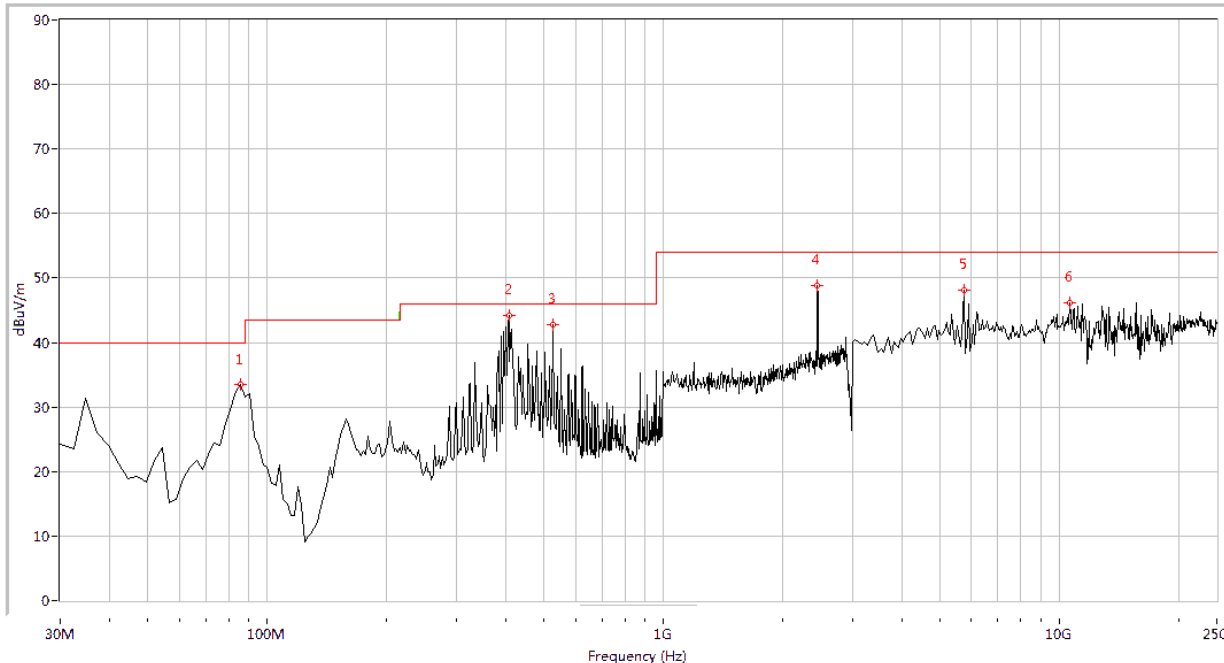

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
85.636	33.50	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
409.776	44.18	42.05	N.A	N.A	46.0	N.A	Vertical	PASS
528.304	42.74	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2452.000	48.79	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
5743.142	48.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10625.935	46.15	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)



## 2.9 RF exposure evaluation

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4 \pi R^2}$$

Where:

S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

### 2.1.1 Limits for Maximum Permissible Exposure

According to FCC Part 1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidelines.

According to FCC Part 1.1310 RF exposure is calculated.

Limits for General Population/ Uncontrolled Exposure			
Frequency Range (MHz)	Electric Field Strength(E)(V/m)	Magnetic Field Strength (H)(A/m)	Power Density (S)(mW/cm <sup>2</sup> )
0.3-1.34	614	1.63	(100)*
1.34-30	824/f	2.19/f	(180/f2)*
30-300	27.5	0.073	0.2
300-1500			f/1500
1500-100,000			1.0





### 2.1.2 Test result

Maximum peak output power at antenna input terminal(dBm):	18.76
Maximum peak output power at antenna input terminal(mW):	75.16229
Source-based time-averaged output power:	--
Prediction distance(cm):	20
Predication frequency(MHz):	2437
Antenna Gain (typical) (dBi):	8.0
Power density at predication frequency at <u>20</u> cm(mW/cm <sup>2</sup> ):	0.094347
MPE limit for RF exposure at prediction frequency(mW/cm <sup>2</sup> ):	1.0

#### Note:

The gain is 5 dBi for each antenna. For 2x2 MIMO, the effective antenna gain is given by the equation gain of one antenna +  $10\log(\# \text{ of antennas})$ . In this case the effective gain would be  $5+10\log(2) = 8 \text{ dBi}$ .

### 2.1.3 Conclusion

Since the test result is passed, the SAR measurement is not required.



REPORT No. : SZ14120207W03

## ANNEX A GENERAL INFORMATION

### 1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China



REPORT No. : SZ14120207W03

### 1.3 Test Equipments Utilized

#### 1.3.1 Conducted Test Equipments

##### Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2014.02.26	2015.02.25
2	Power Splitter	NW521	1506A	Weinschel	2014.02.26	2015.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2014.02.26	2015.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2014.02.26	2015.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2014.02.26	2015.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2014.02.26	2015.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

#### 1.3.2 Conducted Emission Test Equipments

##### Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2014.02.26	2015.02.25
3	Service Supplier	100448	CMU200	R&S	2014.02.26	2015.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2014.02.26	2015.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A





REPORT No. : SZ14120207W03

### 1.3.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	100448	CMU200	R&S	2014.02.26	2015.02.25
2	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
3	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2014.02.26	2015.02.25
4	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2014.02.26	2015.02.25
5	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2014.02.26	2015.02.25
6	Test Antenna - Loop	1519-022	HL050S7	R&S	2014.02.26	2015.02.25
7	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2014.02.26	2015.02.25
8	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

### 1.3.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2014.02.26	2015.02.25

### 1.3.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2014.02.26	2015.02.25

### 1.3.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2014.02.26	2015.02.25

\*\*\*\*\* END OF REPORT \*\*\*\*\*