



LTE Band V - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.01/30)=4.0+0.1=4.1 dB

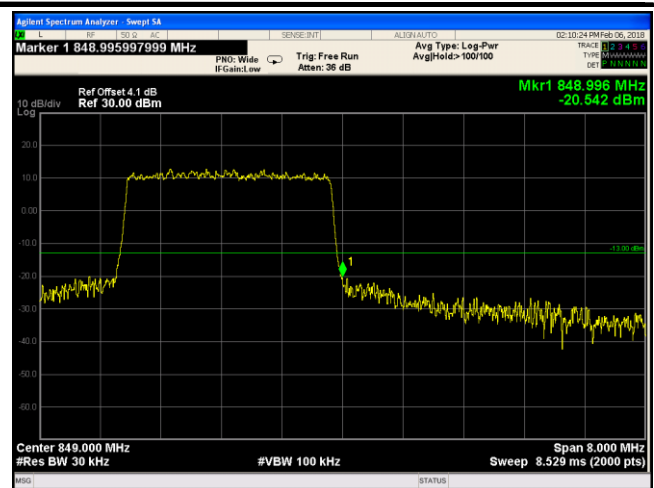


LTE Band V - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(29.98/30)=4.0+0.1=4.1 dB

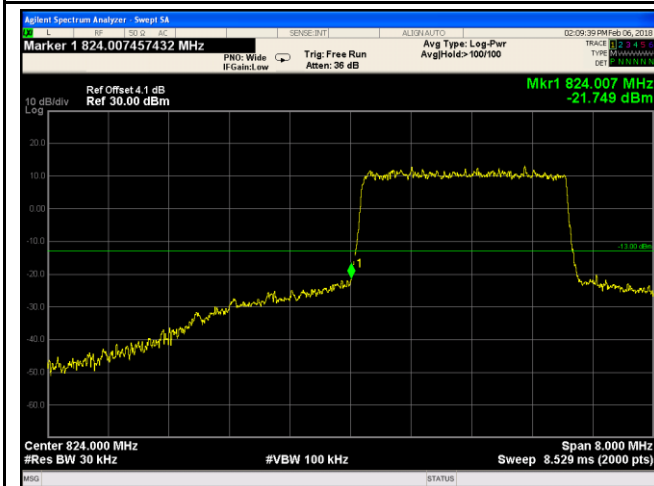


LTE Band V - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.03/30)=4.0+0.1=4.1 dB

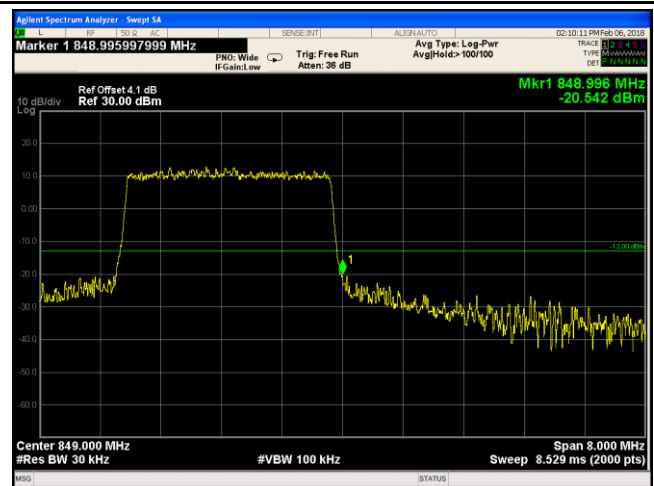


LTE Band V - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.15/30)=4.0+0.1=4.1 dB

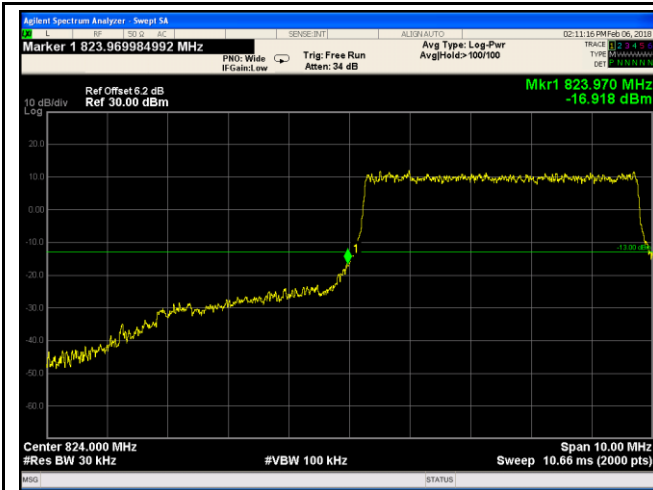


LTE Band V - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(52.0/30)=4.0+2.2=6.2 dB

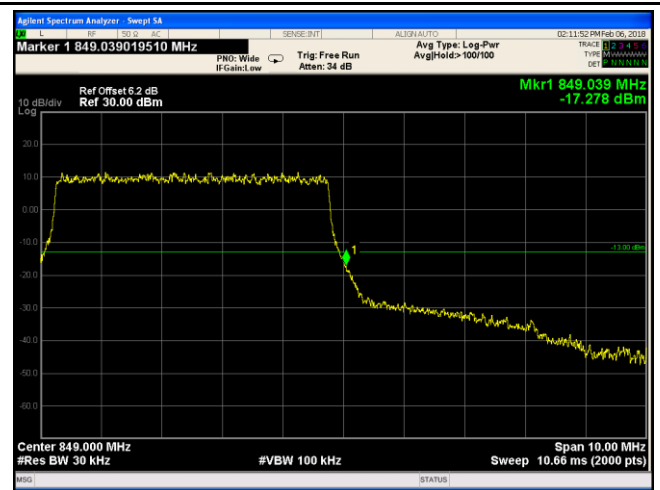


LTE Band V - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(51.92/30)=4.0+2.2=6.2 dB

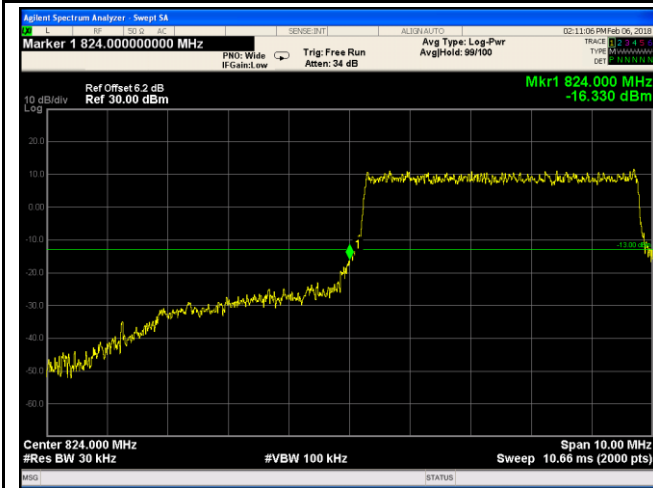


LTE Band V - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(52.03/30)=4.0+2.2=6.2 dB

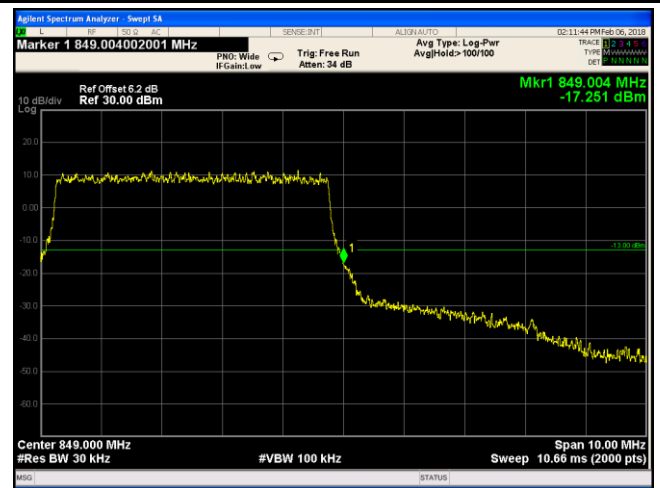


LTE Band V - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(50.90/30)=4.0+2.2=6.2dB

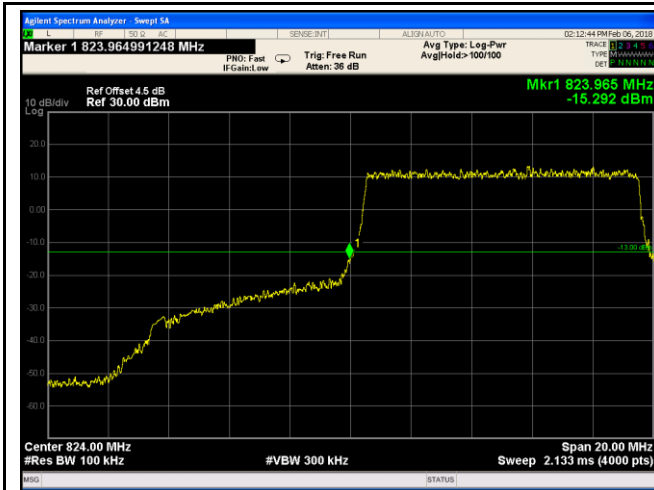


LTE Band V - Low Channel QPSK-10

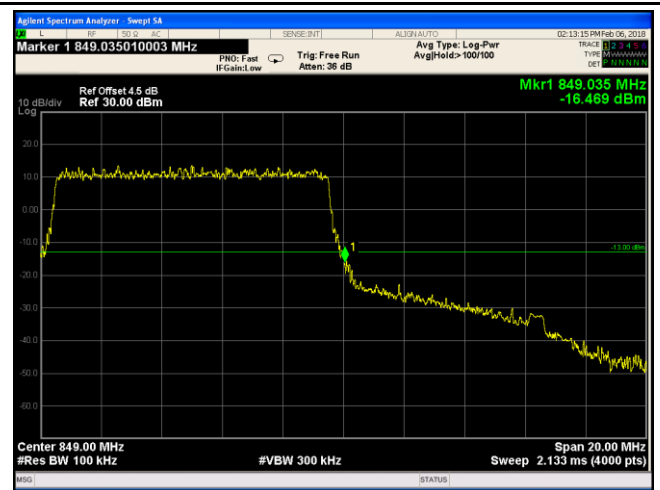

LTE Band V - High Channel QPSK-10

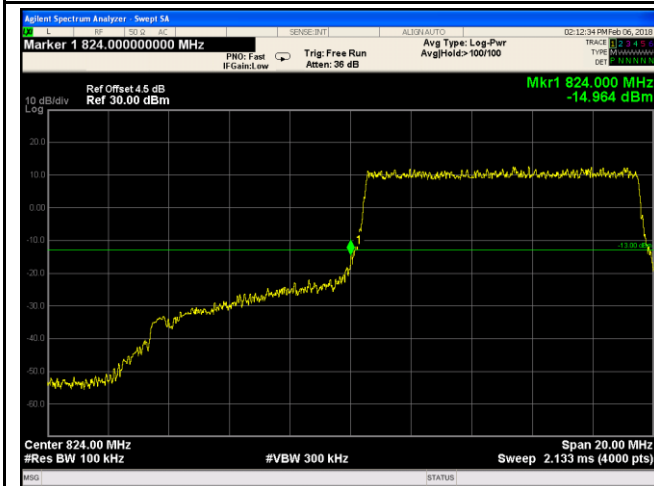

LTE Band V - Low Channel 16QAM-10

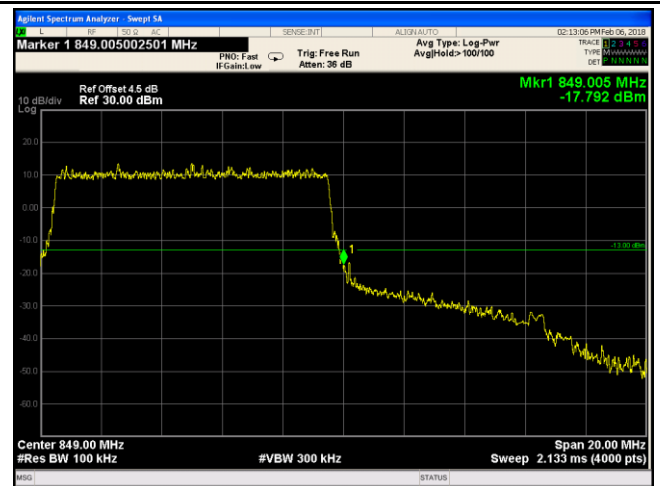


LTE Band V - High Channel 16QAM-10

6.8 Band Edge 27.53(m)

Temperature	25 °C
Relative Humidity	54%
Atmospheric Pressure	1010mbar
Test date :	February 06, 2018
Tested By :	Aarron Liang

Requirement(s):

Spec	Requirement	Applicable
§27.53(m)	According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power(P) by a factor shall be not less than $43+10\log(P)$ dB at the channel edge, the limit of emission equal to -13dBm. And $55+10\log(P)$ dB at 5.5MHz from the channel edges, the limit of emission equal to -25dBm. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.	<input checked="" type="checkbox"/>
Test Setup	 <p>Base Station Spectrum Analyzer EUT</p>	
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. 	
Remark		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

LTE Band VII (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	20775	2500	16QAM	-16.363	-13
			QPSK	-16.358	-13
5	21425	2570	16QAM	-16.294	-13
			QPSK	-16.139	-13
10	20800	2500	16QAM	-16.664	-13
			QPSK	-17.04	-13
10	21400	2570	16QAM	-17.352	-13
			QPSK	-16.587	-13
15	20825	2500	16QAM	-20.414	-13
			QPSK	-19.333	-13
15	21400	2570	16QAM	-19.978	-13
			QPSK	-17.175	-13
20	20850	2500	16QAM	-22.543	-13
			QPSK	-21.882	-13
20	21350	2571	16QAM	-20.872	-13
			QPSK	-20.485	-13

LTE Band VII (Part 27)

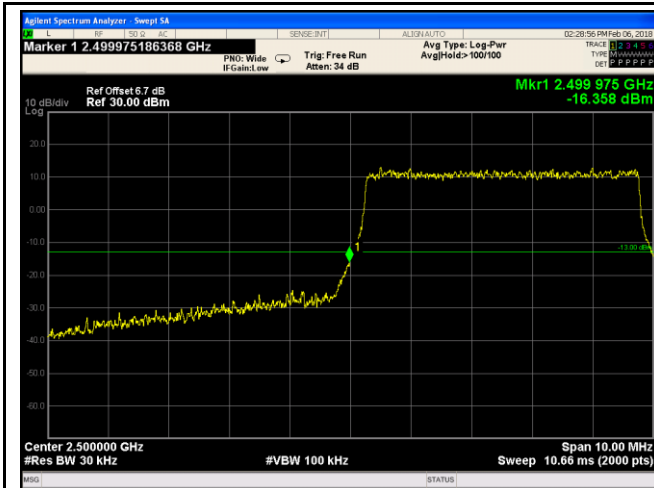


LTE Band VII - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(51.39/30)=4.5+2.2=6.7 dB

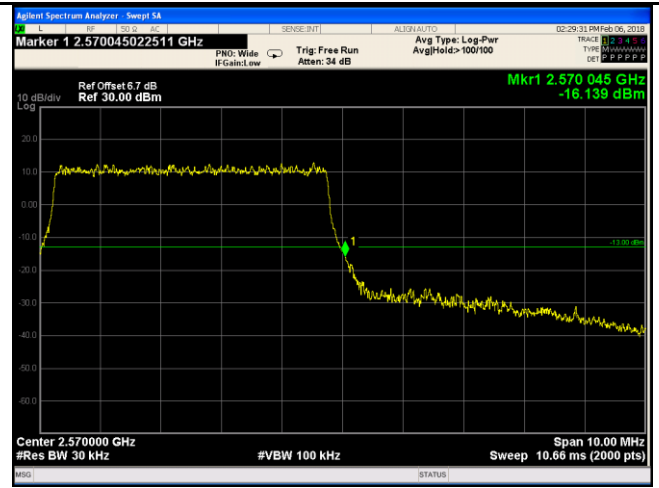


LTE Band VII - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(52.32/30)=4.5+2.2=6.7 dB

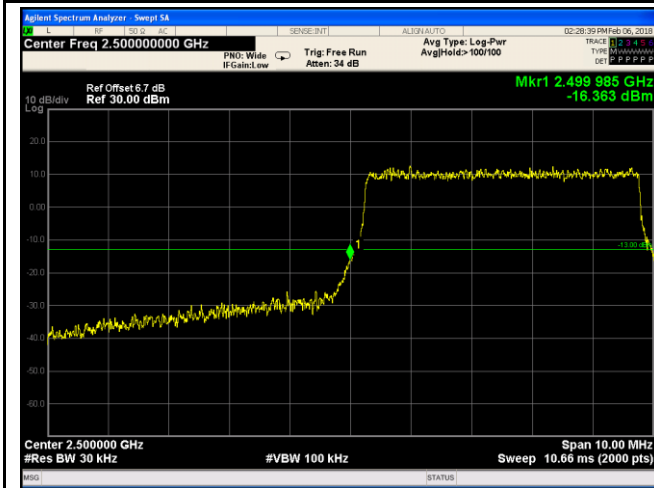


LTE Band VII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(51.37/30)=4.5+2.2=6.7 dB

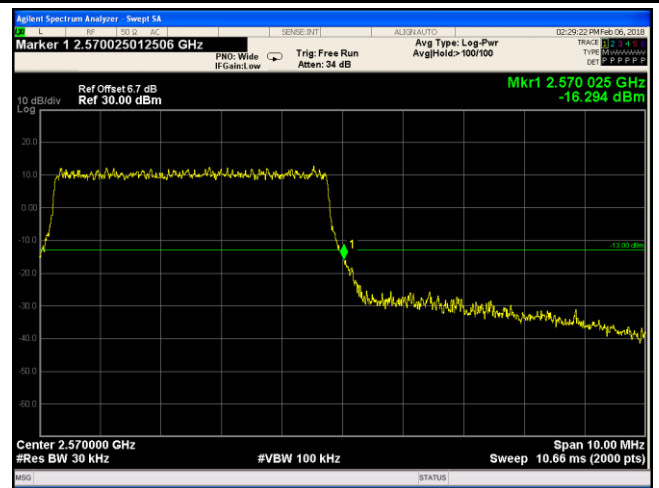


LTE Band VII - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(54.73/30)=4.5+2.2=6.7 dB

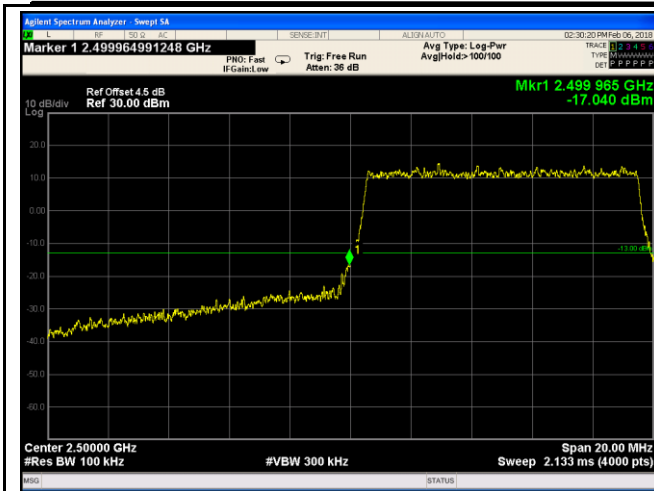


LTE Band VII - Low Channel QPSK-10

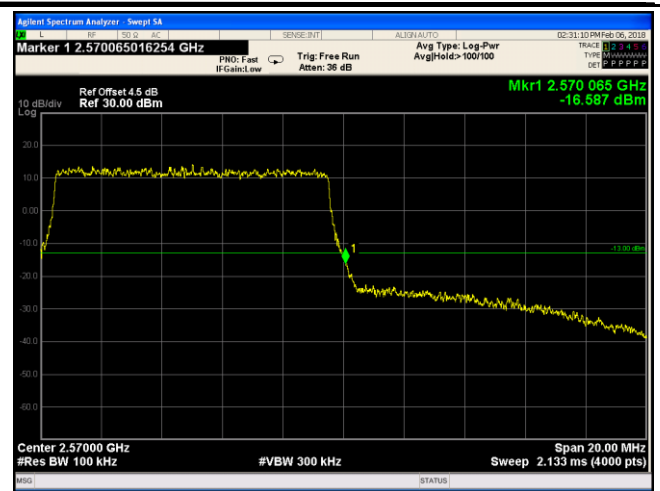


LTE Band VII - High Channel QPSK-10

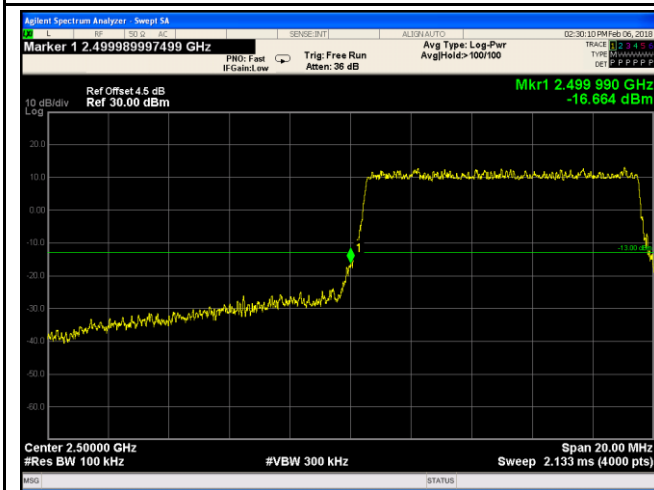

LTE Band VII - Low Channel 16QAM-10

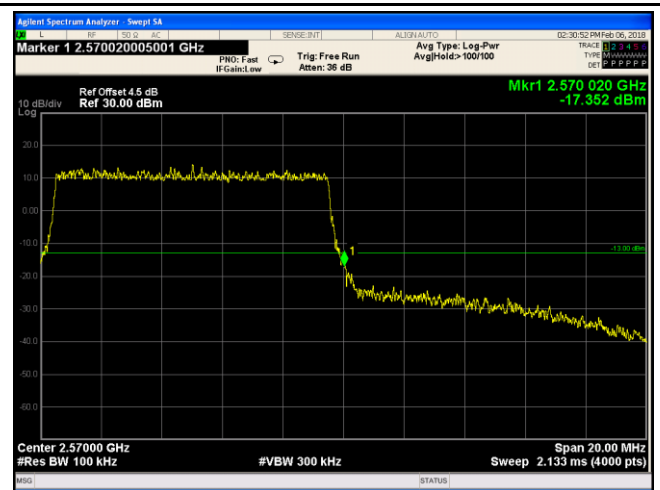


LTE Band VII - High Channel 16QAM-10

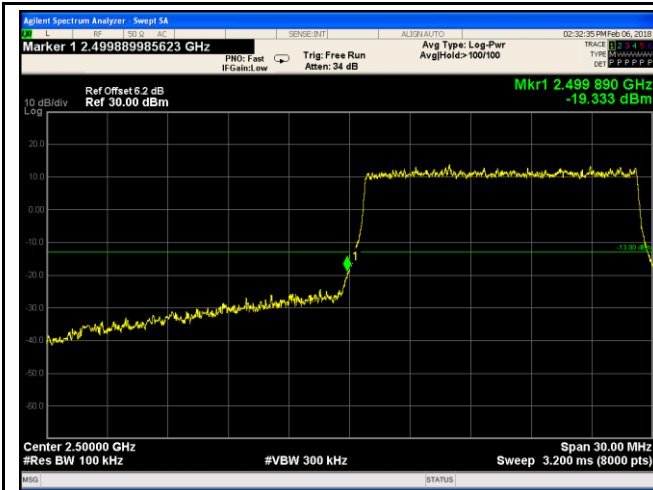


LTE Band VII - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(147.6/100)=4.5+1.7=6.2 dB

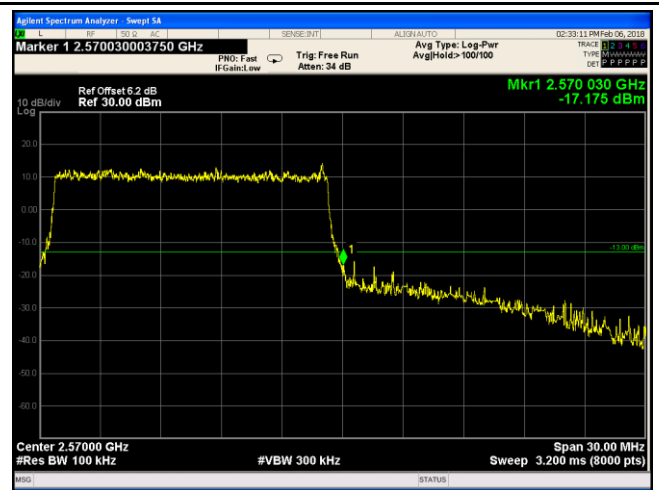


LTE Band VII - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.5/100)=4.5+1.7=6.2 dB

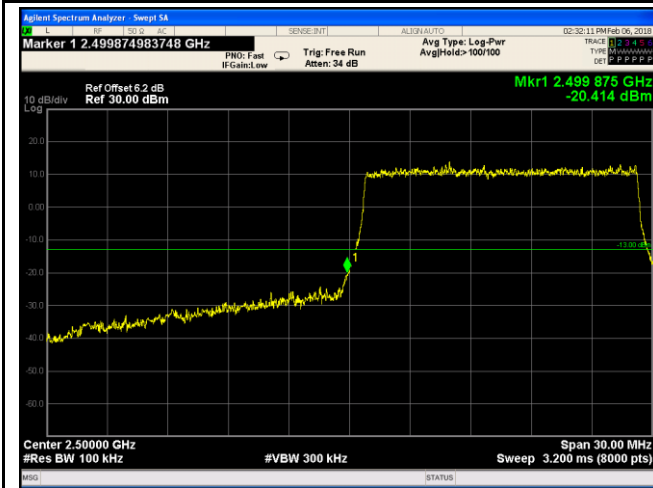


LTE Band VII - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(150.3/100)=4.5+1.7=6.2dB

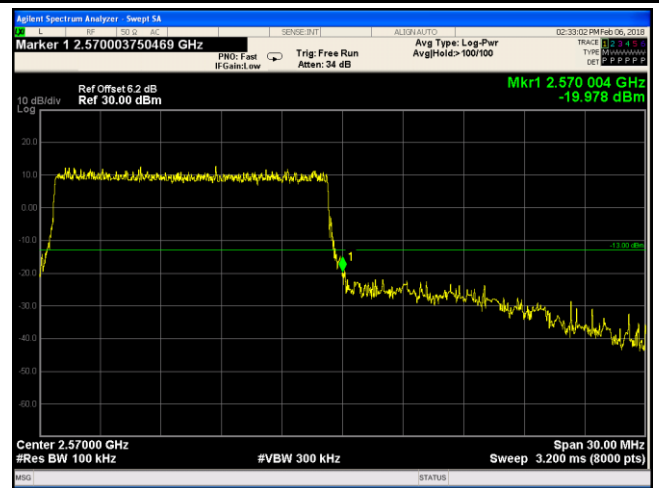


LTE Band VII - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(150.8/100)=4.5+1.7=6.2 dB

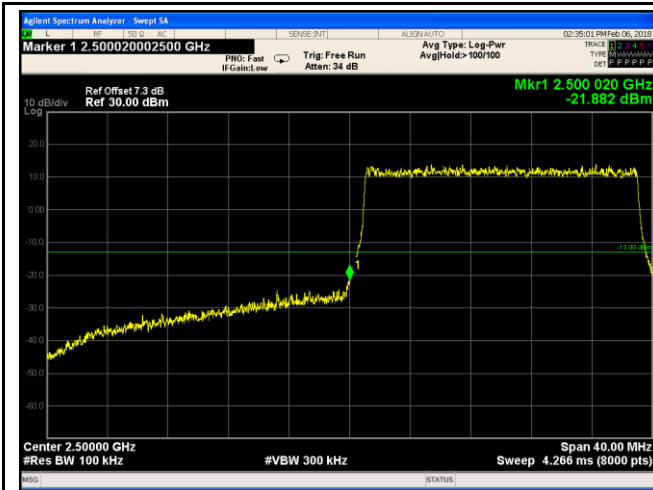


LTE Band VII - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(194/100)=4.5+2.8=7.3 dB

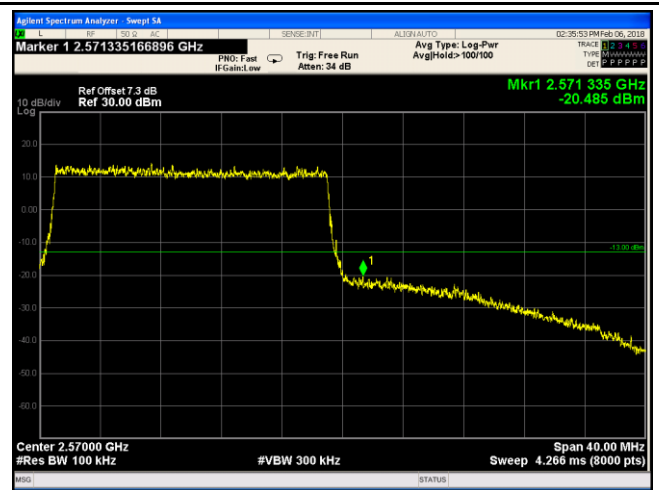


LTE Band VII - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(197.2/100)=4.5+2.8=7.3dB

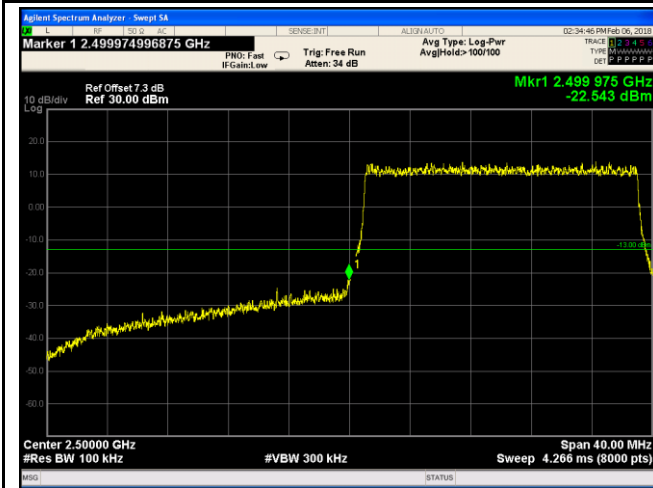

LTE Band VII - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(193.8/100)=4.5+2.8=7.3 dB

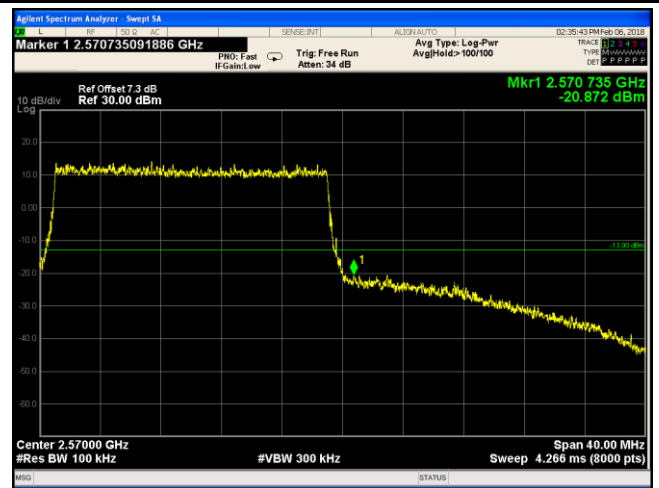


LTE Band VII - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194.8/100)=4.5+2.8=7.3 dB

6.9 Frequency Stability

Temperature	24 °C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	February 05, 2018
Tested By :	Aarron Liang

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	<p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>□□ to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5□□</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p> <p>According to §27.54, The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.</p>	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	□□ to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5□□	821 to 896	1.5	2.5	2.5	928 to 929.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
□□ to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5□□																																
821 to 896	1.5	2.5	2.5																																
928 to 929.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																

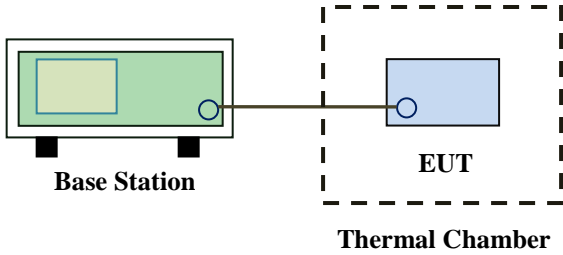Test setup	 <p>The diagram illustrates the test setup. On the left, a green rectangular box represents the 'Base Station'. A line connects it to a blue rectangular box labeled 'EUT' (Equipment Under Test). The 'EUT' is enclosed within a dashed-line rectangle labeled 'Thermal Chamber'.</p>
Procedure	<p>A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.</p> <p>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.</p>
Remark	<p>Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to $+55^{\circ}\text{C}$ at normal supply voltage.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

LTE Band II (Part 24E) result

Middle Channel, $f_o = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-6	0.0032	2.5
0		-10	0.0053	2.5
10		-9	0.0048	2.5
20		-11	0.0059	2.5
30		-14	0.0074	2.5
40		-9	0.0048	2.5
50		-10	0.0053	2.5
55		-10	0.0053	2.5
25	4.2	-12	0.0064	2.5
	3.5	-14	0.0074	2.5

LTE Band IV (Part 27) result

Middle Channel, $f_o = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-11	0.0063	2.5
0		-19	0.0110	2.5
10		-16	0.0092	2.5
20		-10	0.0058	2.5
30		-7	0.0040	2.5
40		-9	0.0052	2.5
50		-11	0.0063	2.5
55		-13	0.0075	2.5
25	4.2	-15	0.0087	2.5
	3.5	-17	0.0098	2.5

LTE Band V (Part 22H) result

Middle Channel, $f_0 = 836.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-11	0.0043	2.5
0		-9	0.0036	2.5
10		-9	0.0036	2.5
20		-8	0.0032	2.5
30		-11	0.0043	2.5
40		-9	0.0036	2.5
50		-10	0.0039	2.5
55		-6	0.0024	2.5
25	4.2	-10	0.0039	2.5
	3.5	-12	0.0047	2.5

LTE Band VII (Part 27) result

Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-11	0.0043	2.5
0		-9	0.0036	2.5
10		-9	0.0036	2.5
20		-8	0.0032	2.5
30		-11	0.0043	2.5
40		-9	0.0036	2.5
50		-10	0.0039	2.5
55		-6	0.0024	2.5
25	4.2	-10	0.0039	2.5
	3.5	-12	0.0047	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/14/2017	09/13/2018	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	UHL-270	001	10/07/2017	10/06/2018	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Power Amplifier	SMC150D	R1553-0313	03/08/2017	03/07/2018	<input checked="" type="checkbox"/>
Power Amplifier	S61-25	R1553-0516	05/26/2017	05/25/2018	<input checked="" type="checkbox"/>
Power Amplifier	S41-25D	R1553-0314	05/26/2017	05/25/2018	<input checked="" type="checkbox"/>


Test Report	18070029-FCC-R5
Page	115 of 120

Tunable Notch Filter	3NF-800/1000-S	AA4	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
----------------------	----------------	-----	------------	------------	-------------------------------------

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

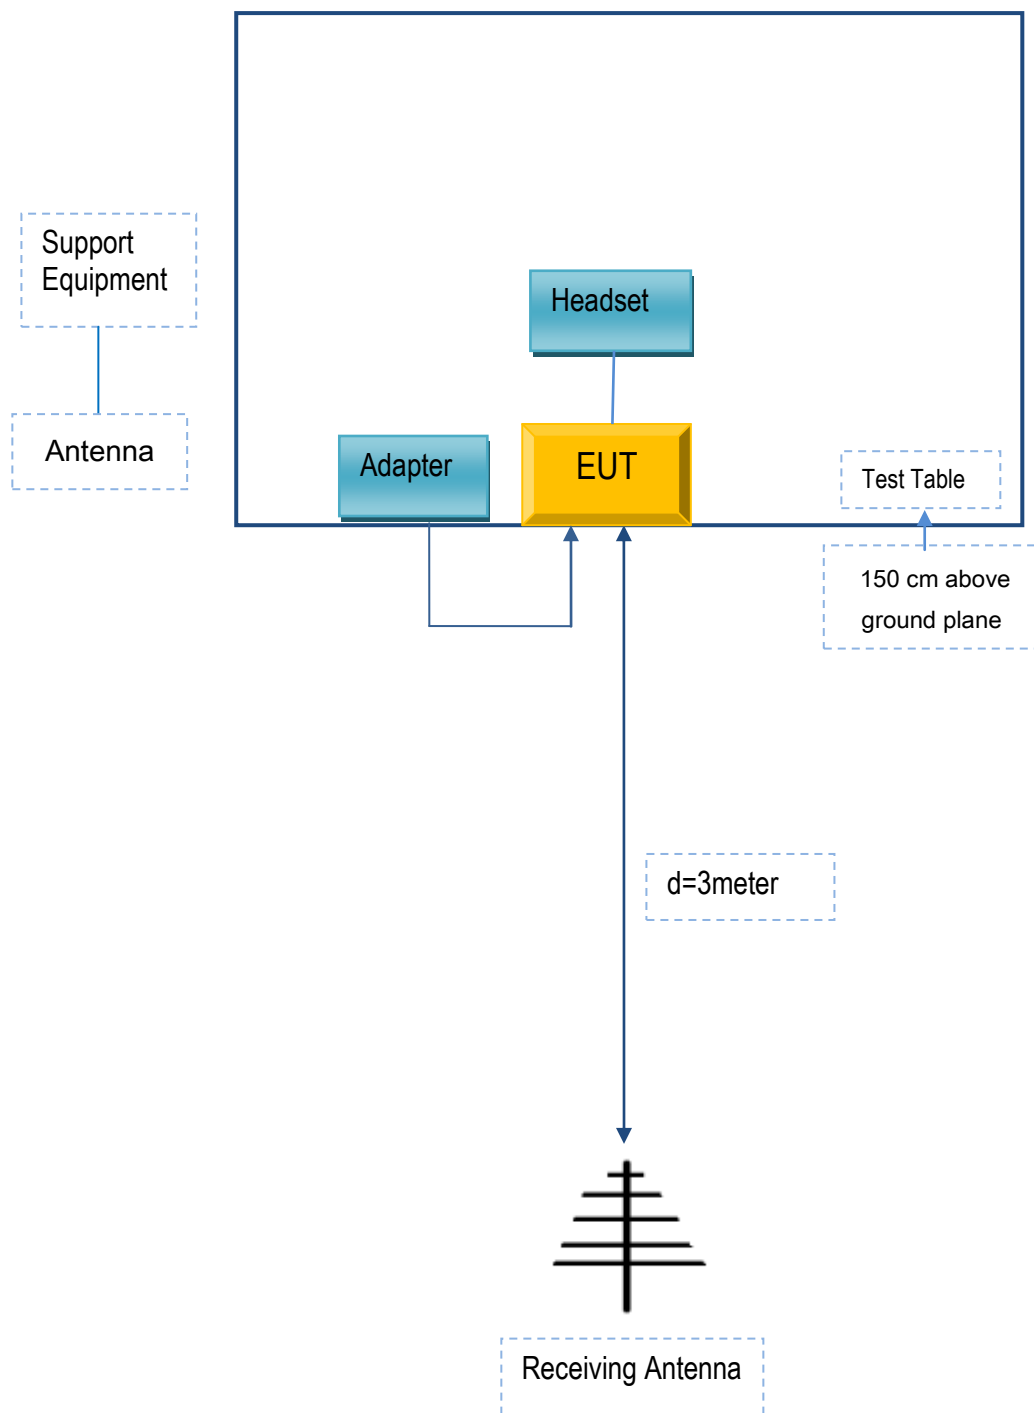

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
TECNO MOBILE LIMITED	Adapter	A88-502000	N/A
TECNO MOBILE LIMITED	Earphone	CA7	N/A
Agilent	Wireless Connectivity Test Set	N4010A	N/A
OEM	omnidirectional antenna	AntSuck	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A