System Check_Body_2450MHz_150114

DUT: D2450V2-924

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_150114 Medium parameters used: f = 2450 MHz; σ = 1.929 S/m; ε_r = 52.48; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃；Liquid Temperature：22.5 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3954; ConvF(7.33, 7.33, 7.33); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2014/7/23
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
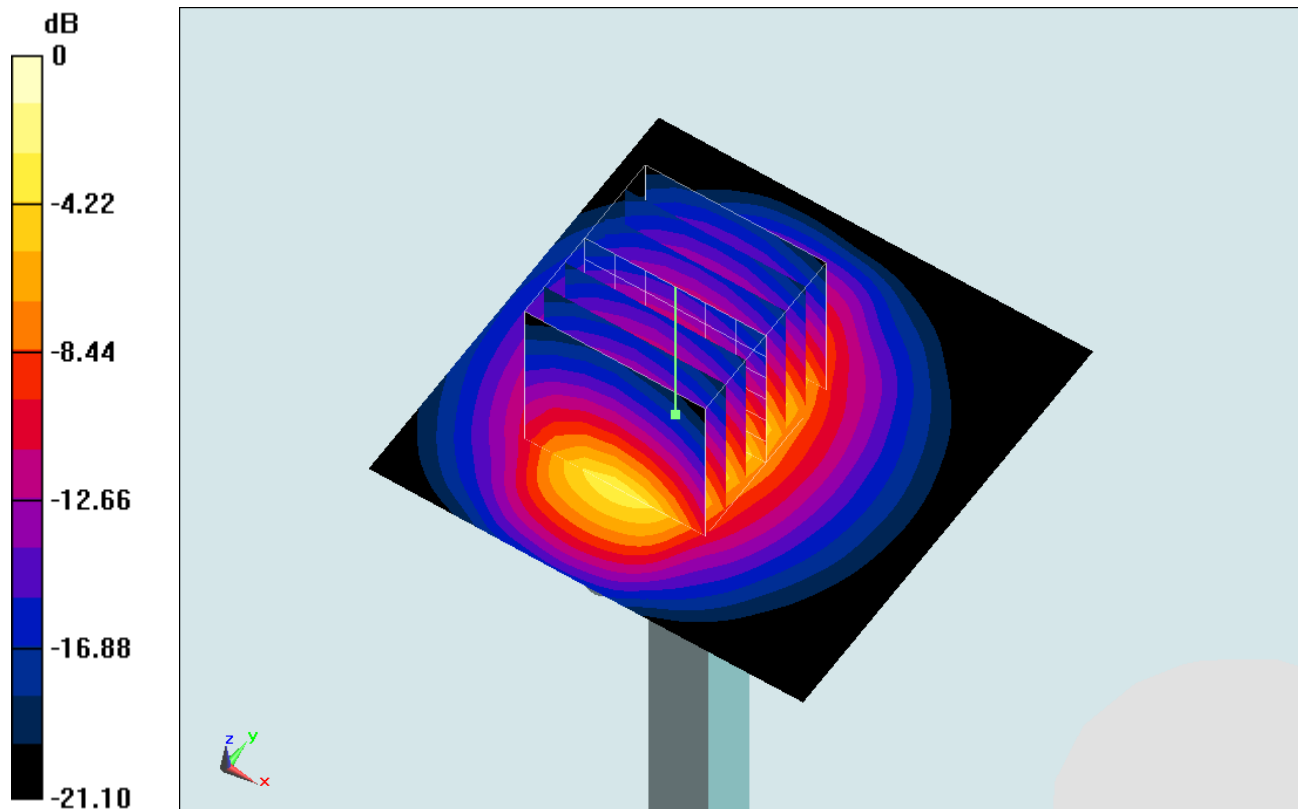Maximum value of SAR (interpolated) = 19.5 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 86.831 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 24.1 W/kg
SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.57 W/kg
Maximum value of SAR (measured) = 18.1 W/kg

0 dB = 18.1 W/kg = 12.58 dBW/kg