







## ISO/IEC17025Accredited Lab.

Report No: FCC 1505170-01 File reference No: 2015-06-30

Applicant: ShenZhen Netxeon Technology Co.,Ltd

Product: TV BOX

Model No: i826, i818, i828

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

It is herewith confirmed and found to comply with the Test result:

requirements set up by ANSI C63.10,FCC Part 15 Subpart C, 15.247 for the evaluation Paragraph

regulations

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 30, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1505170-01 Page 2 of 107

Date: 2015-06-30



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

# IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# **Test Report Conclusion**

#### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	9
3.1	Summary of Test Results	9
3.2	Test Standards.	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test.	14
6.1	Test Method and Test Procedure.	14
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	15
7.0	6dB Bandwidth Measurement.	34
8.0	Maximum Peak Output Power	65
9.0	Power Spectral Density Measurement.	68
10.0	Out of Band Measurement.	83
11.0	Antenna Requirement.	99
12.0	FCC ID Label.	100
13.0	Photo of Test Setup and EUT View.	101

Date: 2015-06-30



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

#### 1.2 Applicant Details

Applicant: ShenZhen Netxeon Technology Co.,Ltd

Address: Unit 708,7/F West, Building 202 Tai Ran Industrial Park, Chegongmiao, Shenzhen, China

Telephone: -Fax: --

## 1.3 Description of EUT

Product: TV BOX

Manufacturer: ShenZhen Netxeon Technology Co.,Ltd

Address: Unit 708,7/F West,Building 202 Tai Ran Industrial

Park, Chegongmiao, Shenzhen, China

Brand Name: N/A
Model Number: i826
Additional Model Number: i818, i828

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz

Channel Spacing IEEE 802.11b/g/n (HT20): 5MHz

Antenna: Two Integral antennas used. MIMO Technology use for all frequency bands.

Antenna Gain: Maximum 2.0dBi for 2.4G band for each antenna.

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps IEEE 802.11n HT40: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1505170-01 Page 5 of 107

Date: 2015-06-30



Input Voltage:

DC5V

Submitted Sample: 2 Samples

1.5 Test Duration

2015-05-26 to 2015-06-30

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 107

Report No: FCC1505170-01

Date: 2015-06-30



2.0 Test Equipments							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20		
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21		
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21		
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22		
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20		
System Controller	CT	SC100	-				
Printer	EPSON	РНОТО ЕХЗ	CFNH234850				
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-		
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21		
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21		
3m OATS			N/A	2014-08-21	2015-08-20		
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22		
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21		
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22		
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21		
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20		
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21		

Page 7 of 107 Report No: FCC1505170-01

Date: 2015-06-30



#### 2.1 **Auxiliary Equipment**

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
Name	Model No.	Seriai No.	Manufacturer	Cable	FCC ID/DOC
TF Card			Kingston		
U-Disk					
Mouse					
LCD Monitor	PH2450		SAMSUNG		DOC
	JHD-AP012U-				
Power Supply	050200AB		JHD		VOC

Report No: FCC1505170-01 Page 8 of 107

Date: 2015-06-30



#### 3. DESCRIPTION OF TEST MODES

#### IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 6.5Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Note: EUT Test With 100% Duty cycle.

Date: 2015-06-30



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	<b>Conducted Emission Test</b>	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2009 and ANSI C63.4:2009

#### **EUT Modification** 4.0


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Date: 2015-06-30



#### 5. Power Line Conducted Emission Test

# 5.1 Schematics of the test

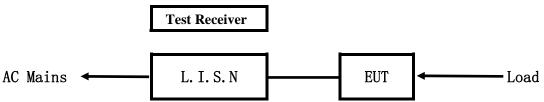


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2009.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

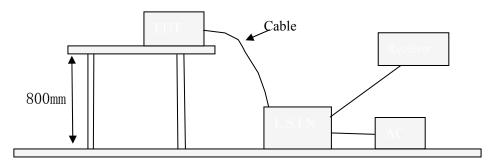

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2009. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

# A. EUT

Device	Manufacturer	Model	FCC ID
TV BOX	ShenZhen Netxeon Technology Co.,Ltd	i826, i818, i828	2AE6JI826

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1505170-01 Page 11 of 107

Date: 2015-06-30



#### B. Internal Device

Device	Manufacturer	Model	Rating

#### C. Peripherals

Device	Manufacturer	Model	Rating
Power	JHD	JHD-AP012U-	Input: 100-240V~, 50/60Hz, 0.35A;
Supplu		050200AB	Output: DC5V, 2A

# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

## 5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2015-06-30



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: WIFI MIMO Keeping TX mode** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

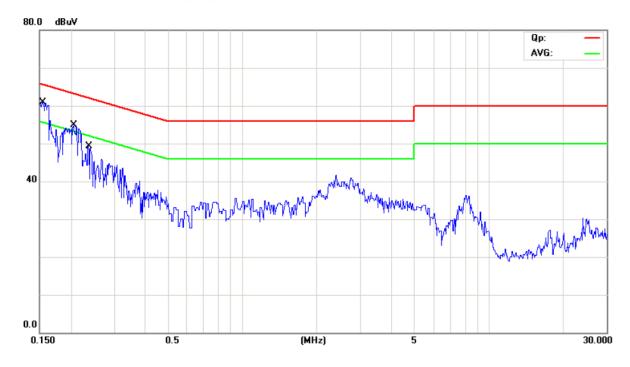

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1542	47.20	11.00	58.20	65.77	-7.57	QP	
2	0.1542	32.50	11.00	43.50	55.77	-12.27	AVG	
3	0.2068	41.06	11.06	52.12	63.33	-11.21	QP	
4	0.2068	27.32	11.06	38.38	53.33	-14.95	AVG	
5	0.2357	35.17	11.09	46.26	62.25	-15.99	QP	
6	0.2357	22.46	11.09	33.55	52.25	-18.70	AVG	

Date: 2015-06-30



#### Conducted Emission on Neutral Terminal (150kHz to 30MHz) B:

## **EUT Operating Environment**


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: WIFI MIMO Keeping TX mode** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

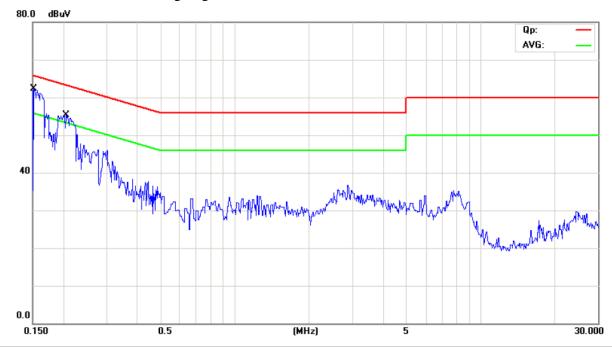

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBu∀	dBuV	dB	Detector	Comment
1 *	0.1511	48.20	11.00	59.20	65.94	-6.74	QP	
2	0.1511	33.50	11.00	44.50	55.94	-11.44	AVG	
3	0.2040	38.10	11.06	49.16	63.45	-14.29	QP	
4	0.2040	23.20	11.06	34.26	53.45	-19.19	AVG	

Report No: FCC1505170-01 Page 14 of 107

Date: 2015-06-30



#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10 –2009. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre – Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1505170-01 Page 15 of 107

Date: 2015-06-30



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

	Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
I	30-88	3	40.0
	88-216	3	43.5
	216-960	3	46.0
I	Above 960	3	54.0

Note: 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$ 

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: FCC1505170-01 Page 16 of 107

Date: 2015-06-30



#### Test result

#### General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition:** WIFI MIMO Keeping TX mode

**Results: Pass** 

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
193.440	27.14	Н	43.50	
148.520	36.34	Н	43.50	
925.160	925.160 42.59		46.00	
118.680	31.18	V	43.50	


Page 17 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## Test Figure:

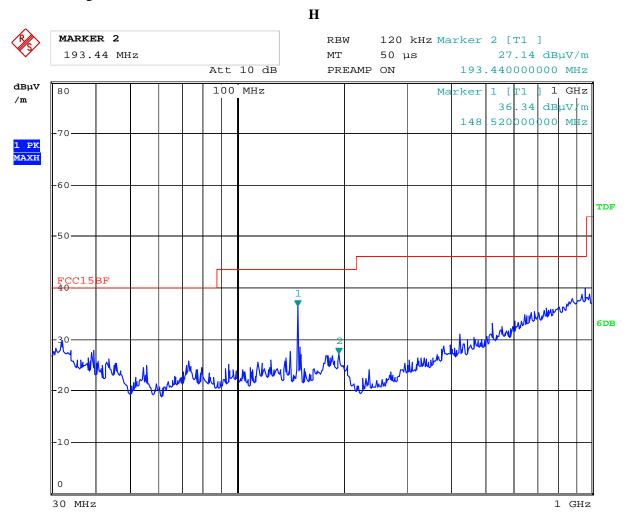

26.JUN.2015 16:09:09 Date:


Page 18 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## Test Figure:

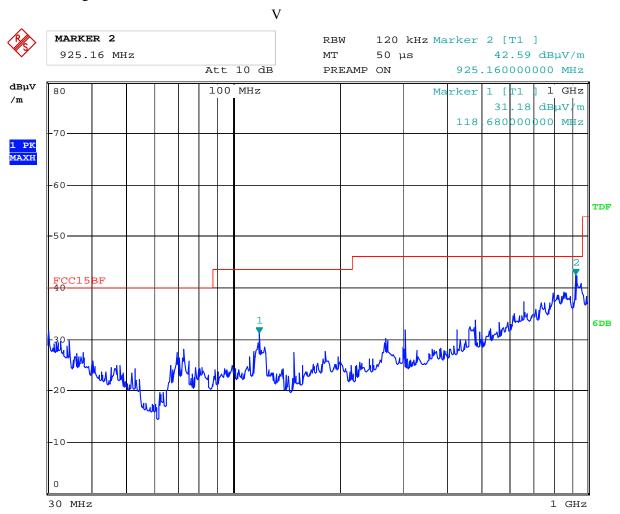

26.JUN.2015 16:05:48 Date:

Report No: FCC1505170-01 Page 19 of 107

Date: 2015-06-30



# Operation Mode: Transmitting under CH01 for 11g at 6Mbps

	8	0 1	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \) V/m)
4824.00	4824.00 52.28 (PK)		74(Peak)/ 54(AV)
4824.00	50.82 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00	.00 H/V		74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472	14472 H/V		74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296	19296 H/		74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps

Date: 2015-06-30



# Operation Mode: Transmitting under CH06 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)	
4874.00	51.65 (PK)	V	74(Peak)/ 54(AV)	
4874.00	51.70 (PK)	Н	74(Peak)/ 54(AV)	
7311.00		H/V	74(Peak)/ 54(AV)	
9748.00		H/V	74(Peak)/ 54(AV)	
12185		H/V	74(Peak)/ 54(AV)	
14622	14622 H/V		74(Peak)/ 54(AV)	
17059		H/V	74(Peak)/ 54(AV)	
19496	19496		74(Peak)/ 54(AV)	
21933		H/V	74(Peak)/ 54(AV)	
24370	-	H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps

# Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
4924	50.58 (PK)	Н	74(Peak)/ 54(AV)	
4924	50.64 (PK)	V	74(Peak)/ 54(AV)	
7368	ı	H/V	74(Peak)/ 54(AV)	
9848	1	H/V	74(Peak)/ 54(AV)	
12310		H/V	74(Peak)/ 54(AV)	
14772	-	H/V	74(Peak)/ 54(AV)	
17234		H/V	74(Peak)/ 54(AV)	
19696		H/V	74(Peak)/ 54(AV)	
22158	-	H/V	74(Peak)/ 54(AV)	
24620		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 6Mbps

Date: 2015-06-30




Please refer to the following test plots for details:

## CH01 for 11g at 6Mbps: Horizontal

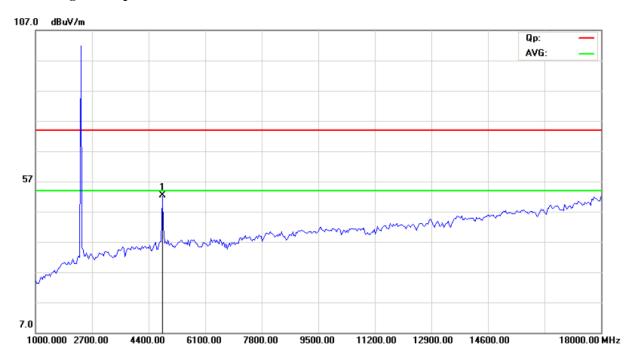

## CH01 for 11g at 6Mbps: Vertical

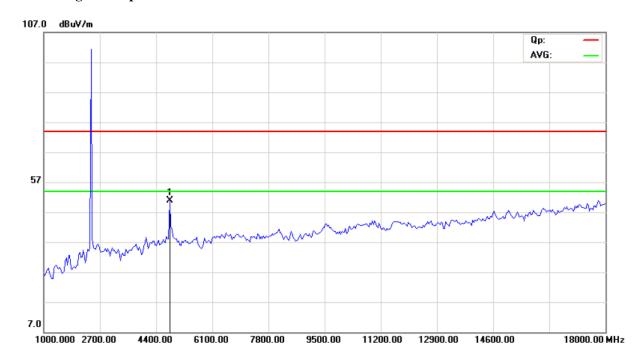

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 22 of 107

Report No: FCC1505170-01


Date: 2015-06-30



# CH06 for 11g at 6Mbps: Vertical

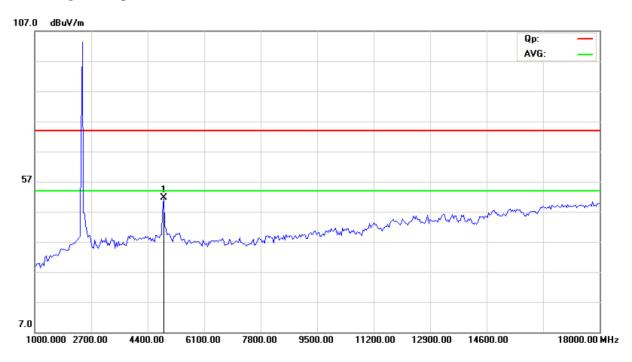

# CH06 for 11g at 6Mbps: Horizontal

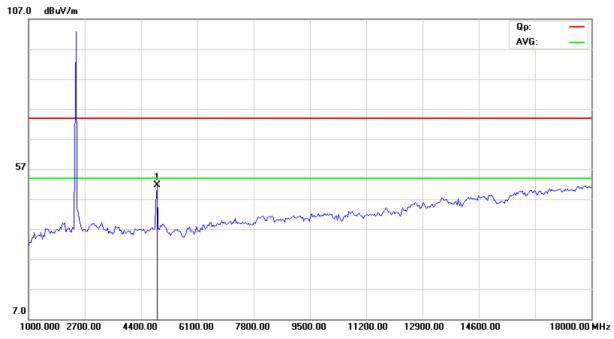

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-06-30



## CH11 for 11g at 6Mbps: Vertical

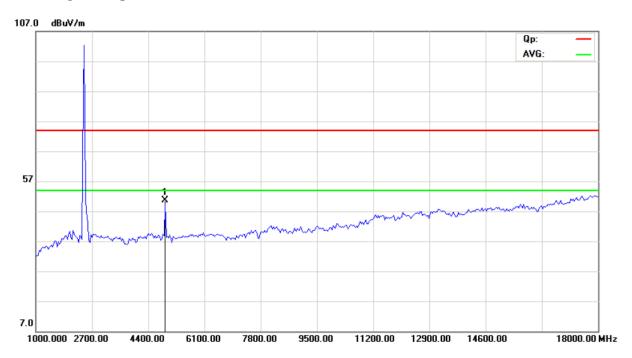

# CH11 for 11g at 6Mbps: Horizontal

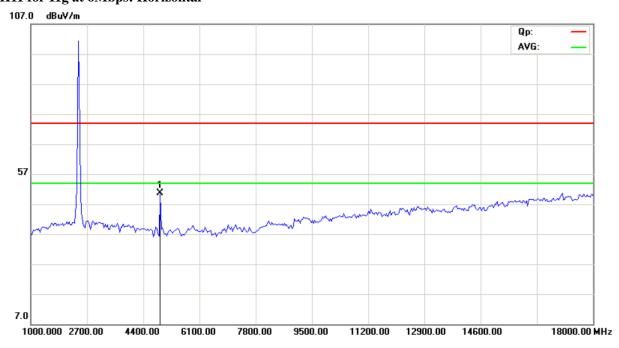

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Date: 2015-06-30



#### Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
4824.00	50.82 (PK)	Н	74(Peak)/ 54(AV)	
4824.00	52.09 (PK)	V	74(Peak)/ 54(AV)	
7236.00		H/V	74(Peak)/ 54(AV)	
9648.00		H/V	74(Peak)/ 54(AV)	
12060		H/V	74(Peak)/ 54(AV)	
14472	H/V		74(Peak)/ 54(AV)	
16684		H/V	74(Peak)/ 54(AV)	
19296		H/V	74(Peak)/ 54(AV)	
21708		H/V	74(Peak)/ 54(AV)	
24120		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

## Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB $\mu$ V/m)	
4874.00	51.51 (PK)	Н	74(Peak)/ 54(AV)	
4874.00	51.58 (PK)	V	74(Peak)/ 54(AV)	
7311.00	ı	H/V	74(Peak)/ 54(AV)	
9748.00		H/V	74(Peak)/ 54(AV)	
12185		H/V	74(Peak)/ 54(AV)	
14622		H/V	74(Peak)/ 54(AV)	
17059		H/V	74(Peak)/ 54(AV)	
19496		H/V	74(Peak)/ 54(AV)	
21933		H/V	74(Peak)/ 54(AV)	
24370		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Report No: FCC1505170-01 Page 25 of 107

Date: 2015-06-30



## Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
4924	52.29 (PK)	Н	74(Peak)/ 54(AV)	
4924	52.13 (PK)	V	74(Peak)/ 54(AV)	
7368		H/V	74(Peak)/ 54(AV)	
9848		H/V	74(Peak)/ 54(AV)	
12310		H/V	74(Peak)/ 54(AV)	
14772	H/V		74(Peak)/ 54(AV)	
17234		H/V	74(Peak)/ 54(AV)	
19696		H/V	74(Peak)/ 54(AV)	
22158		H/V	74(Peak)/ 54(AV)	
24620		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2015-06-30




Please refer to the following test plots for details:

## CH01 for 11b at 11Mbps: Horizontal

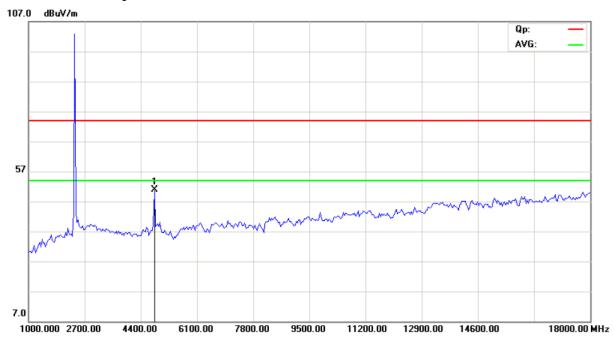

# CH01 for 11b at 11Mbps: Vertical

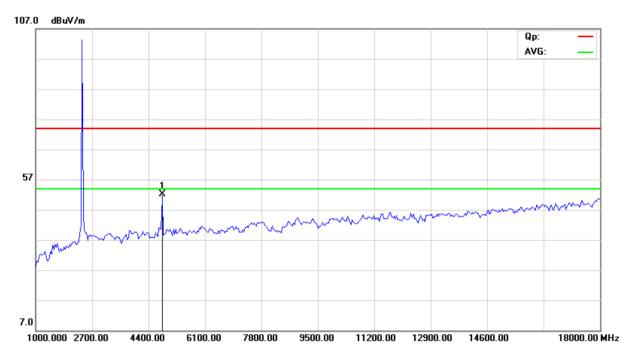

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 27 of 107

Report No: FCC1505170-01


Date: 2015-06-30



# CH06 for 11b at 11Mbps: Vertical

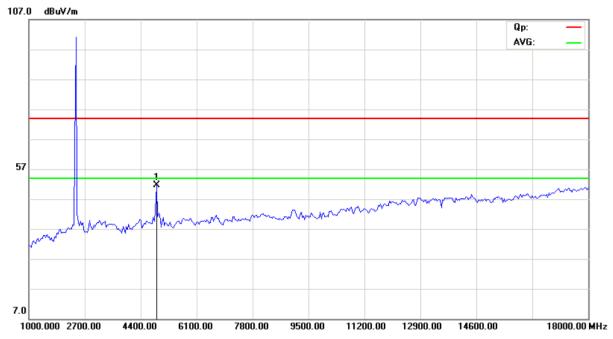


## CH06 for 11b at 11Mbps: Horizontal

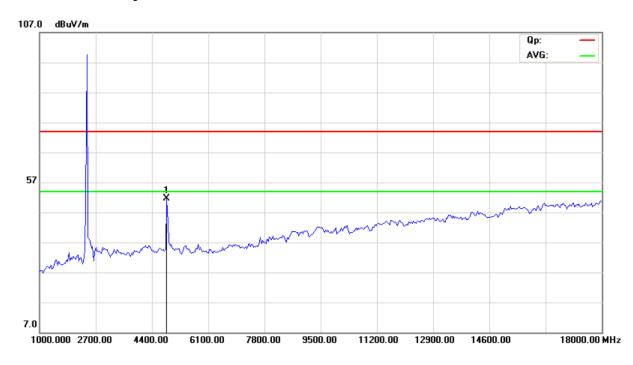


Date: 2015-06-30



## CH11 for 11b at 11Mbps: Vertical

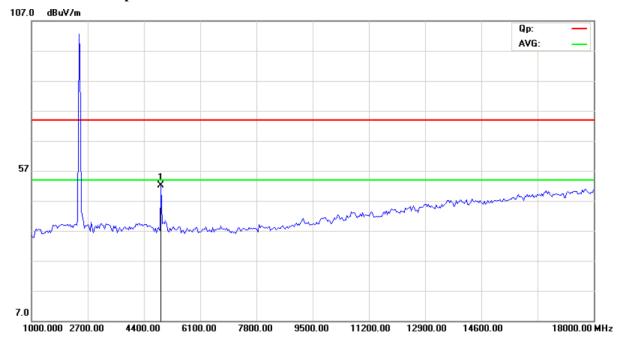

## CH11 for 11b at 11Mbps: Horizontal

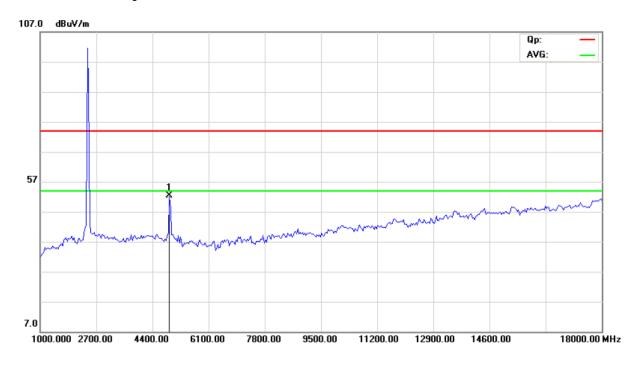

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Date: 2015-06-30



#### Operation Mode: Transmitting under CH01 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)	
4824.00	50.35 (PK)	Н	74(Peak)/ 54(AV)	
4824.00	50.09 (PK)	V	74(Peak)/ 54(AV)	
7236.00	1	H/V	74(Peak)/ 54(AV)	
9648.00		H/V	74(Peak)/ 54(AV)	
12060		H/V	74(Peak)/ 54(AV)	
14472	H/V		74(Peak)/ 54(AV)	
16684		H/V	74(Peak)/ 54(AV)	
19296	-	H/V	74(Peak)/ 54(AV)	
21708		H/V	74(Peak)/ 54(AV)	
24120		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

## Operation Mode: Transmitting under CH06 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)	
4874.00	48.04 (PK)	Н	74(Peak)/ 54(AV)	
4874.00	48.69 (PK)	V	74(Peak)/ 54(AV)	
7311.00		H/V	74(Peak)/ 54(AV)	
9748.00		H/V	74(Peak)/ 54(AV)	
12185		H/V	74(Peak)/ 54(AV)	
14622		H/V	74(Peak)/ 54(AV)	
17059		H/V	74(Peak)/ 54(AV)	
19496		H/V	74(Peak)/ 54(AV)	
21933		H/V	74(Peak)/ 54(AV)	
24370		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Report No: FCC1505170-01 Page 30 of 107

Date: 2015-06-30



## Operation Mode: Transmitting under CH11 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB µ V/m)	
4924	51.19 (PK)	Н	74(Peak)/ 54(AV)	
4924	51.64 (PK)	V	74(Peak)/ 54(AV)	
7368		H/V	74(Peak)/ 54(AV)	
9848		H/V	74(Peak)/ 54(AV)	
12310		H/V	74(Peak)/ 54(AV)	
14772	H/V		74(Peak)/ 54(AV)	
17234		H/V	74(Peak)/ 54(AV)	
19696	H/V		74(Peak)/ 54(AV)	
22158	H/V 74		74(Peak)/ 54(AV)	
24620		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Date: 2015-06-30




Please refer to the following test plots for details:

## CH01 for 11n HT20 at 6.5Mbps: Horizontal

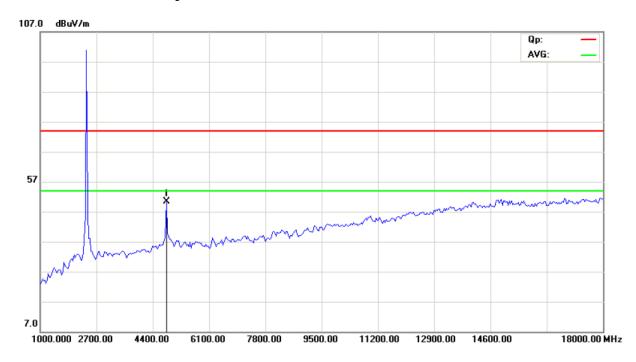

## CH01 for 11n HT20 at 6.5Mbps: Vertical

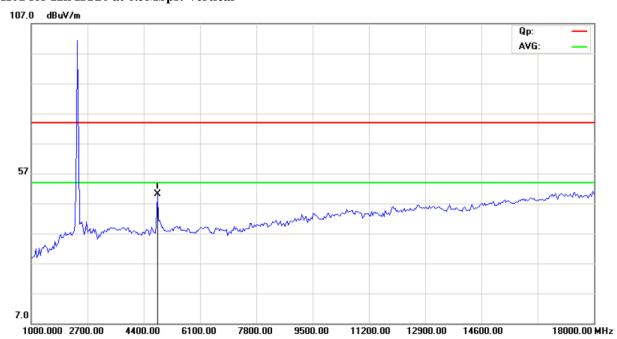

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-06-30



# CH06 for 11n HT20 at 6.5Mbps: Vertical

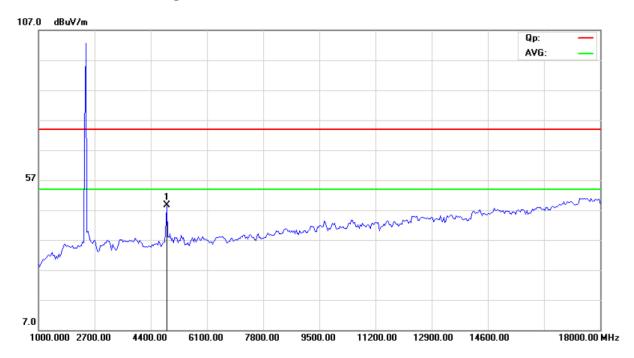

# CH06 for 11n HT20 at 6.5Mbps: Horizontal

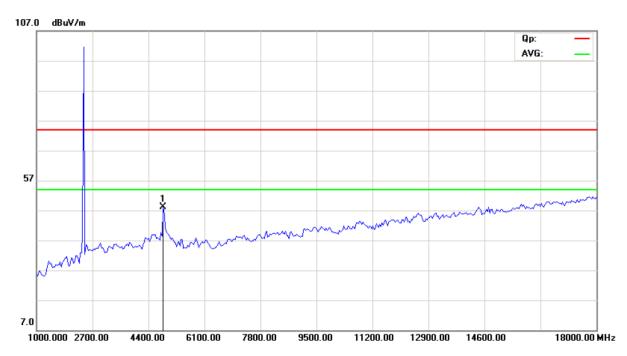

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-06-30



# CH11 for 11n HT20 at 6.5Mbps: Vertical

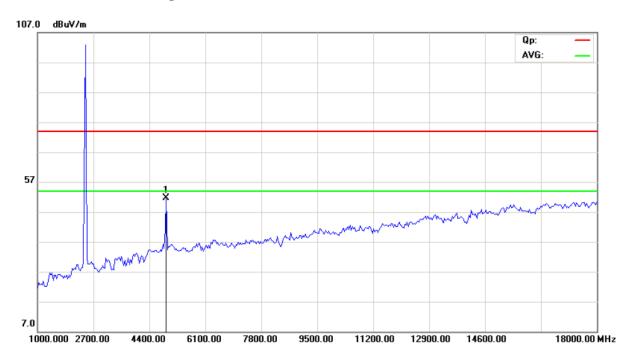

# CH11 for 11n HT20 at 6.5Mbps: Horizontal

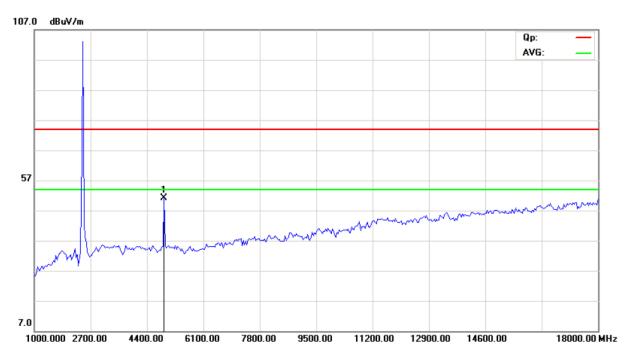

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.


Report No: FCC1505170-01 Page 34 of 107

Date: 2015-06-30



#### 7.0 6dB Bandwidth Measurement

# 7.1 Test Setup



#### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

#### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.4 Test Result

Report No: FCC1505170-01 Page 35 of 107

Date: 2015-06-30



## Antenna A

# 6dB Occupied Bandwidth

EUT		TV BOX		Model		i826, i818, i828		
Mode		802.11b		Input Voltage			DC5.0V	
Temperati	ure	24	4 deg. C,		Humidity		56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	1	8.	60		0.5	Pass
6		2437	1	8.	60		0.5	Pass
11		2462	1	8.	60		0.5	Pass
1		2412	11	8.	84		0.5	Pass
6		2437	11	8.	84		0.5	Pass
11		2462	11	8.	84		0.5	Pass


Page 36 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## 1. 802.11b at 1Mbps of CH01

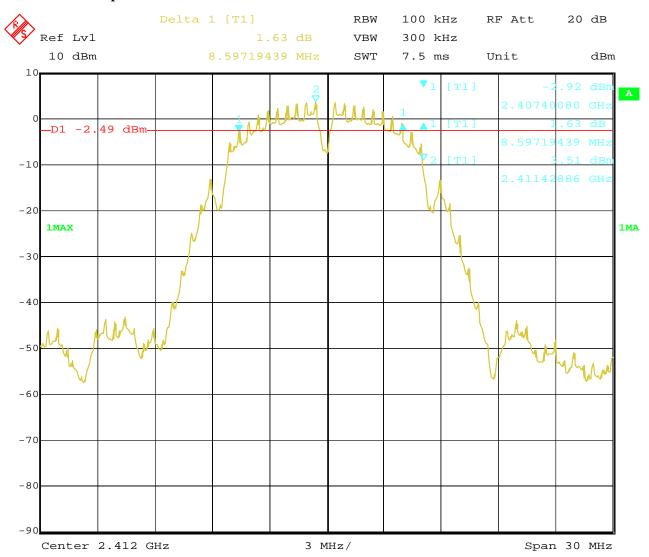

5.JUN.2015 17:55:59 Date:


Page 37 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 2. 802.11b at 1Mbps of CH06

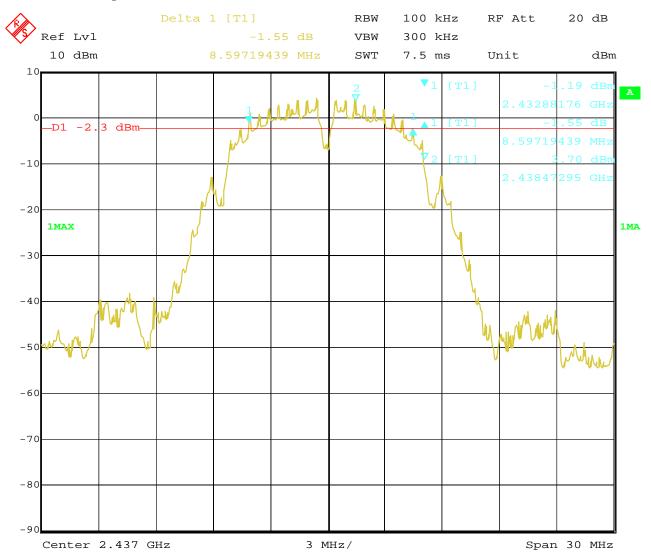

5.JUN.2015 18:08:06 Date:


Page 38 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 3. 802.11b at 1Mbps of CH11

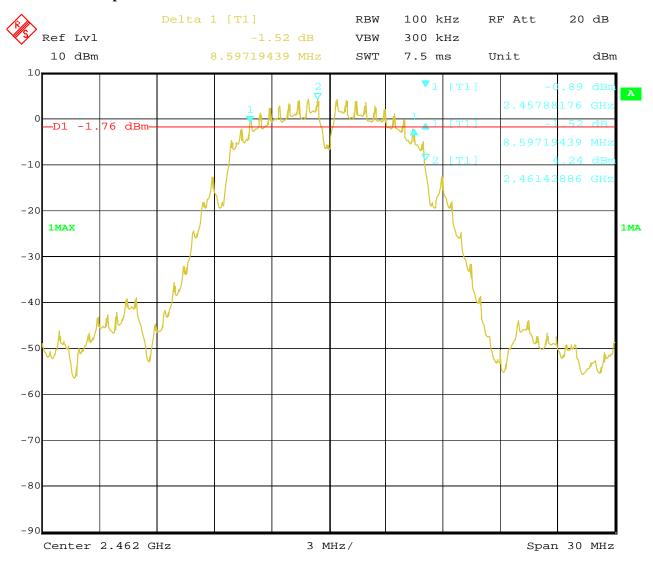

5.JUN.2015 Date: 18:18:53


Page 39 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 4. 802.11b at 11Mbps of CH01

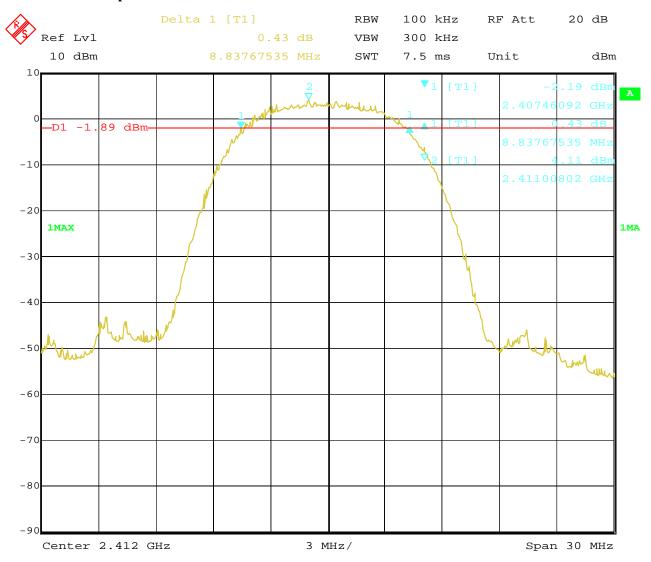

5.JUN.2015 17:58:08 Date:


Page 40 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 5. 802.11b at 11Mbps of CH06

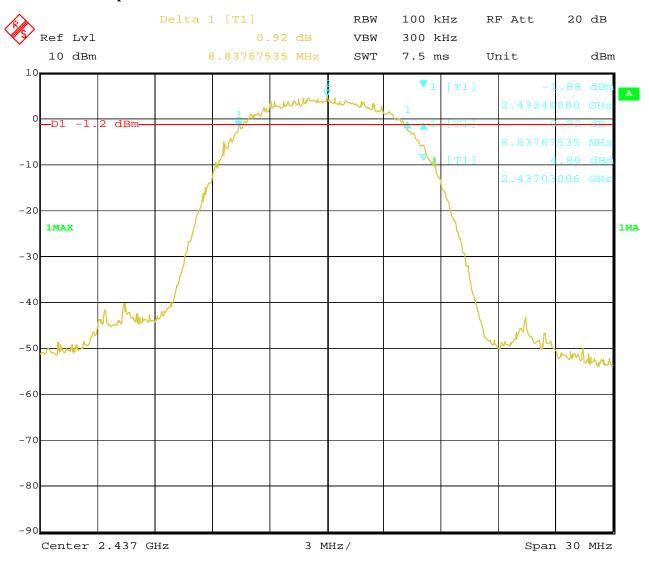

5.JUN.2015

Date:

18:10:40


Page 41 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 6. 802.11b at 11Mbps of CH11

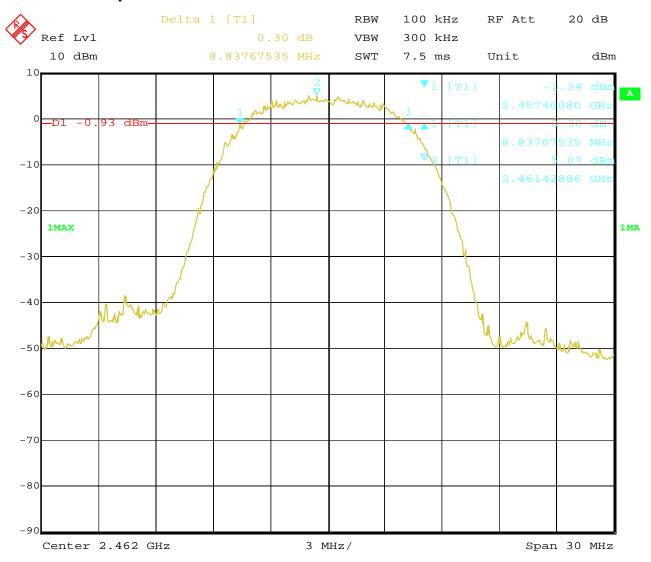

5.JUN.2015 18:13:44 Date:

Report No: FCC1505170-01 Page 42 of 107

Date: 2015-06-30



### Antenna A

## 6dB Occupied Bandwidth

EUT		Т	V BOX		Model		i82	.6, i818, i828
Mode		802.11g			Input Voltage		DC5.0V	
Temperature		24		Humidity		56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)		6 dB Bandwidth (MHz)		num Limit MHz)	Pass/ Fail
1		2412	6	16.05			0.5	Pass
6	2437		6	16.05			0.5	Pass
11	2462		6	16	.05		0.5	Pass

Page 43 of 107


Report No: FCC1505170-01

Date: 2015-06-30



#### **Test Plots:**

### 1. 802.11g at 6Mbps of CH01

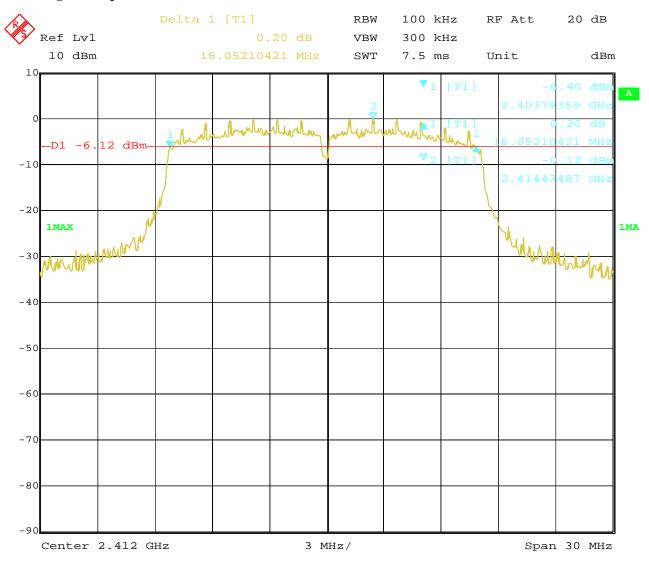

5.JUN.2015 18:01:13 Date:


Page 44 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 2. 802.11g at 6Mbps of CH06

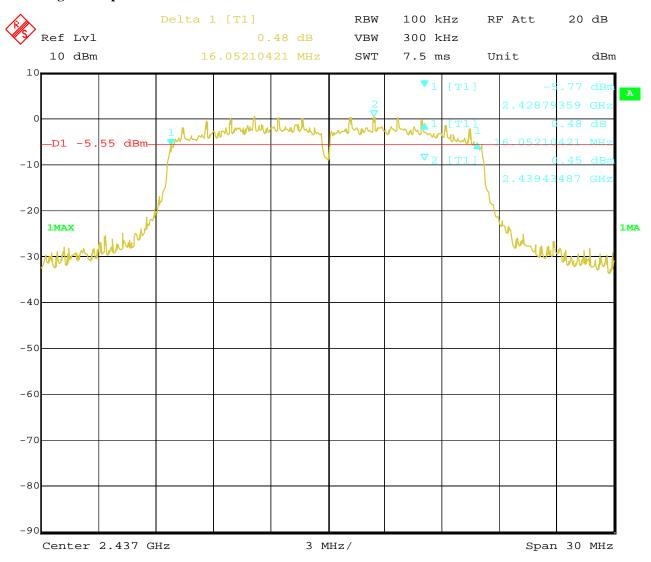

5.JUN.2015 18:05:55 Date:


Page 45 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 3. 802.11g at 6Mbps of CH11

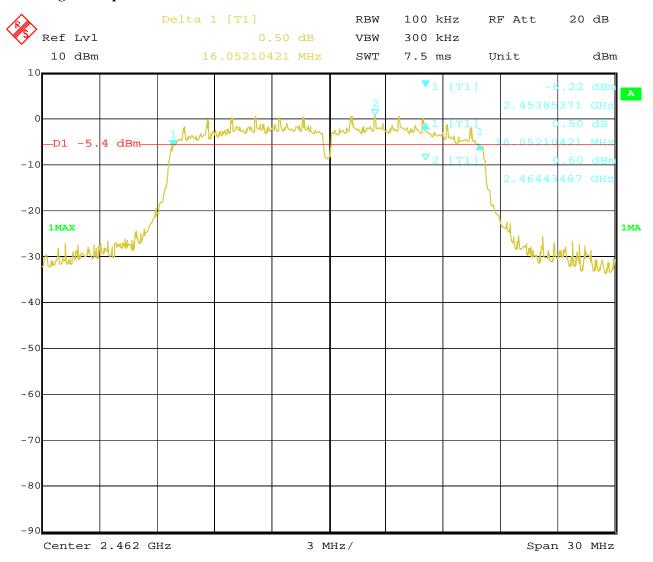

5.JUN.2015 18:16:00 Date:

Report No: FCC1505170-01 Page 46 of 107

Date: 2015-06-30



### Antenna A

### 6dB Occupied Bandwidth

EUT		Т	V BOX		Model		i82	6, i818, i828
Mode		802.11n HT20			Input Voltage			DC5.0V
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412	6.5	16.77			0.5	Pass
6		2437	6.5	16.77			0.5	Pass
11	2462		6.5	16	.77		0.5	Pass

Page 47 of 107


Report No: FCC1505170-01

Date: 2015-06-30



#### **Test Plots:**

#### 1.802.11n at HT20 of CH01

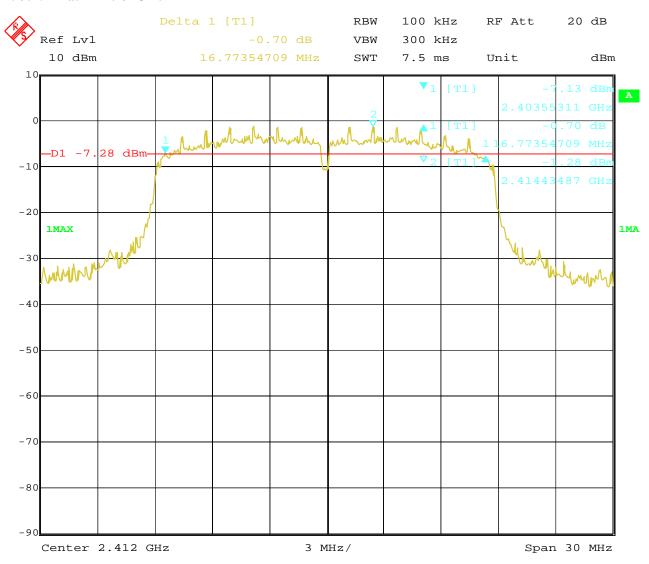

5.JUN.2015 18:22:06 Date:


Page 48 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 2. 802.11n at HT20 of CH06

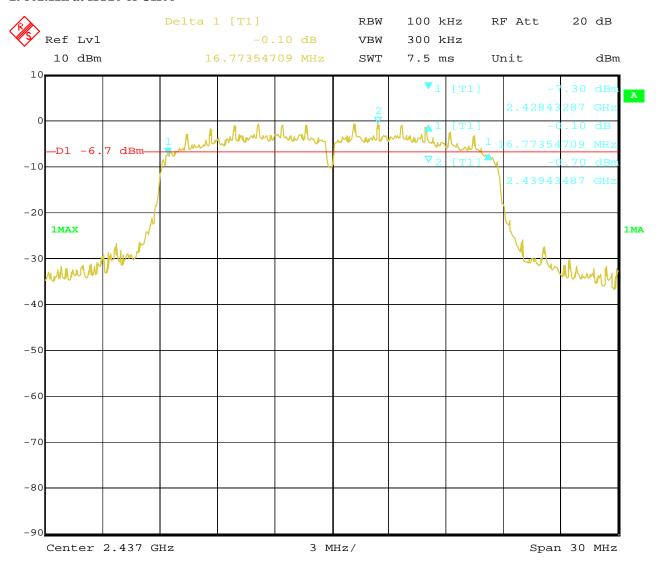

5.JUN.2015 18:25:49 Date:


Page 49 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 3. 802.11n at HT20 of CH11

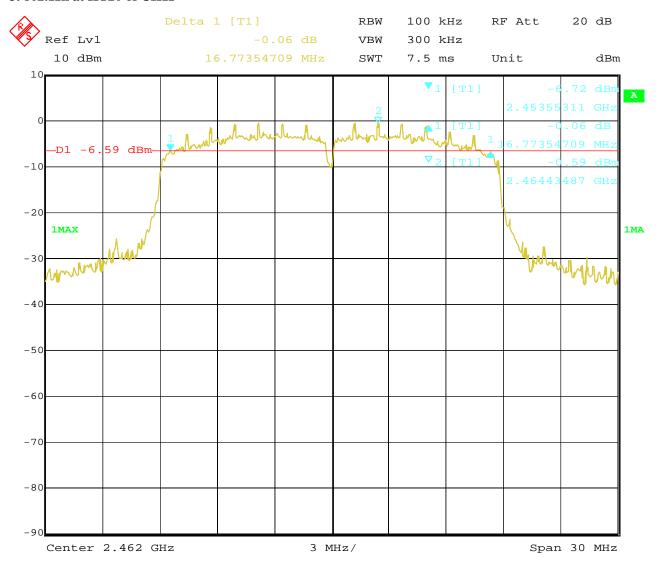

5.JUN.2015 18:29:26 Date:

Report No: FCC1505170-01 Page 50 of 107

Date: 2015-06-30



### Antenna B

### 6dB Occupied Bandwidth

EUT		Т	V BOX		Model		i82	6, i818, i828
Mode		8	802.11b		Input Vol	tage		DC5.0V
Temperati	ure	24 deg. C,			Humidity			56% RH
Channel	nel Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412	1	8.60		0.5		Pass
6		2437	1	8.60			0.5	Pass
11		2462	1	8.60			0.5	Pass
1		2412	11	8.	84	0.5		Pass
6	2437		11	8.84			0.5	Pass
11	2462		11	8.	84		0.5	Pass


Page 51 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 1. 802.11b at 1Mbps of CH01

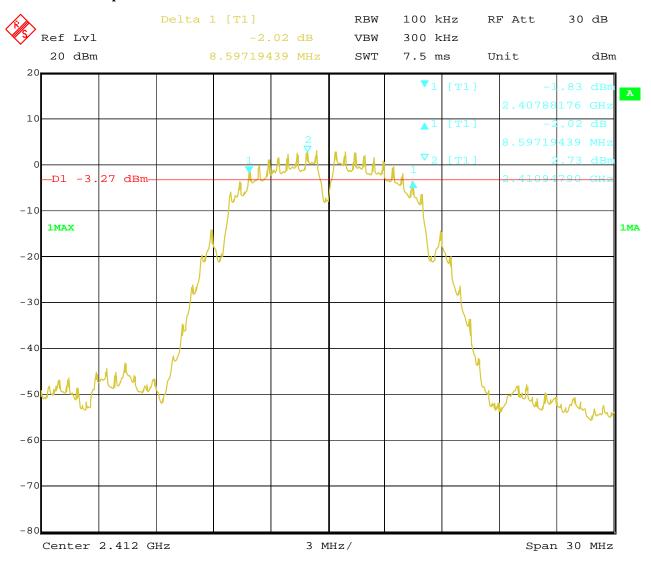

8.JUN.2015 10:38:03 Date:


Page 52 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 2. 802.11b at 1Mbps of CH06

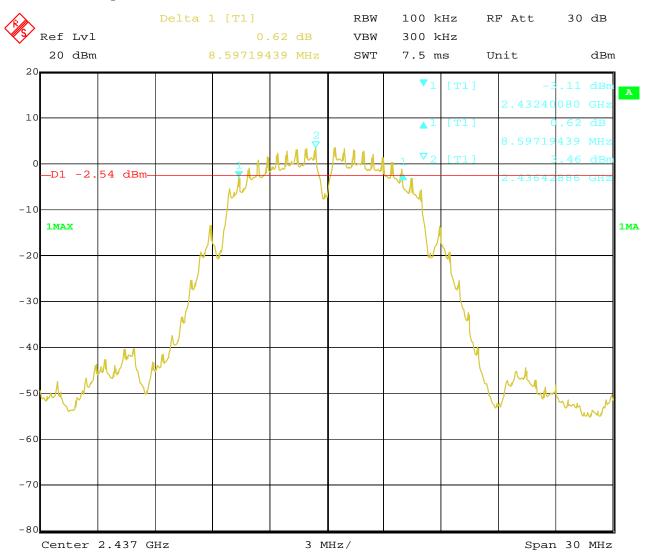

8.JUN.2015 10:46:40 Date:


Page 53 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 3. 802.11b at 1Mbps of CH11

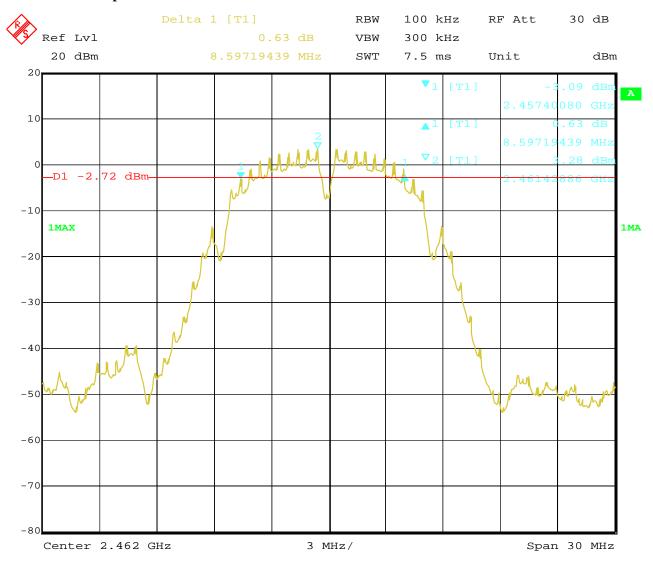

8.JUN.2015 10:48:37 Date:


Page 54 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 4. 802.11b at 11Mbps of CH01

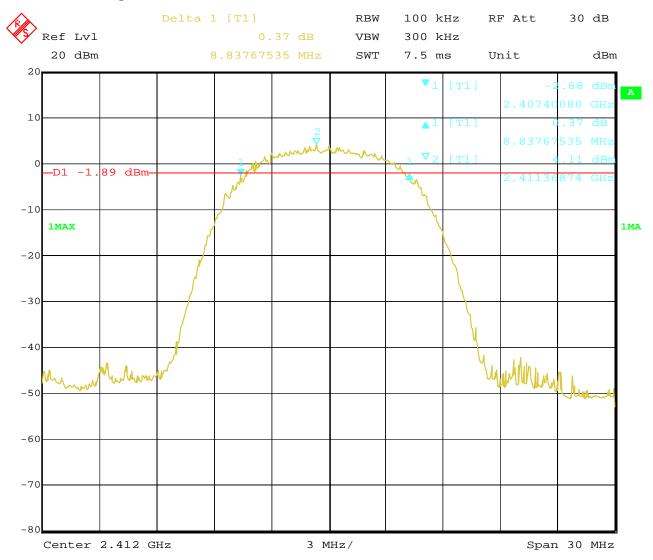

8.JUN.2015 10:41:40 Date:


Page 55 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 5. 802.11b at 11Mbps of CH06

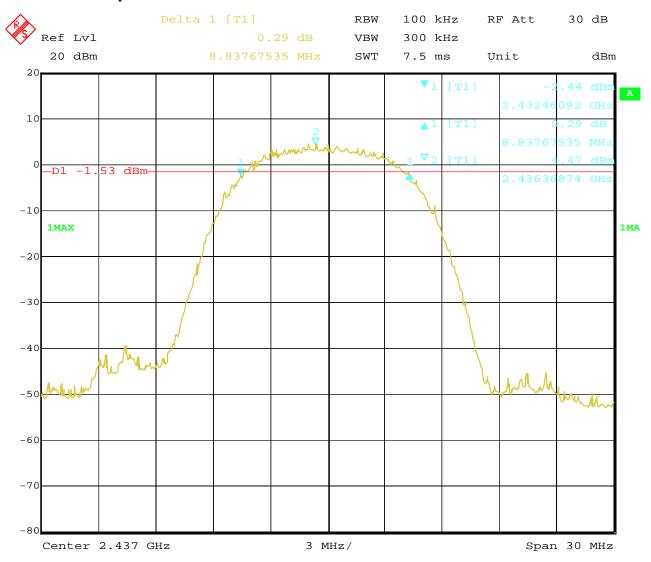

8.JUN.2015 10:44:08 Date:


Page 56 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 6. 802.11b at 11Mbps of CH11

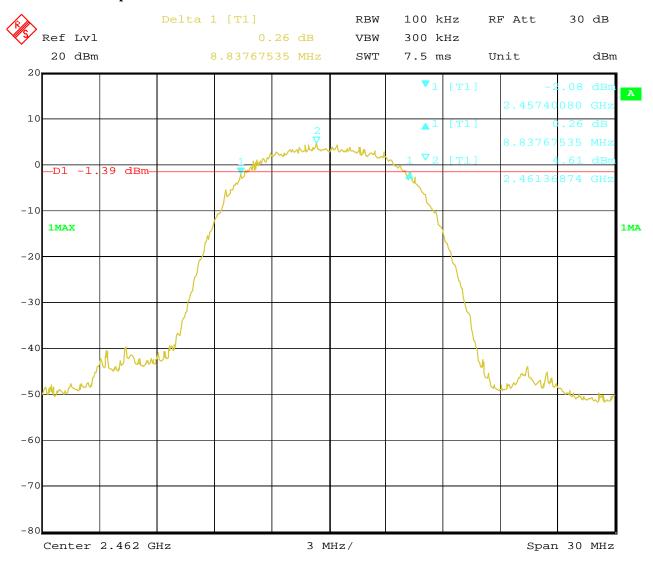

8.JUN.2015

Date:

10:50:29

Report No: FCC1505170-01 Page 57 of 107

Date: 2015-06-30



### Antenna B

### 6dB Occupied Bandwidth

EUT		Т	V BOX		Model		i82	i826, i818, i828	
Mode		802.11g			Input Voltage		DC5.0V		
Temperature		24 deg. C,			Humidity		56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)		6 dB Bandwidth (MHz)		num Limit MHz)	Pass/ Fail	
1		2412	6	16	.05		0.5	Pass	
6		2437	6	16.05			0.5	Pass	
11	2462		6	16	.05		0.5	Pass	

Page 58 of 107


Report No: FCC1505170-01

Date: 2015-06-30



#### **Test Plots:**

#### 1. 802.11g at 6Mbps of CH01

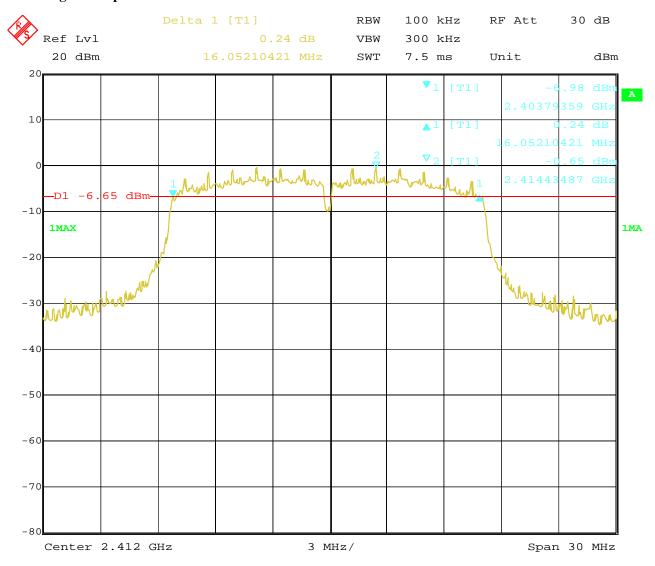

8.JUN.2015 10:53:40 Date:


Page 59 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 2. 802.11g at 6Mbps of CH06

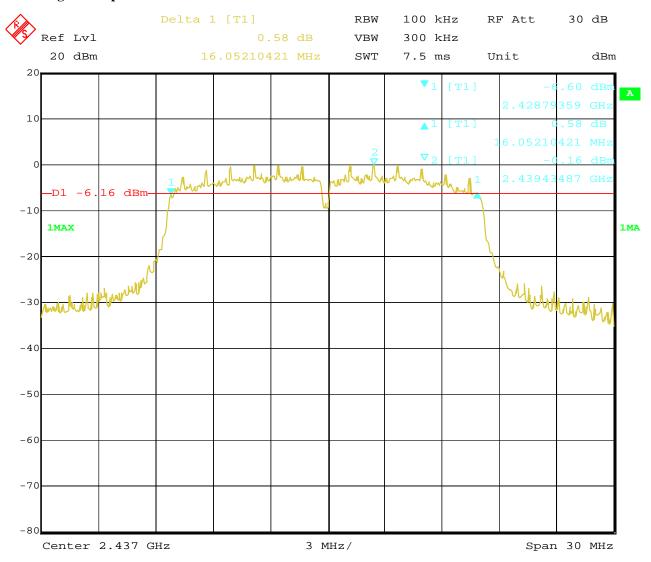

8.JUN.2015 10:56:01 Date:


Page 60 of 107

Report No: FCC1505170-01

Date: 2015-06-30



### 3. 802.11g at 6Mbps of CH11

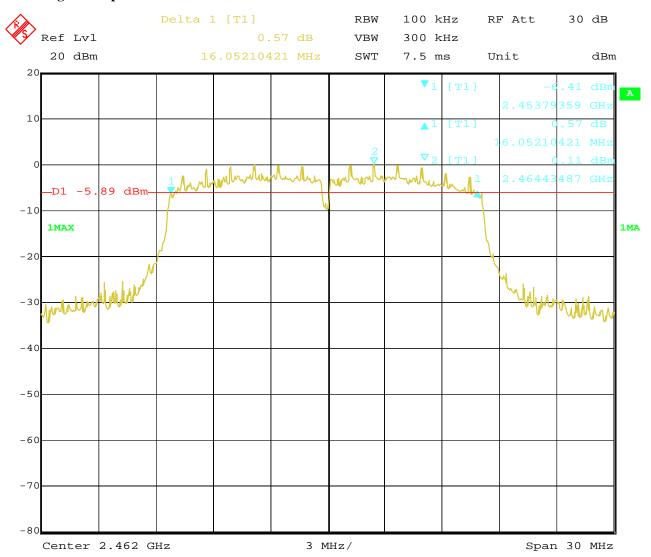

8.JUN.2015 10:57:52 Date:

Report No: FCC1505170-01 Page 61 of 107

Date: 2015-06-30



### Antenna B

### 6dB Occupied Bandwidth

EUT		Т	V BOX		Model		i82	26, i818, i828
Mode		802.11n HT20			Input Voltage		DC5.0V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412	6.5	16.77			0.5	Pass
6		2437	6.5	16.77			0.5	Pass
11	2462		6.5	16	.77		0.5	Pass

Page 62 of 107


Report No: FCC1505170-01

Date: 2015-06-30



#### **Test Plots:**

#### 1.802.11n at HT20 of CH01

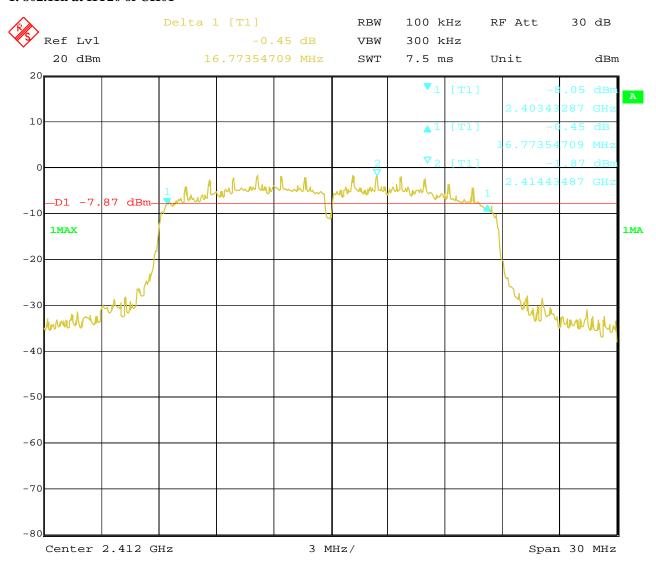

8.JUN.2015 11:15:13 Date:


Page 63 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 2. 802.11n at HT20 of CH06

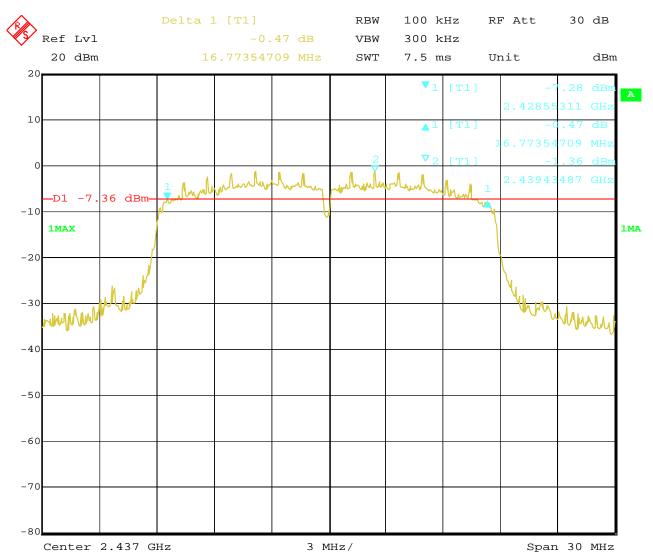

8.JUN.2015 11:17:58 Date:


Page 64 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 3. 802.11n at HT20 of CH11

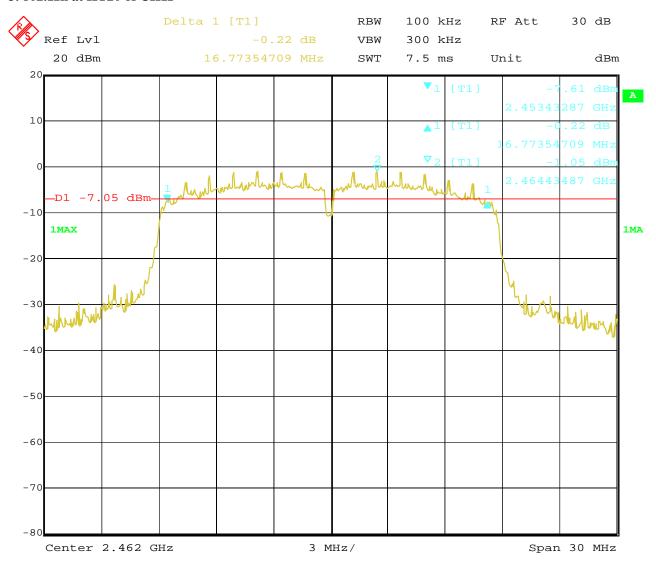

8.JUN.2015 11:20:05 Date:

Report No: FCC1505170-01

Date: 2015-06-30



Page 65 of 107

# 8. Maximum Peak Output Power

### 8.1 Test Setup



#### 8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: FCC1505170-01 Page 66 of 107

Date: 2015-06-30



#### **8.4Test Results**

EU	T		TV BOX	Model		i826, i818, i828	3
Mod	de		802.11b	Input Voltage		DC5.0V	
Temper	Temperature		24 deg. C,	Humidity			
Channel	Frequer	ncy	Antenna	Peak Power	Total Power Limit		Pass/ Fail
	(MHz	(1)	Port	Output (dBm)	(dBm)	(dBm)	
1	2412		A	17.73	20.39	30	Pass
			В	16.99			
6	2437		A	18.31	20.79	30	Pass
			В	17.18			
11	2462		A	18.53	21.05	30	Pass
			В	17.48			

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No: FCC1505170-01

Date: 2015-06-30



EU	T		TV BOX	Model		i826, i818, i828	3	
Mod	de		802.11g	Input Voltage		DC5.0V		
Temper	Temperature		24 deg. C,	Humidity				
Channel	Frequer	ncy	Antenna	Peak Power	Total Power	Limit	Pass/ Fail	
	(MHz	<b>:</b> )	Port	Output (dBm)	(dBm)	(dBm)		
1	2412		A	18.59	21.48	30	Pass	
			В	18.35				
6	2437	1	A	19.13	22.06 30		Pass	
			В	18.97				
11	2462		A	19.33	22.31	30	Pass	
			В	19.26				

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	T		TV BOX	Model		i826, i818, i828	3		
Mod	de	80	2.11n (HT20)	Input Voltage	DC5.0V				
Temper	Temperature		24 deg. C,	Humidity		56% RH			
Channel	Frequency		Antenna	Peak Power	Total Power	Limit	Pass/ Fail		
	(MHz	<b>:</b> )	Port	Output (dBm)	(dBm)	(dBm)			
1	2412		A	17.61	19.98	30	Pass		
			В	16.22					
6	2437	1	A	18.29	20.61 30		Pass		
					В	16.79			
11	2462		A	18.24	20.71	30	Pass		
			В	17.08					

Note: 1. At finial test to get the worst-case emission at 6.5Mbps 11n HT20 for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:

  Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: FCC1505170-01 Page 68 of 107

Date: 2015-06-30



## 9. Power Spectral Density Measurement

### 9.1 Test Setup



# 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8$  dBm.

Report No: FCC1505170-01 Page 69 of 107

Date: 2015-06-30



#### 9.4Test Result

EUT		TV	BOX	Model	i	826, i818, i828	3
Mode 802.111		802.11b 11Mbps		Input Voltage	DC5.0V		
Temperat	Temperature 24 c		eg. C,	Humidity	56% RH		
Channel	Fre	quency Power		10 log(N <sub>ANT</sub> )	Final Power	Limit	Pass/ Fail
	(N	MHz)	Spectral	dB	Spectral	(dBm)	
			Density		Density		
			(dBm)		(dBm)		
1	2	2412	-6.22	3.01	-3.21	8	Pass
6	2437		-4.88	3.01	-1.87	8	Pass
11	2	2462	-4.91	3.01	-1.90	8	Pass

EUT		TV	BOX	Model	i	826, i818, i828	}
Mode 802.11		802.11b 1Mbps		Input Voltage	DC5.0V		
Temperat	ure	24 d	eg. C,	Humidity	56% RH		
Channel	Fre	quency	Power	$10 \log(N_{ANT})$	Final Power	Limit	Pass/ Fail
	(1	MHz)	Spectral	dB	Spectral	(dBm)	
			Density		Density		
			(dBm)		(dBm)		
1	2	2412	-5.61	3.01	-2.60	8	Pass
6	2437		-4.56	3.01	-1.55	8	Pass
11	2	2462	-4.16	3.01	-1.15	8	Pass

Page 70 of 107

Report No: FCC1505170-01

Date: 2015-06-30



EUT		TV	BOX	Model	i	826, i818, i828	
Mode	Mode 802.11		g 6Mbps	Input Voltage	DC5.0V		
Temperat	Temperature 24 c		eg. C,	Humidity	56% RH		
Channel	Fre	quency	Power	10 log(N <sub>ANT</sub> )	Final Power	Limit	Pass/ Fail
	(1	MHz)	Spectral	dB	Spectral	(dBm)	
			Density		Density		
			(dBm)		(dBm)		
1	2	2412	-9.61	3.01	-6.60	8	Pass
6	2	2437	-9.05	3.01	-6.04	8	Pass
11	2	2462	-8.33	3.01	-5.32	8	Pass

EUT		TV	BOX	Model	i	826, i818, i828	
Mode		802.11n HT20		Input Voltage	DC5.0V		
		6.5Mbps					
Temperat	Temperature 24		eg. C,	Humidity	56% RH		
Channel	Fre	quency Power		10 log(N <sub>ANT</sub> )	Final Power	Limit	Pass/ Fail
	(N	MHz)	Spectral	l dB	Spectral	(dBm)	
			Density	,	Density		
			(dBm)		(dBm)		
1	2	2412	-9.76	3.01	-6.75	8	Pass
6	2	2437	-10.91	3.01	-7.90	8	Pass
11	2	2462	-10.10	3.01	-7.09	8	Pass

Page 71 of 107


Report No: FCC1505170-01

Date: 2015-06-30



### 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

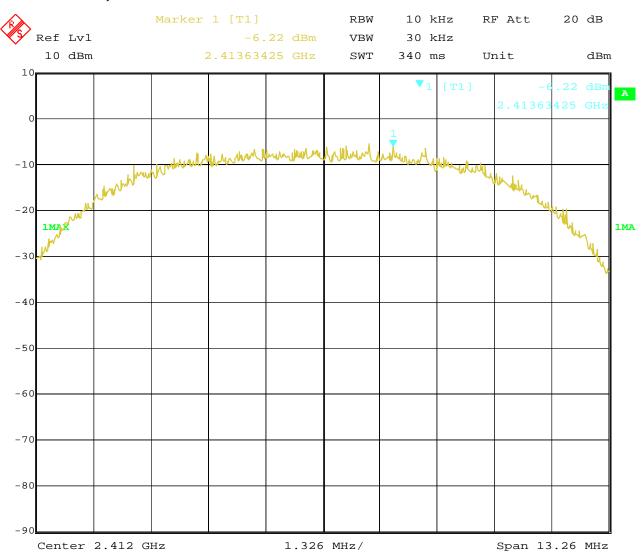

8.JUN.2015 10:15:26 Date:


Page 72 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 2. 802.11b at 11Mbps at CH06

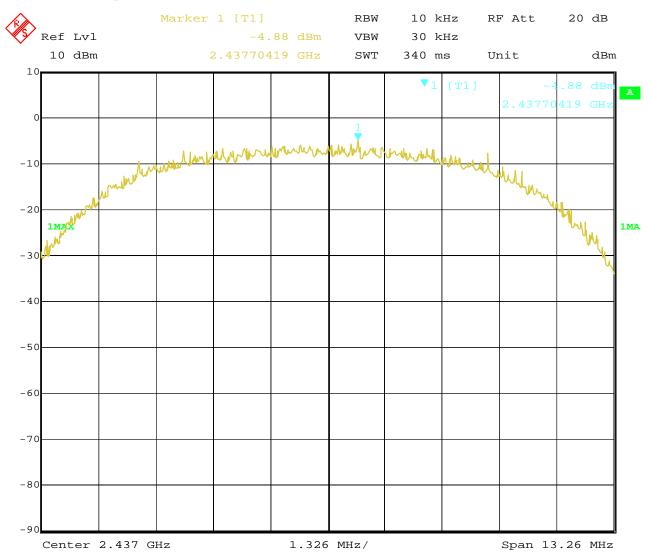

8.JUN.2015 10:14:39 Date:


Page 73 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 3. 802.11b at 11Mbps of CH11

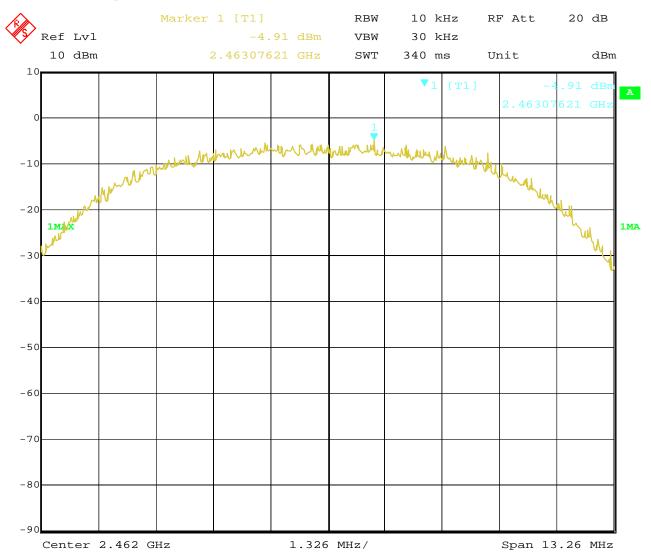

8.JUN.2015 10:14:10 Date:


Page 74 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## 4. 802.11b at 1Mbps of CH1

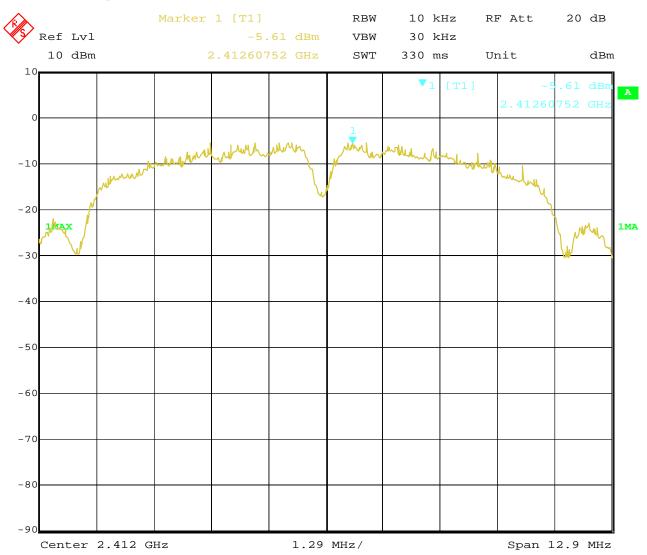

8.JUN.2015 10:11:33 Date:


Page 75 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# 5. 802.11b at 1Mbps of CH6

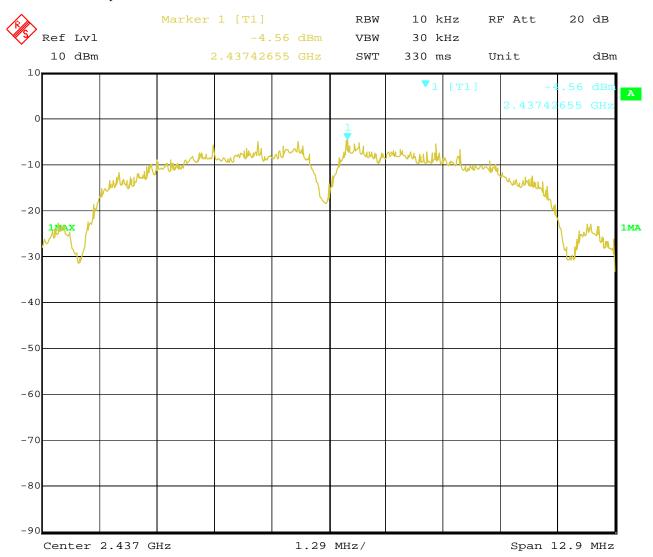

8.JUN.2015 10:12:31 Date:


Page 76 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## 6. 802.11b at 1Mbps of CH11

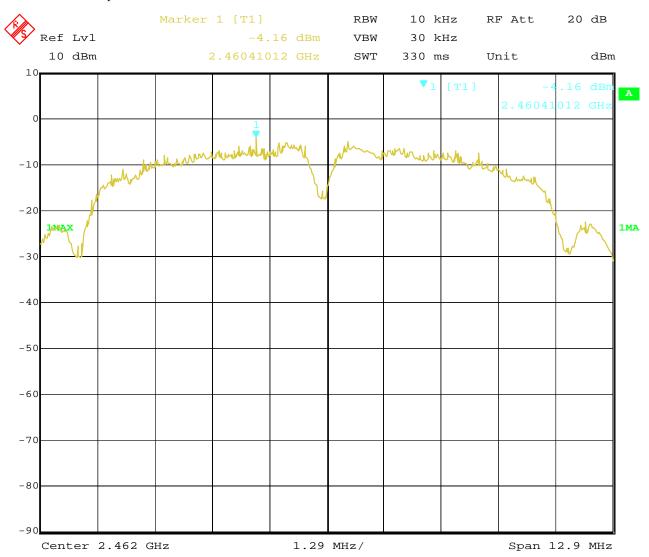

8.JUN.2015 10:13:10 Date:


Page 77 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# 7. 802.11g at 6Mbps of CH1

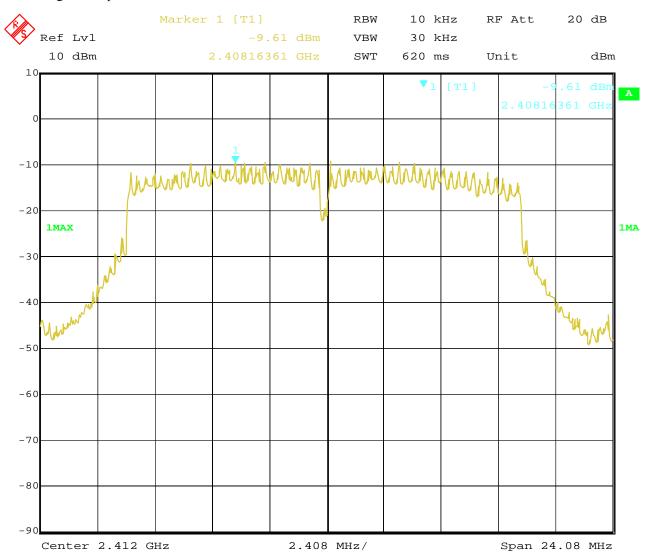

8.JUN.2015 10:16:23 Date:


Page 78 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# 8. 802.11g at 6 Mbps of CH6

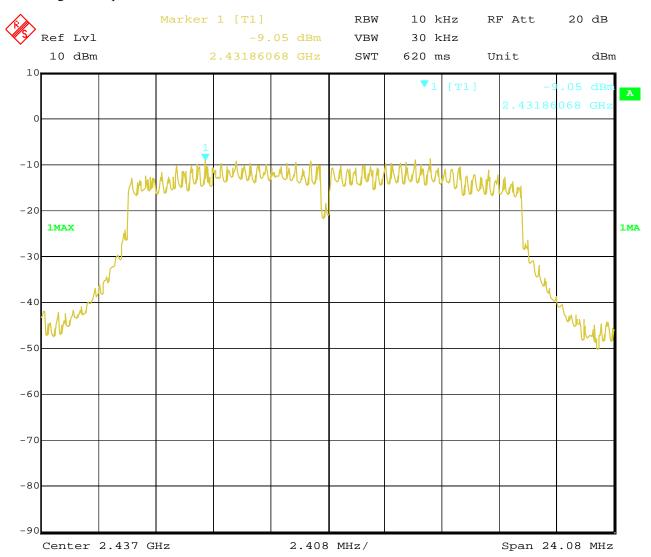

8.JUN.2015 10:16:54 Date:


Page 79 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# 9. 802.11g at 6 Mbps of CH11

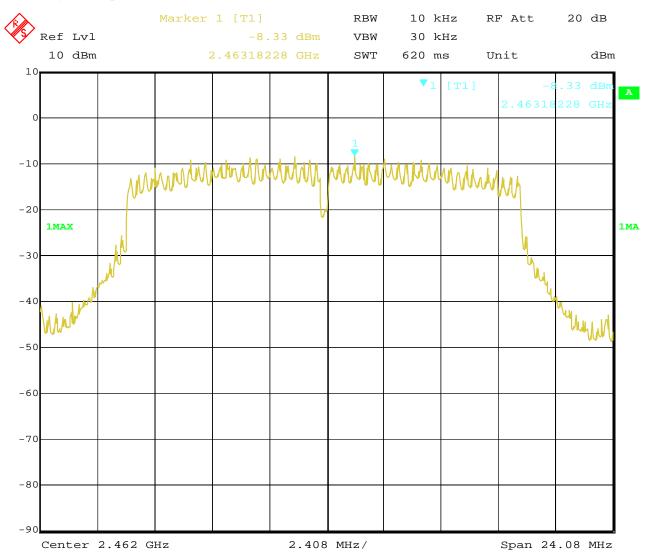

8.JUN.2015 10:17:31 Date:


Page 80 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 10. 802.11n at HT20 of CH01

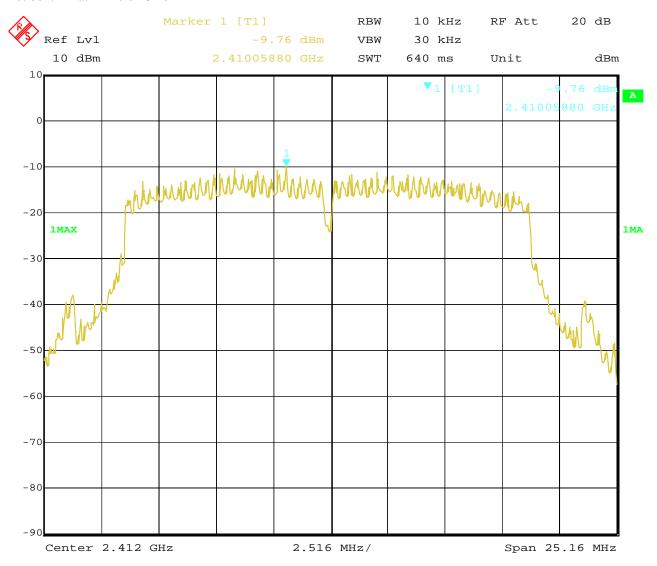

8.JUN.2015 10:19:45 Date:


Page 81 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 11. 802.11n at HT20 of CH06

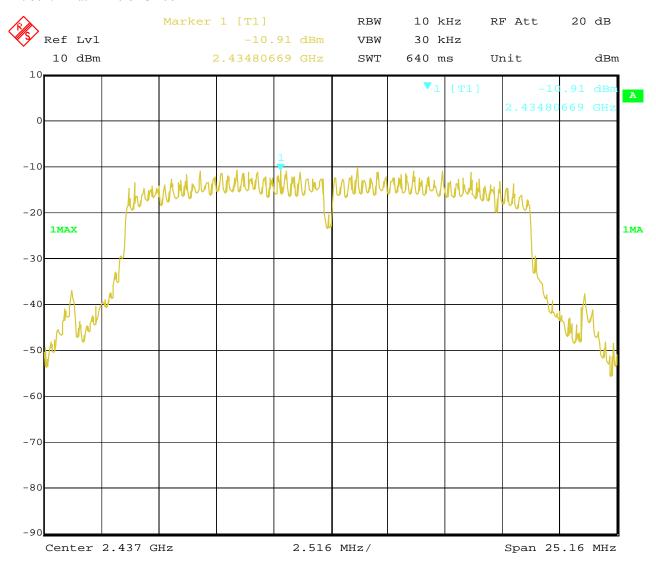

8.JUN.2015 10:19:18 Date:


Page 82 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 12. 802.11n at HT20 of CH11

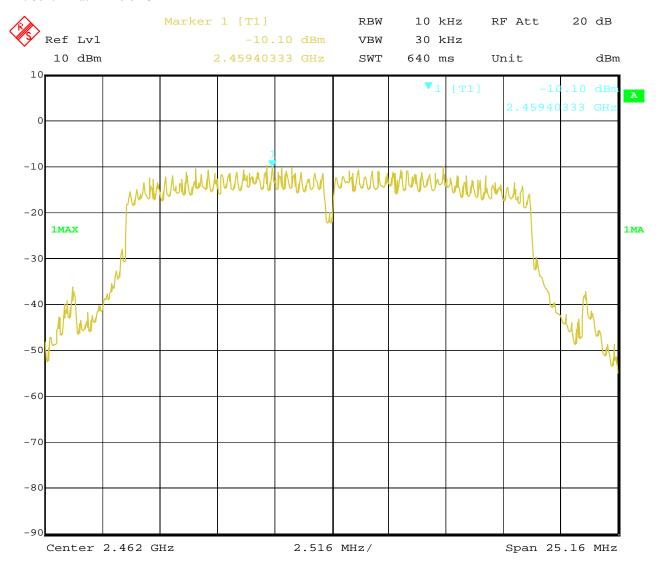

8.JUN.2015 10:18:52 Date:

Report No: FCC1505170-01


Date: 2015-06-30



Page 83 of 107

#### **10 Out of Band Measurement**

# 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.( Peak values with RBW=1MHz,VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

## 10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No: FCC1505170-01

Date: 2015-06-30




#### Antenna A

For 802.11b mode CH01 at 11Mbps

10.4 Band-edge band Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

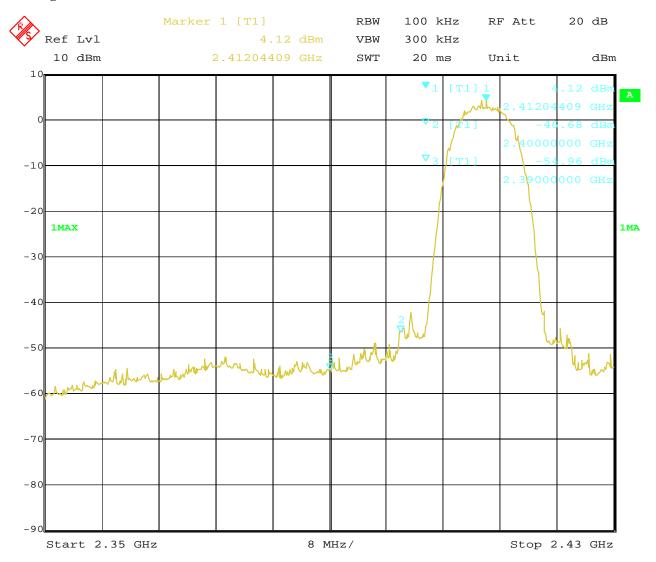

Date: 8.JUN.2015 10:23:44

Page 85 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 11Mbps

#### Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

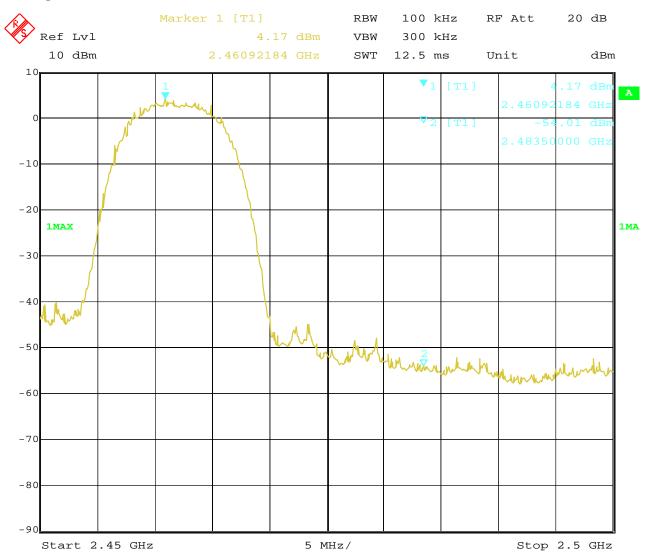

Date: 8.JUN.2015 10:26:22

Page 86 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## For 802.11g mode

CH01 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

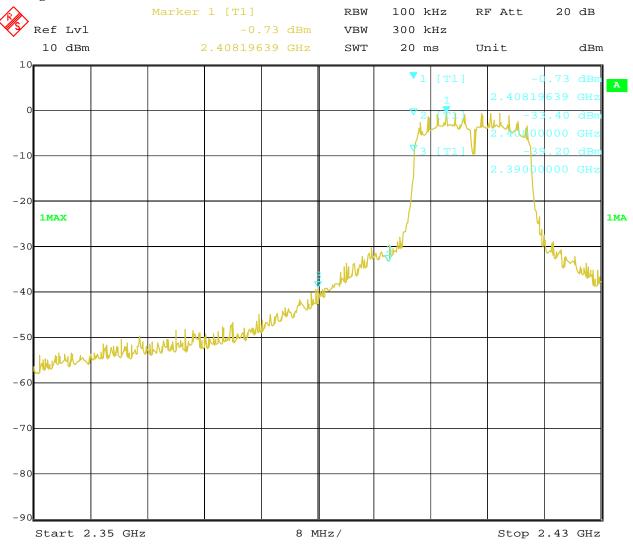

Date: 8.JUN.2015 10:24:26

Page 87 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 6Mbps

#### Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

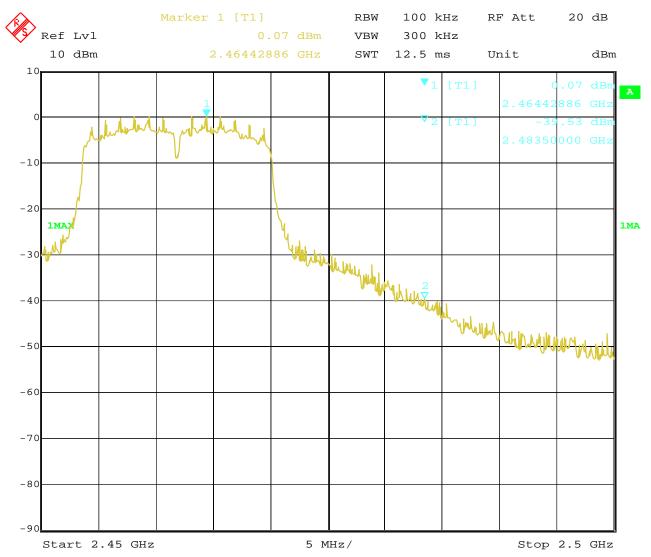

Date: 8.JUN.2015 10:25:13 Report No: FCC1505170-01

Date: 2015-06-30




# For 802.11n (HT20) mode

CH01 at 65Mbps

#### 10.4 Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

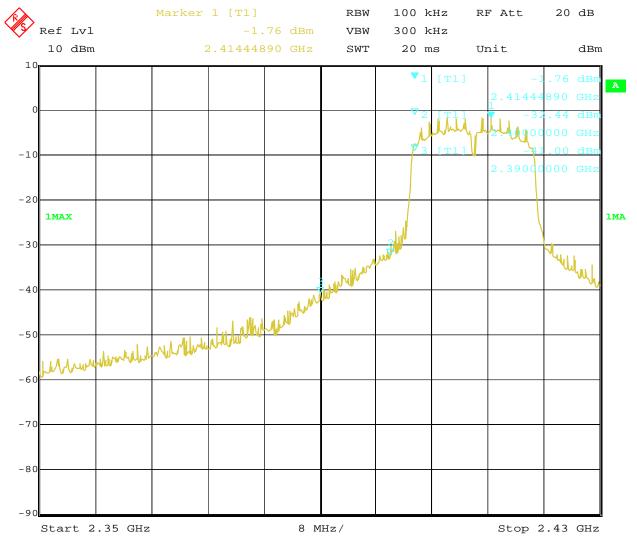

8.JUN.2015 10:22:15 Date:

Page 89 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 65Mbps

#### Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

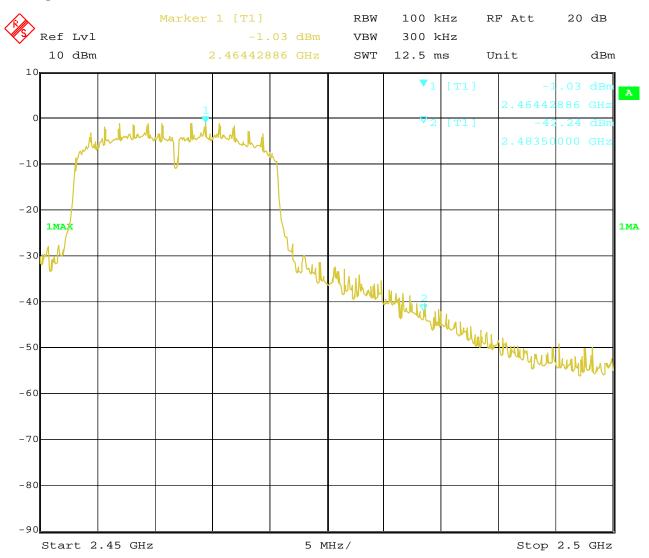

Date: 8.JUN.2015 10:27:21 Report No: FCC1505170-01

Date: 2015-06-30



## The following test figures for Antenna B


For 802.11b mode

CH01 at 11Mbps

#### 10.4 Band-edge band Measurement

	U		
EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

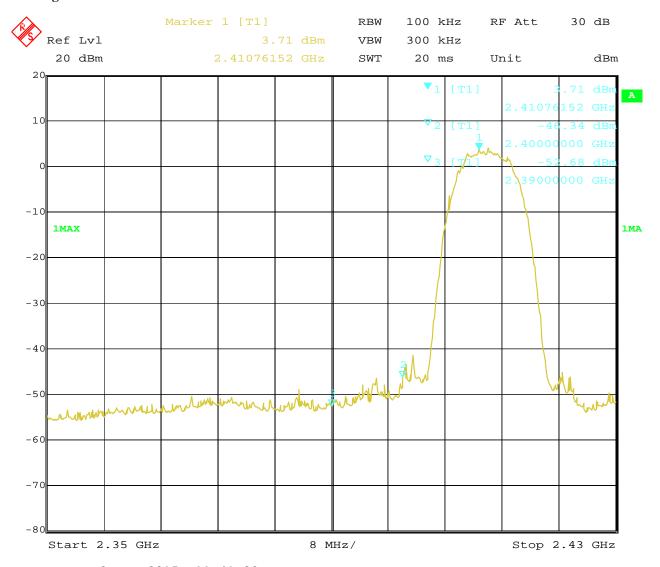

8.JUN.2015 11:41:20 Date:

Page 91 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 11Mbps

#### Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

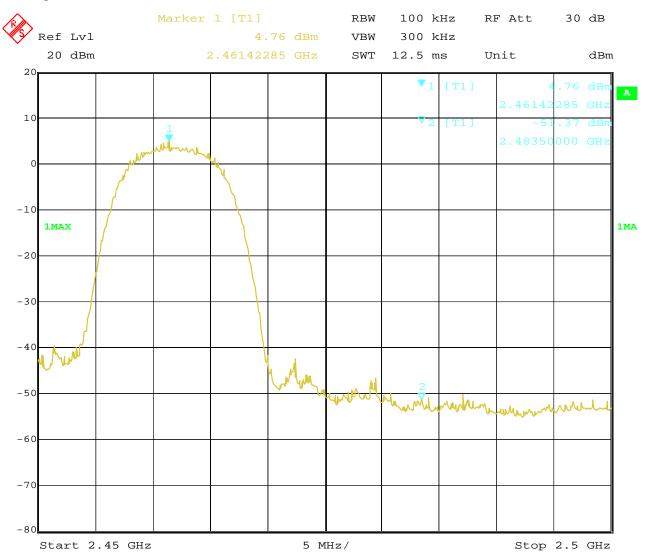

Date: 8.JUN.2015 11:37:34

Page 92 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## For 802.11g mode

CH01 at 6Mbps

#### Band-edge Measurement 10.4

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

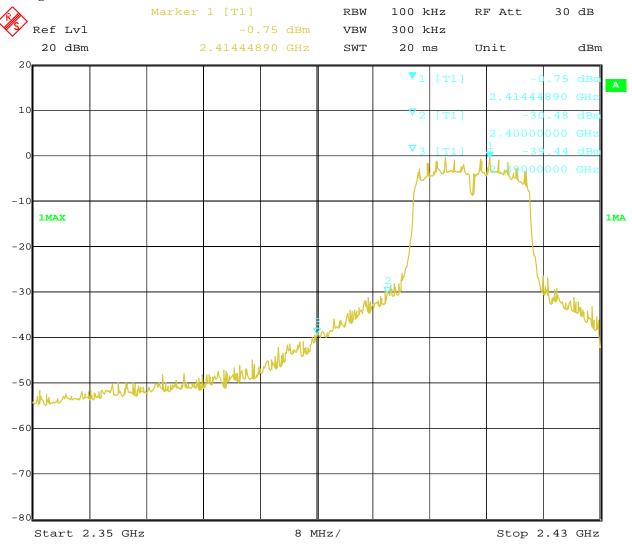

Date: 8.JUN.2015 11:41:59

Page 93 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 6Mbps

## Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

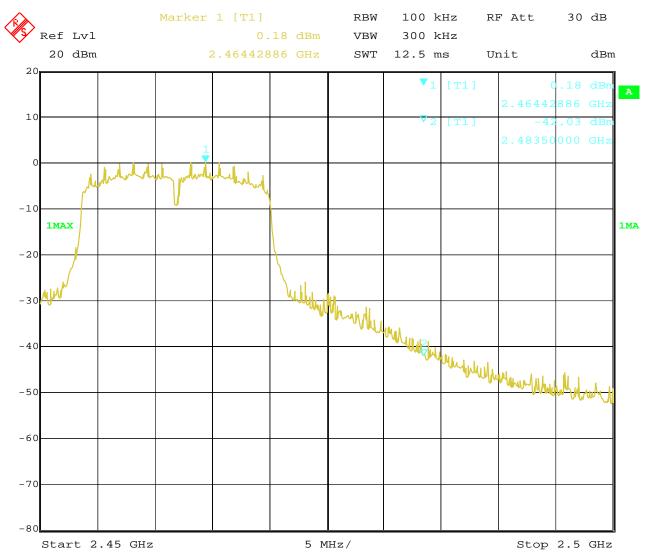

Date: 8.JUN.2015 11:35:06

Page 94 of 107

Report No: FCC1505170-01

Date: 2015-06-30




# For 802.11n (HT20) mode

CH01 at 6.5Mbps

#### 10.4 Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

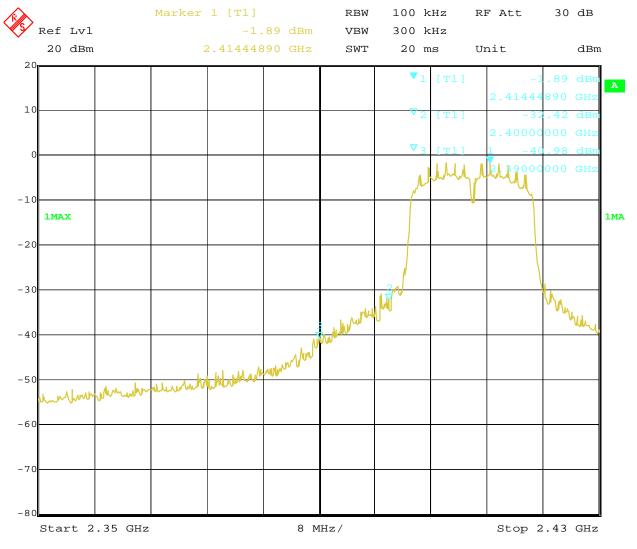

8.JUN.2015 11:39:32 Date:

Page 95 of 107

Report No: FCC1505170-01

Date: 2015-06-30




## CH11 at 6.5Mbps

## Band-edge Measurement

EUT	TV BOX	Model	i826, i818, i828
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

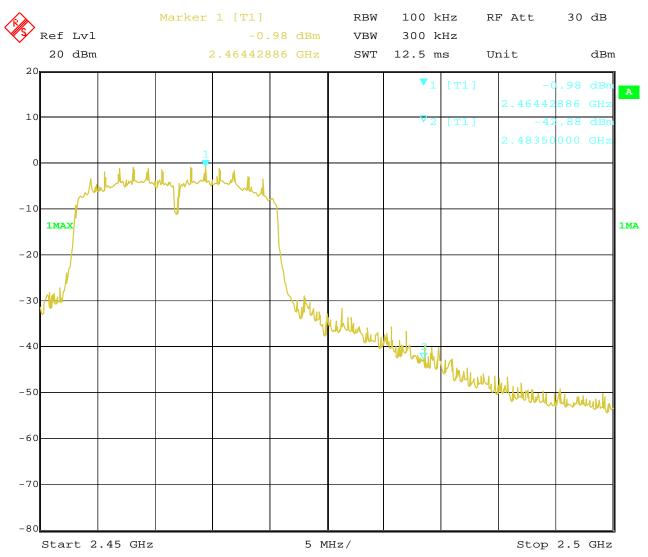

Date: 8.JUN.2015 11:38:33 Report No: FCC1505170-01 Page 96 of 107

Date: 2015-06-30



## 802.11b 11Mbps

#### Restricted band Measurement

Product:	TV BOX		Test Mode:	Low Channel
Mode	WIFI MIMO Keeping TX mode		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	56.0(H)/ 57.1(V)	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	37.6(H)/38.3(V)	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBµV/m)	44.6(H)/ 45.2(V)	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)			$54(dB\mu V/m)$

## 802.11b 11Mbps

#### 12.4 Restricted band Measurement

EUT	TV BOX		Test Mode:	High Channel
Mode	WIFI MIMO Keeping TX mode		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	46.9(H)/ 48.2(V)	I imit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Report No: FCC1505170-01 Page 97 of 107

Date: 2015-06-30



## 802.11g 6Mbps

#### Restricted band Measurement

EUT	TV BOX		Test Mode:	Low Channel
Mode	WIFI MIMO Keeping TX mode		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	59.3(H)/60.5(V)	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	40.1(H)/41.6(V)	Limit	54(dBμV/m)
2390MHz	PK (dBµV/m)	48.6(H)/49.3(V)	Limit	74(dBμV/m)
	AV (dBμV/m)			$54(dB\mu V/m)$

## 802.11g 6Mbps

#### Restricted band Measurement

EUT	TV BOX		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	50.6(H)/ 52.3(V)	I imit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Report No: FCC1505170-01 Page 98 of 107

Date: 2015-06-30



# 802.11n HT20 6.5Mbps

#### Restricted band Measurement

EUT	TV BOX		Test Mode:	Low Channel
Mode	WIFI MIMO Keeping TX mode		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	60.6(H)/62.3(V)	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	41.3(H)/ 42.9(V)	Limit	54(dBμV/m)
2390MHz	PK (dBµV/m)	49.9(H)/ 51.2(V)	Limit	74(dBμV/m)
	AV (dBμV/m)			54(dBμV/m)

## 802.11n HT20 6.5Mbps

#### 12.4 Restricted band Measurement

EUT	TV BOX		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC5.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	51.2(H)/ 53.6(V)	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	32.6(H)/ 34.3(V)	Limit	$54(dB\mu V/m)$

Report No: FCC1505170-01

Date: 2015-06-30



Page 99 of 107

## 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 11.2 Antenna Connected construction

Two Integral antennas used. The maximum Gain of each antenna is 2.0 dBi.

Page 100 of 107

Report No: FCC1505170-01

Date: 2015-06-30




#### 12.0 FCC Label

#### **FCC ID: 2AE6JI826**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

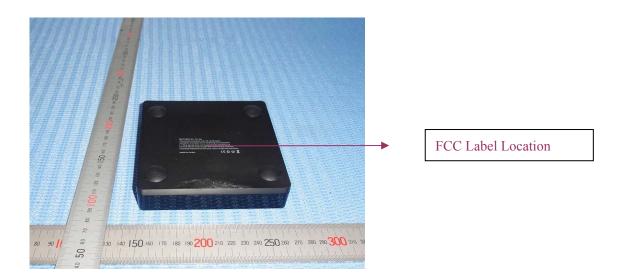

Page 101 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### 13.0 Photo of testing

Conducted Emission Test Setup:



Page 102 of 107

Report No: FCC1505170-01

Date: 2015-06-30



# Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 103 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### **Photos of EUT**





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 104 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### **Photos of EUT**

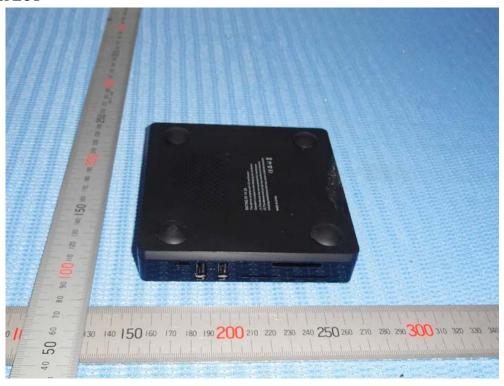



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 105 of 107

Report No: FCC1505170-01

Date: 2015-06-30



#### **Photos of EUT**





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 106 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## **Photos of EUT**





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 107 of 107

Report No: FCC1505170-01

Date: 2015-06-30



## **Photos of EUT**





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.