



GSM 850-Right Head Cheek High CH251	2
GSM 850-Right Head Tilted High CH251	3
GSM 850-Left Head Cheek High CH251	4
GSM 850-Left Head Tilted High CH251	5
PCS 1900-Right Head Cheek High CH810	6
PCS 1900-Right Head Tilted High CH810	7
PCS 1900-Left Head Cheek High CH810	8
PCS 1900-Left Head Tilted High CH810	9
WCDMA Band II-Right Head Cheek High CH9538	10
WCDMA Band II-Right Head Tilted High CH9538	11
WCDMA Band II-Left Head Cheek High CH9538	12
WCDMA Band II-Left Head Tilted High CH9538	13
WCDMA Band V-Right Head Cheek High CH4233	14
WCDMA Band V-Right Head Tilted High CH4233	15
WCDMA Band V-Left Head Cheek High CH4233	16
WCDMA Band V-Left Head Tilted High CH4233	17
WIFI-Right Head Cheek High CH11	18
WIFI-Right Head Tilted High CH11	19
WIFI-Left Head Cheek High CH11	20
WIFI-Left Head Tilted High CH11	21
GPRS 850-Body Front High CH251	22
GPRS 850-Body Rear Low CH128	23
GPRS 850-Body Rear Middle CH190	24
GPRS 850-Body Rear High CH251	25
GPRS 850-Body Edge 1 High CH251	26
GPRS 850-Body Edge 2 High CH251	27
GPRS 850-Body Edge 3 High CH251	28
GPRS 850-Body Edge 4 High CH251	29
GPRS 1900-Body Front Low CH512	30
GPRS 1900-Body Front Middle CH661	31
GPRS 1900-Body Front High CH810	32
GPRS 1900-Body Rear Low CH512	33
GPRS 1900-Body Rear Middle CH661	34
GPRS 1900-Body Rear High CH810	35
GPRS 1900-Body Edge 2 Middle CH661	36
GPRS 1900-Body Edge 3 Middle CH661	37
GPRS 1900-Body Edge 4 Middle CH661	38
WCDMA Band II-Body Front High CH9538	39
WCDMA Band II-Body Rear High CH9538	40
WCDMA Band II-Body Edge 2 High CH9538	41
WCDMA Band II-Body Edge 3 High CH9538	42
WCDMA Band II-Body Edge 4 High CH9538	43
WCDMA Band V-Body Front High CH4233	44
WCDMA Band V-Body Rear High CH4233	45
WCDMA Band V-Body Edge 2 High CH4233	46
WCDMA Band V-Body Edge 3 High CH4233	47
WCDMA Band V-Body Edge 4 High CH4233	48
WIFI-Body Front High CH11	49
WIFI-Body Rear High CH11	50
WIFI-Body Edge 1 High CH11	51
WIFI-Body Edge 4 High CH11	52

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

GSM 850-Right Head Cheek High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.534$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Cheek High CH251/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0923 W/kg



GSM 850/Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.124 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.0861 W/kg

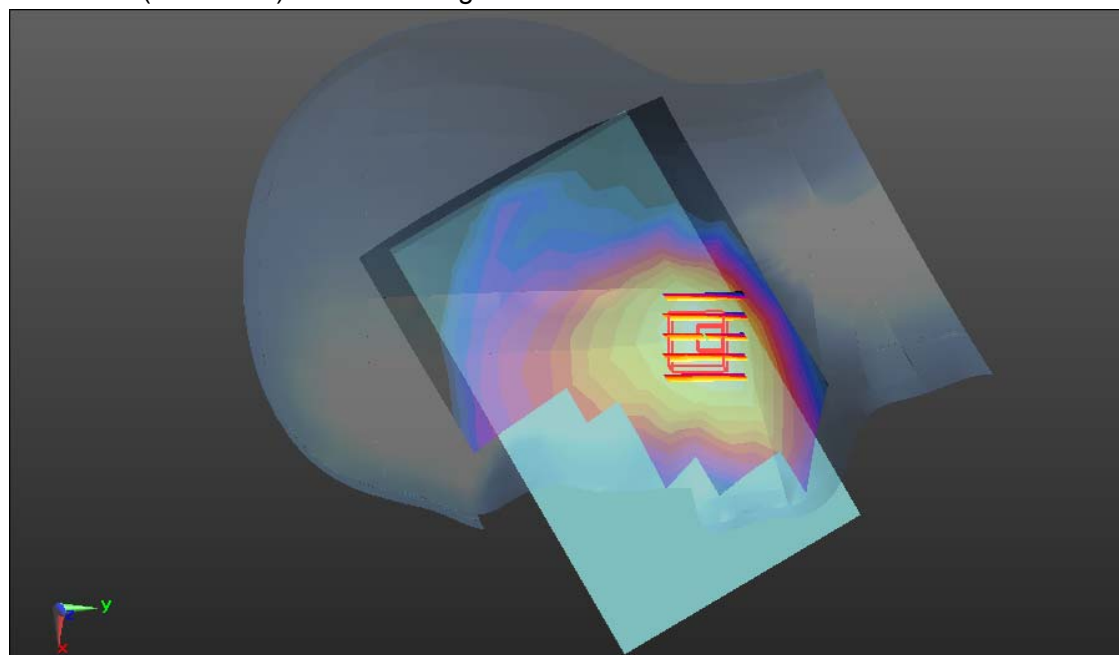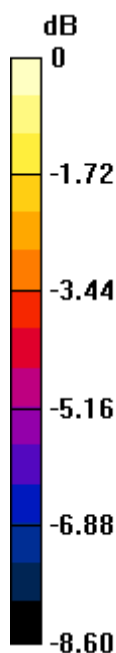

0 dB = 0.0861 W/kg = -10.65 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

GSM 850-Right Head Tilted High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.534$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Tilted High CH251/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0439 W/kg


GSM 850/Tilted High CH251/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.215 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0559 W/kg

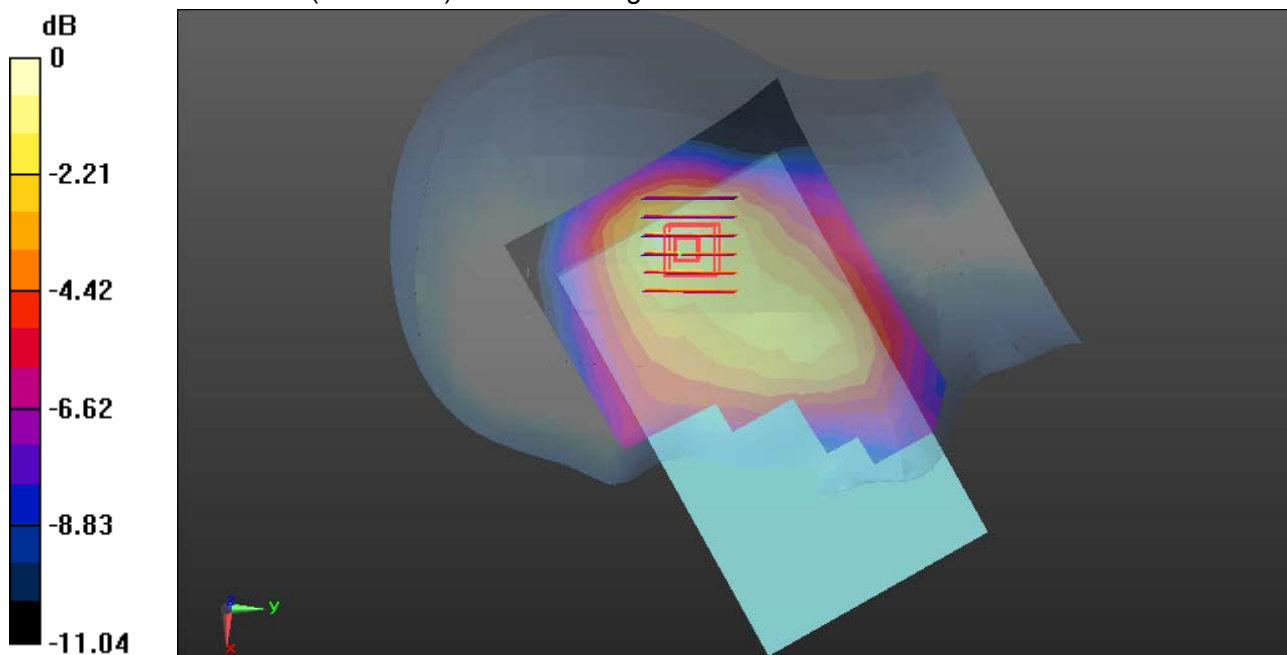

0 dB = 0.0559 W/kg = -12.53 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

GSM 850-Left Head Cheek High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.534$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Cheek High CH251/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0652 W/kg


GSM 850/Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.998 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0737 W/kg

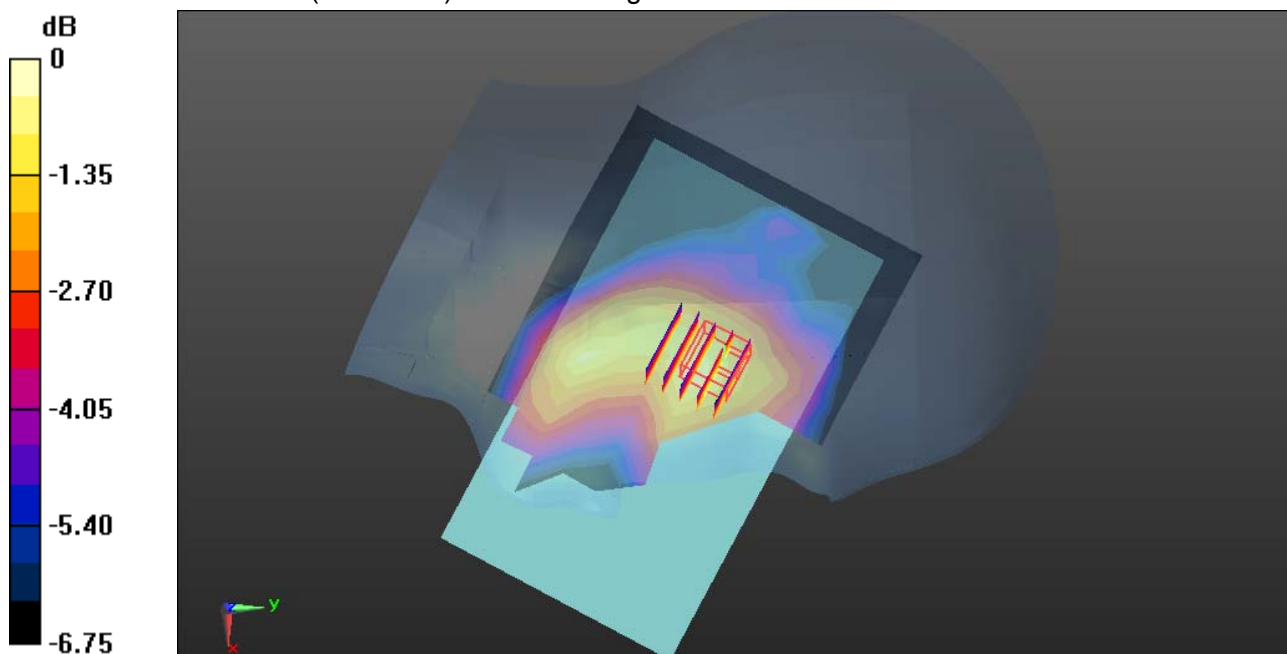

0 dB = 0.0737 W/kg = -11.33 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

GSM 850-Left Head Tilted High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.534$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Tilted High CH251/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0545 W/kg


GSM 850/Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.940 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0596 W/kg

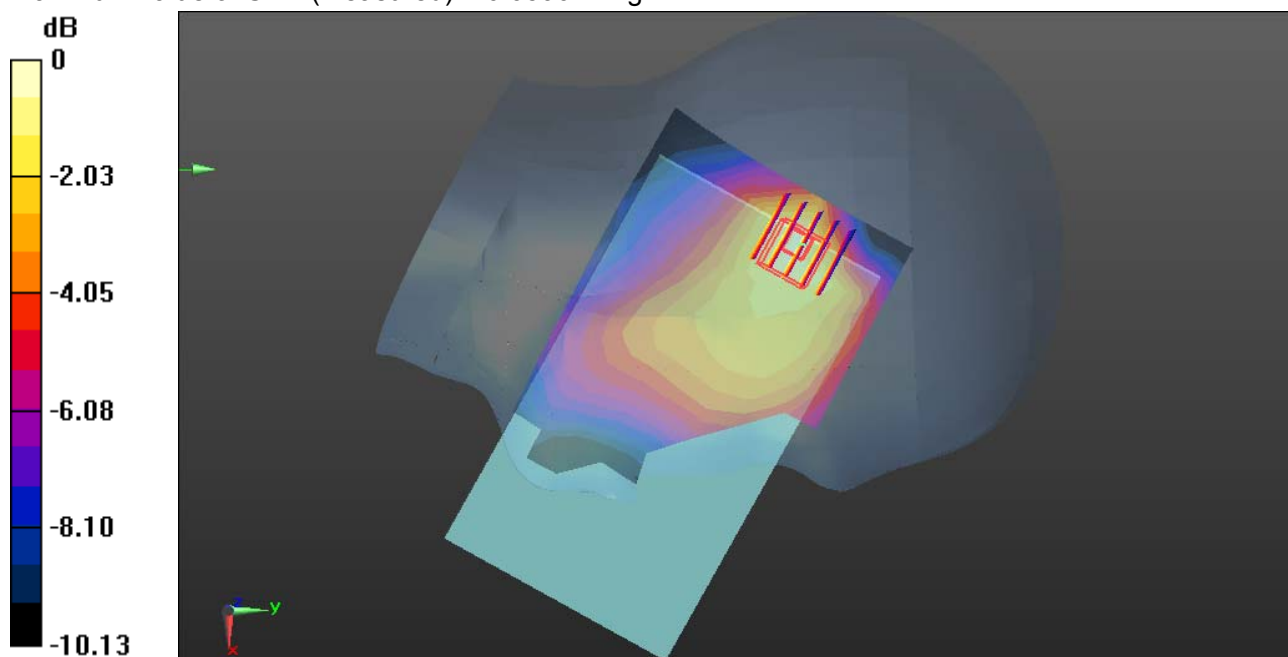

0 dB = 0.0596 W/kg = -12.25 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

PCS 1900-Right Head Cheek High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.753$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Cheek High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0786 W/kg



PCS 1900/Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.337 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0785 W/kg

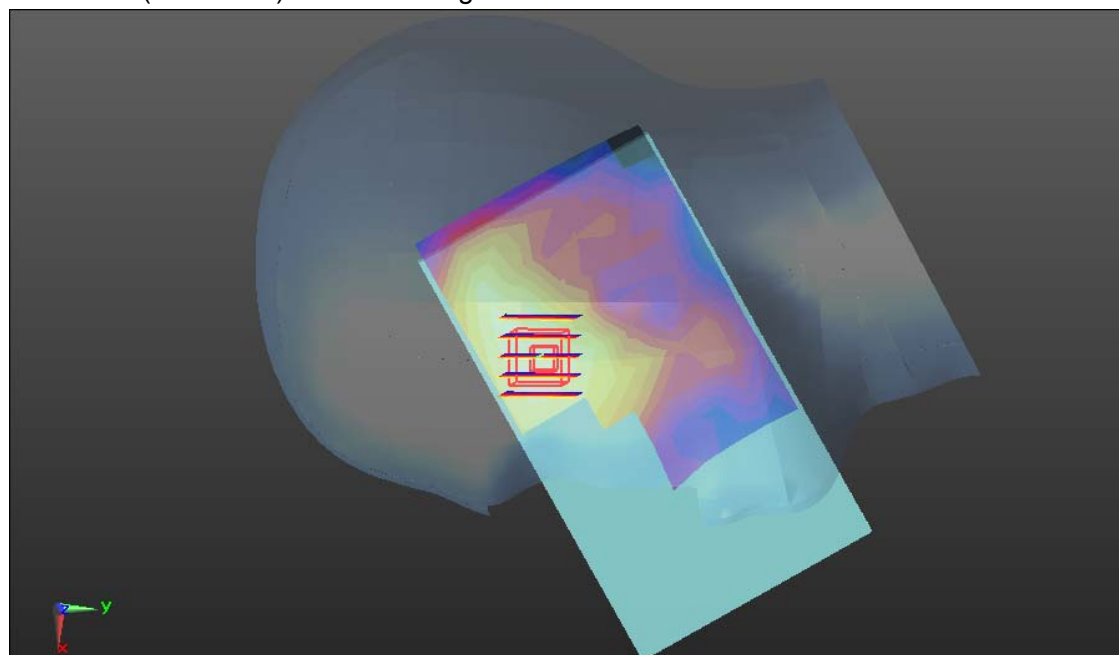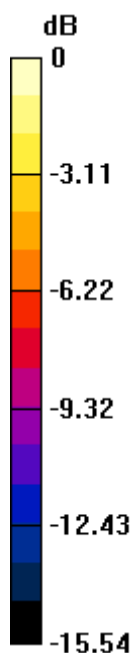

0 dB = 0.0785 W/kg = -11.05 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

PCS 1900-Right Head Tilted High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.753$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Tilted High CH810/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0660 W/kg


PCS 1900/Tilted High CH810/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.828 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0711 W/kg

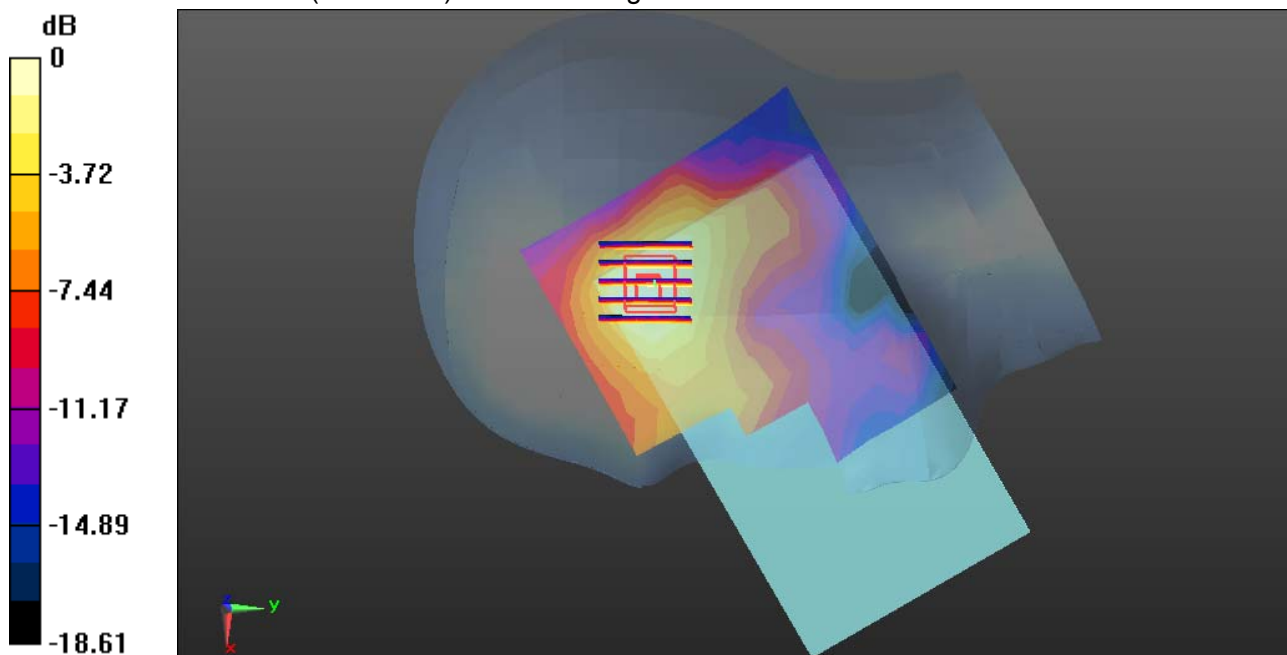

0 dB = 0.0711 W/kg = -11.48 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

PCS 1900-Left Head Cheek High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.753$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Cheek High CH810/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg



PCS 1900/Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.892 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

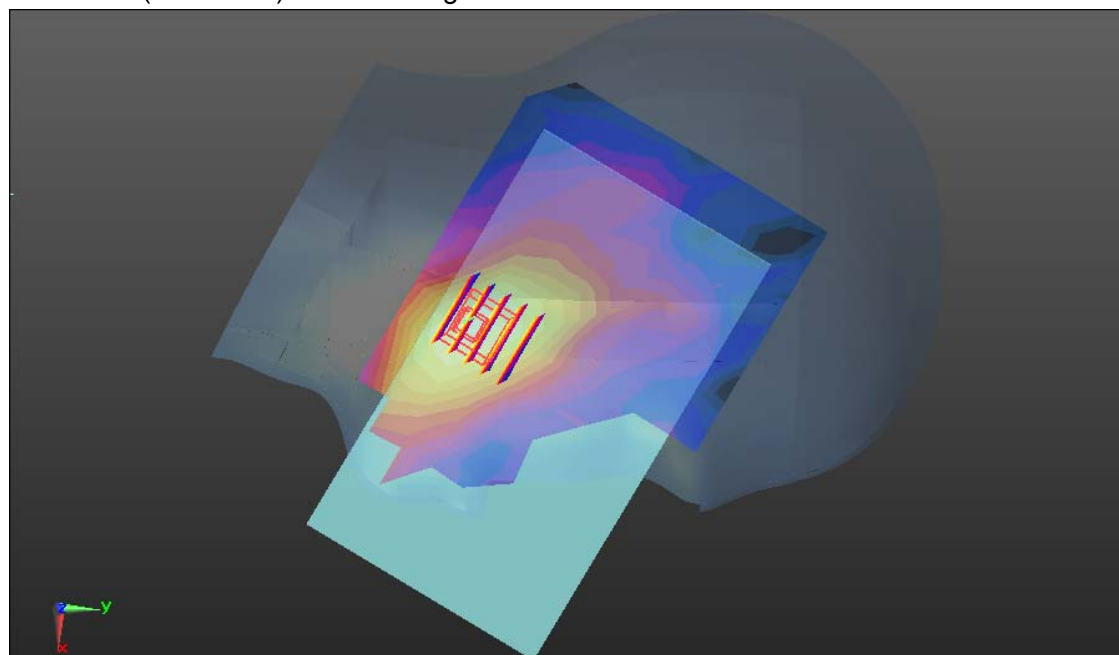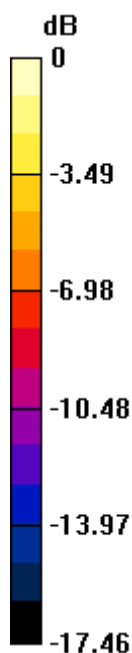

0 dB = 0.186 W/kg = -7.30 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

PCS 1900-Left Head Tilted High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.753$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Tilted High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0680 W/kg


PCS 1900/Tilted High CH810/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.053 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0696 W/kg

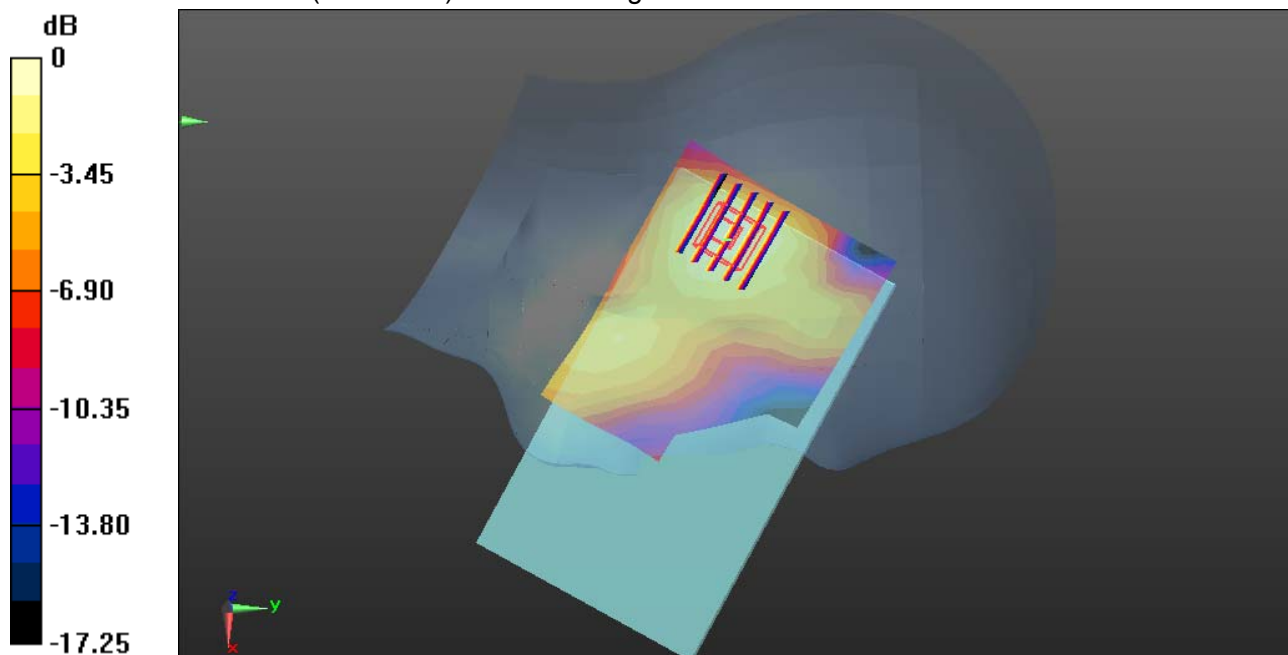

0 dB = 0.0696 W/kg = -11.57 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band II-Right Head Cheek High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WCDMA Band II/Cheek High CH9538/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.169 W/kg**WCDMA Band II/Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.563 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

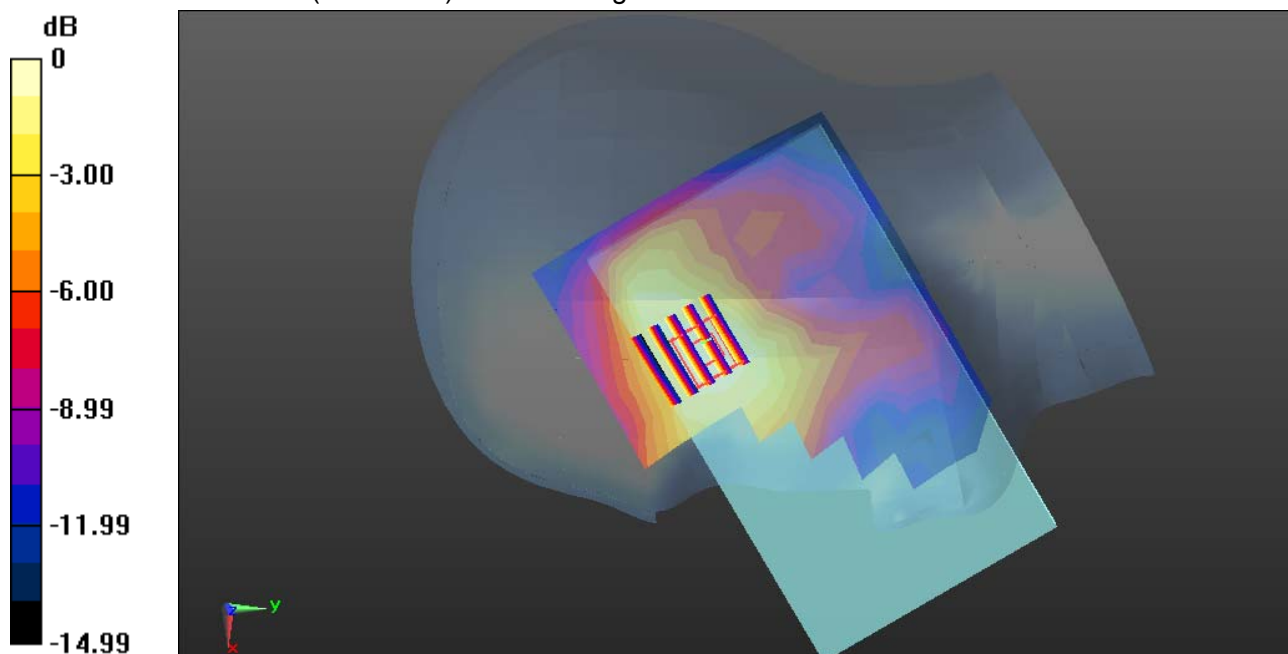

0 dB = 0.180 W/kg = -7.45 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band II-Right Head Tilted High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WCDMA Band II/Tilted High CH9538/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.162 W/kg**WCDMA Band II/Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.610 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

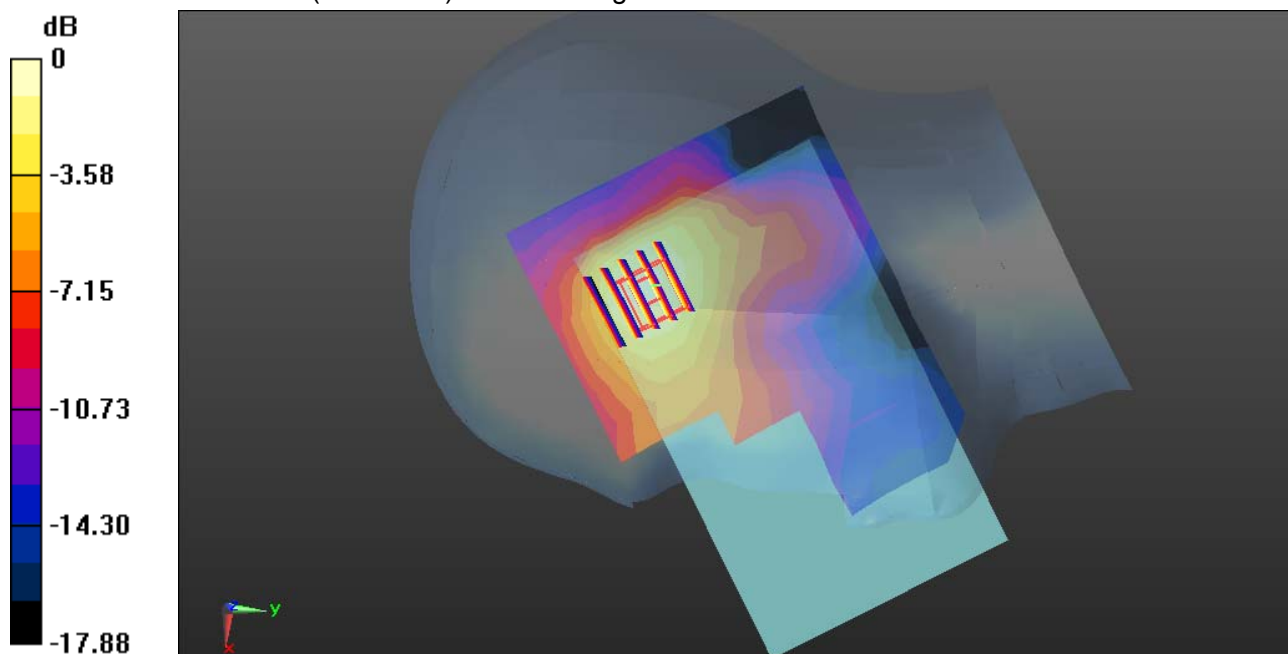

0 dB = 0.188 W/kg = -7.26 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band II-Left Head Cheek High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)



WCDMA Band II/Cheek High CH9538/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.358 W/kg**WCDMA Band II/Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.235 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

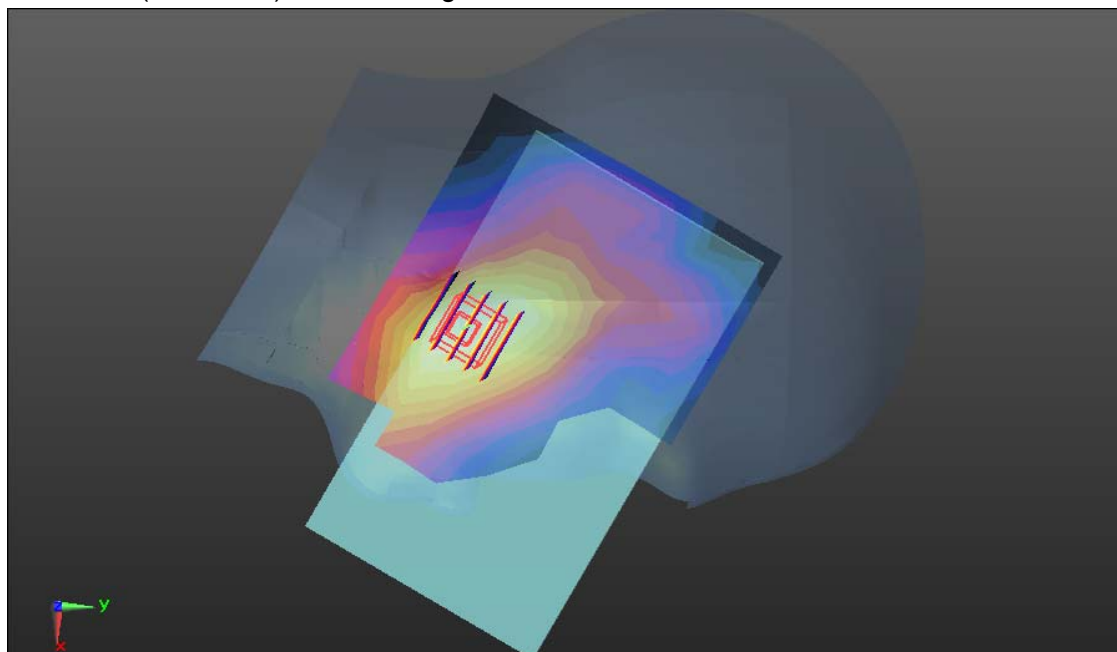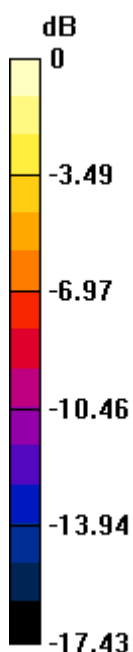

0 dB = 0.395 W/kg = -4.03 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band II-Left Head Tilted High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WCDMA Band II/Tilted High CH9538/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.132 W/kg**WCDMA Band II/Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.168 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

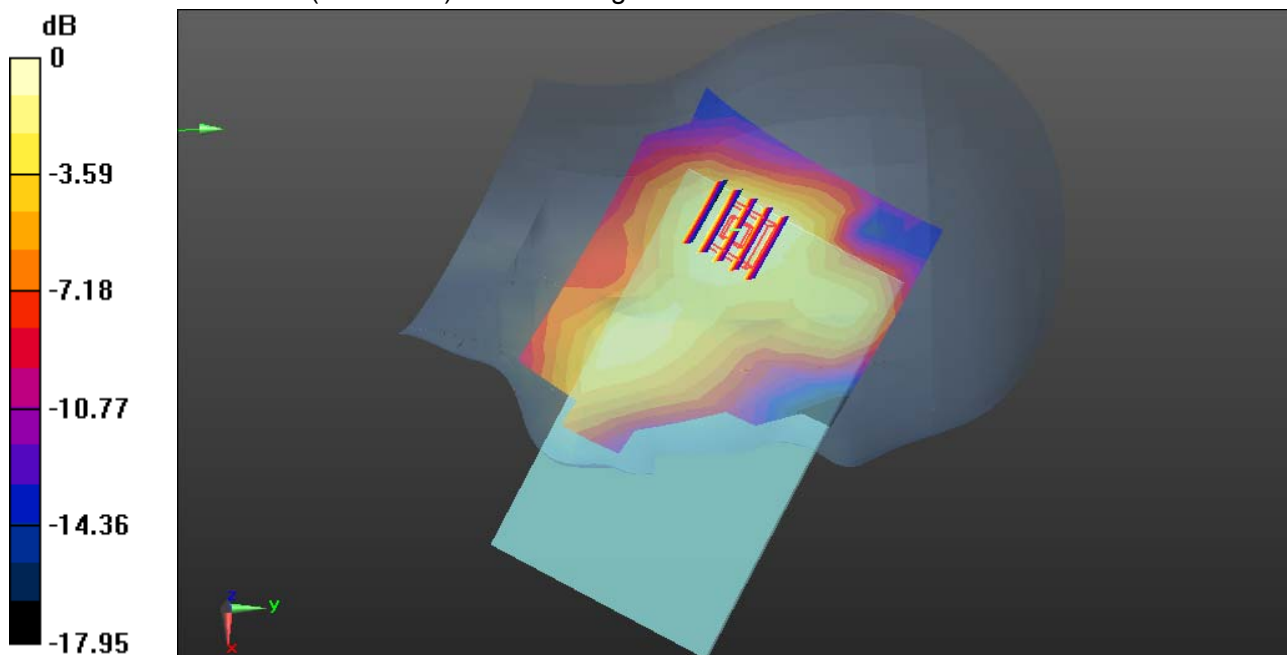

0 dB = 0.145 W/kg = -8.39 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band V-Right Head Cheek High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.554$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Cheek High CH4233/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.120 W/kg


WCDMA Band V/Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.040 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.093 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.133 W/kg

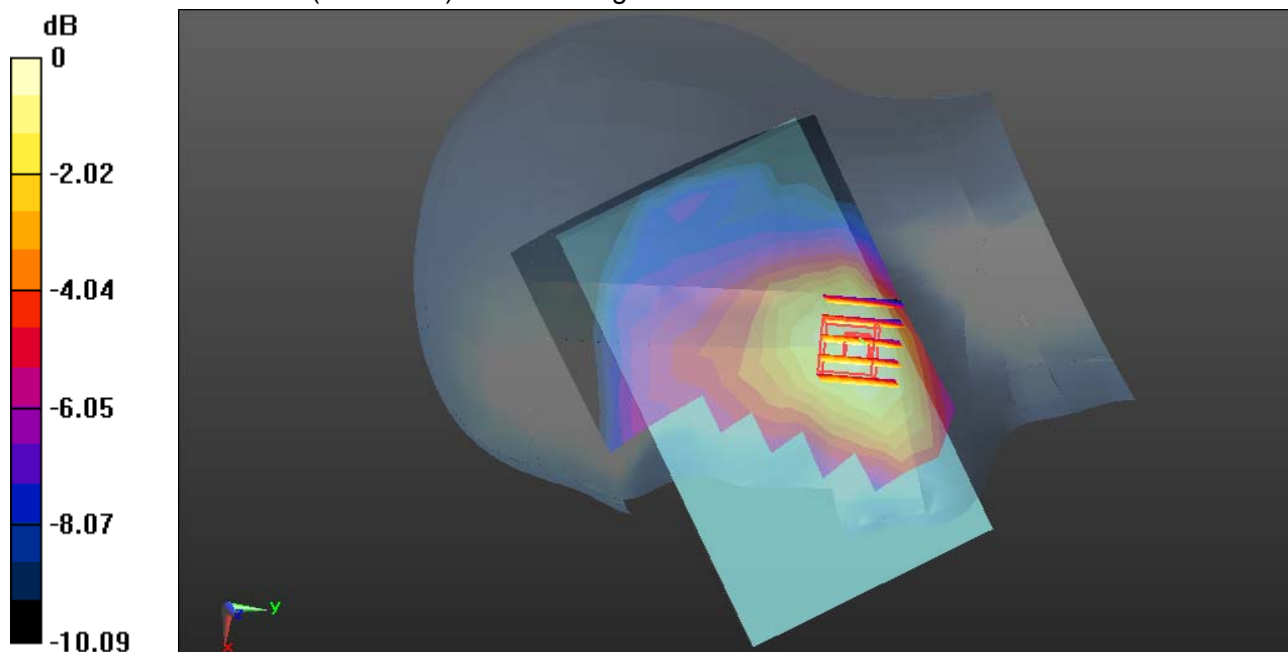

0 dB = 0.133 W/kg = -8.76 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band V-Right Head Tilted High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.554$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Tilted High CH4233/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0615 W/kg



WCDMA Band V/Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.347 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.040 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0652 W/kg

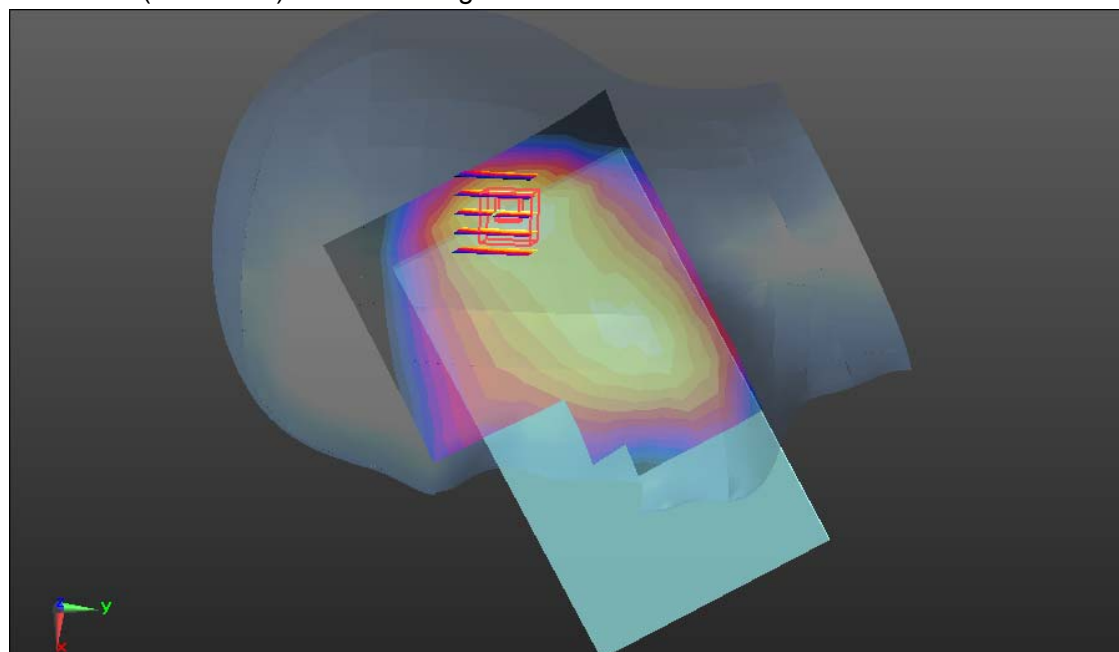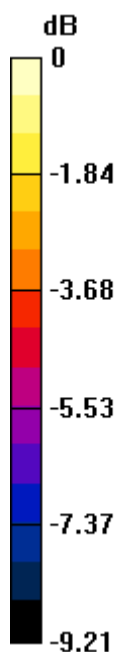

0 dB = 0.0652 W/kg = -11.86 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band V-Left Head Cheek High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.554$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Cheek High CH4233/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0780 W/kg


WCDMA Band V/Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.017 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.057 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0810 W/kg

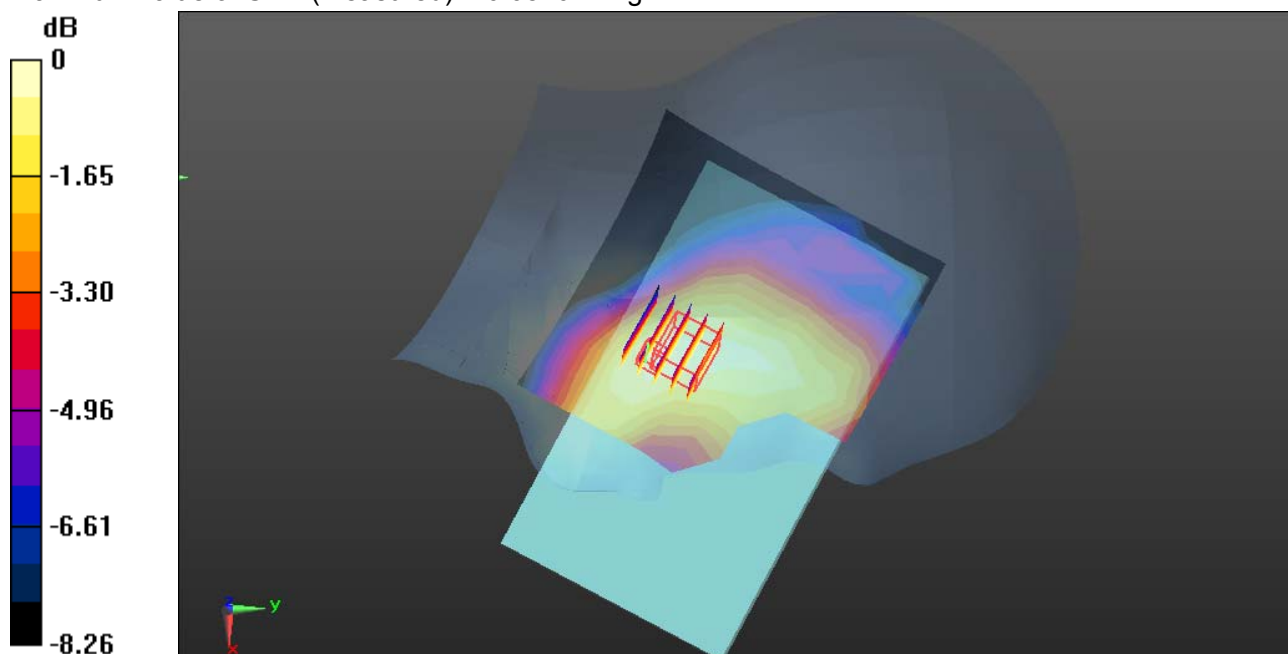

0 dB = 0.0810 W/kg = -10.92 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/6/2015

WCDMA Band V-Left Head Tilted High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.554$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Tilted High CH4233/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0790 W/kg


WCDMA Band V/Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.233 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.046 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0781 W/kg

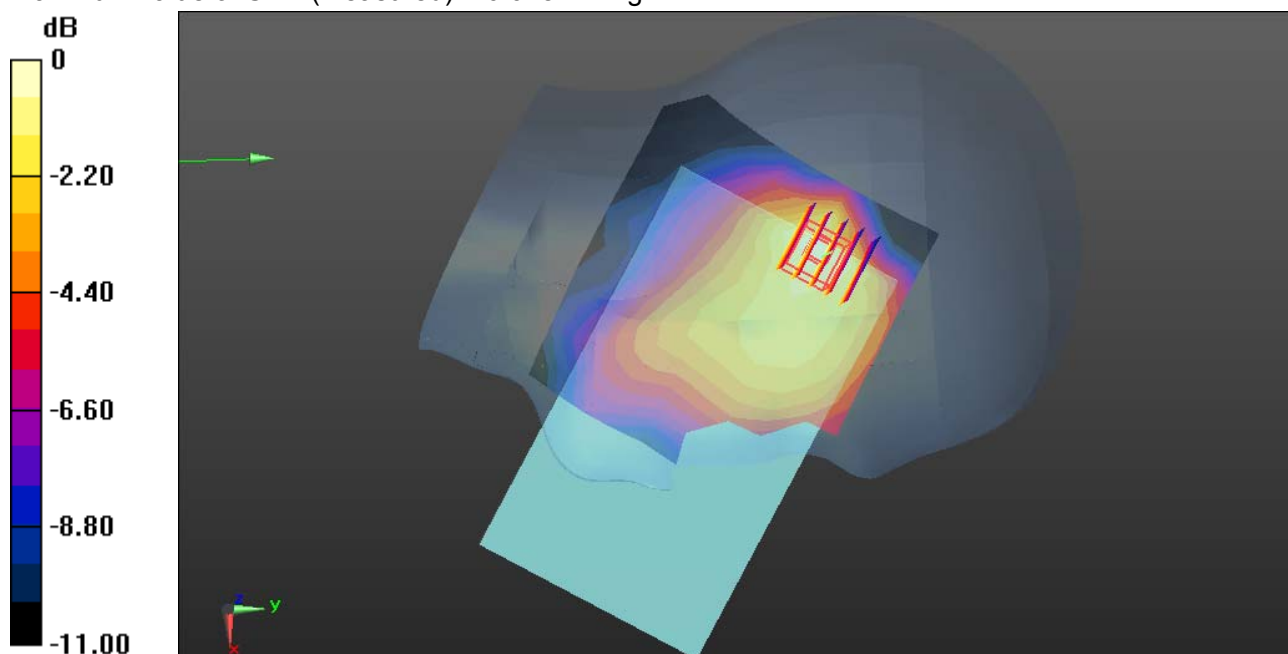

0 dB = 0.0781 W/kg = -11.07 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Right Head Cheek High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.78$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Cheek High CH11/Area Scan (12x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0516 W/kg


WIFI/Cheek High CH11/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.687 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0567 W/kg

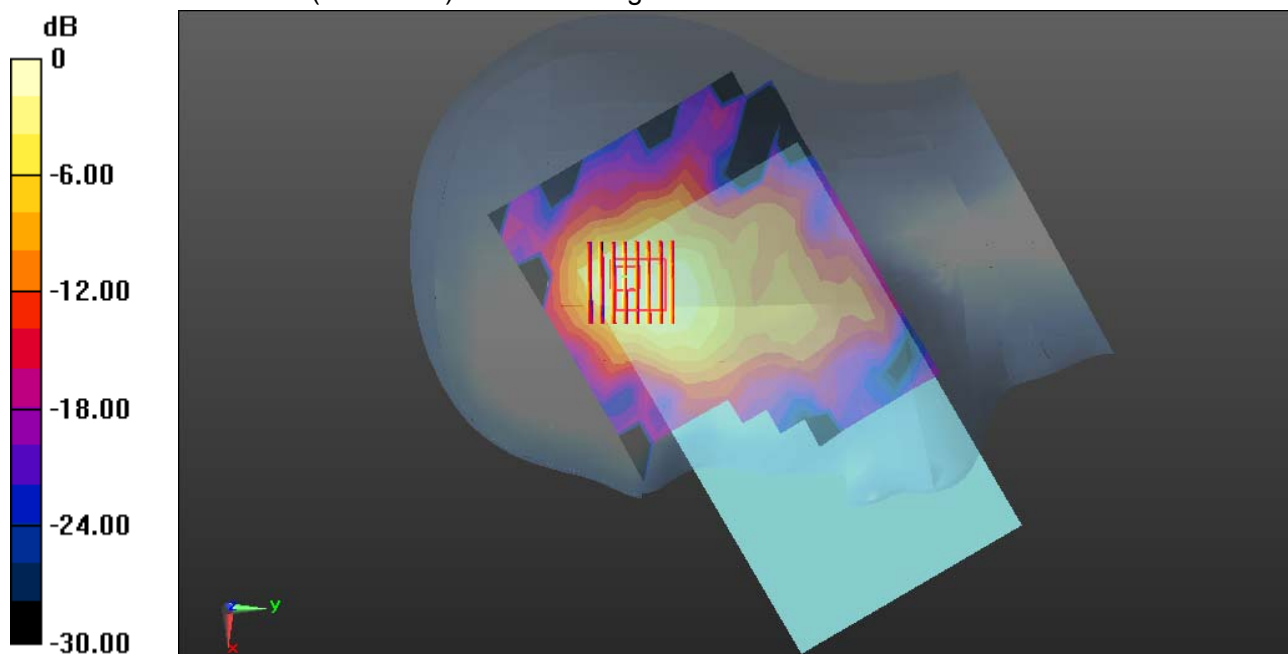

0 dB = 0.0567 W/kg = -12.46 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Right Head Tilted High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.78$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Tilted High CH11/Area Scan (12x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0344 W/kg


WIFI/Tilted High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.135 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0347 W/kg

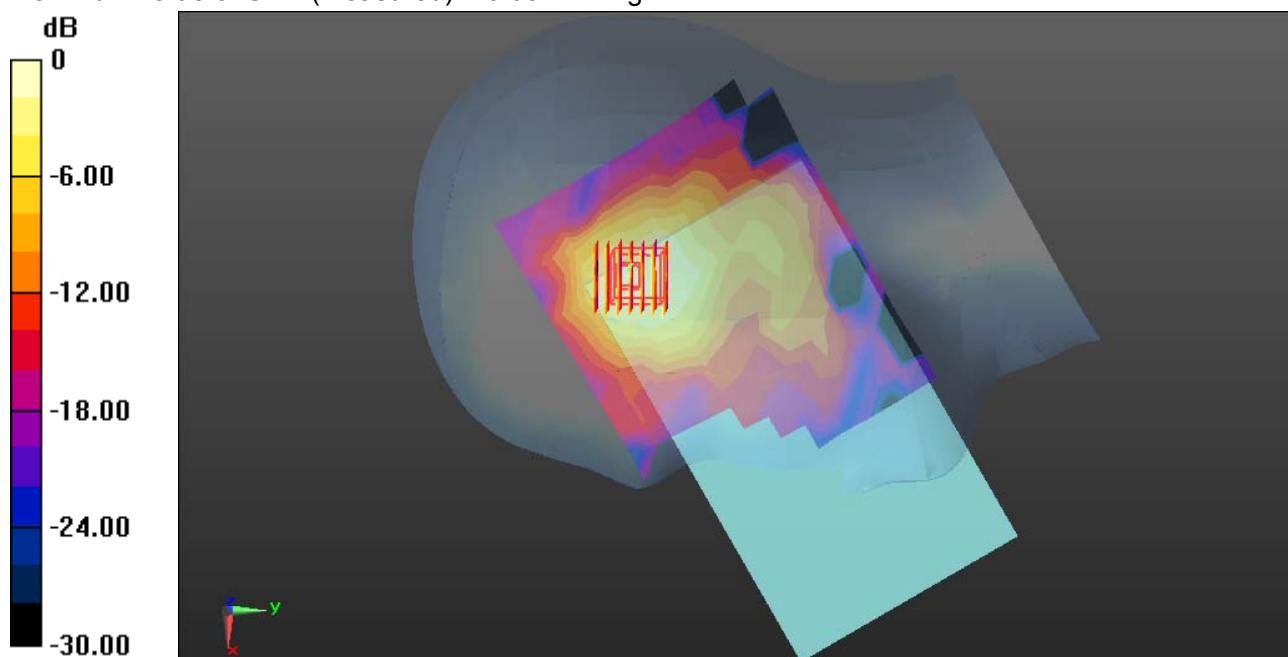

0 dB = 0.0347 W/kg = -14.60 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Left Head Cheek High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.78$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Cheek High CH11/Area Scan (11x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0132 W/kg


WIFI/Cheek High CH11/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.608 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.0098 W/kg; SAR(10 g) = 0.00547 W/kg

Maximum value of SAR (measured) = 0.0134 W/kg

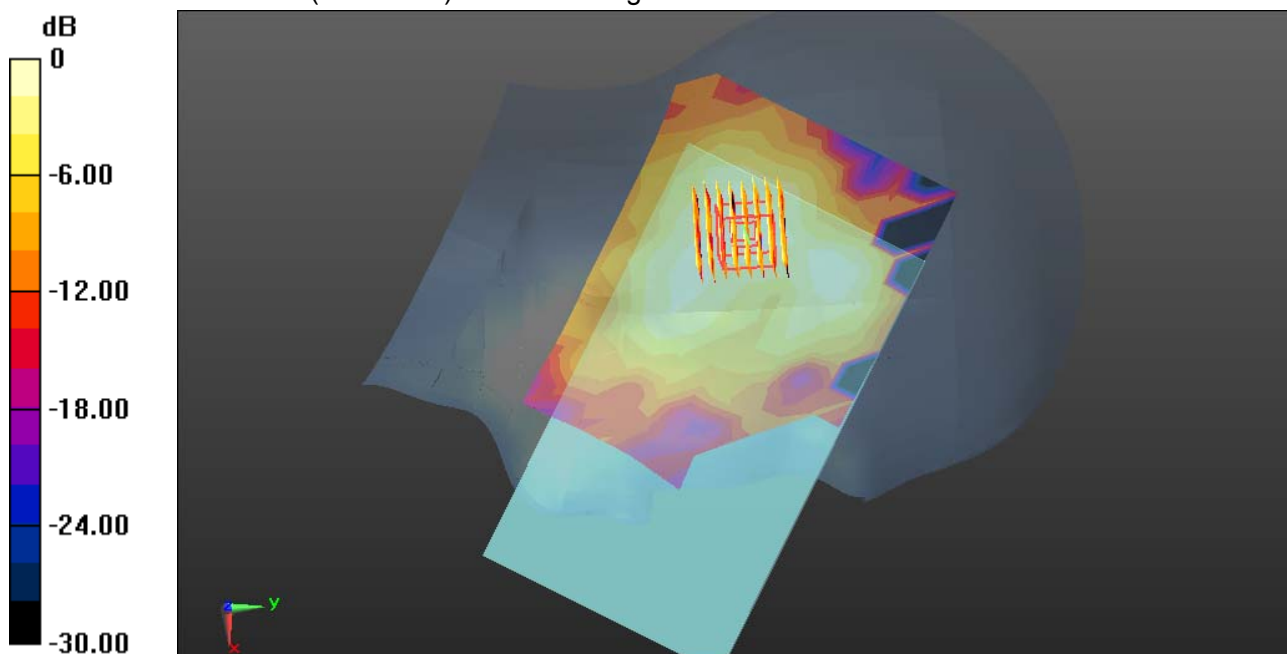

0 dB = 0.0134 W/kg = -18.73 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Left Head Tilted High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.78$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Tilted High CH11/Area Scan (11x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0186 W/kg


WIFI/Tilted High CH11/Zoom Scan (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.170 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00746 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg

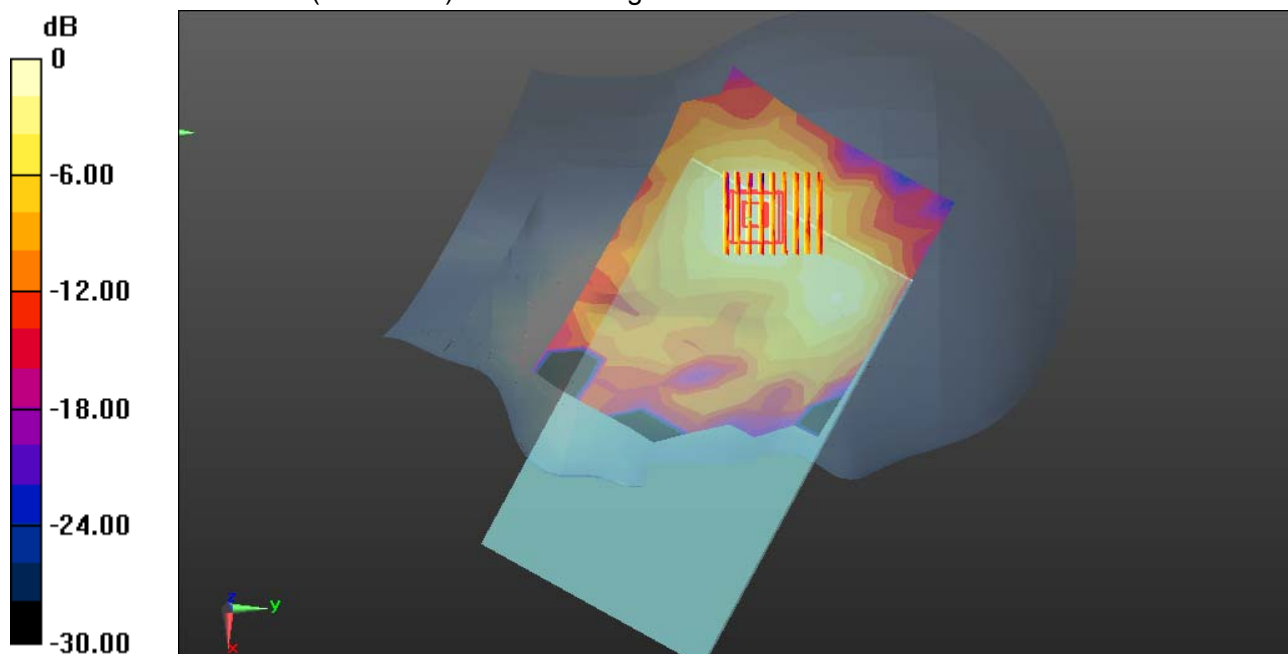

0 dB = 0.0188 W/kg = -17.26 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Front High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Front High CH251/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.701 W/kg


GPRS 850/Front High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.392 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.826 W/kg

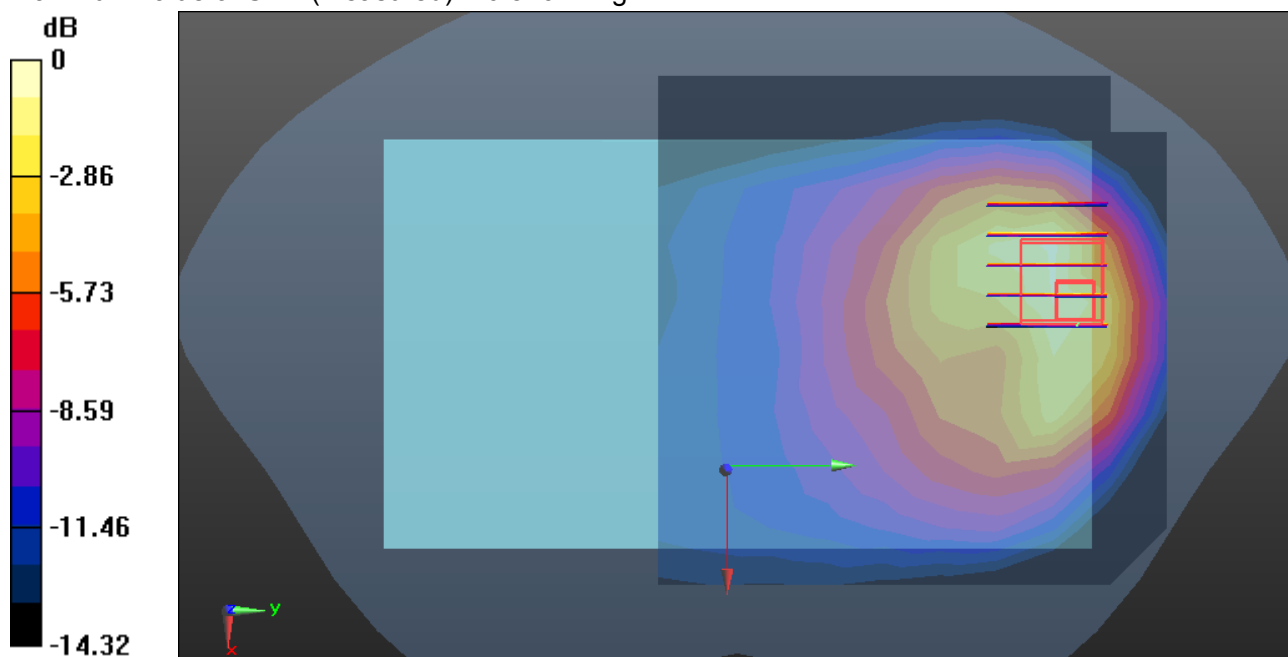

0 dB = 0.826 W/kg = -0.83 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Rear Low CH128**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.968$ S/m; $\epsilon_r = 55.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Rear Low CH128/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.843 W/kg


GPRS 850/Rear Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.963 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.403 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.901 W/kg

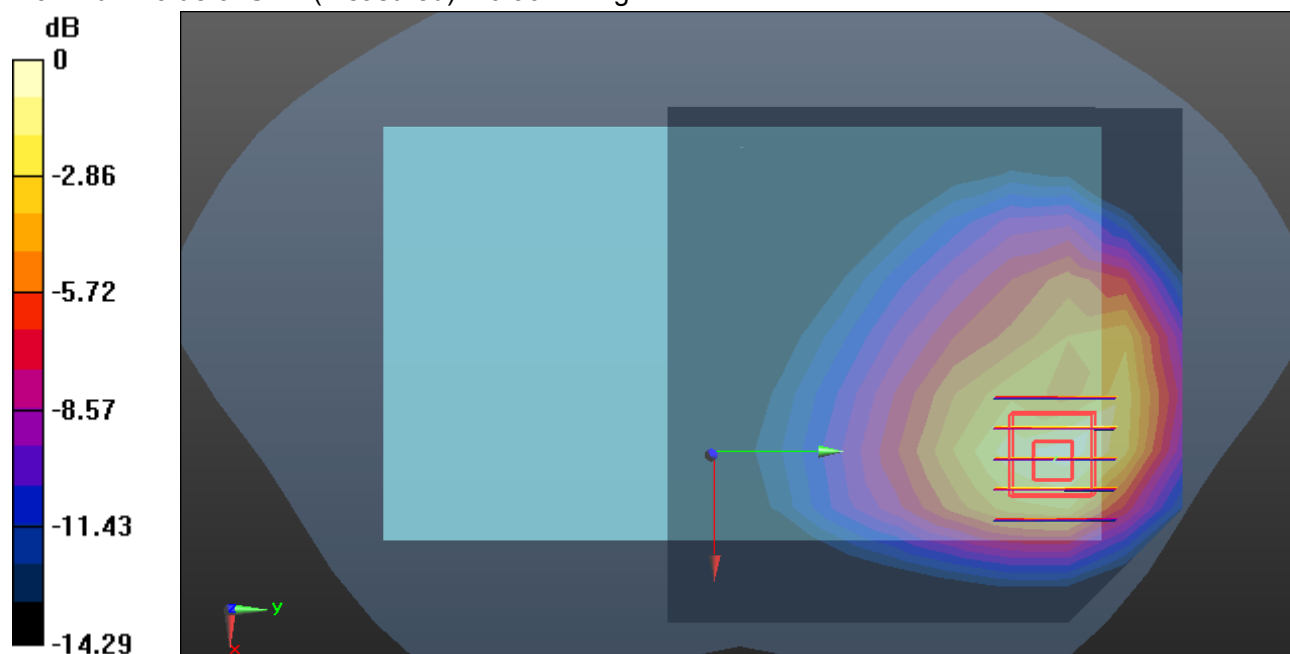

0 dB = 0.901 W/kg = -0.45 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Rear Middle CH190**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 55.335$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Rear Middle CH190/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.938 W/kg


GPRS 850/Rear Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.757 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.430 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 W/kg

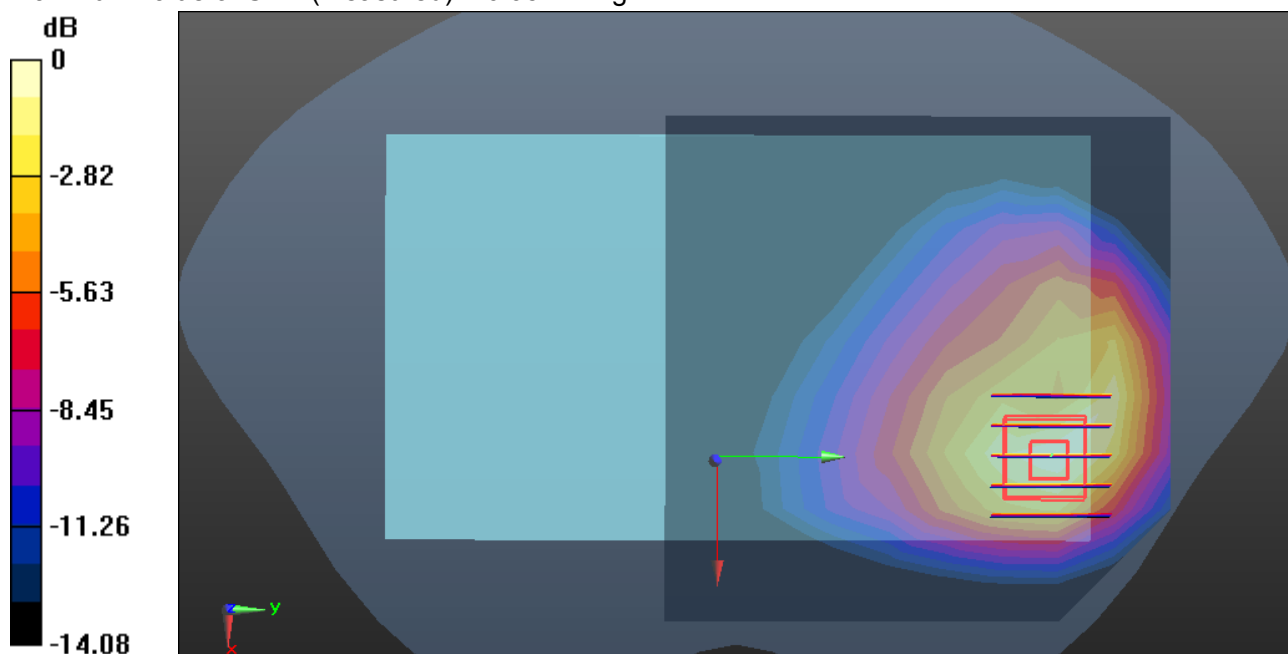

0 dB = 0.951 W/kg = -0.22 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Rear High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Rear High CH251/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.00 W/kg


GPRS 850/Rear High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.326 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

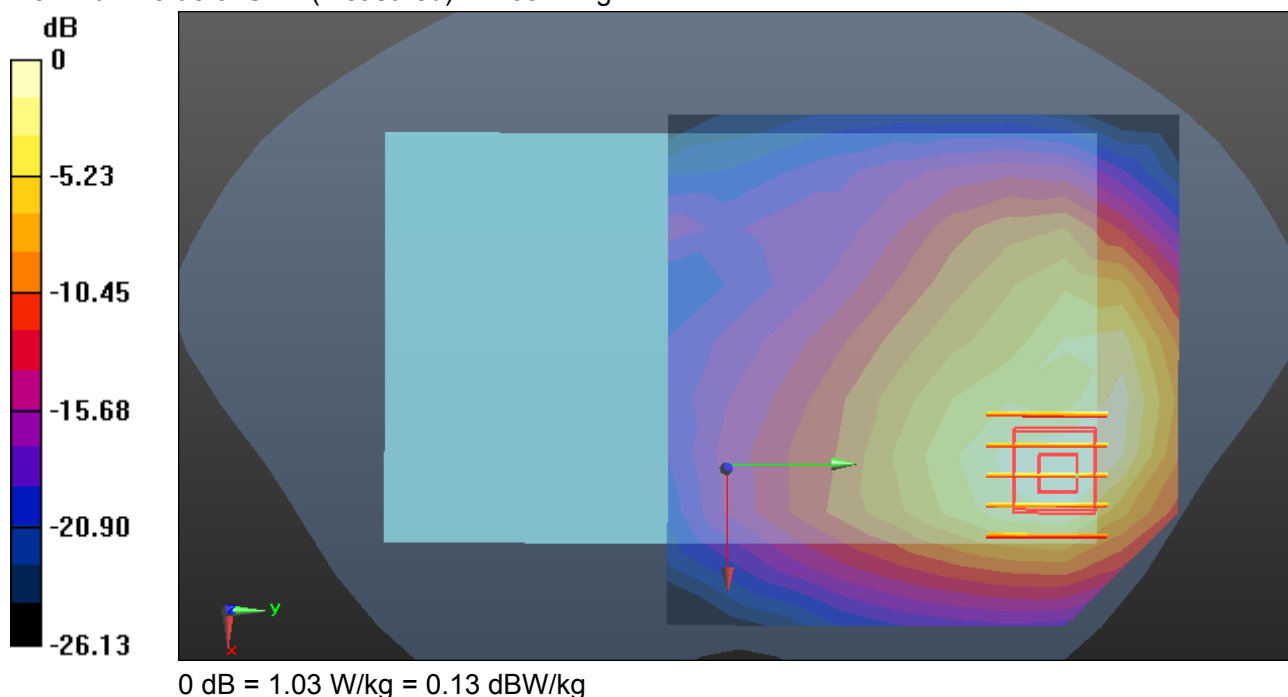

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Edge 1 High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/High CH251/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0105 W/kg


GPRS 850/High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.190 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00927 W/kg; SAR(10 g) = 0.00677 W/kg

Maximum value of SAR (measured) = 0.0122 W/kg

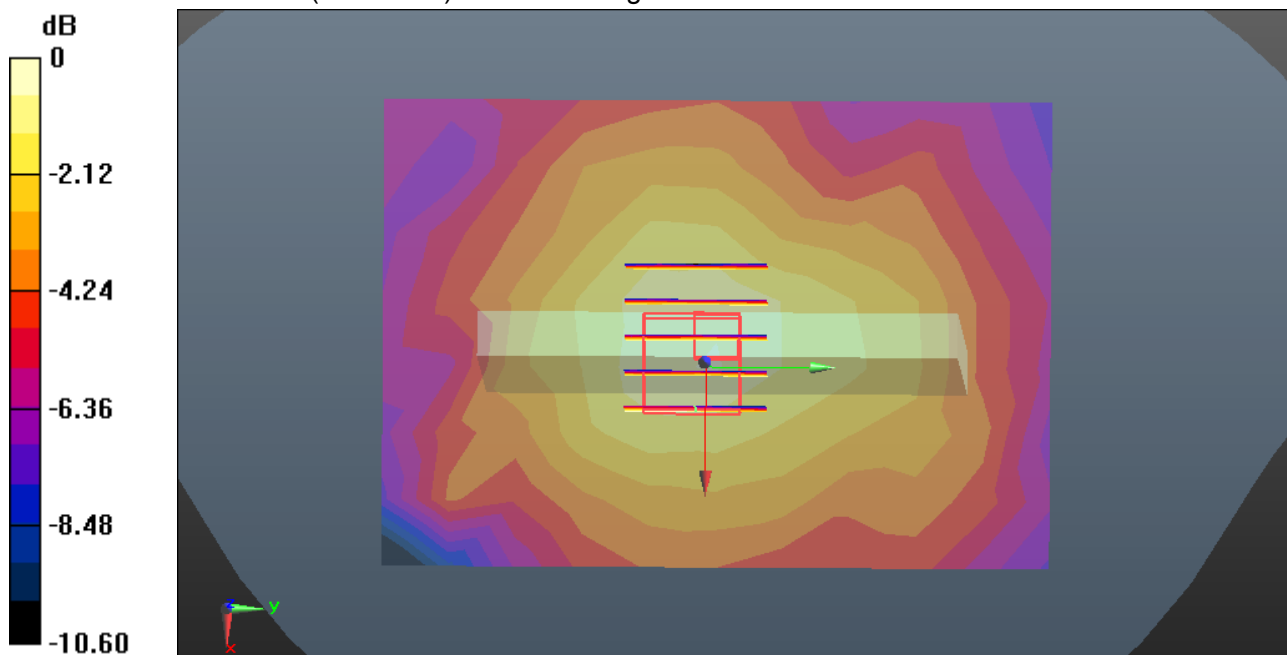

0 dB = 0.0122 W/kg = -19.14 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Edge 2 High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/High CH251/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


GPRS 850/High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.675 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

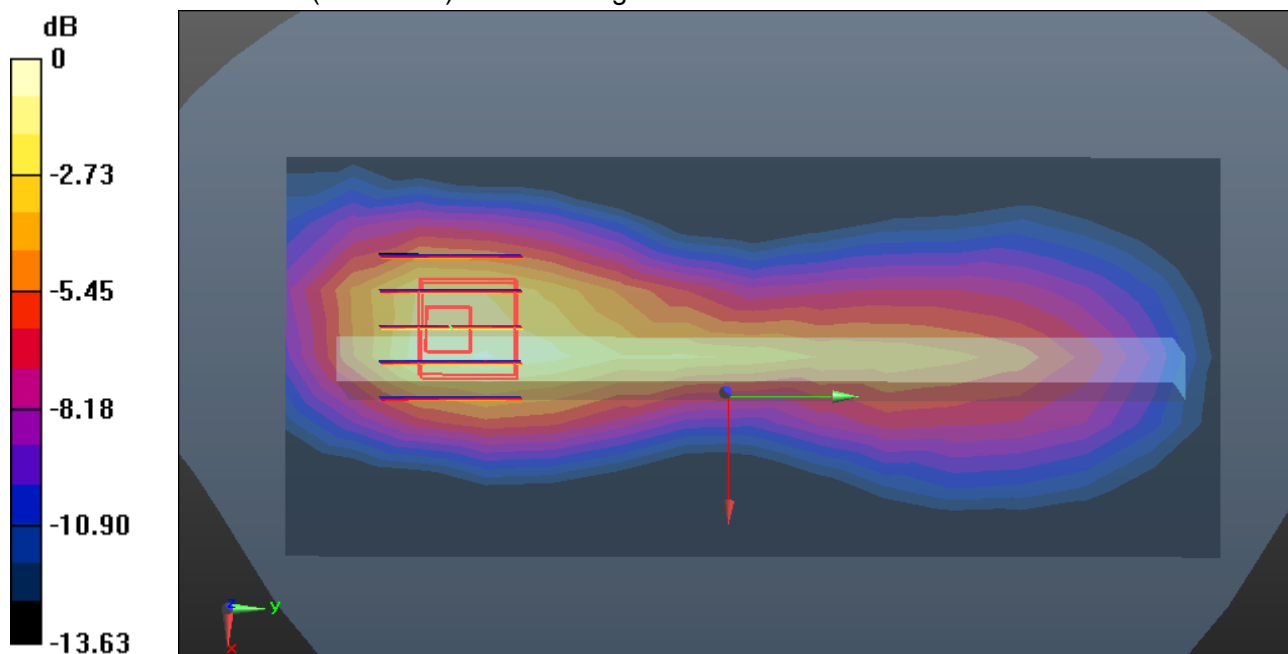

0 dB = 0.157 W/kg = -8.04 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Edge 3 High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/High CH251/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.604 W/kg


GPRS 850/High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.88 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

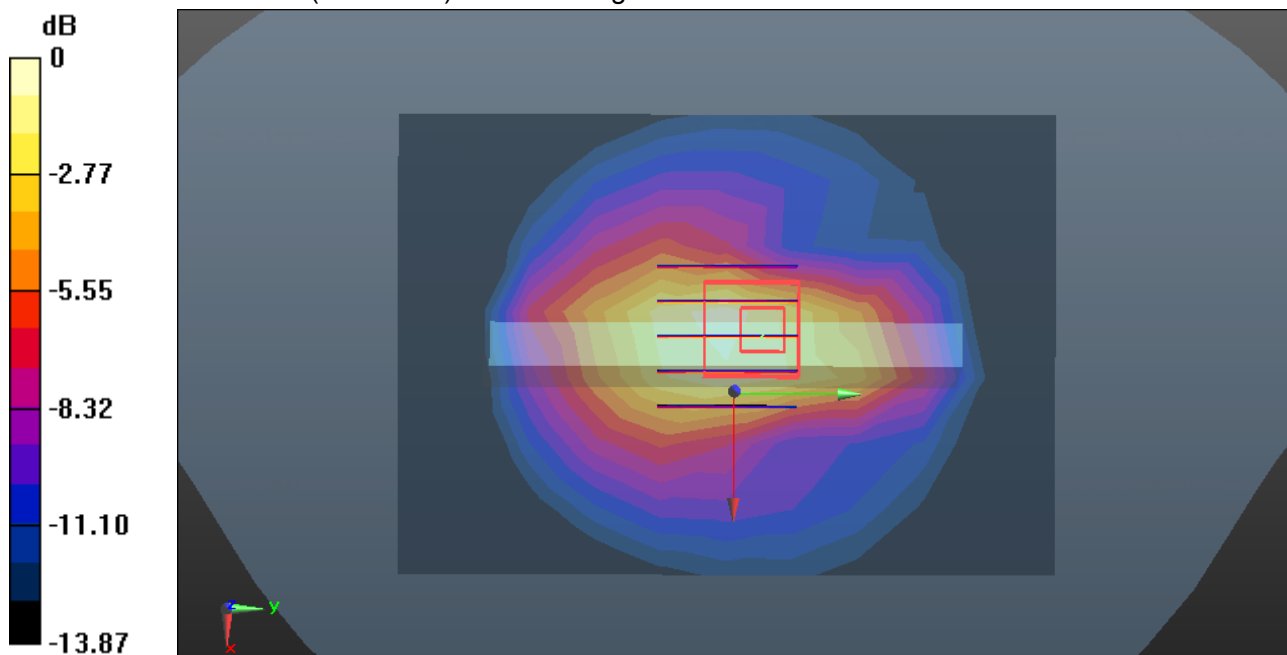

0 dB = 0.656 W/kg = -1.83 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 850-Body Edge 4 High CH251**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/High CH251/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 W/kg


GPRS 850/High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.826 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

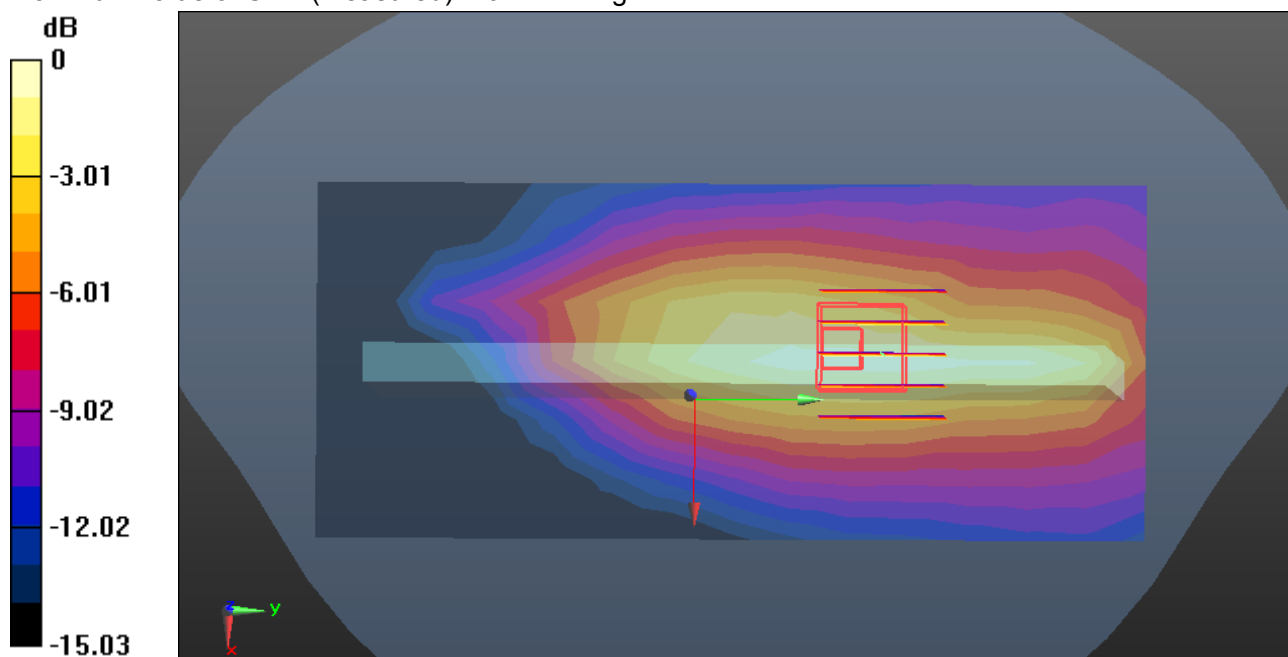

0 dB = 0.127 W/kg = -8.96 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Front Low CH512**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Front Low CH512/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.652 W/kg


GPRS 1900/Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.421 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.273 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.945 W/kg

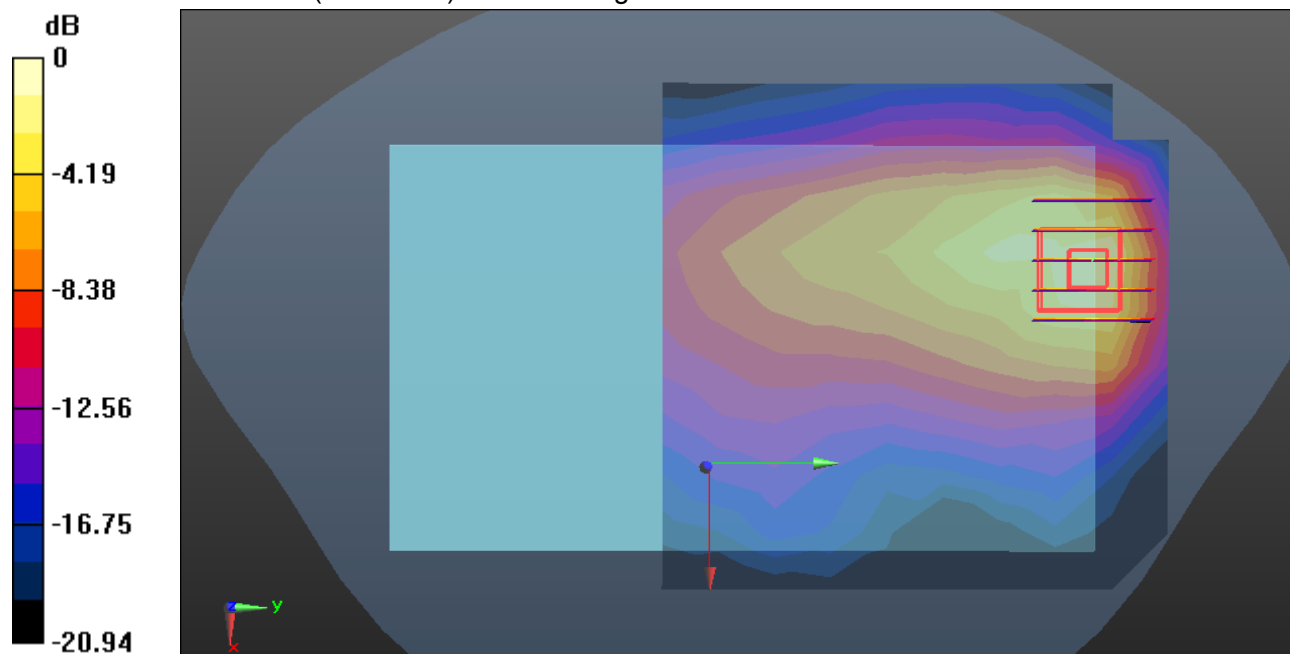

0 dB = 0.945 W/kg = -0.25 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Front Middle CH661**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Front Middle CH661/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.905 W/kg


GPRS 1900/Front Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.145 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

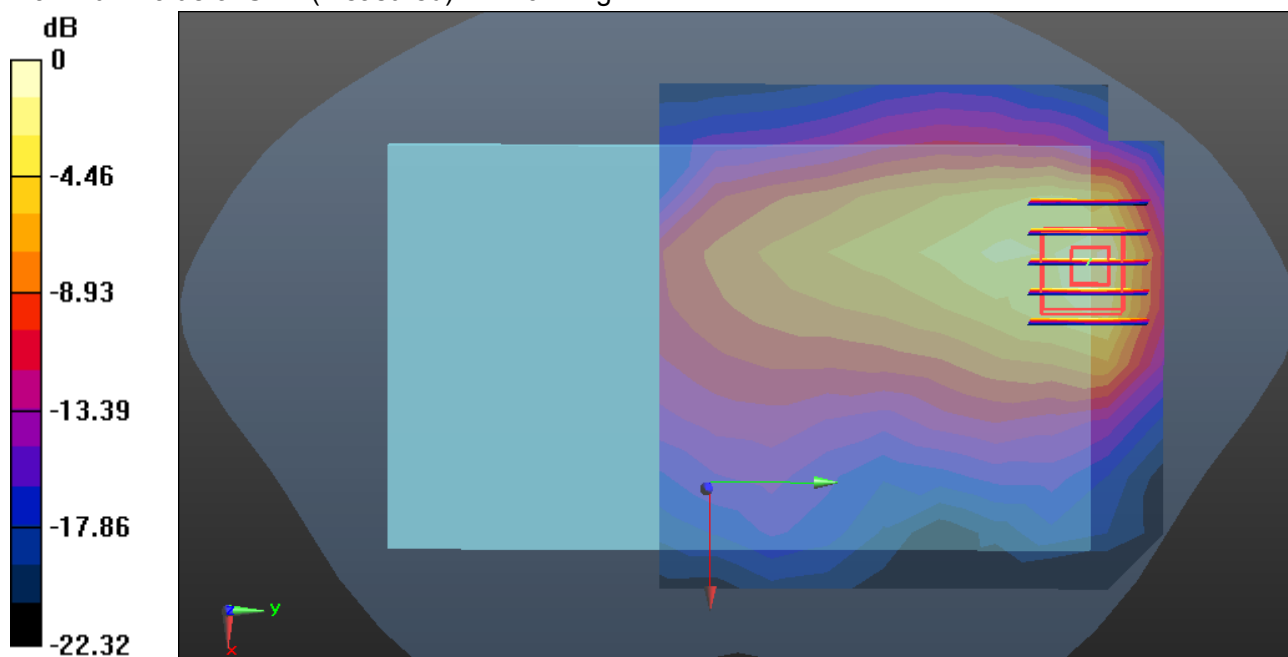

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Front High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.571$ S/m; $\epsilon_r = 52.446$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Front High CH810/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.846 W/kg


GPRS 1900/Front High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.778 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

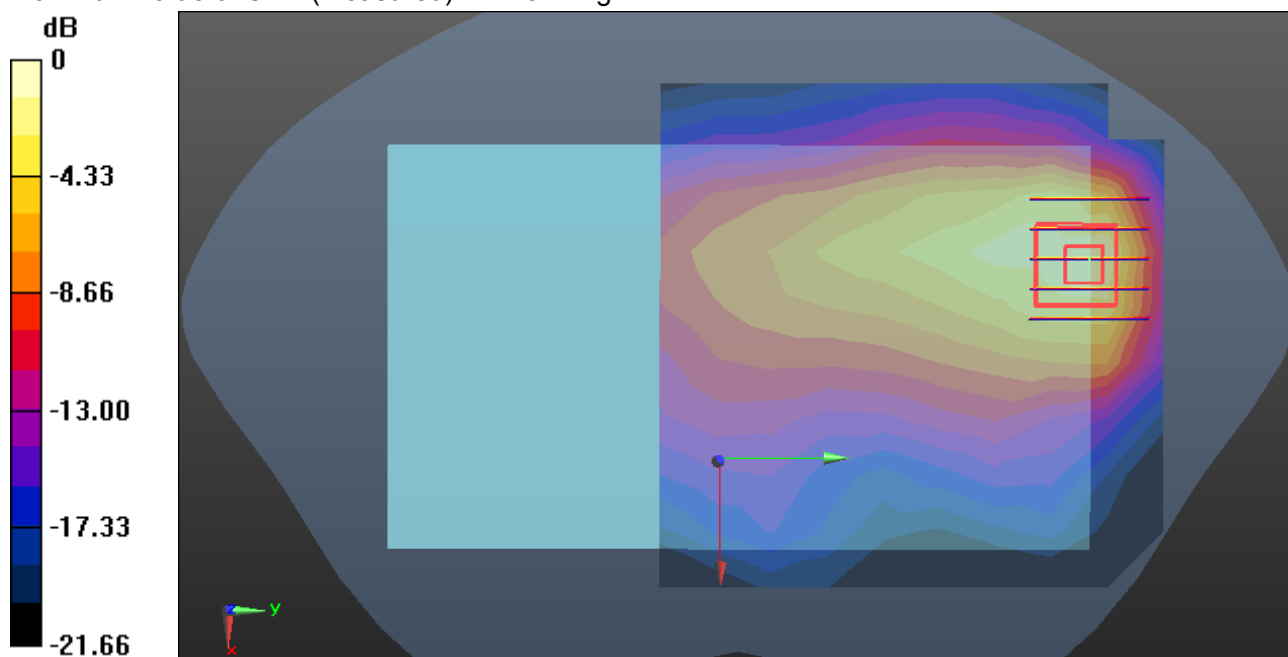

0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Rear Low CH512**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Rear Low CH512/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.857 W/kg


GPRS 1900/Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.044 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.336 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.918 W/kg

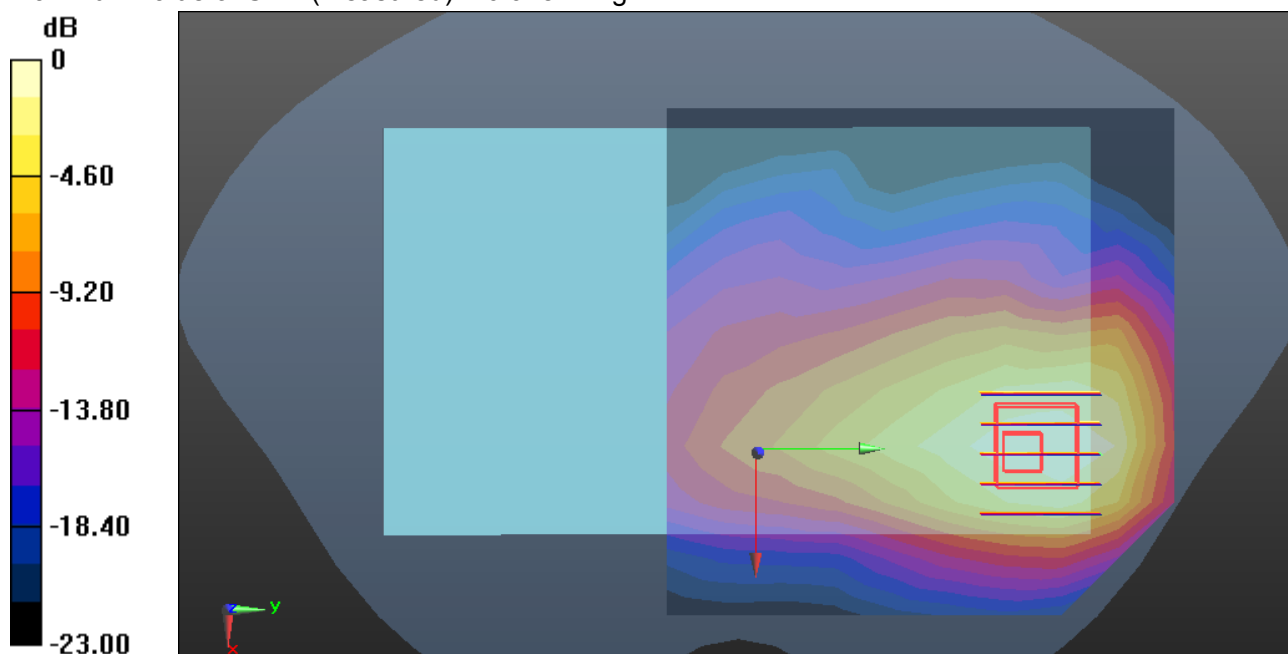

0 dB = 0.918 W/kg = -0.37 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Rear Middle CH661**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Rear Middle CH661/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 W/kg


GPRS 1900/Rear Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.887 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

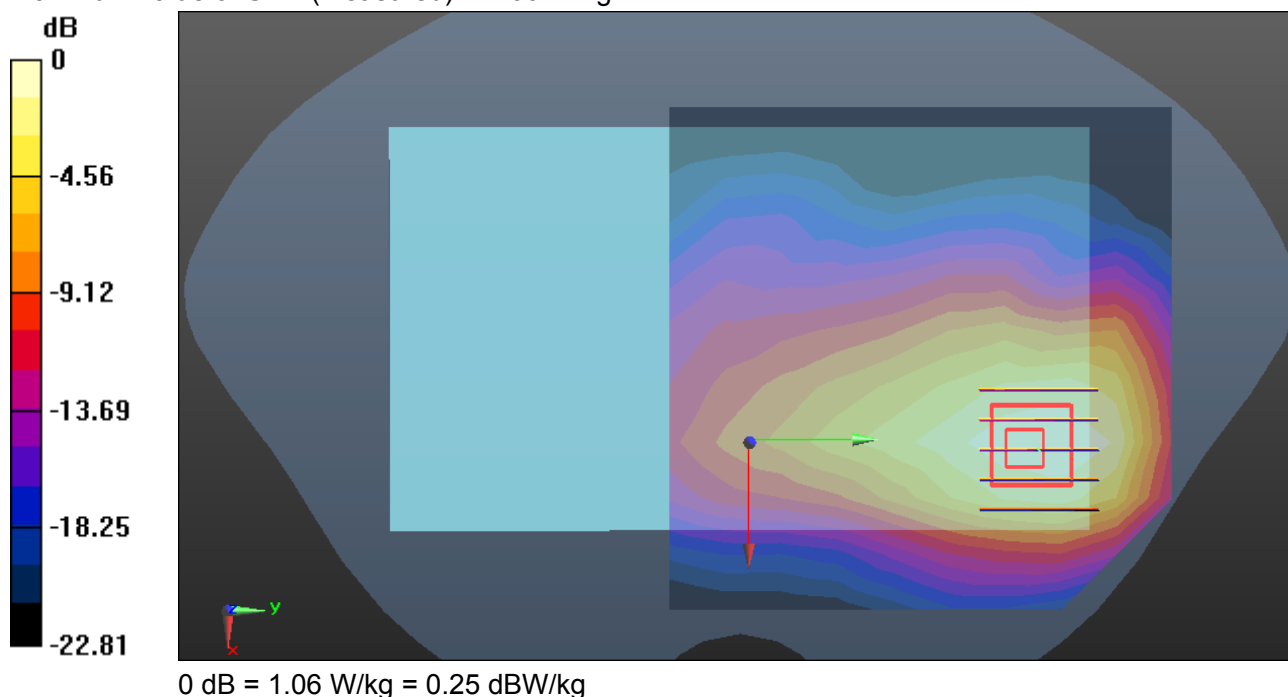

0 dB = 1.06 W/kg = 0.25 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Rear High CH810**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.571$ S/m; $\epsilon_r = 52.446$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Rear High CH810/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 W/kg


GPRS 1900/Rear High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.357 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.436 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

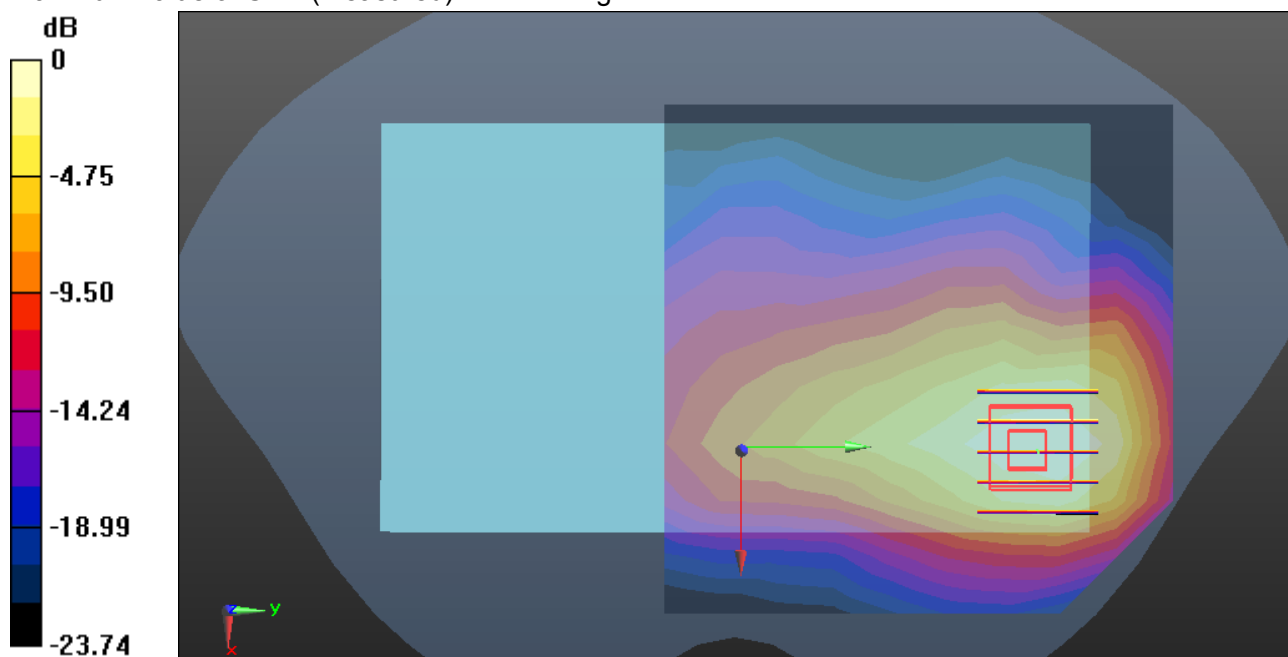

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Edge 2 Middle CH661**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Middle CH661/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.942 W/kg


GPRS 1900/Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.47 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.939 W/kg

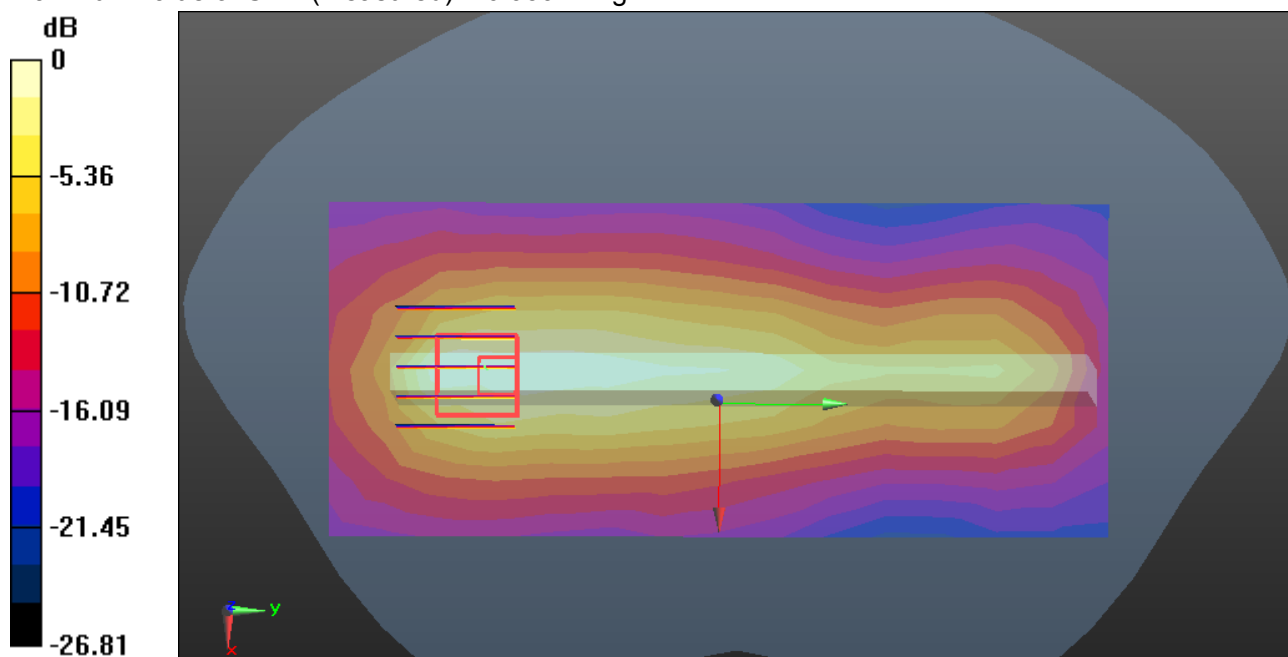

0 dB = 0.939 W/kg = -0.27 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Edge 3 Middle CH661**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Middle CH661/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.599 W/kg


GPRS 1900/Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

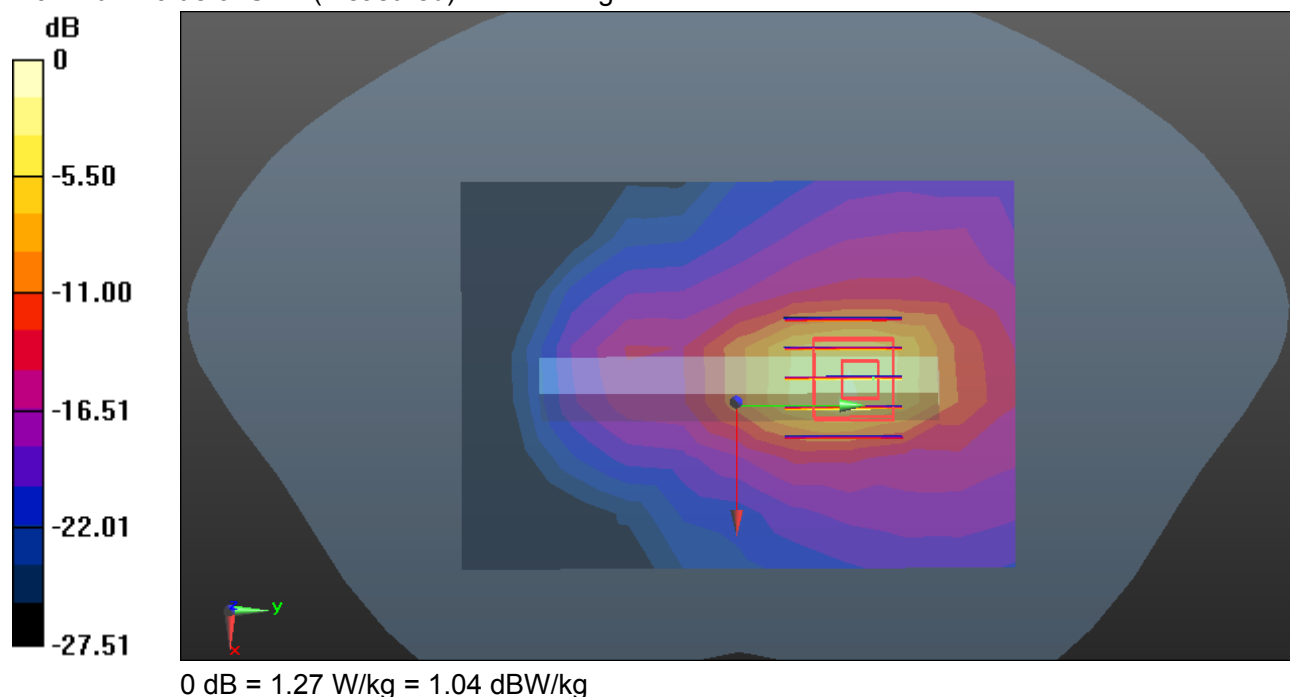

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

GPRS 1900-Body Edge 4 Middle CH661**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.503$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Middle CH661/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0196 W/kg


GPRS 1900/Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.370 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00637 W/kg

Maximum value of SAR (measured) = 0.0207 W/kg

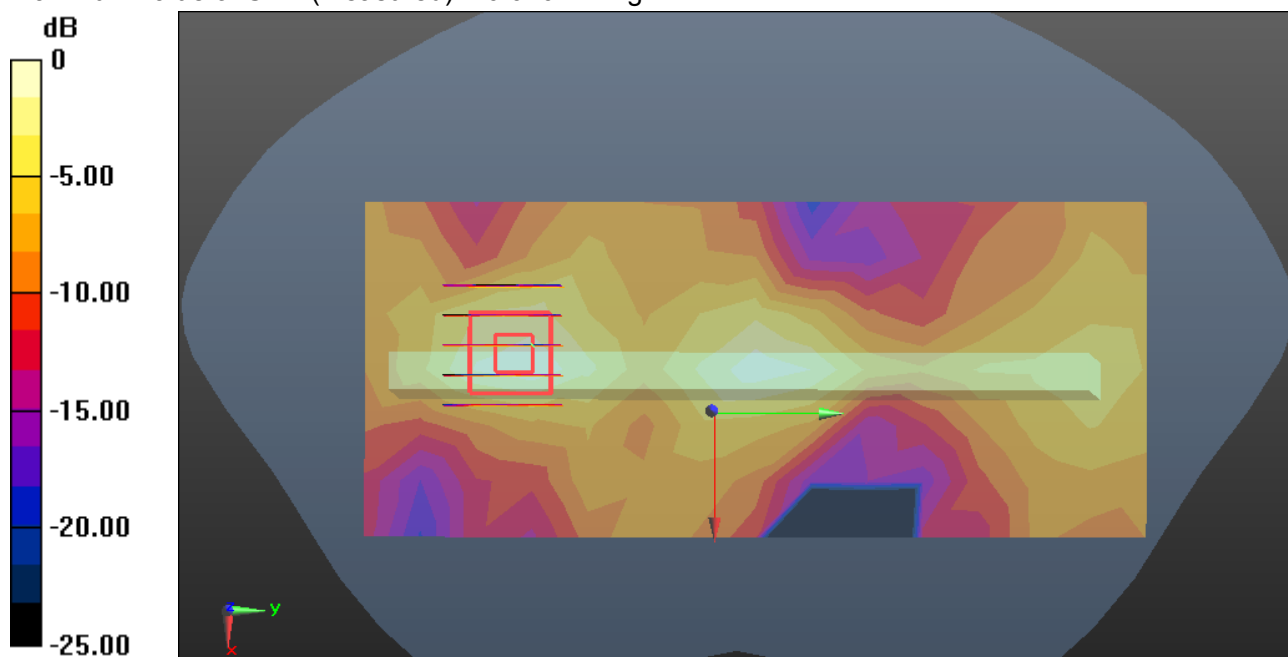

0 dB = 0.0207 W/kg = -16.84 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band II-Body Front High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 52.449$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WCDMA Band II/Front High CH9538/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.564 W/kg**WCDMA Band II/Front High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.835 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

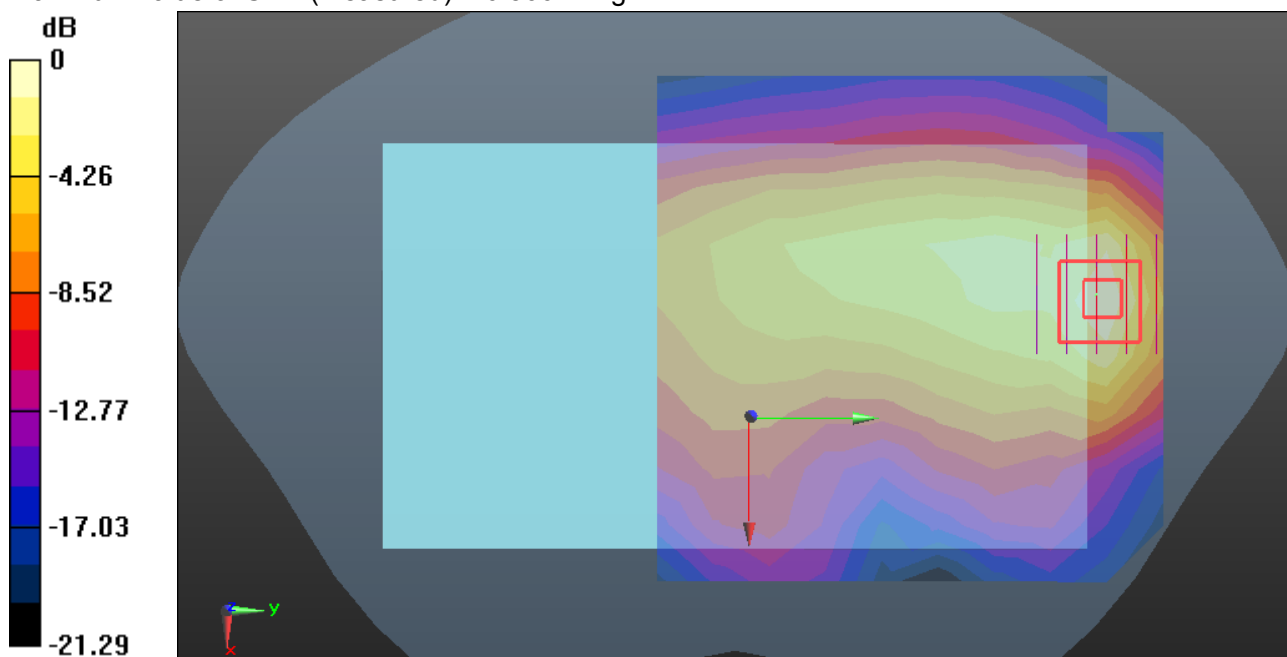

0 dB = 0.566 W/kg = -2.47 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band II-Body Rear High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 52.449$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


WCDMA Band II/Rear High CH9538/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.02 W/kg**WCDMA Band II/Rear High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

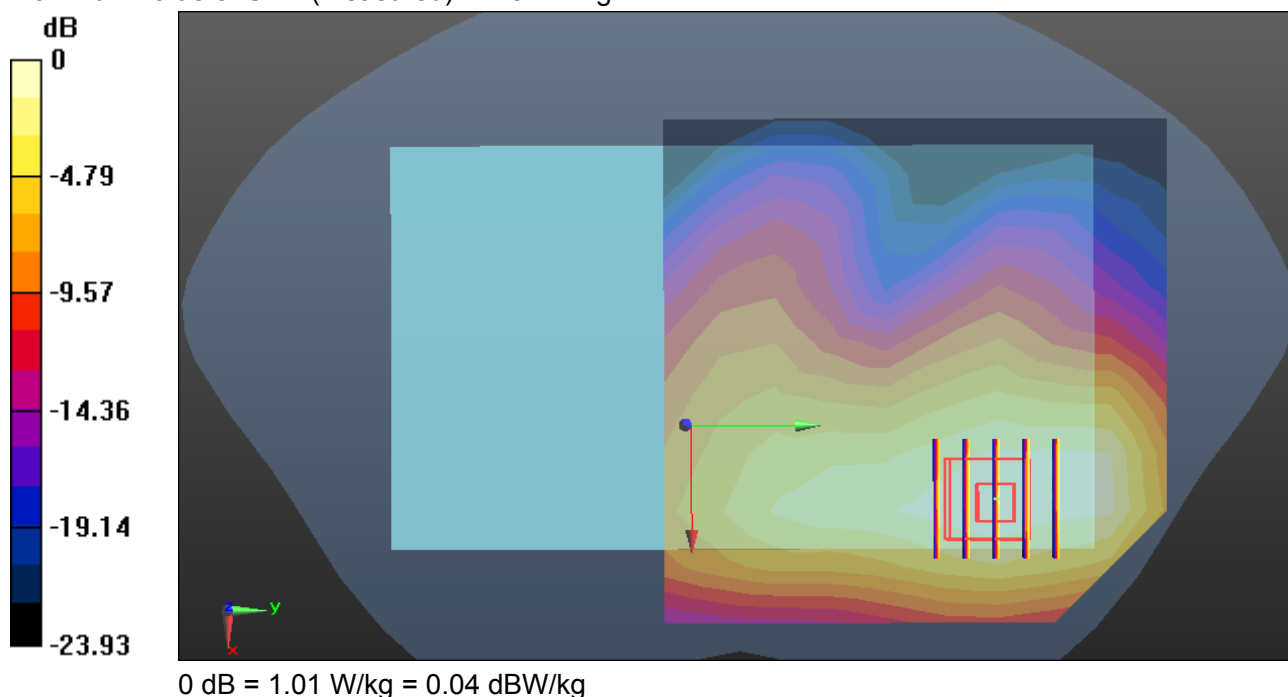

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band II-Body Edge 2 High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 52.449$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/High CH9538/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.20 W/kg


WCDMA Band II/High CH9538/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.862 W/kg

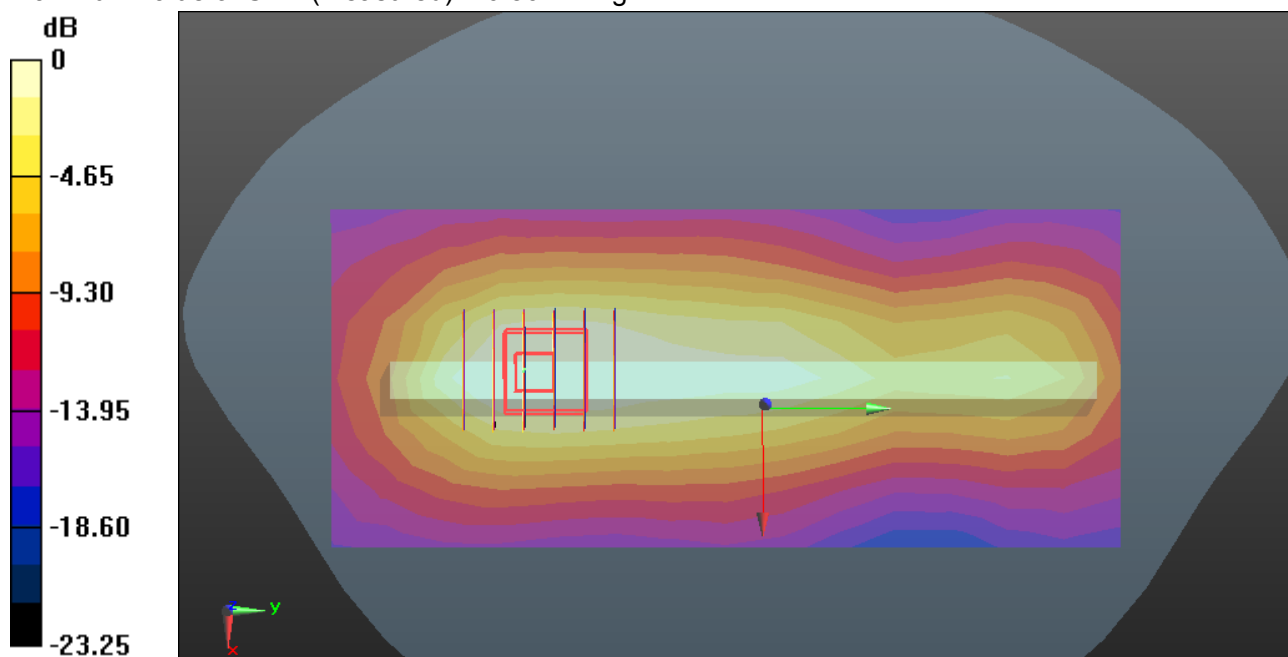

0 dB = 0.862 W/kg = -0.64 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band II-Body Edge 3 High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 52.449$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/High CH9538/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.580 W/kg


WCDMA Band II/High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.215 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

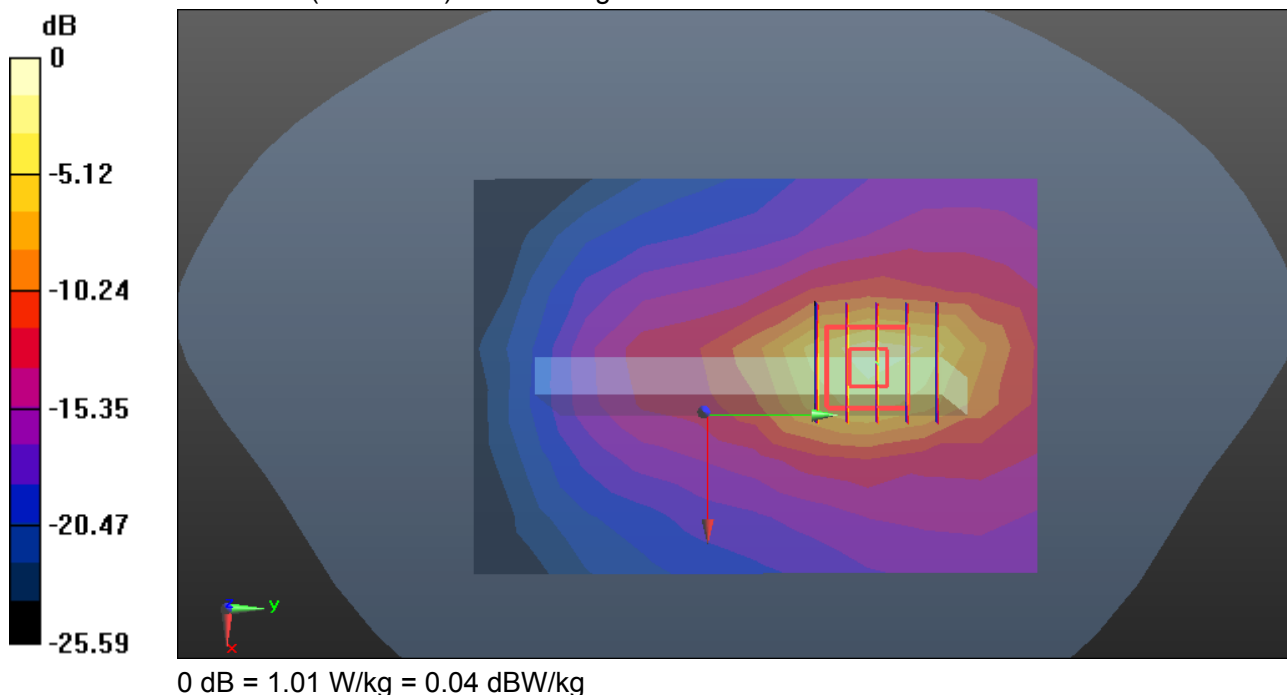

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band II-Body Edge 4 High CH9538**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 52.449$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/High CH9538/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0276 W/kg


WCDMA Band II/High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.824 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00992 W/kg

Maximum value of SAR (measured) = 0.0326 W/kg

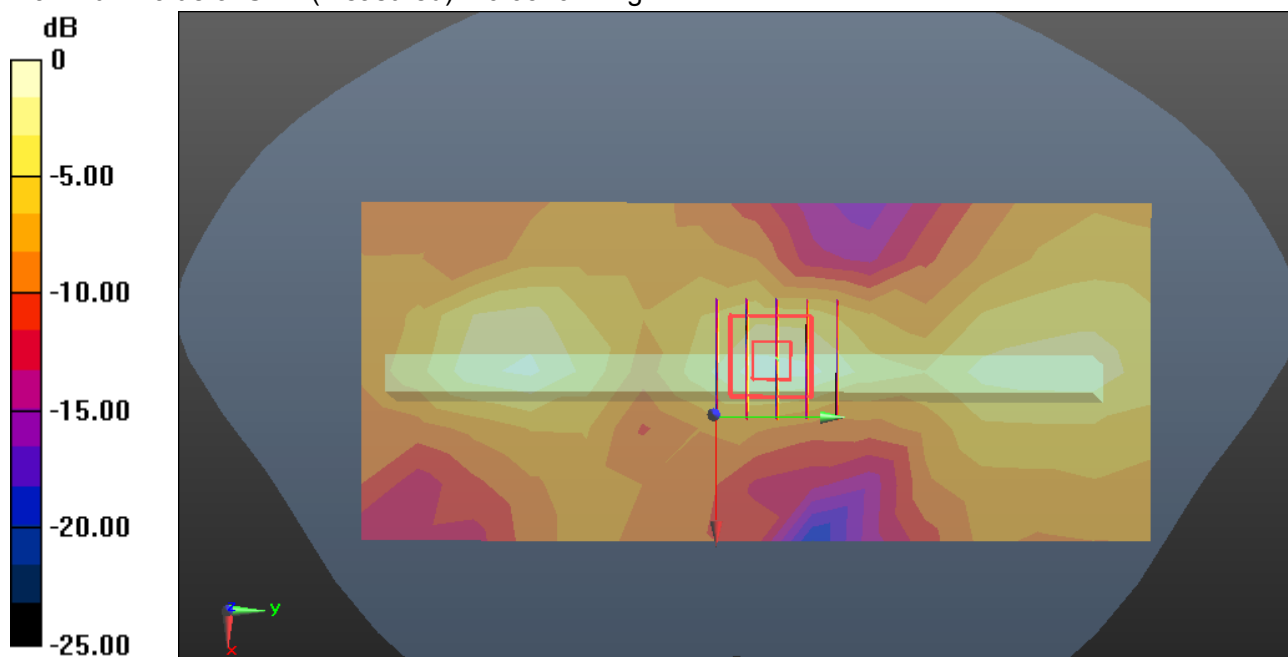

0 dB = 0.0326 W/kg = -14.87 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band V-Body Front High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 55.291$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Front High CH4233/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.852 W/kg


WCDMA Band V/Front High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.409 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.862 W/kg

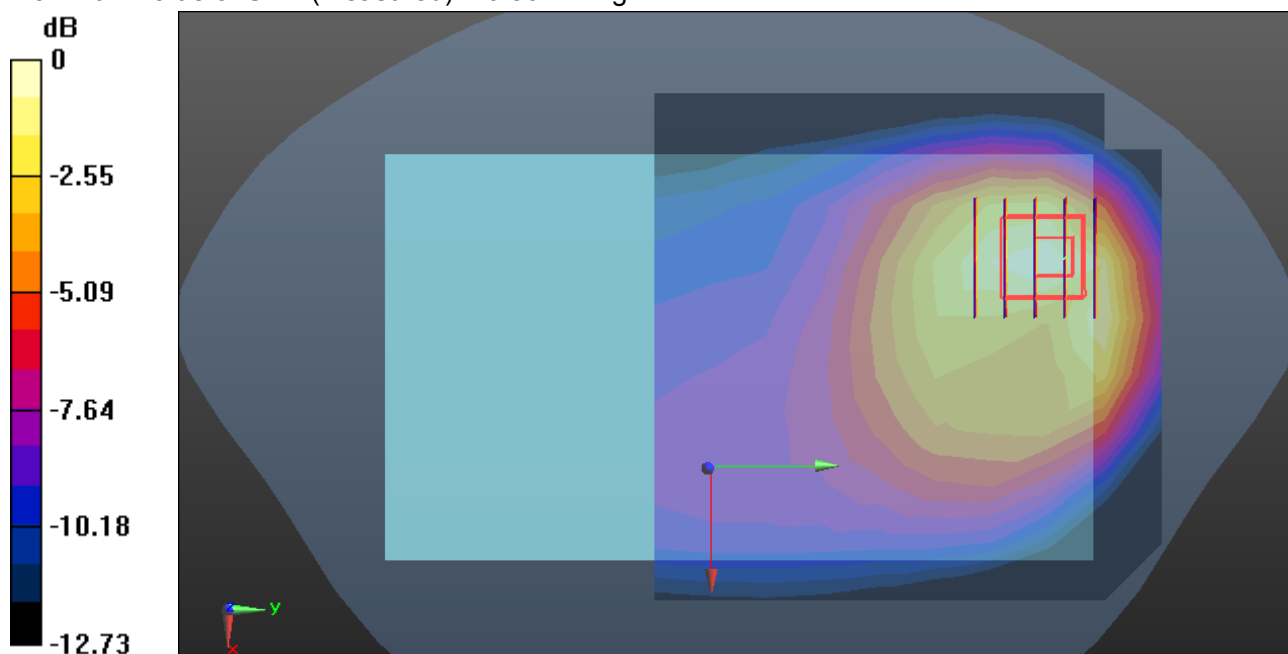

0 dB = 0.862 W/kg = -0.64 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band V-Body Rear High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 55.291$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Rear High CH4233/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.582 W/kg


WCDMA Band V/Rear High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.298 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.578 W/kg

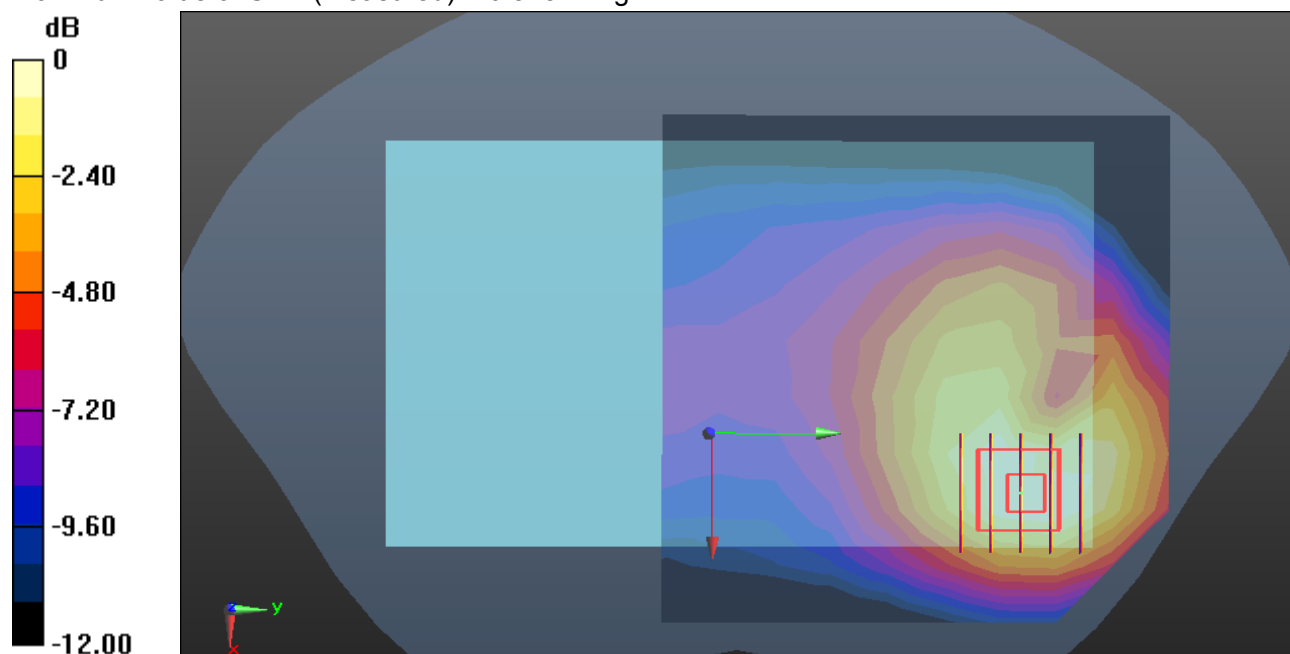

0 dB = 0.578 W/kg = -2.38 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band V-Body Edge 2 High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 55.291$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/High CH4233/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.270 W/kg


WCDMA Band V/High CH4233/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.37 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.135 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.288 W/kg

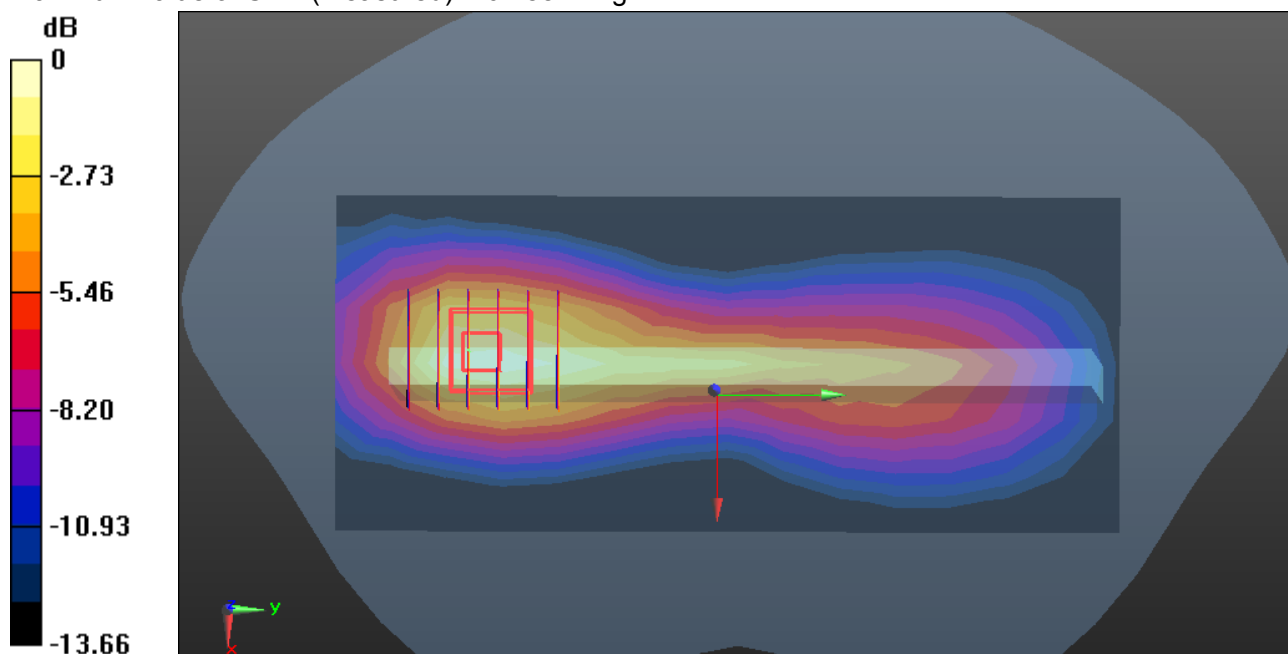

0 dB = 0.288 W/kg = -5.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band V-Body Edge 3 High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 55.291$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/High CH4233/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.20 W/kg


WCDMA Band V/High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.83 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.318 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.797 W/kg

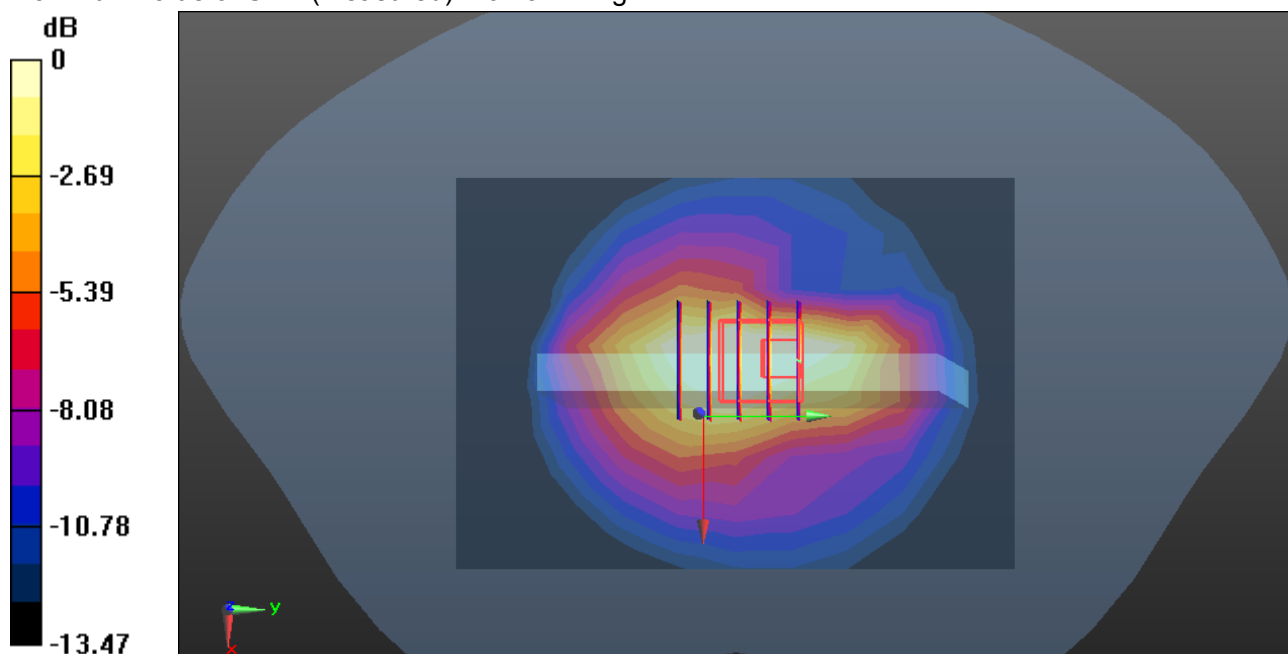

0 dB = 0.797 W/kg = -0.99 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/7/2015

WCDMA Band V-Body Edge 4 High CH4233**DUT: Tablet; Type: U706G; Serial: 356875033031910**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 55.291$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/High CH4233/Area Scan (15x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.217 W/kg


WCDMA Band V/High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.96 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.109 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.236 W/kg

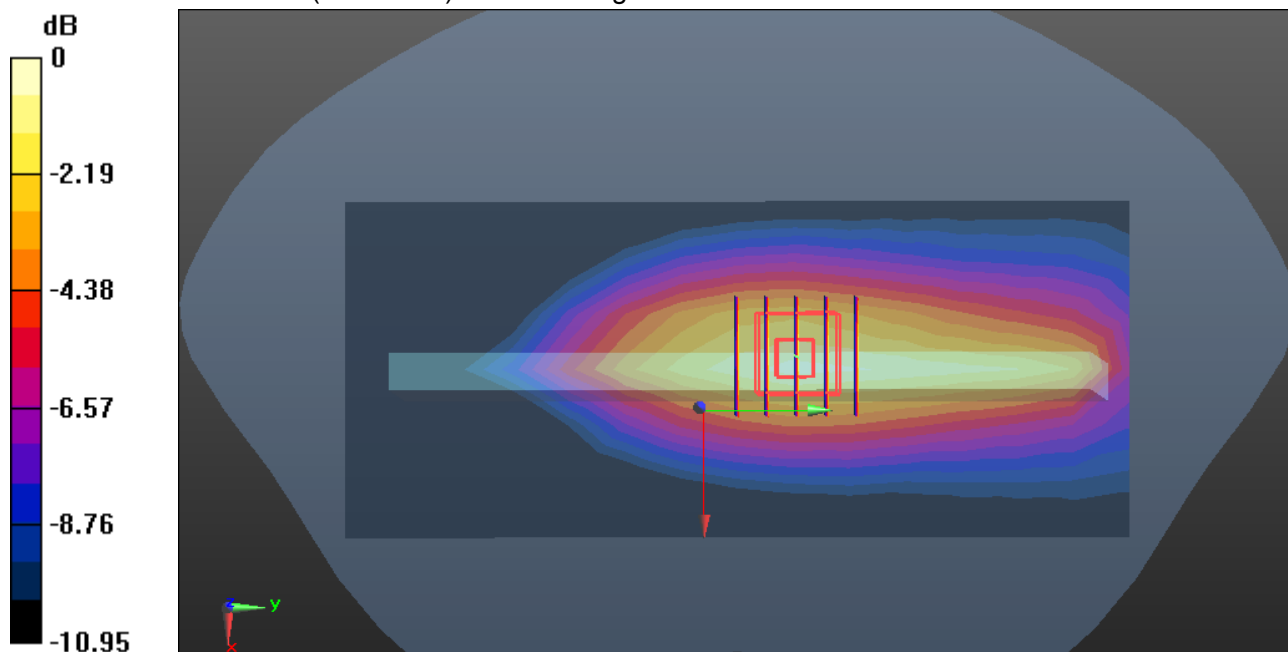

0 dB = 0.236 W/kg = -6.27 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Body Front High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Front High CH11/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.113 W/kg


WIFI/Front High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.270 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

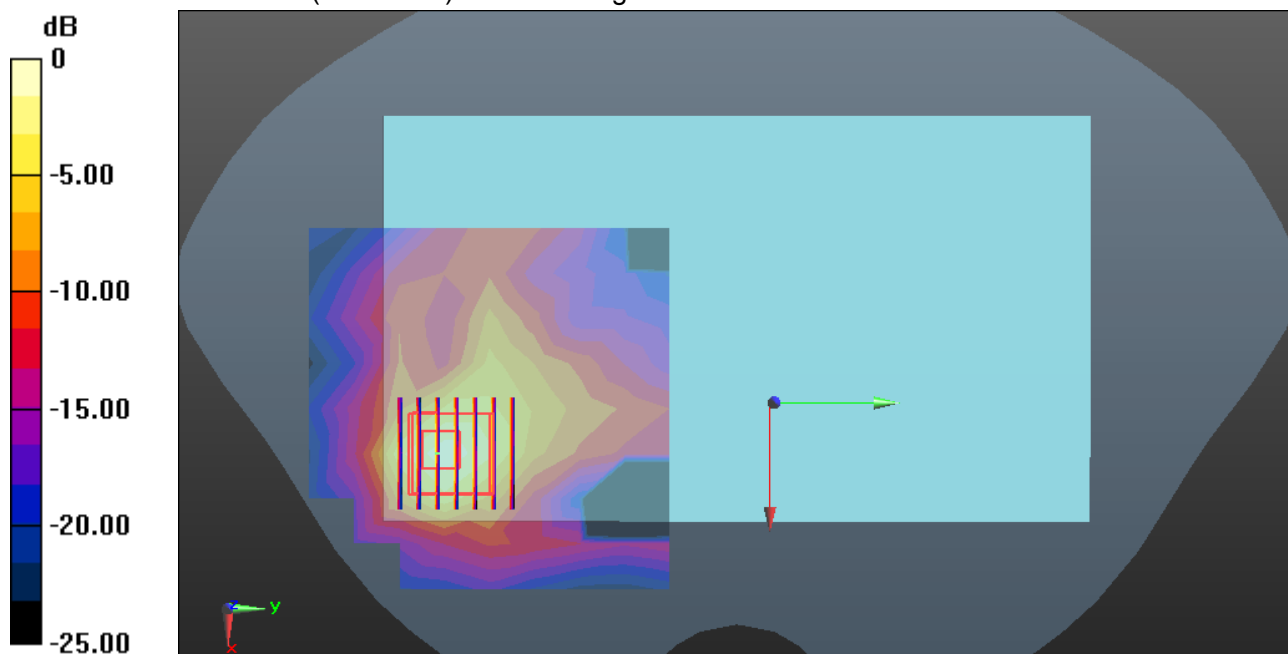

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Body Rear High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Rear High CH11/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.478 W/kg


WIFI/Rear High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.494 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

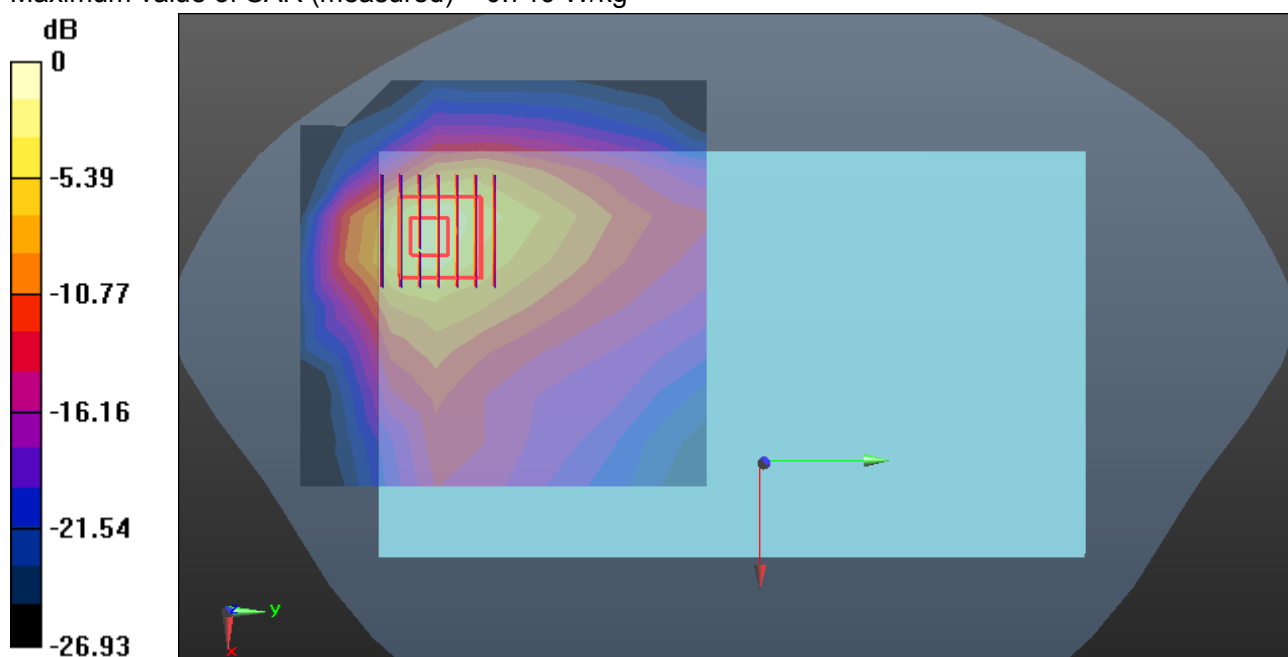

0 dB = 0.719 W/kg = -1.43 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Body Edge 1 High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/High CH11/Area Scan (13x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.129 W/kg


WIFI/High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.455 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

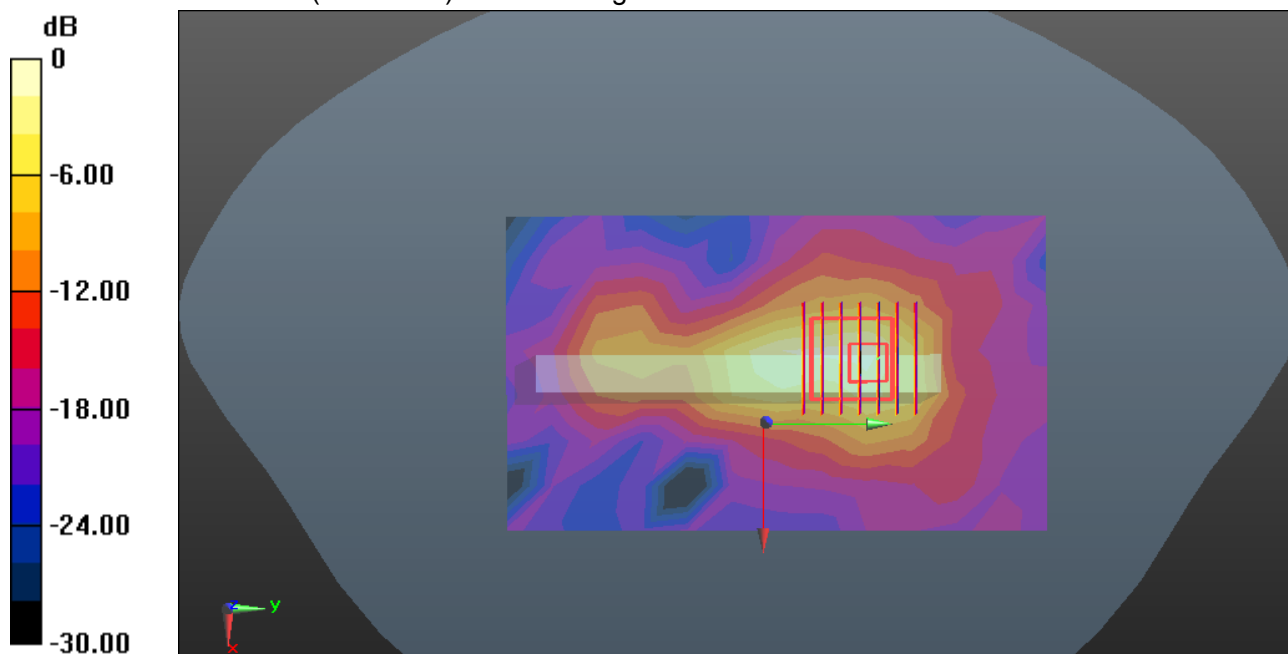

0 dB = 0.153 W/kg = -8.15 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/8/2015

WIFI-Body Edge 4 High CH11**DUT: Tablet; Type: U706G; Serial: 356875033031910**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/High CH11/Area Scan (19x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.182 W/kg


WIFI/High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.123 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.266 W/kg

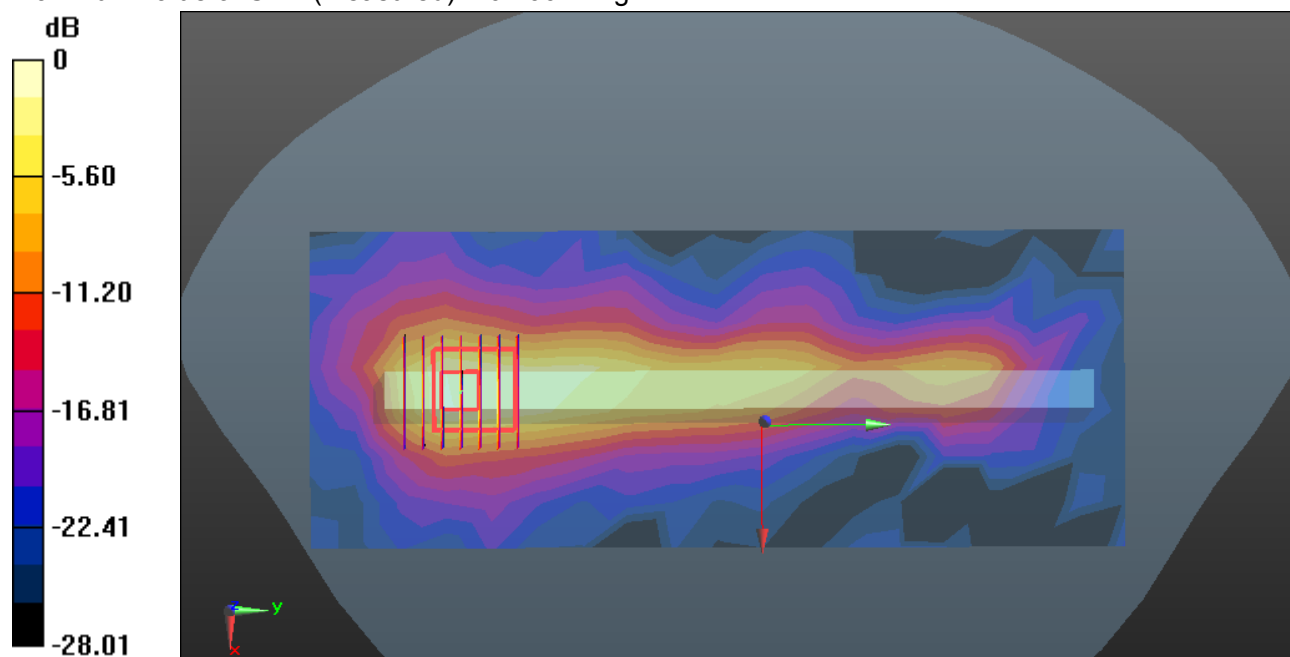

0 dB = 0.266 W/kg = -5.75 dBW/kg