

FCC - TEST REPORT

Report Number : **64.790.15.03711.01** Date of Issue: 2015-12-15

Model : M2131.P.-.

Product Type : Mini video outdoor station

Applicant : ABB Genway Xiamen Electrical Equipment Co.,Ltd

Address : Room 501-1, No.12-14, 3rd Chuang Xin Road, Torch High Technology Development Zone, Xiamen S.E.Z, Fujian Province, P.R.China

Production Facility : ABB Genway Xiamen Electrical Equipment Co.,Ltd

Address : NO.7 Fangshan South Road, Torch High Technology Development Zone (Xiang An) Industrial Zone, Xiamen S.E.Z, Fujian Province, P.R.China

Test Result : ☒ **Positive** ☐ **Negative**



Total pages including Appendices : 26

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	5
6	General Remarks.....	6
7	Test Setups.....	7
8	Test Methodology	8
8.1	Conducted Emission	8
8.2	Radiated Emission	8
8.3	Field Strength Calculation	8
9	Systems test configuration	9
10	Technical Requirement.....	10
10.1	Conducted Emission Measurement	10
10.2	Filed Strength Measurement.....	13
10.3	Occupied Bandwidth	15
11	Test Equipment List.....	17
12	System Measurement Uncertainty	17
13	Appendix A – Setup Photos.....	A1-A2
14	Appendix B – EUT Photos.....	B1-B7

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 502708
IC Registration Number: 10320A

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Product:	Mini video outdoor station
Model no.:	M2131.P.-.
FCC ID:	2AEBL- M2131
Brand Name:	ABB
Options and accessories:	N/A
Rating:	DC 20-30V
RF Transmission Frequency:	125KHz
Modulation:	ASK
Antenna Type:	Coil antenna
Description of the EUT:	EUT is a card reader.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2014 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 4 November 2014	General Requirements for Compliance of Radio Apparatus
RSS-210 Issue 8 December 2010	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

All the test methods were according to ANSI C63.4 (2014).

5 Summary of Test Results

Technical Requirements					
Test Condition			Pages	Test Site	Test Result
FCC Rules	RSS Requirements	Test Item	10	1	P
§15.207	RSS-Gen Issue 4 clause 8.8	Conducted emission AC power port			
§15.209, 15.205	RSS-210 Issue 8 section 2 RSS-Gen Issue 4 clause 2.5	Filed Strength Measurement	13	1	P
§15.215(c)	RSS-Gen Issue 4 clause 6.6	Occupied Bandwidth	15	1	P

Note 1: N/A=Not Applicable.

6 General Remarks

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2015-08-25


Testing Start Date: 2015-08-31

Testing End Date: 2015-10-29


- TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch -

Reviewed by:

Prepared by:

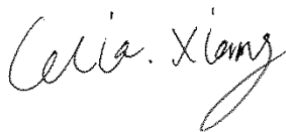


Celia Xiang





Peter Jia

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

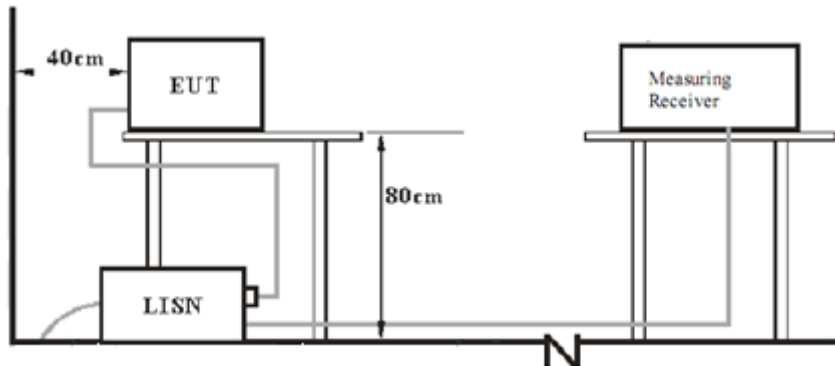

7.2 Radiated test setups

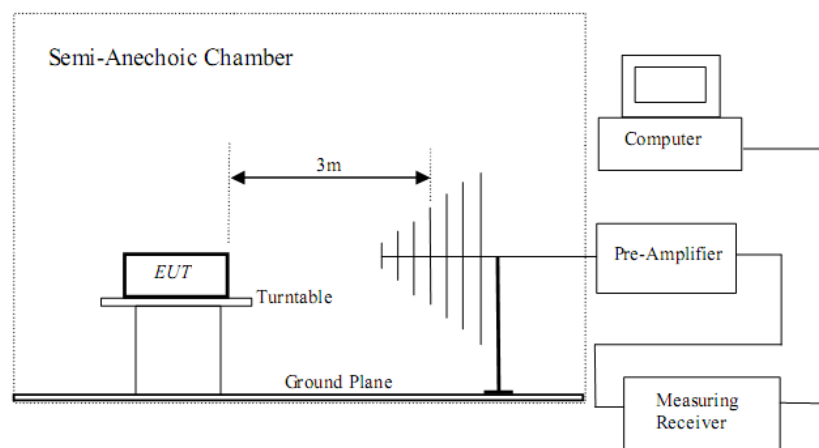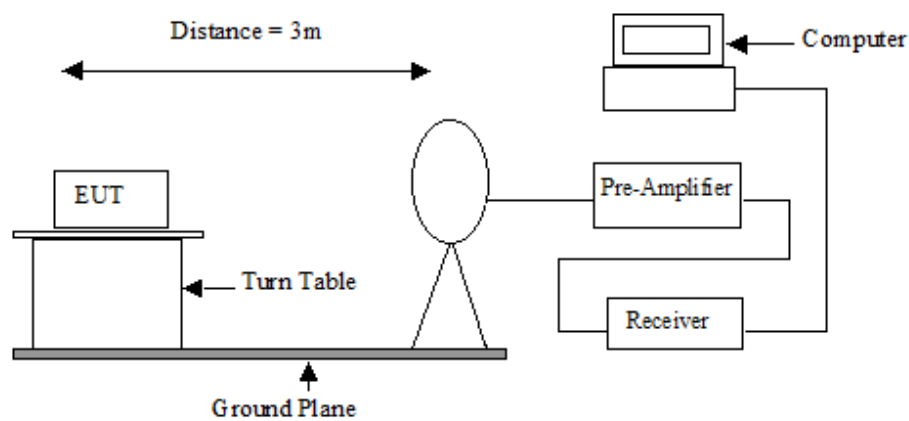

7.3 Conducted RF test setups



8 Test Methodology

8.1 Conducted Emission

The EUT was placed on a table, which is 0.8m above ground plane, the power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).

Maximum procedure was performed to ensure EUT compliance, A EMI test receiver is used to test the emissions from both sides of AC line.

8.2 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*On a standard emission test site with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules.

8.3 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + \text{System Factor}$$

$$\text{System Factor} = AF + CF + FA - PA$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

9 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
System controller	ABB	M2300	Input: 100-240 V a.c., 50/60 Hz, 1.0 A; output: 28.0 V d.c., 1.2 A

Remark: All the auxiliary equipments are used to make this "Display module with ID card reader" works as its representative configuration for conducted emission test.

10 Technical Requirement

10.1 Conducted Emission Measurement

Test Requirement:

FCC part 15 section 15.207
RSS-Gen Issue 4 clause 8.8

Limits of 15.207:

Frequency (MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Method:

ANSI C63.4:2014

Test Date:

2015-10-29

Mode of Operation:


Test EUT in a representative configuration that can read card.

Detector Function

Quasi-peak and Average

Test data:


Conducted emission

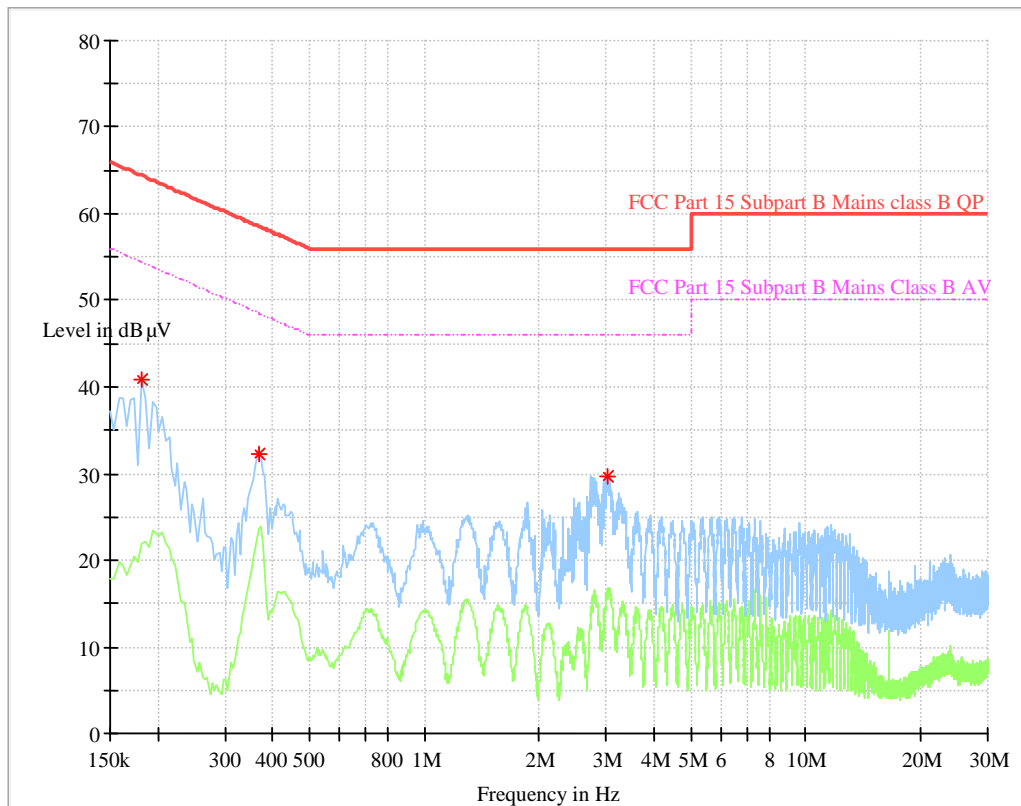

No significant emission was detected within 10 dB to limit

Operating Mode : Test EUT in a representative configuration with reading card.
 Conduct Line/Port : L
 Test By : Peter Jia
 Test Date : 2015-10-29

Conducted emission

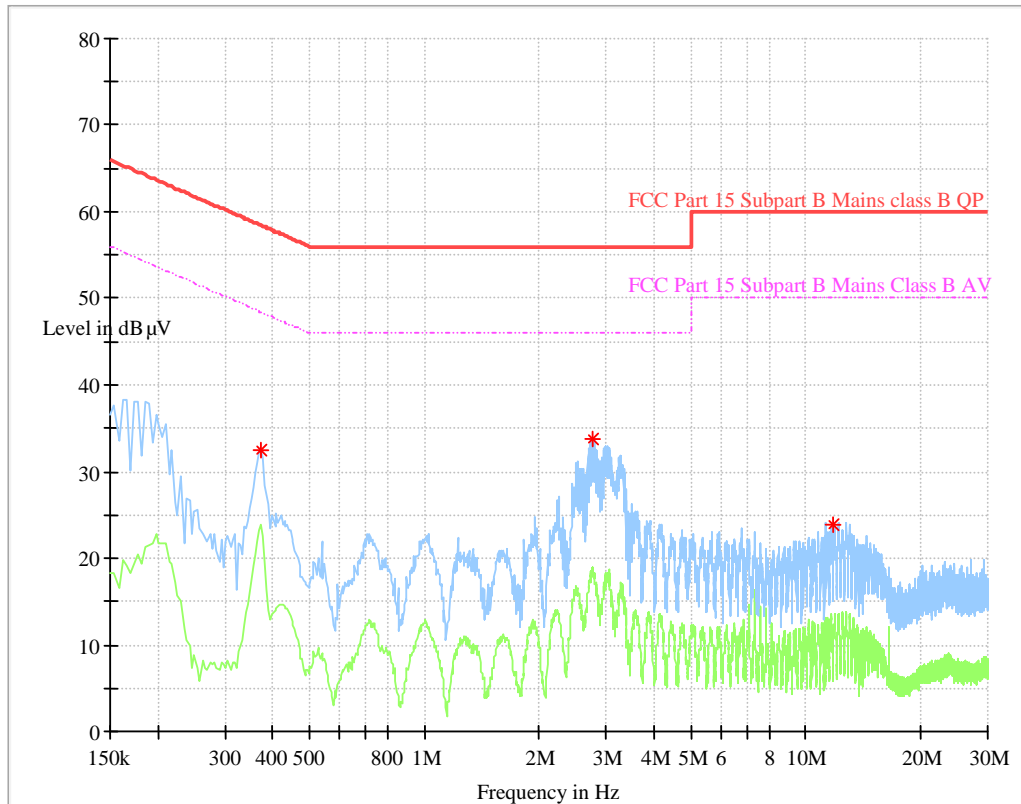

No significant emission was detected within 10 dB to limit

Operating Mode : Test EUT in a representative configuration with reading card.
 Conduct Line/Port : N
 Test By : Peter Jia
 Test Date : 2015-10-29

Test result: PASS

10.2 Filed Strength Measurement

Test Requirement: FCC part 15 section 15.209, 15.205 &
RSS-210 Issue 8 section 2,
RSS-Gen Issue 4 clause 8.9, 8.10

Limits of 15.209:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Method: ANSI C63.4:2014
Test Date: 2015-08-31
Mode of Operation: Continuously transmitting mode.
Detector Function: Quasi-peak (Below 1000 MHz)
Average and Peak (Above 1000 MHz)
Measurement BW: 200Hz(9KHz-150KHz)
9KHz(150KHz-30MHz)
120 kHz (30MHz-1000 MHz)
1 MHz (Above 1000 MHz)

Test data:

Emission 9KHz-30MHz

Frequency (MHz)	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)	Remark
0.018494	37.41	122.25	84.84	H	31.9	Peak
0.045237	33.73	114.48	80.76	H	29.1	Peak
0.125073	31.47	107.50	76.04	H	25.0	Peak
0.226886	39.02	100.48	61.47	H	25.2	Peak
0.507296	38.32	73.50	35.18	H	25.1	QP
1.131432	36.28	66.55	30.28	H	25.2	QP
1.674159	35.74	63.16	27.42	H	25.3	QP
4.944091	36.46	69.50	33.04	H	25.5	QP
7.960750	37.61	69.50	31.89	H	25.8	QP
28.353727	39.42	69.50	30.08	H	27.7	QP

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)	Remark
0.018024	37.02	122.47	85.45	V	32.0	Peak
0.037247	35.85	116.17	80.32	V	29.9	Peak
0.125227	31.81	107.58	75.77	V	25.0	Peak
0.226886	38.89	100.48	61.59	V	25.2	Peak
0.516341	38.64	73.35	34.71	V	25.1	QP
1.086205	37.01	66.91	29.89	V	25.2	QP
1.669636	35.77	63.18	27.42	V	25.3	QP
5.513955	36.21	69.50	33.29	V	25.6	QP
6.884341	37.07	69.50	32.43	V	25.7	QP
29.620091	39.56	69.50	29.94	V	28.1	QP

Test result: PASS

10.3 Occupied Bandwidth

Test Requirement:

FCC Part 15 C Section 15.215 (c)

RSS-Gen Issue 4 clause 6.6

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Method:

ANSI C63.4:2014

Test Date:

2015-08-31

Mode of Operation:

Continuously transmitting mode.

Detector Function

Maxpeak


Measurement BW

RBW:100Hz

VBW:300Hz

Test data:

20dB bandwidth

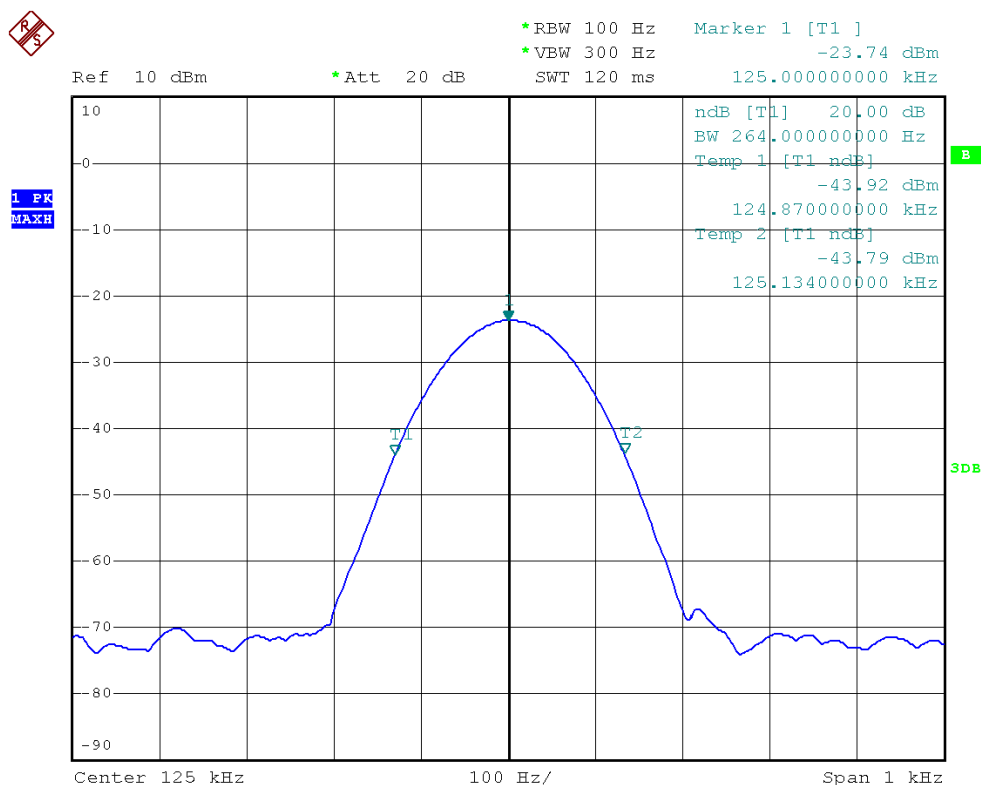

99% bandwidth




*RBW 100 Hz Marker 1 [T1]
 *VBW 300 Hz -23.79 dBm
 SWT 120 ms 125.004000000 kHz

Ref 10 dBm

*Att 20 dB

1 PK
MAXH

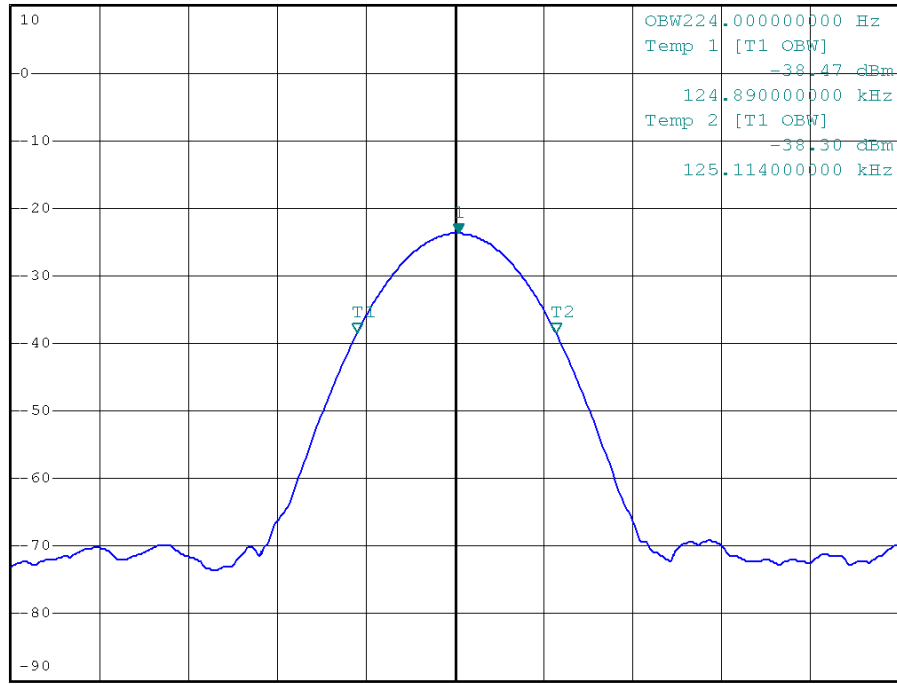

Result: PASS

11 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	101031	2016-7-24
	Programmable temperature and humidity chamber	MHG-408CASI	TaiLi	A81002	2016-7-24
	DC power supply	INSTEK	GPR-30600	EH873394	N/A
CE	EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2016-7-24
	LISN	Rohde & Schwarz	ENV216	100326	2016-7-24
RE	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100398	2016-7-24
	EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2016-7-24
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2016-8-14
	Horn Antenna	Rohde & Schwarz	HF907	102294	2016-7-24
	Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2016-7-24
	3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29

C - Conducted RF tests

- Occupied bandwidth
- Frequency Stability

12 System Measurement Uncertainty



For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items	Extended Uncertainty
Radiated spurious emission	U=±4.54dB (9KHz~30MHz)
	U=±4.91dB (30MHz~1GHz)
	U=±4.89dB (1GHz~18GHz)

13 Appendix A – Setup Photos

Setup photo of radiated emission (9KHz-30MHz)

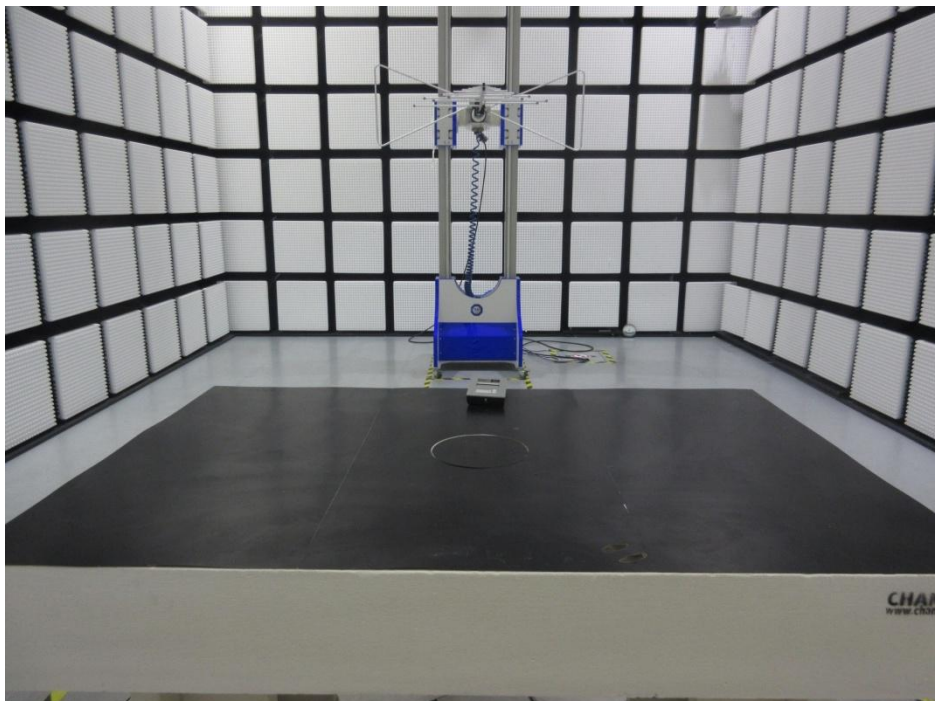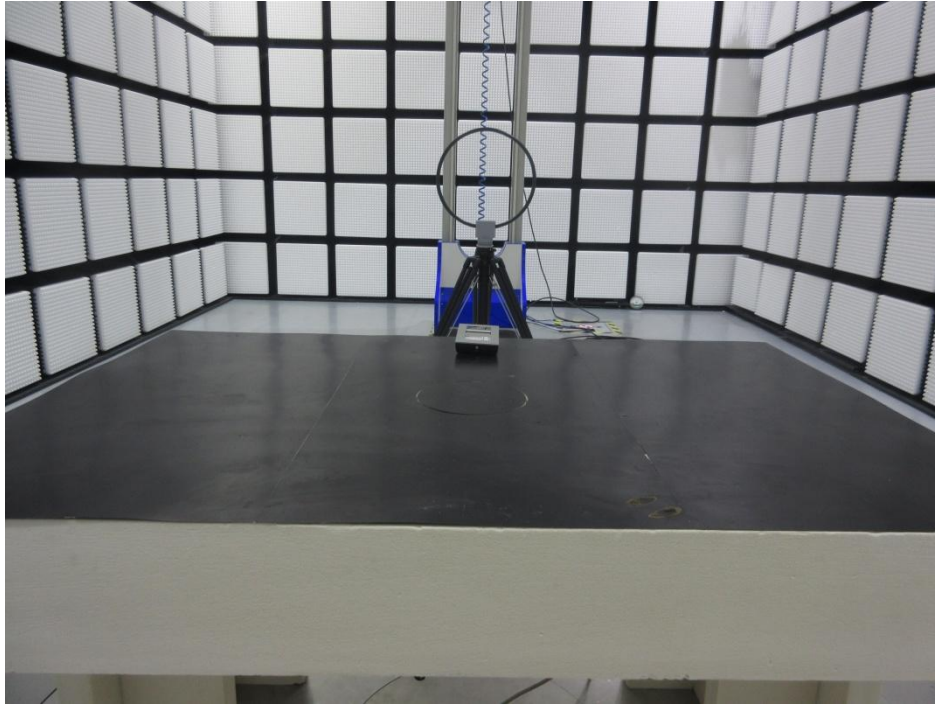


Setup photo of conducted emission (150KHz-30MHz)




14 Appendix B – EUT Photos

External photos



Front View


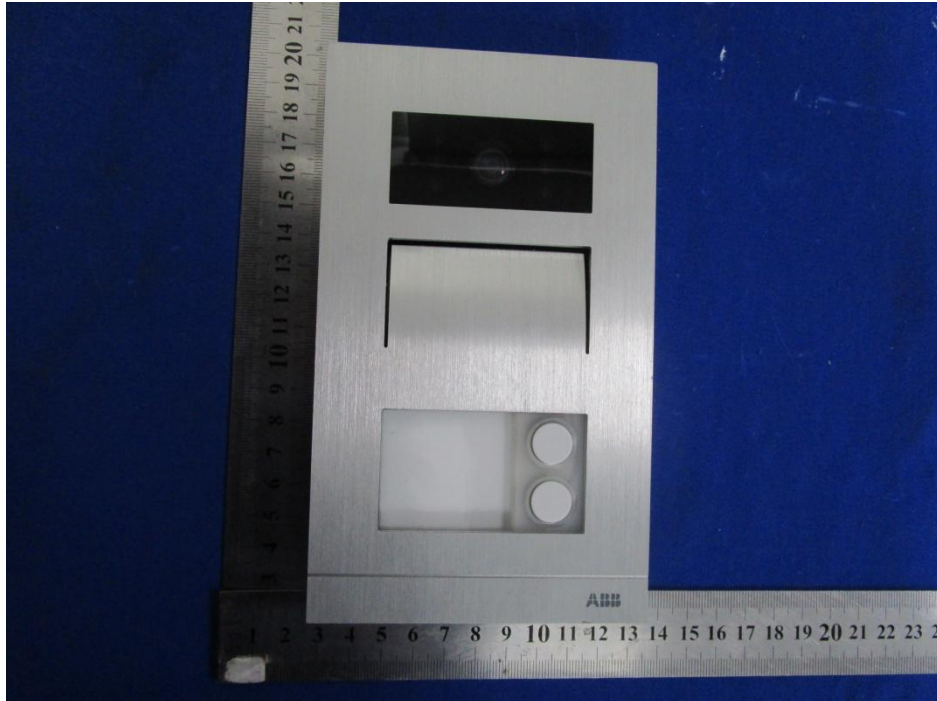


Back view

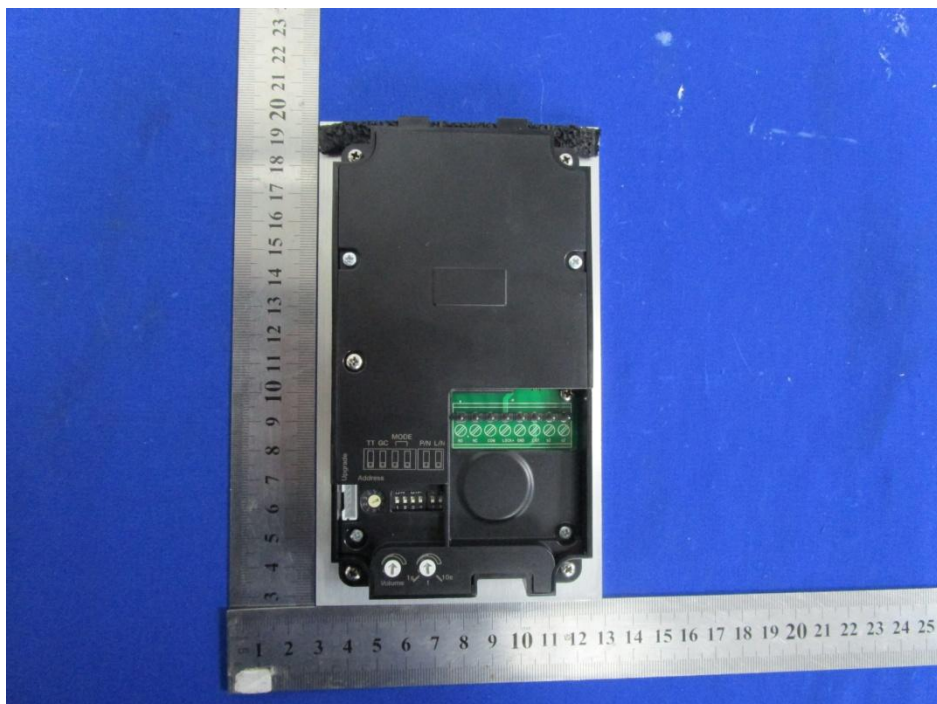



Side view

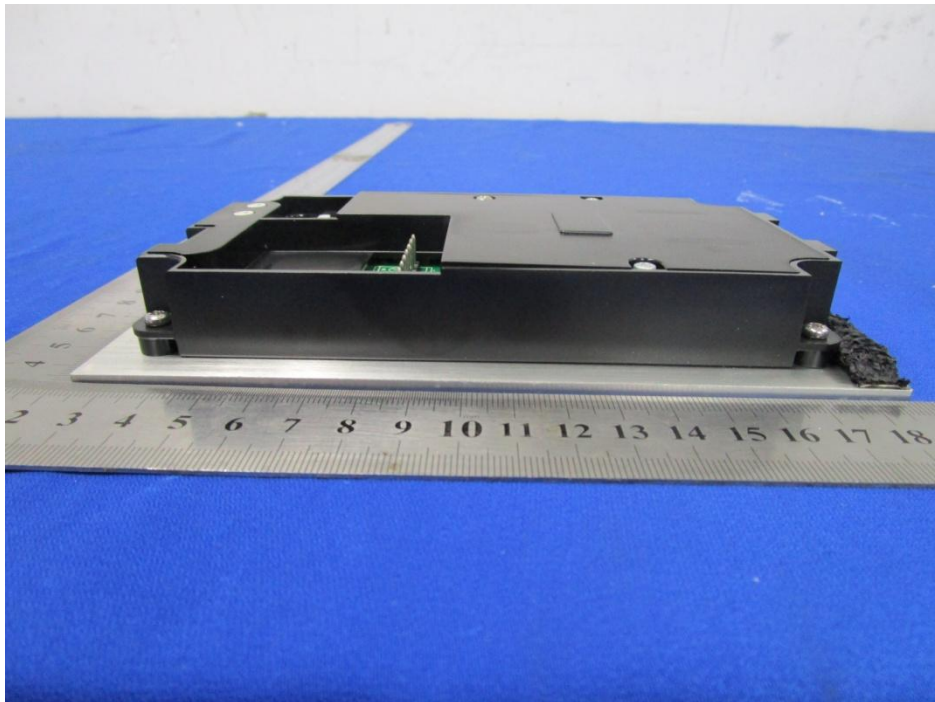
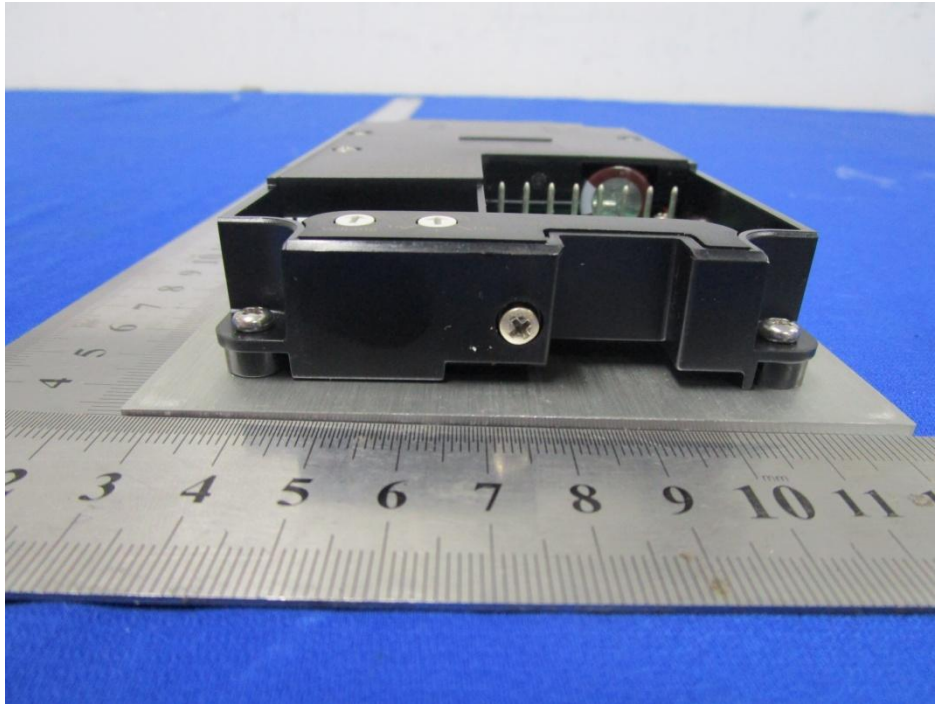


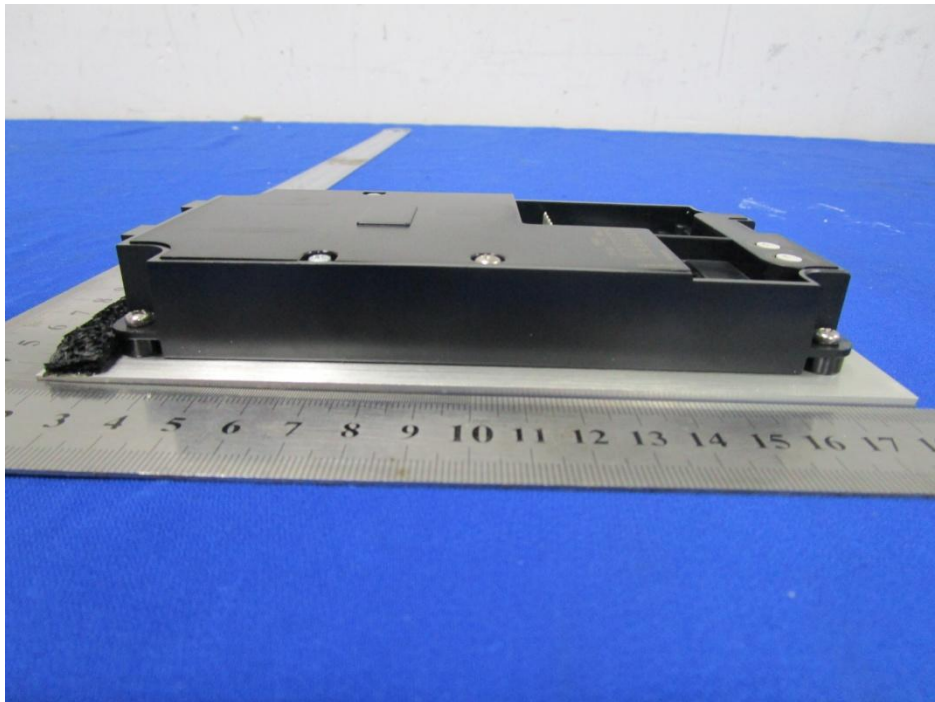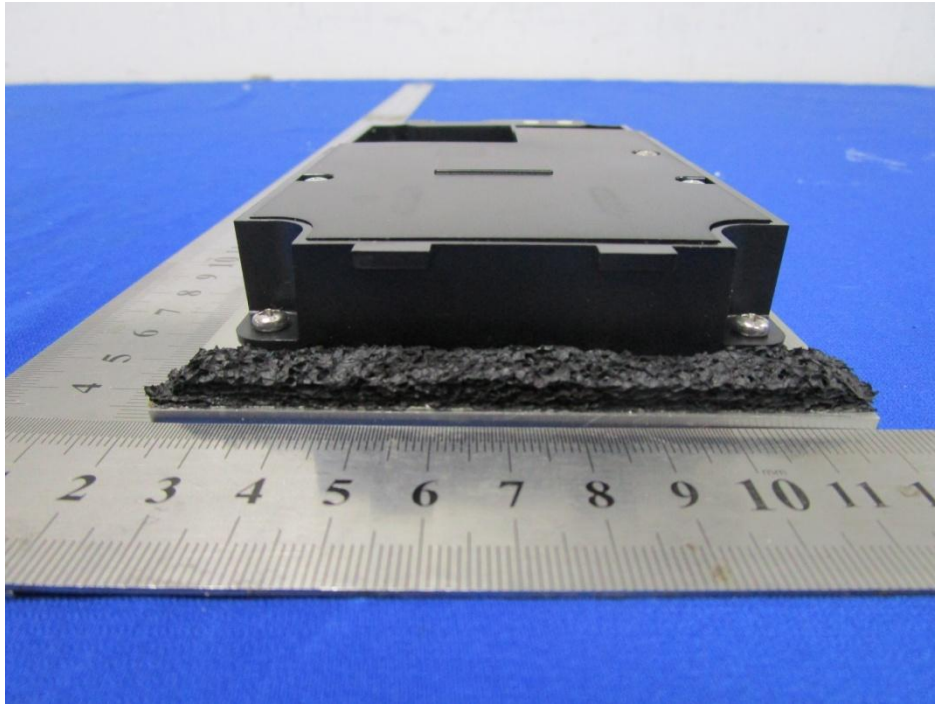


Internal Photos



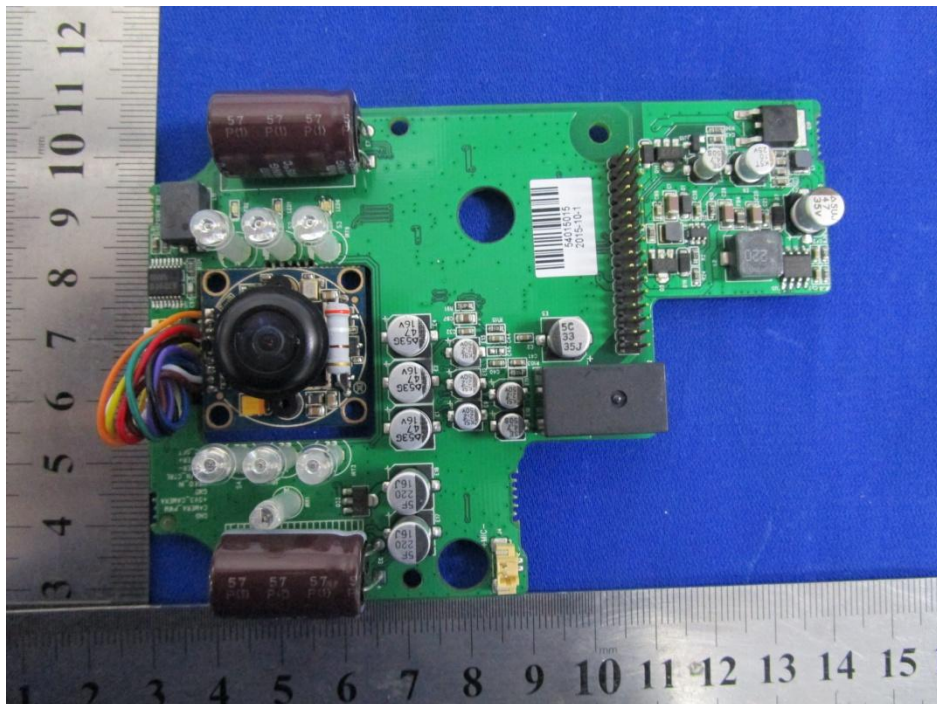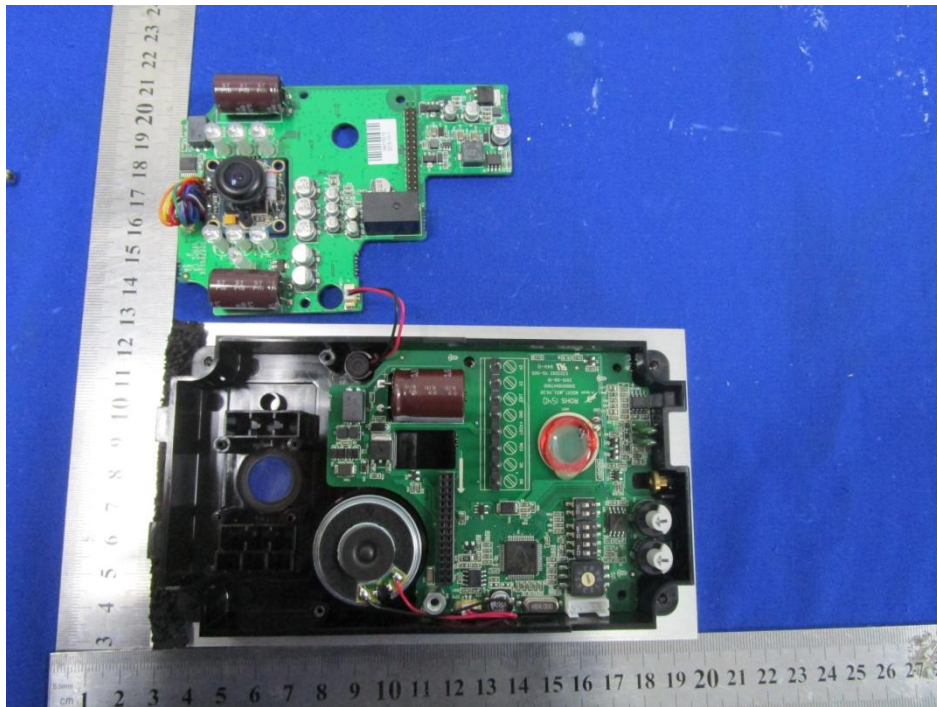

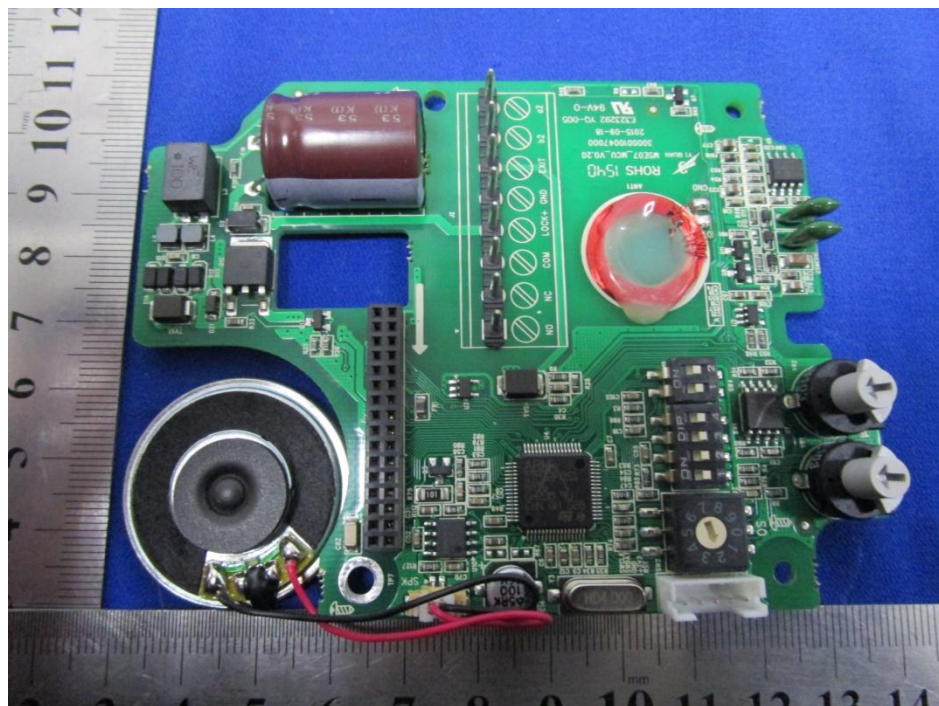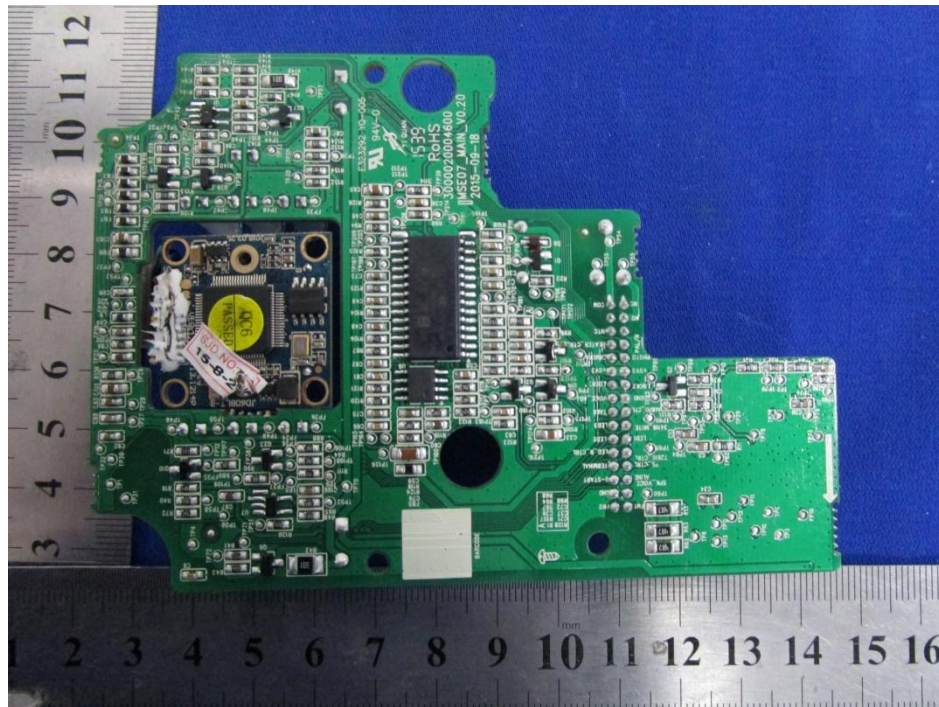

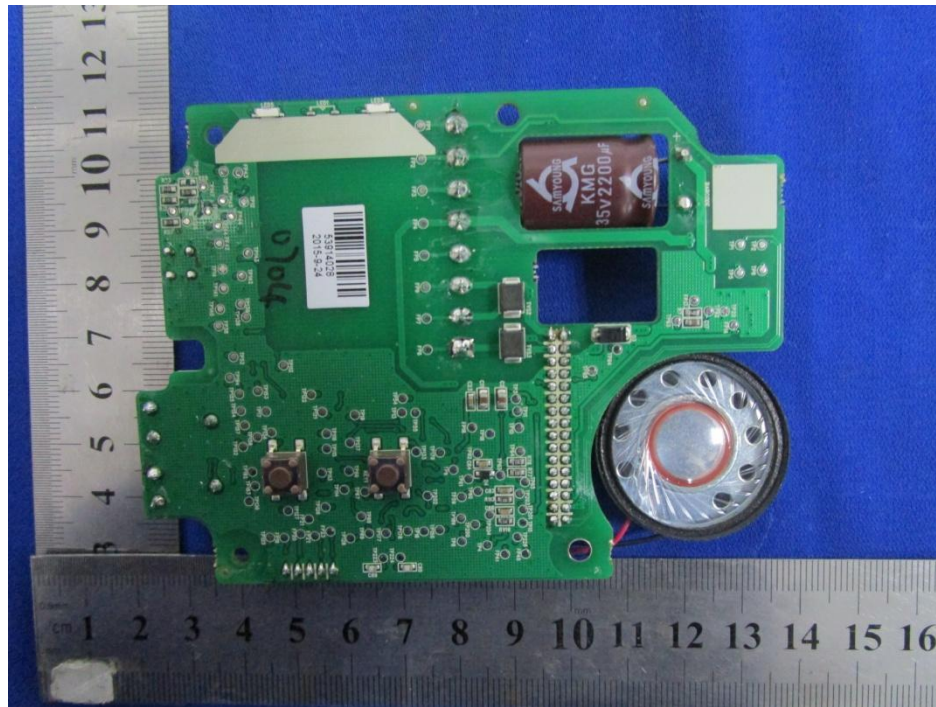

Antenna photo

