



# FCC PART 15.247 TEST REPORT

For

## PETKIT NETWORK TECHNOLOGY (SHANGHAI) CO.,LTD

Room 218, Building W1, No.1000 Chenhui Road, Pudong District, Shanghai. China

FCC ID: 2AEDGP530

Report Type: **Product Type:** Original Report FRESH ELEMENT Mini Test Engineer: Hope Zhang Report Number: RSHA180831004-00B **Report Date: 2018-12-06** Oscar Ye Oscar. Ye Reviewed By: RF Leader **Prepared By:** Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	4
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	
SUPPORT EQUIPMENT LIST AND DETAILS	8
External I/O Cable	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	
TEST EQUIPMENT LIST	12
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
FCC §15.203 - ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
Antenna Connector Construction	
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP TEST PROCEDURE	
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	19
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
Test Data	21
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	40
APPLICABLE STANDARD	
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	47
APPLICABLE STANDARD	
TEST PACEDURE	
TEST DATA	
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	
APPLICABLE STANDARD	
TEST PROCEDURE TEST DATA	
* => . *	······································

Bay Area Compliance Laboratories Corp. (Kunsha	Bay A	rea Comp	oliance	Laboratories	Corp. (	(Kunsha
--	-------	----------	---------	--------------	---------	---------

Report No.: RSHA180831004-00B 

APPLICABLE STANDARD	53
TEST PROCEDURE	
Tegt Data	53

FCC Part 15.247 Page 3 of 58

### **GENERAL INFORMATION**

### **Product Description for Equipment under Test (EUT)**

Applicant	PETKIT NETWORK TECHNOLOGY (SHANGHAI) CO.,LTD
Tested Model	P530
Product Type	FRESH ELEMENT Mini
Dimension	315mm(L)*319mm(W)*170mm(H)
Power Supply	DC 5.9V from adapter

Report No.: RSHA180831004-00B

Adapter Information:

Model: TEKA006-0591000UKC Input: AC 100-240V, 50/60 Hz, 0.3A

Output: DC 5.9V, 1A

### **Objective**

This report is prepared on behalf of *PETKIT NETWORK TECHNOLOGY (SHANGHAI) CO.,LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### Related Submittal(s)/Grant(s)

No related submittal/grant.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 58

<sup>\*</sup>All measurement and test data in this report was gathered from production sample serial number: 20180831004. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-08-31)

### **Measurement Uncertainty**

	Item	Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conduct	ed test with spectrum	0.9dB
RF Output Po	ower with Power meter	0.5dB
	30MHz~1GHz	6.11dB
D. Fate Landing	1GHz~6GHz	4.45dB
Radiated emission	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Оссир	pied Bandwidth	0.5kHz
Temperature		1.0℃
	Humidity	6%

Report No.: RSHA180831004-00B

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FCC Part 15.247 Page 5 of 58

### **SYSTEM TEST CONFIGURATION**

### **Description of Test Configuration**

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	1	/

Report No.: RSHA180831004-00B

### **Equipment Modifications**

No modification was made to the EUT tested.

### **EUT Exercise Software**

RF test tool: espRFTool

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level
802.11b	1 Mbps	16
802.11g	6 Mbps	4
802.11n-HT20	MCS0	4

FCC Part 15.247 Page 6 of 58

### **Duty Cycle:**

### 802.11b Mode Middle Channel

Report No.: RSHA180831004-00B

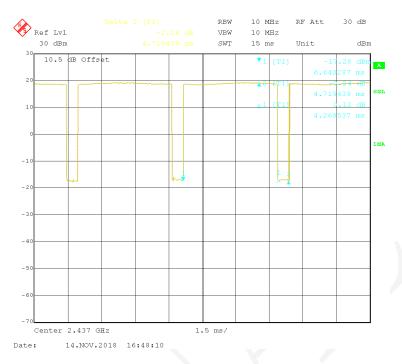

### **802.11g Mode Middle Channel**



FCC Part 15.247 Page 7 of 58

#### 802.11n-HT20 Mode Middle Channel

Report No.: RSHA180831004-00B



Mode	Duty Cycle (%)	T(us)	1/T(kHz)	10log(1/x)
802.11b	90.46	4269	0.23	0.44
802.11g	100	/	/	0
802.11n-HT20	100		/	0

**Note**: "x" means the Duty Cycle.

### **Support Equipment List and Details**


Manufacturer Description		Model	Serial Number	
/	/	/	/	


### **External I/O Cable**

Cable Description Length (m)		From Port	То
Power Cable 1.0		EUT	Adapter


FCC Part 15.247 Page 8 of 58

### **Block Diagram of Test Setup**

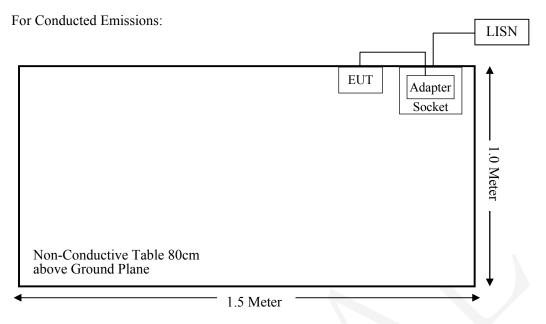

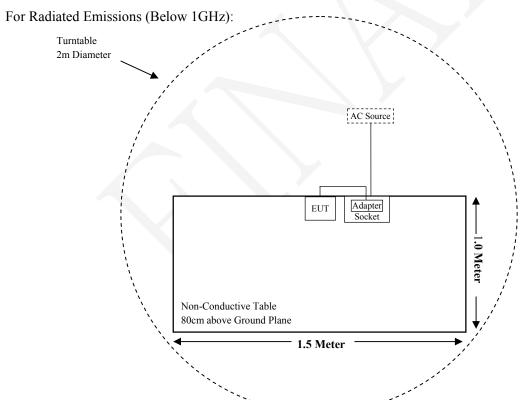

FCC Part 15.247 Page 9 of 58

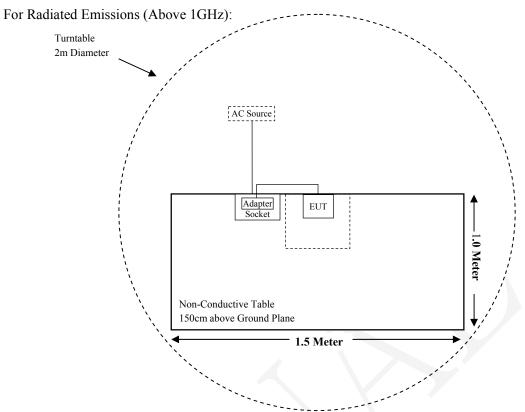

FCC Part 15.247 Page 10 of 58

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Report No.: RSHA180831004-00B

FCC Part 15.247 Page 11 of 58

# TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date		
Radiated Emission Test (Chamber 1#)							
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11		
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25		
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14		
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A		
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14		
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14		
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14		
	Radiated Em	nission Test (Char	nber 2#)				
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26		
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10		
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17		
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10		
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21		
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04		
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14		
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A		
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14		
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14		
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14		
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14		
	R	F Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11		
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17		
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17		
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14		
PETKIT	RF Cable	PETKITC01	C01	Each Time	/		
	Cond	lucted Emission To	est				
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-12	2019-11-11		
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-15	2019-11-14		
BACL	Auto test Software	BACL-EMC	CE001	N/A	N/A		
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09		
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14		

Report No.: RSHA180831004-00B

FCC Part 15.247 Page 12 of 58

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Report No.: RSHA180831004-00B

#### **Applicable Standard**

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure										
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)						
0.3-1.34	614	1.63	*(100)	30						
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30						
30-300	27.5	0.073	0.2	30						
300-1500	/	/	f/1500	30						
1500-100,000	/	/	1.0	30						

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

 $S = PG/4\pi R^2 = power density (in appropriate units, e.g. mW/cm^2);$ 

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

#### **Calculated Data:**

Frequenc Mode Range		Antenna Gain		Target Output Power		Evaluation Distance	Power Density	MPE Limit
	(MHz) (d		(numeric)	(dBm)	(mW)	(cm)	$(mW/cm^2)$	(mW/cm <sup>2</sup> )
802.11b		3.00	2.00	18.00	63.10	20	0.0251	1.0
802.11g	2412~2462	3.00	2.00	22.00	158.49	20	0.0631	1.0
802.11 n-HT20		3.00	2.00	21.50	141.25	20	0.0562	1.0

**Note**: The target output power was declared by the manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC Part 15.247 Page 13 of 58

### FCC §15.203 - ANTENNA REQUIREMENT

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RSHA180831004-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has a PCB antenna for Wi-Fi and the antenna gain is 3dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.


FCC Part 15.247 Page 14 of 58

### FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

### **Applicable Standard**

FCC §15.207(a)

### **EUT Setup**

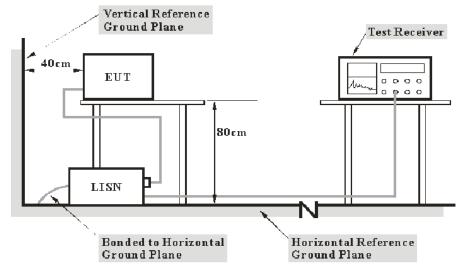

Report No.: RSHA180831004-00B

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### **Test Procedure**

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 15 of 58

### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Report No.: RSHA180831004-00B

The "Margin" column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB $\mu$ V) – Corrected Amplitude (dB $\mu$ V)

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	20.2 ℃
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2018-11-21.

EUT operation mode: Transmitting in 802.11g mode low channel (worst case)

FCC Part 15.247 Page 16 of 58

### AC 120V/60 Hz, Line

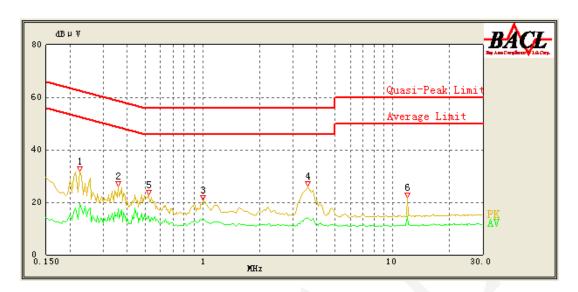


Report No.: RSHA180831004-00B

						1000		
Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.225	31.75	QP	9.000	L1	16.02	62.63	30.88	Compliance
0.225	19.65	AV	9.000	L1	16.02	52.63	32.98	Compliance
0.360	26.16	QP	9.000	L1	16.05	58.73	32.57	Compliance
0.360	17.53	AV	9.000	L1	16.05	48.73	31.20	Compliance
1.000	20.71	QP	9.000	L1	15.88	56.00	35.29	Compliance
1.000	13.69	AV	9.000	L1	15.88	46.00	32.31	Compliance
3.600	26.28	QP	9.000	L1	15.85	56.00	29.72	Compliance
3.600	14.08	AV	9.000	L1	15.85	46.00	31.92	Compliance
0.520	22.82	QP	9.000	L1	16.07	56.00	33.18	Compliance
0.520	14.90	AV	9.000	L1	16.07	46.00	31.10	Compliance
12.000	21.88	QP	9.000	L1	16.12	60.00	38.12	Compliance
12.000	14.63	AV	9.000	L1	16.12	50.00	35.37	Compliance

FCC Part 15.247 Page 17 of 58

### AC 120V/60 Hz, Neutral

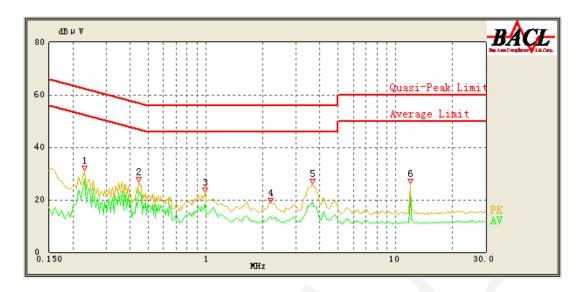

Report No.: RSHA180831004-00B

Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.230	31.13	QP	9.000	N	16.06	62.45	31.32	Compliance
0.230	27.80	AV	9.000	N	16.06	52.45	24.65	Compliance
0.445	26.98	QP	9.000	N	16.10	56.97	29.99	Compliance
0.445	23.53	AV	9.000	N	16.10	46.97	23.44	Compliance
0.995	22.78	QP	9.000	N	15.94	56.00	33.22	Compliance
0.995	18.62	AV	9.000	N	15.94	46.00	27.38	Compliance
2.200	18.96	QP	9.000	N	15.91	56.00	37.04	Compliance
2.200	13.37	AV	9.000	N	15.91	46.00	32.63	Compliance
3.650	26.13	QP	9.000	N	15.89	56.00	29.87	Compliance
3.650	19.30	AV	9.000	N	15.89	46.00	26.70	Compliance
12.000	26.06	QP	9.000	N	16.00	60.00	33.94	Compliance
12.000	21.59	AV	9.000	N	16.00	50.00	28.41	Compliance

#### Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dB $\mu$ V) – Corrected Amplitude (dB $\mu$ V)

FCC Part 15.247 Page 18 of 58

# FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS


Report No.: RSHA180831004-00B

### **Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

### **EUT Setup**

#### **Below 1 GHz:**

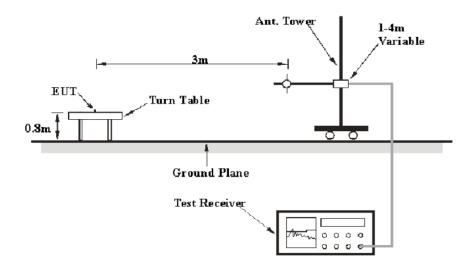

#### **Above 1GHz:**

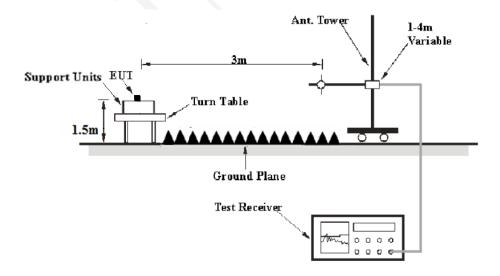

FCC Part 15.247 Page 19 of 58

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

Report No.: RSHA180831004-00B

#### **EMI Test Receiver Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1CHz	1MHz	3 MHz	1	PK
Above 1GHz	1MHz	3 MHz	1	Ave.

#### **Test Procedure**

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB $\mu$ V /m) = Meter Reading (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The "Margin" column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

FCC Part 15.247 Page 20 of 58

### **Test Data**

### **Environmental Conditions**

Temperature:	24.1-24.2 ℃
Relative Humidity:	49-50 %
ATM Pressure:	1011-101.2kPa

The testing was performed by Hope Zhang from 2018-11-14 to 2018-11-28.


EUT operation mode: Transmitting

### **Spurious Emission Test:**

#### 30MHz-1GHz:

Pre-scan with 802.11b, 802.11g and 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11g mode in X-axis of orientation** was recorded

Report No.: RSHA180831004-00B

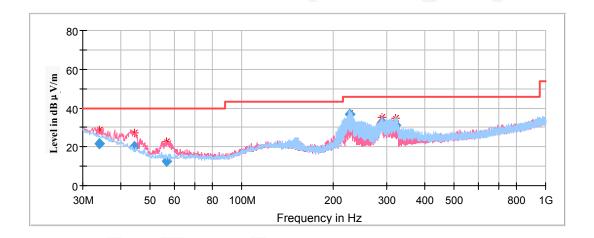

Frequency	Frequency Corrected Amplitude Rx Antenna		ntenna	Turntable	Corrected Factor	Limit	Margin	
(MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)	Degree	(dB/m)	(dBµV/m)	(dB)	
34.015450	21.53	101.0	V	38.0	-6.7	40.00	18.47	
44.288450	20.16	101.0	V	235.0	-13.6	40.00	19.84	
56.647500	12.40	101.0	V	272.0	-17.8	40.00	27.60	
227.347800	36.50	101.0	Н	110.0	-12.2	46.00	9.50	
289.165350	32.73	101.0	Н	136.0	-10.8	46.00	13.27	
320.781200	31.03	101.0	Н	132.0	-10.1	46.00	14.97	

FCC Part 15.247 Page 21 of 58

#### **1GHz-18GHz:**

#### 802.11b Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

#### Note:

- 1. This test was performed with the 2.4 2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V) Margin (dB) = Limit (dB $\mu$ V/m) Corrected Amplitude (dB $\mu$ V /m)

### Low Channel: 2412MHz

Report No.: RSHA180831004-00B

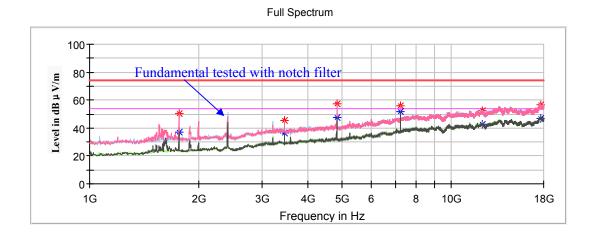


Frequency	Corrected .	Amplitude	Rx A	Antenna Turntable		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1765.000000		37.13	100.0	V	56.0	-6.6	54.00	16.87
1768.400000	50.18		100.0	V	56.0	-6.6	74.00	23.82
3454.800000	45.20		100.0	V	248.0	-0.9	74.00	28.80
3454.800000		36.29	100.0	V	248.0	-0.9	54.00	17.71
4824.000000	57.02		200.0	Н	222.0	1.9	74.00	16.98
4824.000000		47.60	200.0	Н	222.0	1.9	54.00	6.40
7236.000000	55.86		100.0	Н	59.0	9.0	74.00	18.14
7236.000000		50.43	100.0	Н	59.0	9.0	54.00	3.57
12175.800000		42.85	250.0	Н	53.0	13.3	54.00	11.15
12175.800000	52.58		250.0	Н	53.0	13.3	74.00	21.42
17619.200000		46.87	100.0	V	213.0	17.3	54.00	7.13
17619.200000	56.69		100.0	V	213.0	17.3	74.00	17.31

FCC Part 15.247 Page 22 of 58

### Middle Channel: 2437MHz

Report No.: RSHA180831004-00B

### Full Spectrum

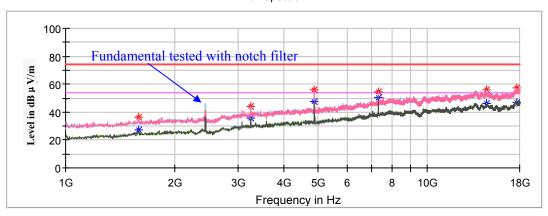


Frequency	Corrected .	Amplitude	Rx A	Rx Antenna		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Turntable Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000	36.65		200.0	V	91.0	-7.2	74.00	37.35
1591.600000		27.55	200.0	V	91.0	-7.2	54.00	26.45
3247.400000	44.38		100.0	Н	81.0	-1.2	74.00	29.62
3247.400000		35.74	100.0	Н	81.0	-1.2	54.00	18.26
4874.000000	55.99		150.0	Н	242.0	1.9	74.00	18.01
4874.000000		47.32	150.0	Н	242.0	1.9	54.00	6.68
7311.000000	54.35		200.0	Н	46.0	9.2	74.00	19.65
7311.000000		50.47	200.0	Н	46.0	9.2	54.00	3.53
14600.000000	56.07		100.0	Н	222.0	14.5	74.00	17.93
14600.000000		45.87	100.0	Н	222.0	14.5	54.00	8.13
17629.400000		46.93	200.0	V	240.0	17.3	54.00	7.07
17629.400000	57.14		200.0	V	240.0	17.3	74.00	16.86

FCC Part 15.247 Page 23 of 58

### High Channel: 2462MHz

Report No.: RSHA180831004-00B

### Full Spectrum

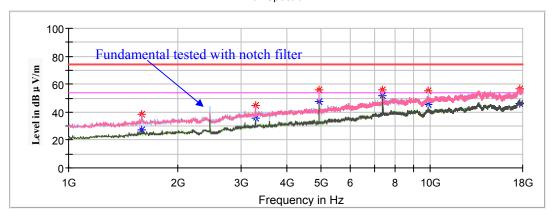

Emaguanay	Corrected Amplitude		Rx A	Rx Antenna		Corrected	Limit	Margin
Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Turntable Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000		27.10	200.0	V	297.0	-7.2	54.00	26.90
1591.600000	38.69		200.0	V	297.0	-7.2	74.00	35.31
3281.400000		35.52	150.0	Н	309.0	-1.2	54.00	18.48
3281.400000	44.71		150.0	Н	309.0	-1.2	74.00	29.29
4924.000000		47.23	200.0	Н	224.0	2.0	54.00	6.77
4924.000000	55.72		200.0	Н	224.0	2.0	74.00	18.28
7386.000000		51.93	200.0	Н	36.0	9.4	54.00	2.07
7386.000000	55.65		200.0	Н	36.0	9.4	74.00	18.35
9846.800000		45.56	150.0	Н	238.0	12.2	54.00	8.44
9846.800000	55.08		150.0	Н	238.0	12.2	74.00	18.92
17636.200000		46.37	200.0	V	269.0	17.3	54.00	7.63
17636.200000	56.77		200.0	V	269.0	17.3	74.00	17.23

FCC Part 15.247 Page 24 of 58

#### 802.11g Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)


#### Note:

- 1. This test was performed with the 2.4 2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV) Margin (dB) = Limit (dBμV/m) Corrected Amplitude (dBμV/m)

### Low Channel: 2412MHz

Report No.: RSHA180831004-00B



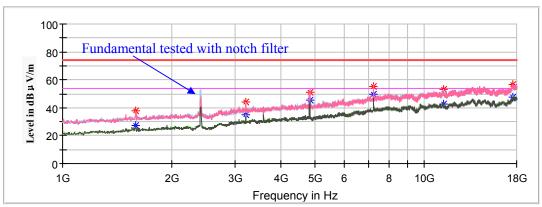


Frequency	Corrected	Amplitude	Rx A	Rx Antenna		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Turntable Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000		27.15	100.0	V	247.0	-7.2	54.00	26.85
1591.600000	37.61		100.0	V	247.0	-7.2	74.00	36.39
3213.400000		34.71	150.0	Н	179.0	-1.3	54.00	19.29
3213.400000	44.39		150.0	Н	179.0	-1.3	74.00	29.61
4824.000000	51.14		250.0	Н	229.0	1.9	74.00	22.86
4824.000000		45.62	250.0	Н	229.0	1.9	54.00	8.38
7236.000000	55.46		150.0	Н	262.0	9.0	74.00	18.54
7236.000000		49.79	150.0	Н	262.0	9.0	54.00	4.21
11281.600000		42.46	250.0	Н	284.0	13.1	54.00	11.54
11281.600000	53.26		250.0	Н	284.0	13.1	74.00	20.74
17602.200000		47.24	100.0	Н	351.0	17.3	54.00	6.76
17602.200000	56.36		100.0	Н	351.0	17.3	74.00	17.64

FCC Part 15.247 Page 25 of 58

### Middle Channel: 2437MHz

Report No.: RSHA180831004-00B

### Full Spectrum

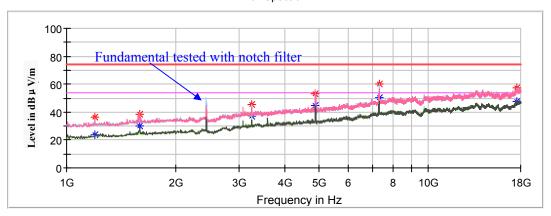


Frequency	Corrected A	Amplitude	Rx A	Rx Antenna		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Turntable Degree	Factor (dB/m)	(dBµV/m)	(dB)
1197.200000		23.91	200.0	V	8.0	-9.3	54.00	30.09
1197.200000	36.11		200.0	V	8.0	-9.3	74.00	37.89
1591.600000		29.91	150.0	V	308.0	-7.2	54.00	24.09
1591.600000	38.75		150.0	V	308.0	-7.2	74.00	35.25
3247.400000		36.90	100.0	H	257.0	-1.2	54.00	17.10
3247.400000	45.36		100.0	Н	257.0	-1.2	74.00	28.64
4874.000000	52.99		200.0	Н	250.0	1.9	74.00	21.01
4874.000000		44.67	200.0	Н	250.0	1.9	54.00	9.33
7311.000000	59.79		150.0	Н	73.0	9.2	74.00	14.21
7311.000000		50.20	150.0	Н	73.0	9.2	54.00	3.80
17513.800000		47.55	200.0	Н	125.0	17.2	54.00	6.45
17513.800000	57.68		200.0	Н	125.0	17.2	74.00	16.32

FCC Part 15.247 Page 26 of 58

### High Channel: 2462MHz

Report No.: RSHA180831004-00B

### Full Spectrum

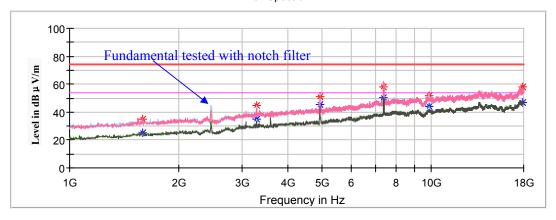

Enggueney	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000		24.92	200.0	Н	281.0	-7.2	54.00	29.08
1591.600000	34.84		200.0	Н	281.0	-7.2	74.00	39.16
3281.400000		35.14	100.0	Н	176.0	-1.2	54.00	18.86
3281.400000	44.46		100.0	Н	176.0	-1.2	74.00	29.54
4924.000000	50.99		250.0	Н	40.0	2.0	74.00	23.01
4924.000000		45.58	250.0	Н	40.0	2.0	54.00	8.42
7386.000000	58.00		200.0	Н	253.0	9.4	74.00	16.00
7386.000000		50.65	200.0	Н	253.0	9.4	54.00	3.35
9843.400000		44.31	100.0	Н	280.0	12.2	54.00	9.69
9843.400000	51.96		100.0	Н	280.0	12.2	74.00	22.04
17928.600000	58.23		200.0	V	162.0	17.6	74.00	15.77
17932.000000		46.65	200.0	V	162.0	17.6	54.00	7.35

FCC Part 15.247 Page 27 of 58

#### 802.11n-HT20 Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)


#### Note:

- 1. This test was performed with the 2.4 2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV) Margin (dB) = Limit (dBμV/m) Corrected Amplitude (dBμV/m)

#### Low Channel: 2412MHz

Report No.: RSHA180831004-00B



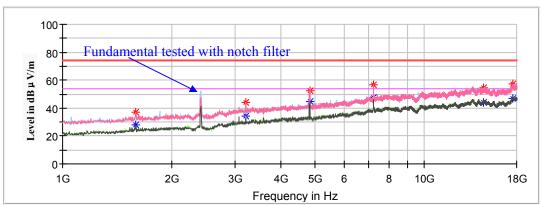


Frequency	Corrected .	Amplitude	Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1595.000000		28.17	100.0	V	178.0	-7.2	54.00	25.83
1595.000000	36.81		100.0	V	178.0	-7.2	74.00	37.19
3213.400000		34.37	100.0	Н	222.0	-1.3	54.00	19.63
3213.400000	43.91		100.0	Н	222.0	-1.3	74.00	30.09
4824.000000	52.13		250.0	Н	184.0	1.9	74.00	21.87
4824.000000		44.94	250.0	Н	184.0	1.9	54.00	9.06
7236.000000	56.76		100.0	Н	355.0	9.0	74.00	17.24
7236.000000		47.34	100.0	Н	355.0	9.0	54.00	6.66
14552.400000		43.96	200.0	V	253.0	14.6	54.00	10.04
14552.400000	54.80		200.0	V	253.0	14.6	74.00	19.20
17554.600000		47.09	100.0	V	324.0	17.2	54.00	6.91
17554.600000	57.02		100.0	V	324.0	17.2	74.00	16.98

FCC Part 15.247 Page 28 of 58

### Middle Channel: 2437MHz

Report No.: RSHA180831004-00B

### Full Spectrum

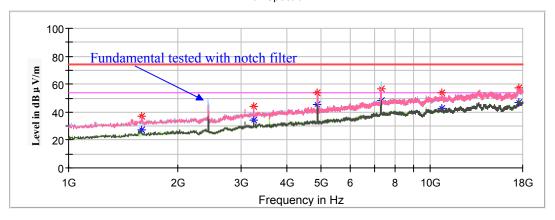


Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000	36.76		200.0	V	111.0	-7.2	74.00	37.24
1591.600000		27.46	200.0	V	111.0	-7.2	54.00	26.54
3247.400000	43.98		100.0	Н	108.0	-1.2	74.00	30.02
3247.400000		34.35	100.0	Н	108.0	-1.2	54.00	19.65
4874.000000	53.84		150.0	Н	262.0	1.9	74.00	20.16
4874.000000		45.61	150.0	Н	262.0	1.9	54.00	8.39
7311.000000	56.80		250.0	Н	99.0	9.2	74.00	17.20
7311.000000		48.27	250.0	Н	99.0	9.2	54.00	5.73
10730.800000		42.58	100.0	V	70.0	13.1	54.00	11.42
10730.800000	53.54		100.0	V	70.0	13.1	74.00	20.46
17551.200000		47.02	250.0	V	354.0	17.2	54.00	6.98
17551.200000	57.11		250.0	V	354.0	17.2	74.00	16.89

FCC Part 15.247 Page 29 of 58

### High Channel: 2462MHz

Report No.: RSHA180831004-00B

### Full Spectrum

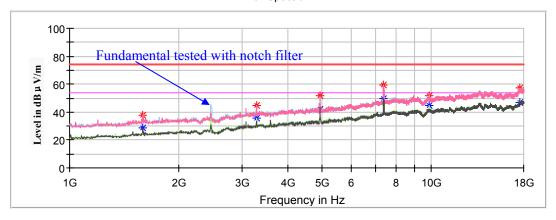

Frequency	Corrected Amplitude		Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1591.600000		28.44	200.0	V	40.0	-7.2	54.00	25.56
1591.600000	38.00		200.0	V	40.0	-7.2	74.00	36.00
3281.400000		35.36	100.0	Н	254.0	-1.2	54.00	18.64
3281.400000	44.58		100.0	Н	254.0	-1.2	74.00	29.42
4924.000000		41.71	200.0	Н	167.0	2.0	54.00	12.29
4924.000000	51.59		200.0	Н	167.0	2.0	74.00	22.41
7386.000000	59.76		200.0	Н	18.0	9.4	74.00	14.24
7386.000000		49.98	200.0	Н	18.0	9.4	54.00	4.02
9846.800000	52.06		100.0	Н	10.0	12.2	74.00	21.94
9846.800000		44.88	100.0	Н	10.0	12.2	54.00	9.12
17527.400000		46.85	250.0	V	338.0	17.2	54.00	7.15
17527.400000	57.25		250.0	V	338.0	17.2	74.00	16.75


FCC Part 15.247 Page 30 of 58

#### 18GHz-25GHz:

Pre-scan with 802.11b, 802.11g and 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11g mode in X-axis of orientation** was recorded


Report No.: RSHA180831004-00B

### Horizontal

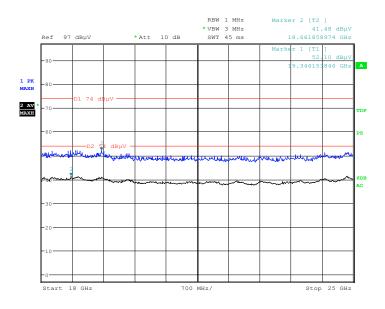

Date: 28.NOV.2018 11:46:21

### Vertical

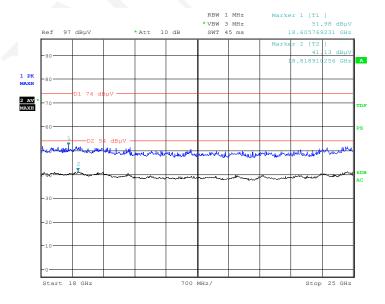

Date: 28.NOV.2018 12:10:49

FCC Part 15.247 Page 31 of 58

#### **Fundamental Test & Restricted Bands Emissions Test:**

#### Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB) Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V) Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V /m)

**802.11b Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Report No.: RSHA180831004-00B

Frequency	Corrected	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
Low Channel: 2412MHz								
2412.000000	107.33		150.0	Н	334.0	6.1	/	/
2412.000000		105.39	150.0	Н	334.0	6.1	/	/
2412.000000	104.83		100.0	V	38.0	6.1	/	/
2412.000000		103.11	100.0	V	38.0	6.1	/	/
2390.000000		44.25	150.0	Н	53.0	6.0	54.00	9.75
2390.000000	50.50		150.0	Н	53.0	6.0	74.00	23.50
		N	Middle Cha	nnel: 2437N	MHz			
2437.000000	110.66		200.0	Н	48.0	6.2	/	/
2437.000000		108.64	200.0	Н	48.0	6.2	/	/
2437.000000	108.34		250.0	V	221.0	6.2	/	/
2437.000000		106.19	250.0	V	221.0	6.2	/	/
			Channe1	11: 2462MI	Hz			
2462.000000	110.61		200.0	Н	284.0	6.2	/	/
2462.000000		108.41	200.0	Н	284.0	6.2	/	/
2462.000000	108.13		150.0	V	211.0	6.2	/	/
2462.000000	4-	106.36	150.0	V	211.0	6.2	/	/
2483.500000	51.22		100.0	Н	120.0	6.3	74.00	22.78
2483.500000		46.38	100.0	Н	120.0	6.3	54.00	7.62

FCC Part 15.247 Page 32 of 58

**802.11g Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Report No.: RSHA180831004-00B

Emagnamay	Corrected	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Manain	
Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	Margin (dB)	
	Low Channel: 2412MHz								
2412.000000	104.31		200.0	Н	327.0	6.1	/	/	
2412.000000		96.87	200.0	Н	327.0	6.1	/	/	
2412.000000	102.04		150.0	V	170.0	6.1	/	/	
2412.000000		94.71	150.0	V	170.0	6.1	/	/	
2390.000000		48.95	150.0	Н	243.0	6.0	54.00	5.05	
2390.000000	57.57		150.0	Н	243.0	6.0	74.00	16.43	
		1	Middle Cha	nnel: 24371	MHz				
2437.000000	106.62		150.0	Н	54.0	6.2	/	/	
2437.000000		99.28	150.0	Н	54.0	6.2	/	/	
2437.000000	104.58		250.0	V	18.0	6.2	/	/	
2437.000000		96.98	250.0	V	18.0	6.2	/	/	
			High Char	nnel: 2462N	IHz				
2462.000000	106.18		150.0	Н	263.0	6.2	/	/	
2462.000000		99.27	150.0	Н	263.0	6.2	/	/	
2462.000000	103.74		150.0	V	11.0	6.2	/	/	
2462.000000		97.21	150.0	V	11.0	6.2	/	/	
2483.500000	59.78		150.0	Н	243.0	6.3	74.00	14.22	
2483.500000		46.31	150.0	Н	243.0	6.3	54.00	7.69	

FCC Part 15.247 Page 33 of 58

**802.11n-HT20 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Report No.: RSHA180831004-00B


Frequency	Corrected Amplitude		Rx A	ntenna	Turntable	Corrected	Limit	Mongin		
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	Margin (dB)		
	Low Channel: 2412MHz									
2412.000000	105.66		100.0	Н	232.0	6.1	/	/		
2412.000000		98.22	100.0	Н	232.0	6.1	/	/		
2412.000000	103.58		200.0	V	245.0	6.1	/	/		
2412.000000		96.12	200.0	V	245.0	6.1	/	/		
2390.000000		50.71	150.0	Н	162.0	6.0	54.00	3.29		
2390.000000	62.26		150.0	Н	162.0	6.0	74.00	11.74		
		N	Middle Cha	nnel: 24371	MHz					
2437.000000	106.25		100.0	Н	36.0	6.2	/	/		
2437.000000		99.01	100.0	Н	36.0	6.2	/	/		
2437.000000	104.20		200.0	V	120.0	6.2	/	/		
2437.000000		96.92	200.0	V	120.0	6.2	/	/		
			High Char	nel: 2462M	ΙΗz					
2462.000000	106.46		200.0	Н	162.0	6.2	/	/		
2462.000000		99.24	200.0	Н	162.0	6.2	/	/		
2462.000000	104.26		100.0	V	32.0	6.2	/	/		
2462.000000		96.90	100.0	V	32.0	6.2	/	/		
2483.500000	59.38	/	100.0	Н	357.0	6.3	74.00	14.62		
2483.500000		48.81	100.0	Н	357.0	6.3	54.00	5.19		

FCC Part 15.247 Page 34 of 58


### **Conducted Spurious Emissions at Antenna Port**

### 802.11b Mode Low Channel

Report No.: RSHA180831004-00B

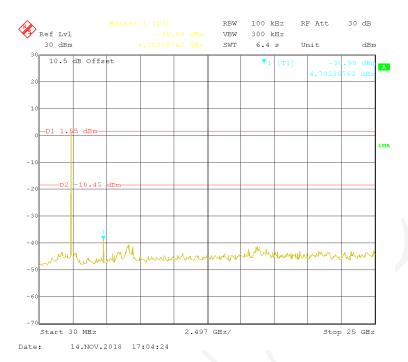


#### 802.11b Mode Middle Channel

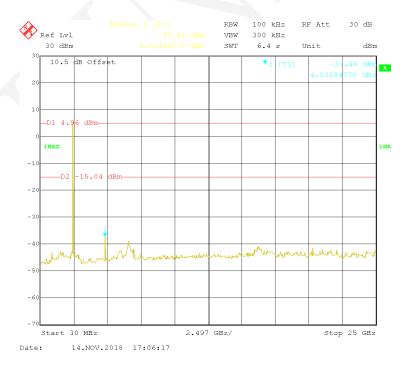


FCC Part 15.247 Page 35 of 58

### 802.11b Mode High Channel

Report No.: RSHA180831004-00B

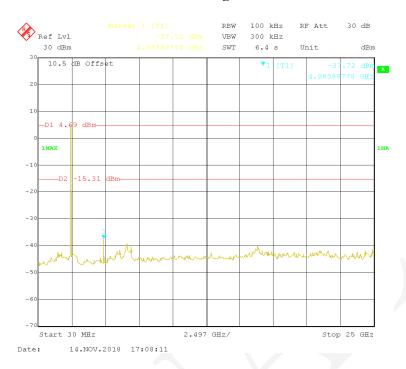


### **802.11g Mode Low Channel**

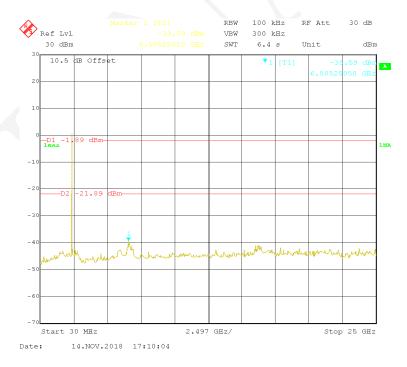


FCC Part 15.247 Page 36 of 58

## 802.11g Mode Middle Channel

Report No.: RSHA180831004-00B

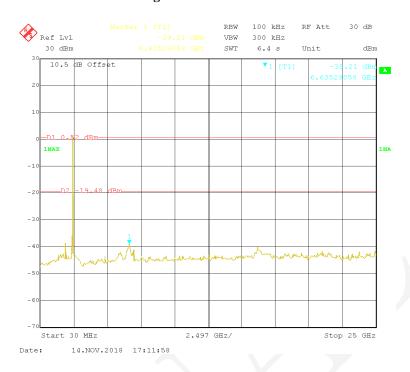


# 802.11g Mode High Channel

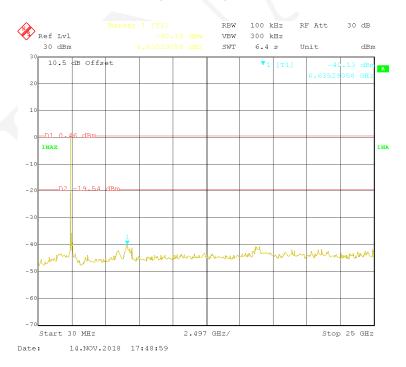


FCC Part 15.247 Page 37 of 58

### 802.11n-HT20 Mode Low Channel

Report No.: RSHA180831004-00B

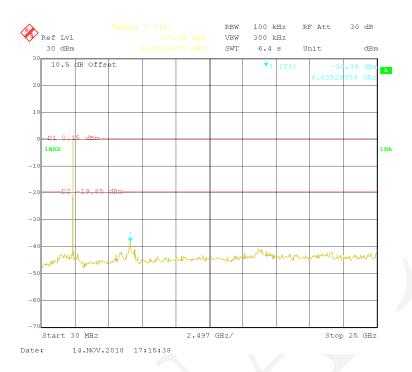


### 802.11n-HT20 Mode Middle Channel

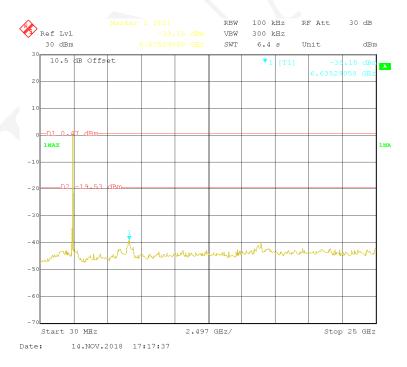

FCC Part 15.247 Page 38 of 58

### Report No.: RSHA180831004-00B

# 802.11n-HT20 Mode High Channel

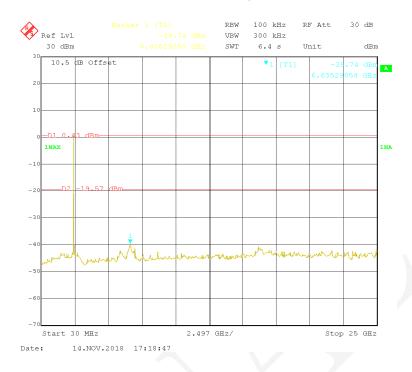

FCC Part 15.247 Page 39 of 58

# FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

## **Applicable Standard**


Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RSHA180831004-00B

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.8.1

- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW)  $\geq$  3 \* RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### **Test Data**

#### **Environmental Conditions**

Temperature:	24 ℃
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2018-11-14.

EUT operation mode: Transmitting

**Test Result:** Pass

FCC Part 15.247 Page 40 of 58


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)		
	802.11b Mode				
Low	2412	9.018	≥ 0.5		
Middle	2437	9.078	≥ 0.5		
High	2462	9.018	≥ 0.5		
	802.11g Mode				
Low	2412	15.691	≥ 0.5		
Middle	2437	15.691	≥ 0.5		
High	2462	15.571	≥ 0.5		
802.11n-HT20 Mode					
Low	2412	15.451	≥ 0.5		
Middle	2437	15.451	≥ 0.5		
High	2462	15.451	≥ 0.5		

Report No.: RSHA180831004-00B


FCC Part 15.247 Page 41 of 58

#### **802.11b Mode Low Channel**

Report No.: RSHA180831004-00B

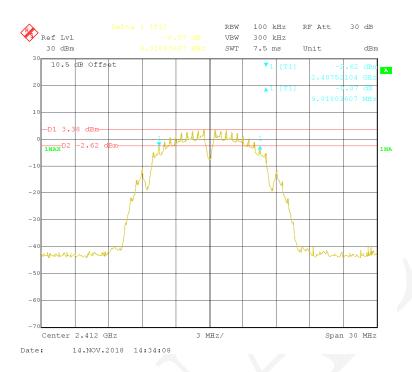


### **802.11b Mode Middle Channel**

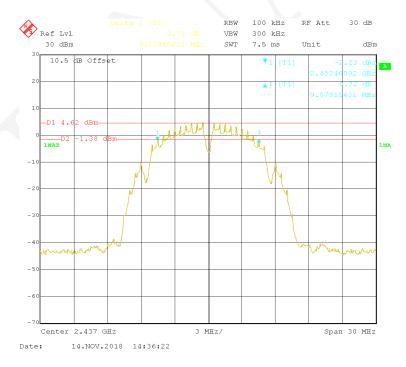


FCC Part 15.247 Page 42 of 58

## 802.11b Mode High Channel

Report No.: RSHA180831004-00B

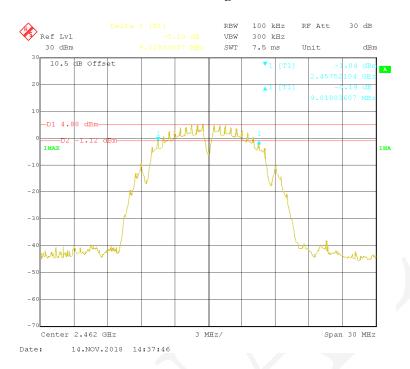


## **802.11g Mode Low Channel**

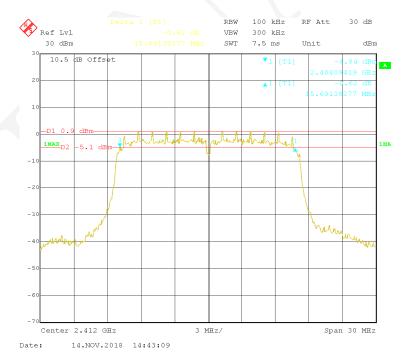


FCC Part 15.247 Page 43 of 58

# 802.11g Mode Middle Channel

Report No.: RSHA180831004-00B

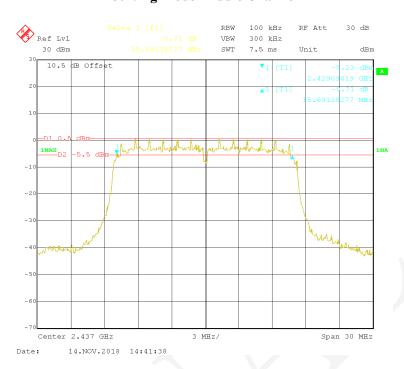


# 802.11g Mode High Channel

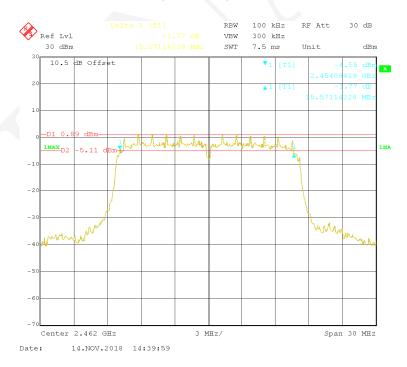


FCC Part 15.247 Page 44 of 58

### 802.11n-HT20 Mode Low Channel

Report No.: RSHA180831004-00B

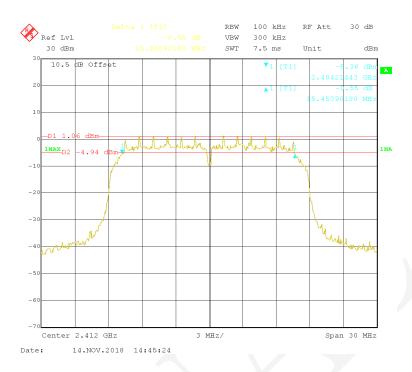


### 802.11n-HT20 Mode Middle Channel

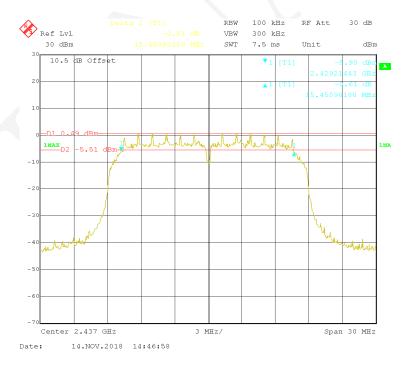

FCC Part 15.247 Page 45 of 58

### Report No.: RSHA180831004-00B

# 802.11n-HT20 Mode High Channel

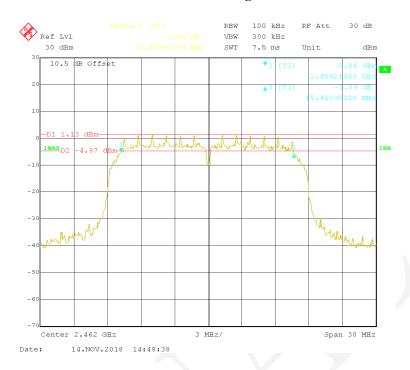

FCC Part 15.247 Page 46 of 58

# FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### **Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Report No.: RSHA180831004-00B

#### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.



#### **Test Data**

#### **Environmental Conditions**

Temperature:	23.8℃	
Relative Humidity:	54 %	
ATM Pressure:	101.2 kPa	

The testing was performed by Hope Zhang on 2018-11-14.

FCC Part 15.247 Page 47 of 58

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
	802.11b Mode			
Low	2412	16.76	30	Pass
Middle	2437	17.78	30	Pass
High	2462	17.95	30	Pass
	802.11g Mode			
Low	2412	21.52	30	Pass
Middle	2437	21.06	30	Pass
High	2462	21.21	30	Pass
802.11n-HT20 Mode				
Low	2412	21.13	30	Pass
Middle	2437	20.59	30	Pass
High	2462	20.78	30	Pass

Report No.: RSHA180831004-00B

FCC Part 15.247 Page 48 of 58

# FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: RSHA180831004-00B

## **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 6.10.

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2018-11-14.


EUT operation mode: Transmitting

Test Result: Compliance


FCC Part 15.247 Page 49 of 58

#### 802.11b Mode Left Side

Report No.: RSHA180831004-00B

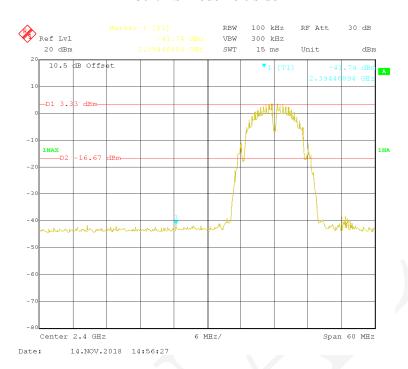


## 802.11b Mode Right Side

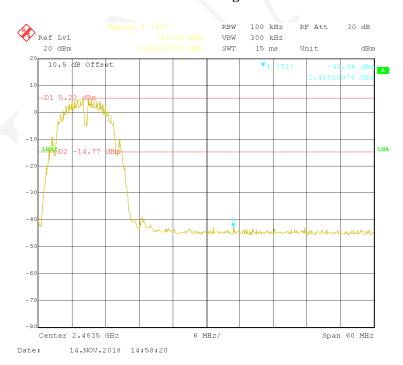


FCC Part 15.247 Page 50 of 58

## 802.11g Mode Left Side

Report No.: RSHA180831004-00B

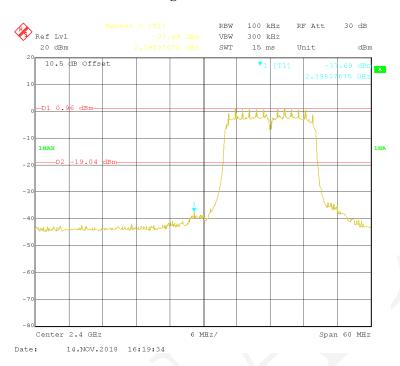


# 802.11g Mode Left Side

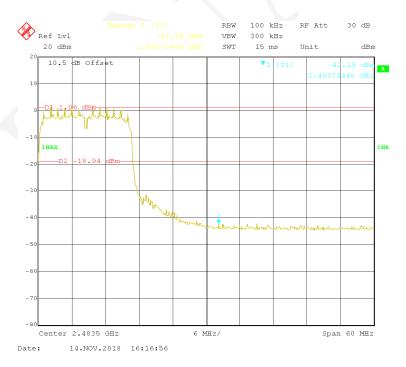


FCC Part 15.247 Page 51 of 58

### 802.11n-HT20 Mode Left Side

Report No.: RSHA180831004-00B

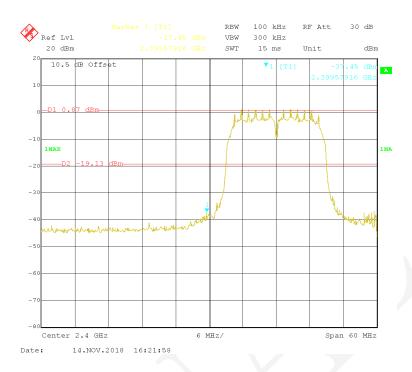

## 802.11n-HT20 Mode Left Side

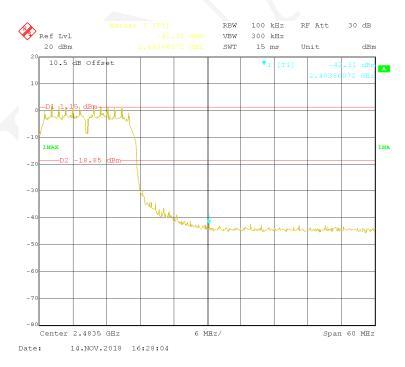

FCC Part 15.247 Page 52 of 58

# FCC §15.247(e) - POWER SPECTRAL DENSITY

## **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RSHA180831004-00B

#### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- 1. Set the RBW to: 3kHz < RBW < 100 kHz.
- 2. Set the VBW  $\geq 3xRBW$ .
- 3. Set the span to 1.5 times the DTS bandwidth.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### **Test Data**

### **Environmental Conditions**

Temperature:	24.1 ℃	
Relative Humidity:	50%	
ATM Pressure:	101.3 kPa	

The testing was performed by Hope Zhang on 2018-11-14.


EUT operation mode: Transmitting

**Test Result:** Pass

FCC Part 15.247 Page 53 of 58

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)		
	802.11b Mode				
Low	2412	-11.27	≤ 8		
Middle	2437	-10.16	≤ 8		
High	2462	-9.39	≤ 8		
	802.11g Mode				
Low	2412	-13.61	≤ 8		
Middle	2437	-13.90	≤ 8		
High	2462	-13.16	≤ 8		
802.11n-HT20 mode					
Low	2412	-13.84	≤ 8		
Middle	2437	-14.32	≤ 8		
High	2462	-13.36	≤ 8		


## **802.11b Mode Low Channel**

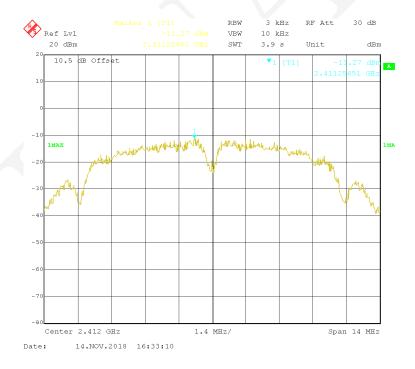


FCC Part 15.247 Page 54 of 58

### **802.11b Mode Middle Channel**

Report No.: RSHA180831004-00B

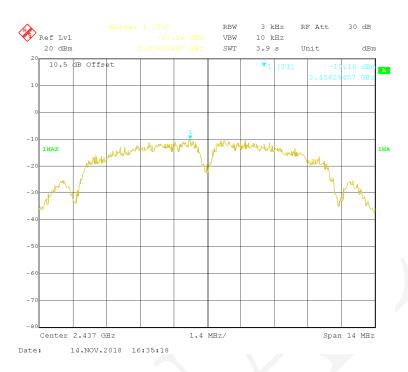


### **802.11b Mode High Channel**

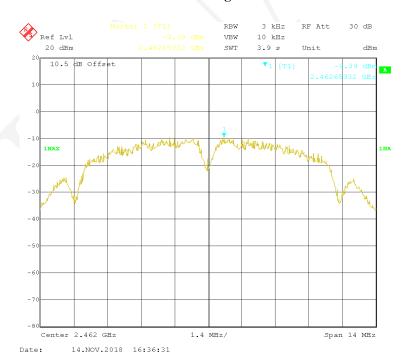


FCC Part 15.247 Page 55 of 58

## **802.11g Mode Low Channel**

Report No.: RSHA180831004-00B

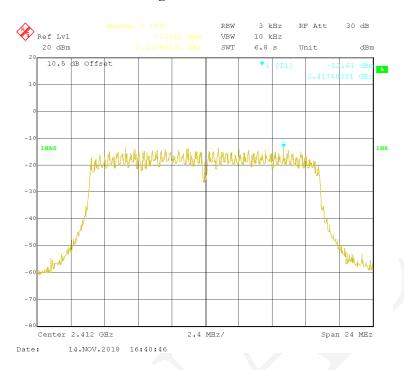


### **802.11g Mode Middle Channel**

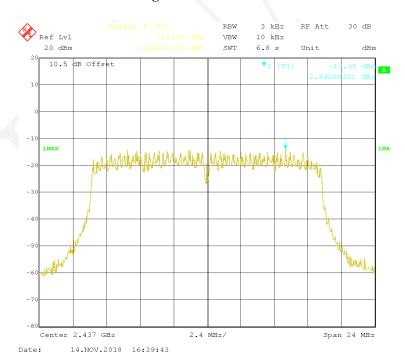


FCC Part 15.247 Page 56 of 58

## 802.11g Mode High Channel

Report No.: RSHA180831004-00B

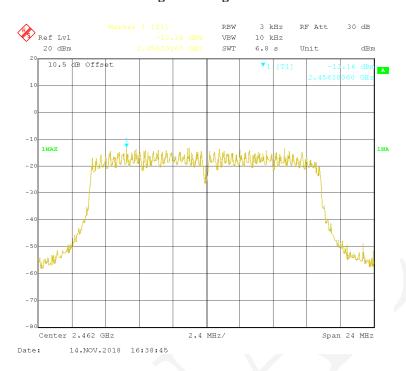


### 802.11n-HT20 Mode Low Channel

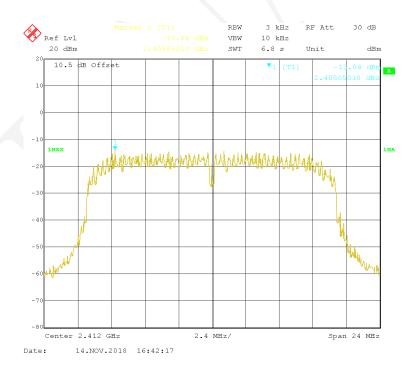


FCC Part 15.247 Page 57 of 58

### 802.11n-HT20 Mode Middle Channel

Report No.: RSHA180831004-00B

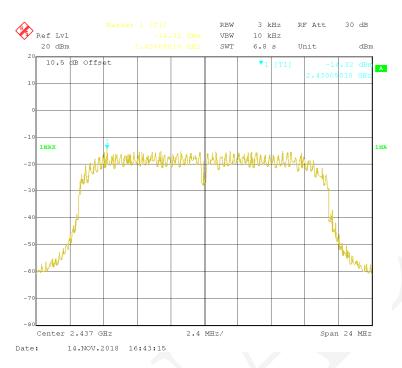

## 802.11n-HT20 Mode High Channel

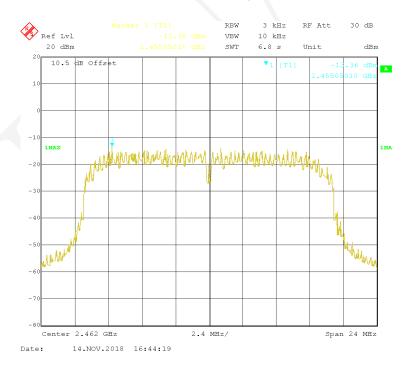

# \*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 58 of 58