EMC TEST REPORT for Bluetooth Device
No. 150301602SHA-001

Applicant	: Ningbo Desa Electrical Appliance Manufacturing Co., Ltd Industrial Estate Fuhai Town, Cixi, Zhejiang, China
Manufacturer	: Ningbo Desa Electrical Appliance Manufacturing Co., Ltd Industrial Estate Fuhai Town, Cixi, Zhejiang, China
Equipment	: Quartz Infrared Portable Heater
Type/Model	: GD9315BCW-FPR/XXX

SUMMARY

The equipment complies with the requirements according to the following standard(s):

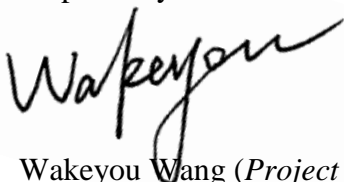**47CFR Part 15 (2014):** Radio Frequency Devices

ANSI C63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8 (December 2010): Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 4 (November 2014): General Requirements and Information for the Certification of Radiocommunication Equipment
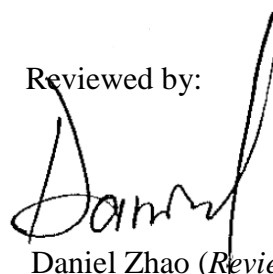
Date of issue: April 12, 2015

Prepared by:

Wakeyou Wang (*Project Engineer*)

Reviewed by:

Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 61278271
Fax: +86 21 54262353

Content

1. General Information

1.1 Applicant Information

Applicant:	Ningbo Desa Electrical Appliance Manufacturing Co., Ltd Industrial Estate Fuhai Town, Cixi, Zhejiang, China
Name of contact:	Jerry Shen
Tel:	86-574-58971324
Fax:	86-574-58971329
Manufacturer:	Ningbo Desa Electrical Appliance Manufacturing Co., Ltd Industrial Estate Fuhai Town, Cixi, Zhejiang, China

Sample received date   :   March 23, 2015
Sample Identification No :   /
Date of test   :   March 23, 2015 ~ April 5, 2015

1.2 Identification of the EUT

Equipment:	Quartz Infrared Portable Heater
Type/model:	GD9315BCW-FPR/XXX
FCC ID:	2AEHAGD9315BCW-FPR
IC:	/

1.3 Technical specification

Operation Frequency Band:	2402 - 2480 MHz
Modulation:	GFSK, Pi/4 DQPSK, 8DQPSK
Gain of Antenna:	PCB antenna, 1.2dBi
Rating:	120V ac, 60Hz, 1500W
Description of EUT:	The EUT is a Portable Heater containing Bluetooth modules.
Channel Description:	The channel spacing is 1MHz.

1.4 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation was applied.

Test software setting: Default power setting among the software *UartAssist.exe.*

Test peripherals used:

Item No	Description	Band and Model	S/No
1	Laptop computer	HP ProBook 6470b	NA

Test mode:
Mode 1: Hopping off, GFSK_DH5
Mode 2: Hopping off, Pi/4 DQPSK_DH5
Mode 3: Hopping off, 8DPSK_DH5
Mode 4: Hopping on, GFSK_DH5
Mode 5: Hopping on, Pi/4 DQPSK_DH5
Mode 6: Hopping on, 8DPSK_DH5

Test Channel:

Channel	Frequency (MHz)
L	2402
M	2441
H	2480

1.5 Frequency Hopping System Requirement

☒**Compliance for Section 15.247 (a)(1), (g), (h) requirement**
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is

permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

⊠ **Compliance for Section 15.247 (a)(1)**
According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a ninestage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.
• Number of shift register stages: 9
• Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
• Longest sequence of zeros: 8 (non-inverted signal)
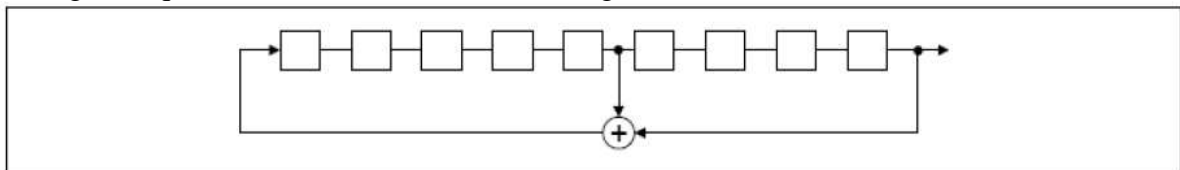
Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:
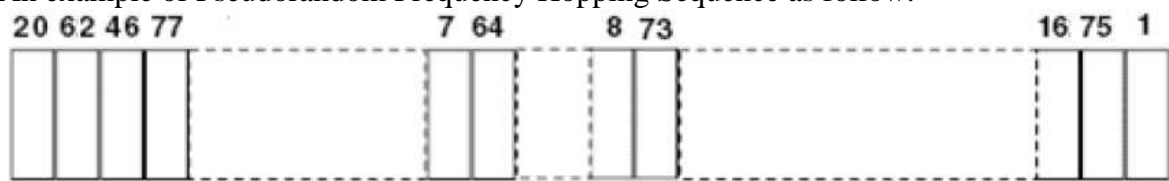
Each frequency used equally on the average by each transmitter.
According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

⊠ **Compliance for section 15.247(g)**
According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

⊠ **Compliance for section 15.247(h)**
According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.
According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2014-10-21	2015-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2014-10-20	2015-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2015-1-9	2016-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2013-4-28	2015-4-27
Horn antenna	HF 906	R&S	EC 3049	2013-4-28	2015-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2014-4-12	2015-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2014-5-12	2015-5-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2015-1-8	2016-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2014-04-12	2015-04-11
Loop Antenna	FMZB 1516	SCHWARZBECK	/	2014-11-29	2015-11-28
Temperature Camber	SETH-E	tayasaf	EC4315	2014-4-9	2015-4-9
Spectrum analyzer	E7402A	Agilent	EC2254	2014-08-16	2015-08-15

2.2 Test Standard

47CFR Part 15 (2014)
RSS-210 Issue 8 (December 2010)
RSS-Gen Issue 4 (November 2014)
ANSI C63.4: 2003
DA 00-705 (March 30, 2000)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Pass
Output power	15.247(b)(1)	RSS-210 Issue 8 Annex 8	Pass
Radiated Spurious Emissions	15.205 & 15.209	RSS-210 Issue 8 Clause 2	Pass
Band Edge Emission	15.247(d)	RSS-210 Issue 8 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Clause 8.8	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Dwell time	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Occupied bandwidth	-	RSS-Gen Clause 6.6	NA

Note: "NA" means "not applied".

3. 20 dB Bandwidth

Test result: **Tested**

3.1 Limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

Spectrum Analyzer

RF input

EUT

Antenna connector
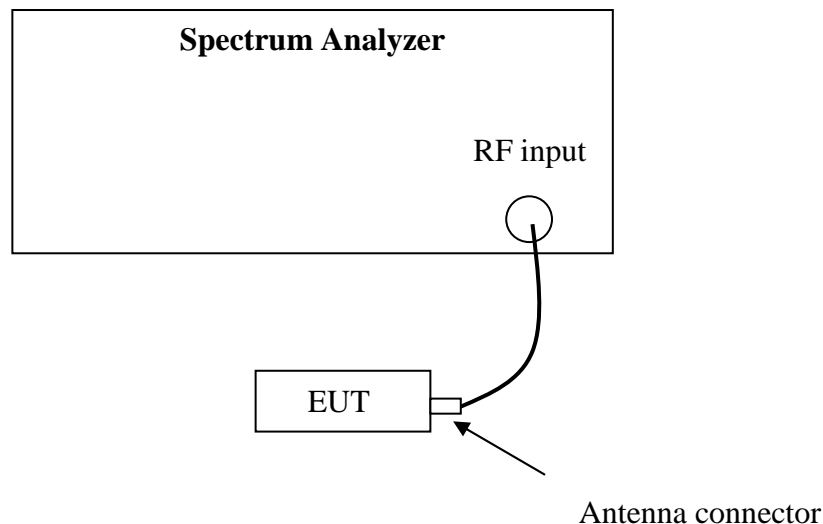
3.3 Test Procedure and test setup

The 20 bandwidth per FCC §15.247(a)(1) is measured using the Spectrum Analyzer with Span = approximately 2 to 3 times the 20 dB bandwidth, RBW≥1% of the 20 dB bandwidth, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

3.4 Test Protocol

Temperature　　　　　　：　　25°C

Relative Humidity　　　：　　55 %

Mode	CH	20dB Bandwidth (kHz)
1	L	978
	M	978
	H	848

Channel L


```
              *RBW 30 kHz    Marker 1 [T1 ]
               VBW 100 kHz          -39.75 dBm
Ref -20 dBm        *Att  10 dB    SWT 5 ms       2.402036000 GHz
```
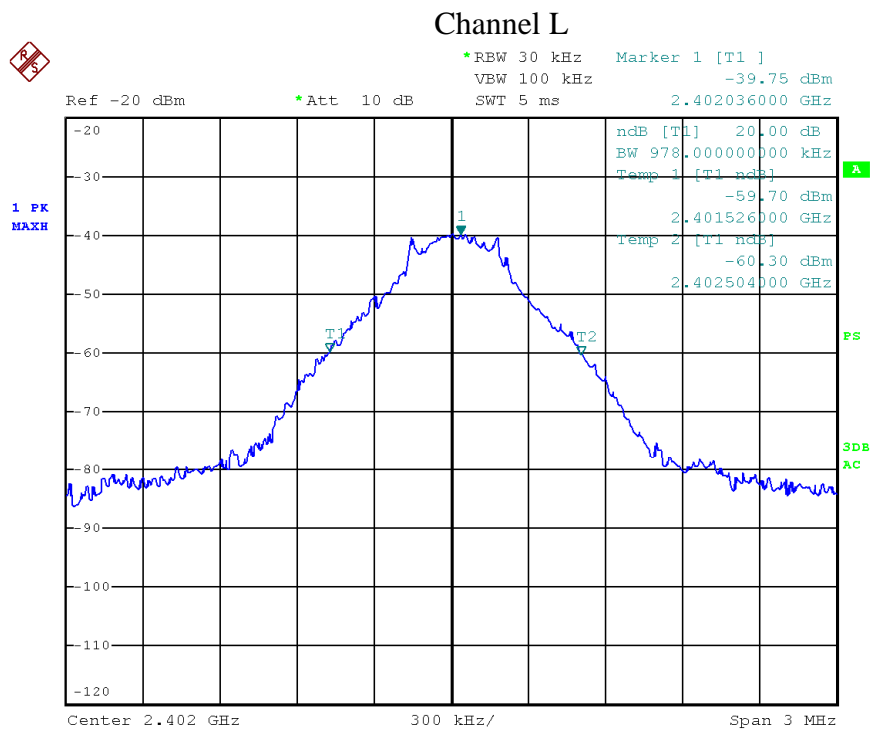
Date: 24.MAR.2015 16:01:00

Channel M


```
                                        *RBW 30 kHz    Marker 1 [T1 ]
                                         VBW 100 kHz           -42.01 dBm
          Ref -20 dBm        *Att  10 dB  SWT 5 ms          2.441006000 GHz

          -20                                          ndB [T1]    20.00 dB
                                                       BW 978.000000000 kHz
          -30                                          Temp 1 [T1 ndB]
                                                                 -61.10 dBm
                                                             2.440526000 GHz
                                                       Temp 2 [T1 ndB]
          -40                                                    -61.86 dBm
                                                             2.441504000 GHz
          -50
                                                                      PS
                   T1                  T2
          -60
          -70
                                                                      3DB
          -80                                                         AC
          -90
          -100
          -110
          -120
          Center 2.441 GHz          300 kHz/              Span 3 MHz
```
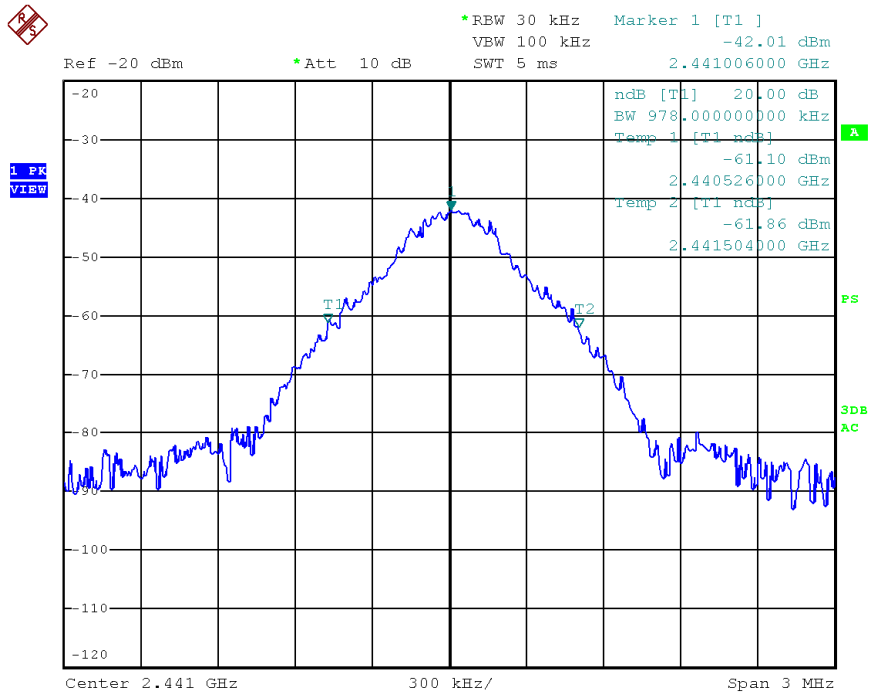
Date: 24.MAR.2015 16:02:04

Channel H


```
                                        *RBW 30 kHz    Marker 1 [T1 ]
                                         VBW 100 kHz           -36.44 dBm
          Ref -20 dBm        *Att  10 dB  SWT 5 ms          2.480000000 GHz

          -20                                          ndB [T1]    20.00 dB
                                                       BW 948.000000000 kHz
          -30                                          Temp 1 [T1 ndB]
                                                                 -56.57 dBm
          -40                                              2.479538000 GHz
                                                       Temp 2 [T1 ndB]
                                                                 -56.17 dBm
          -50                                              2.480486000 GHz
                   T1                  T2
          -60                                                         PS
          -70
          -80                                                         3DB
                                                                      AC
          -90
          -100
          -110
          -120
          Center 2.48 GHz           300 kHz/              Span 3 MHz
```
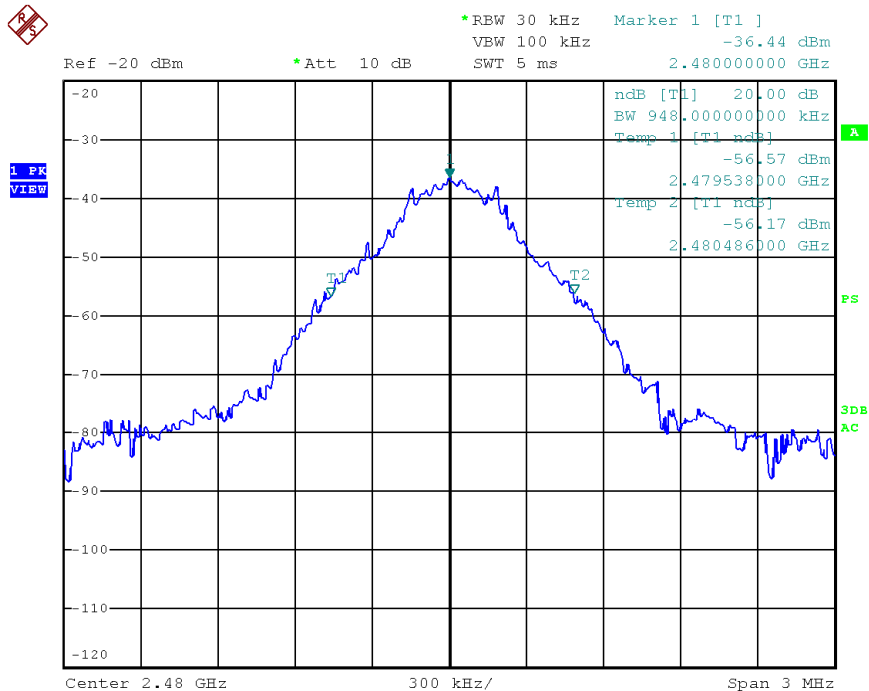
Date: 24.MAR.2015 16:02:35

Mode	CH	20dB Bandwidth (kHz)
2	L	1326
	M	1338
	H	1302
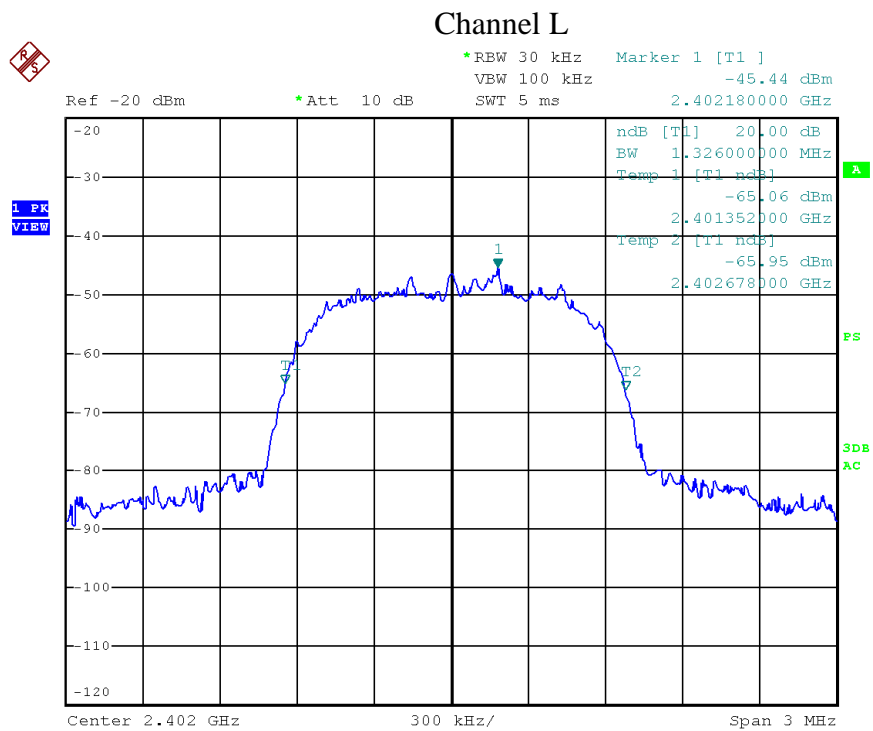
Channel L

Date: 24.MAR.2015 16:03:50

Channel M


```
                                    *RBW 30 kHz    Marker 1 [T1 ]
                                     VBW 100 kHz              -43.35 dBm
  Ref -20 dBm         *Att  10 dB    SWT 5 ms          2.440862000 GHz
```

```
-20                                              ndB [T1]    20.00 dB
                                                 BW   1.338000000 MHz
-30                                              Temp 1 [T1 ndB]          A
1 PK                                                          -63.83 dBm
VIEW                                                   2.440340000 GHz
-40                              1               Temp 2 [T1 ndB]
                                                             -63.91 dBm
-50                                                    2.441678000 GHz

-60              T1                      T2                              PS

-70

-80                                                                     3DB
                                                                        AC
-90

-100

-110

-120
```

```
    Center 2.441 GHz              300 kHz/              Span 3 MHz
```
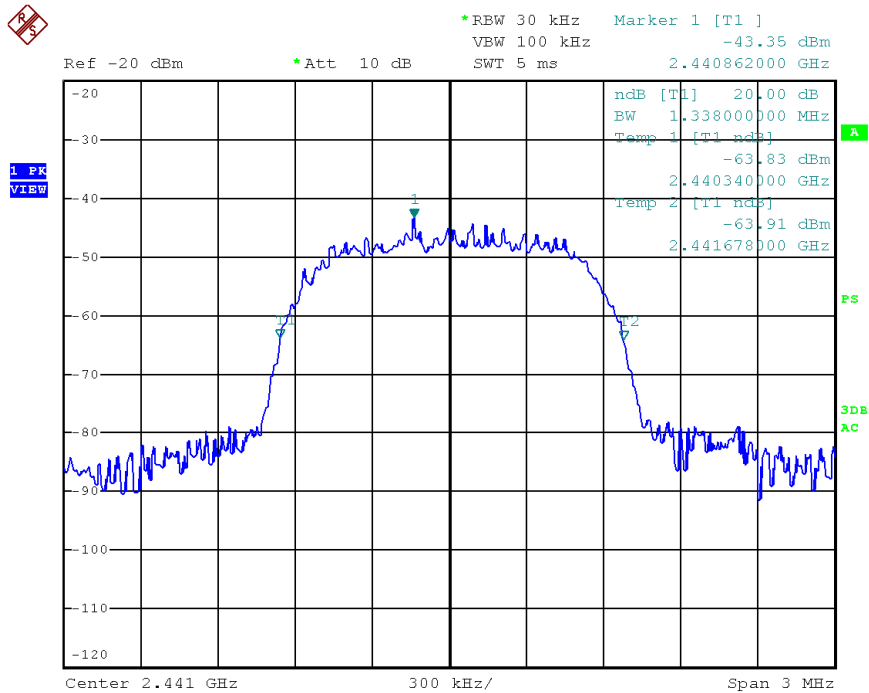
Date: 24.MAR.2015 16:04:40

Channel H


```
                                    *RBW 30 kHz    Marker 1 [T1 ]
                                     VBW 100 kHz              -36.13 dBm
  Ref -20 dBm         *Att  10 dB    SWT 5 ms          2.480180000 GHz
```

```
-20                                              ndB [T1]    20.00 dB
                                                 BW   1.302000000 MHz
-30                                              Temp 1 [T1 ndB]          A
1 PK                              1                           -56.21 dBm
VIEW                                                   2.479358000 GHz
-40                                              Temp 2 [T1 ndB]
                                                             -56.25 dBm
-50                                                    2.480660000 GHz
          T1                              T2
-60                                                                     PS

-70

-80                                                                     3DB
                                                                        AC
-90

-100

-110

-120
```

```
    Center 2.48 GHz               300 kHz/              Span 3 MHz
```
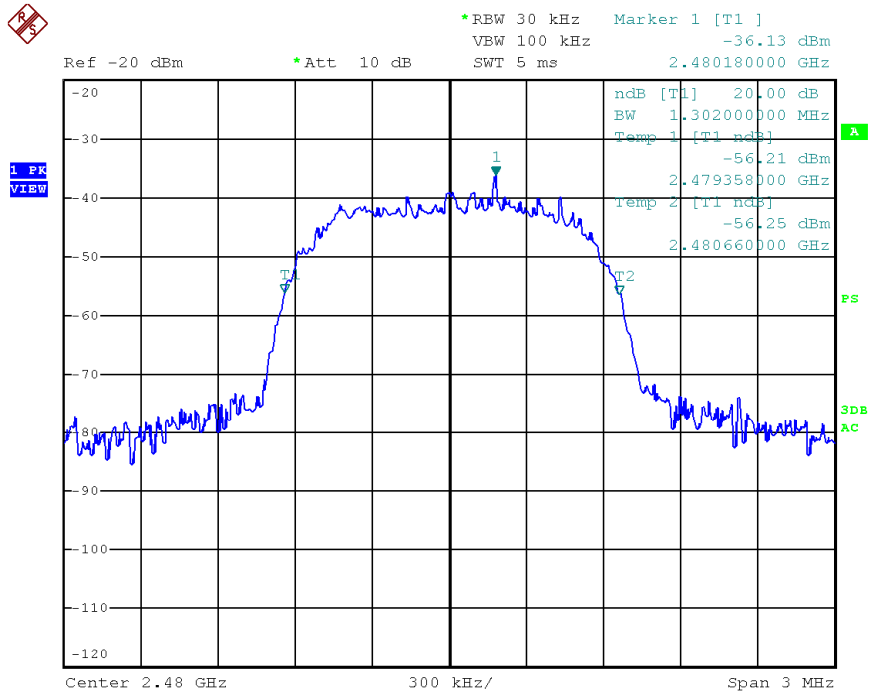
Date: 24.MAR.2015 16:05:45

Mode	CH	20dB Bandwidth (kHz)
3	L	1320
	M	1302
	H	1332
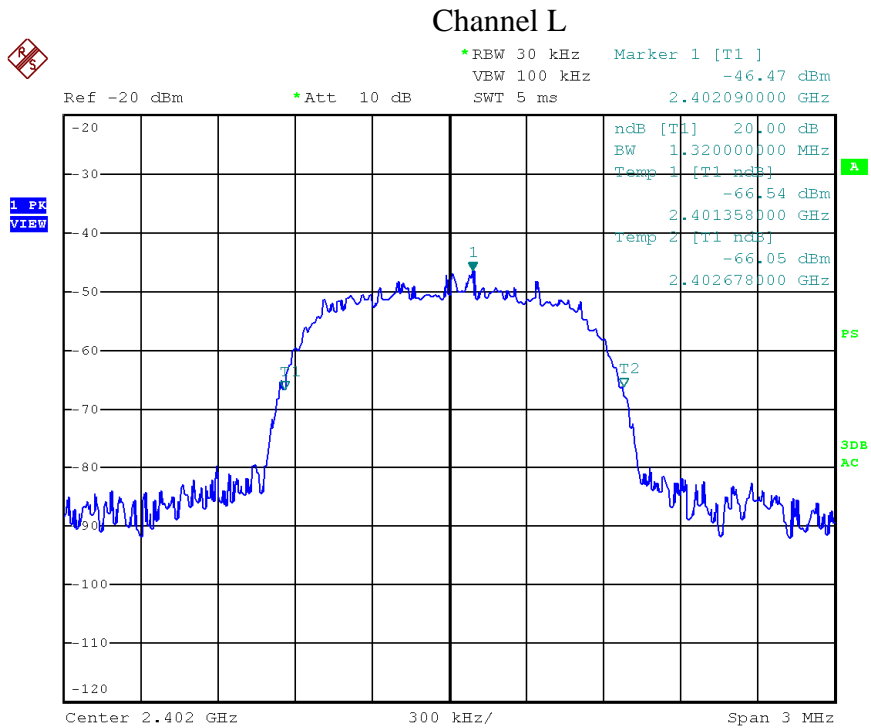
Channel L

Date: 24.MAR.2015 16:06:23

Channel M


```
                                        *RBW 30 kHz    Marker 1 [T1 ]
                                         VBW 100 kHz              -41.67 dBm
     Ref -20 dBm            *Att  10 dB   SWT 5 ms         2.441174000 GHz

  -20                                               ndB [T1]    20.00 dB
                                                    BW   1.302000000 MHz
  -30                                               Temp 1 [T1 ndB]
                                                               -61.73 dBm
  1 PK                                                  2.440364000 GHz
  VIEW                                   1            Temp 2 [T1 ndB]
  -40                                                          -61.88 dBm
                                                        2.441666000 GHz
  -50

  -60        T1                           T2                        PS

  -70

  -80                                                             3DB
                                                                  AC
  -90

  -100

  -110

  -120
     Center 2.441 GHz         300 kHz/              Span 3 MHz
```
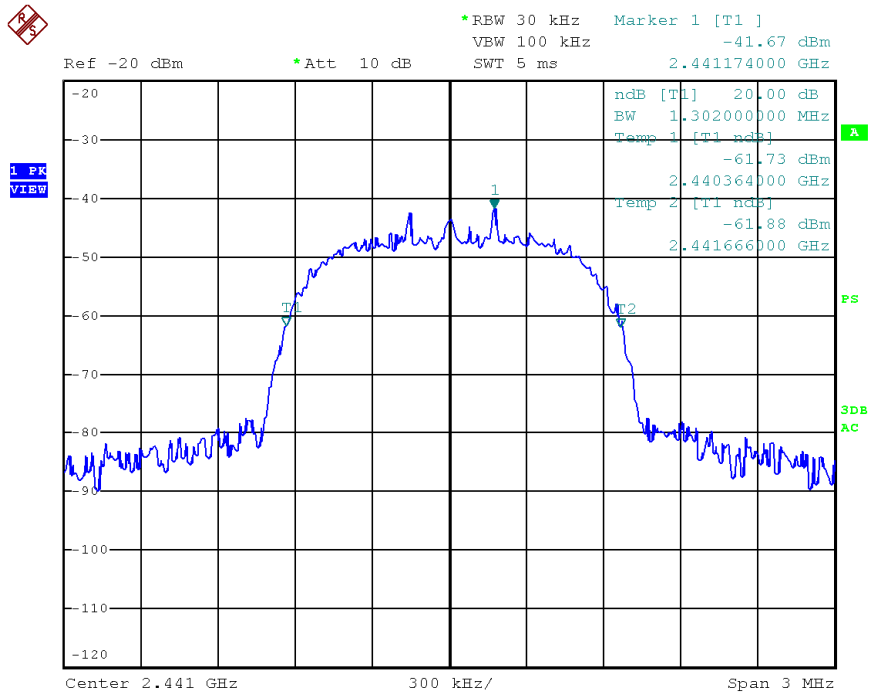
Date: 24.MAR.2015 16:07:54

Channel H


```
                                        *RBW 30 kHz    Marker 1 [T1 ]
                                         VBW 100 kHz              -38.35 dBm
     Ref -20 dBm            *Att  10 dB   SWT 5 ms         2.480174000 GHz

  -20                                               ndB [T1]    20.00 dB
                                                    BW   1.332000000 MHz
  -30                                               Temp 1 [T1 ndB]
                                                               -58.23 dBm
  1 PK                                                  2.479352000 GHz
  VIEW                                   1            Temp 2 [T1 ndB]
  -40                                                          -58.33 dBm
                                                        2.480684000 GHz
  -50

  -60        T1                           T2                        PS

  -70

  -80                                                             3DB
                                                                  AC
  -90

  -100

  -110

  -120
     Center 2.48 GHz          300 kHz/              Span 3 MHz
```
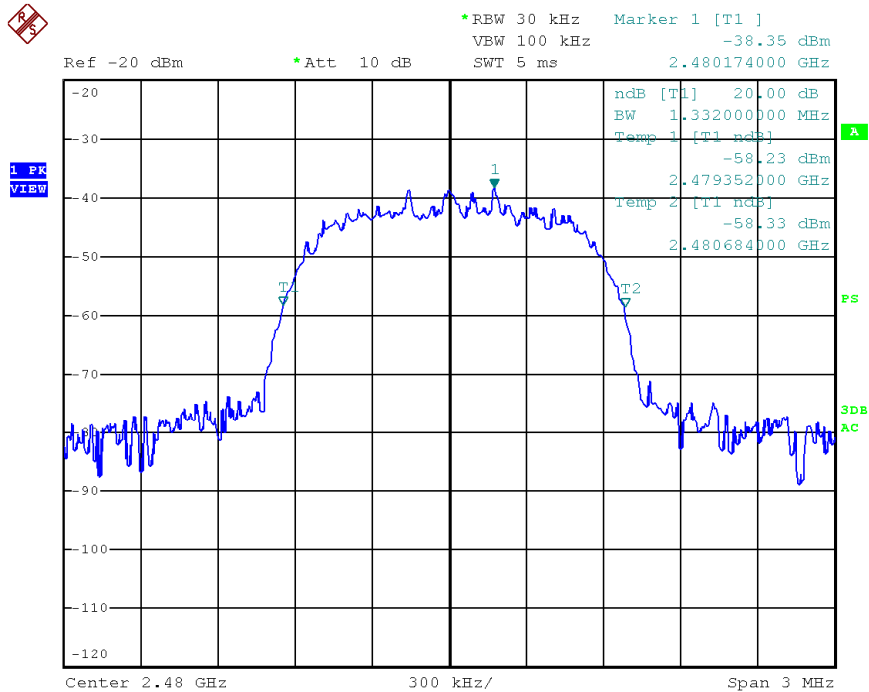
Date: 24.MAR.2015 16:08:30

4.   Carrier Frequency Separation

Test   result: Pass

4.1 Limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration
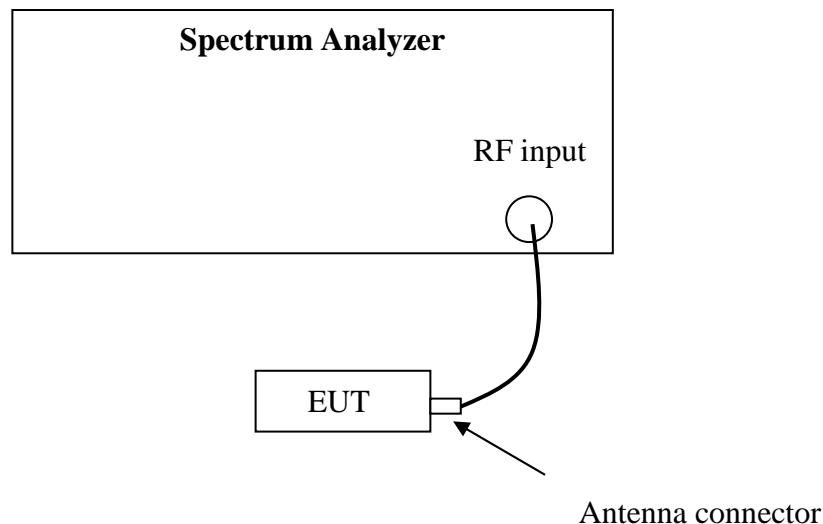
4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC §15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, RBW≥1% of the span, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

4.4 Test Protocol

Temperature : 25°C

Relative Humidity : 55 %

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
1	L	960	≥ 2/3 of 20dB BW
	M	980	≥ 2/3 of 20dB BW
	H	1030	≥ 2/3 of 20dB BW

Channel L
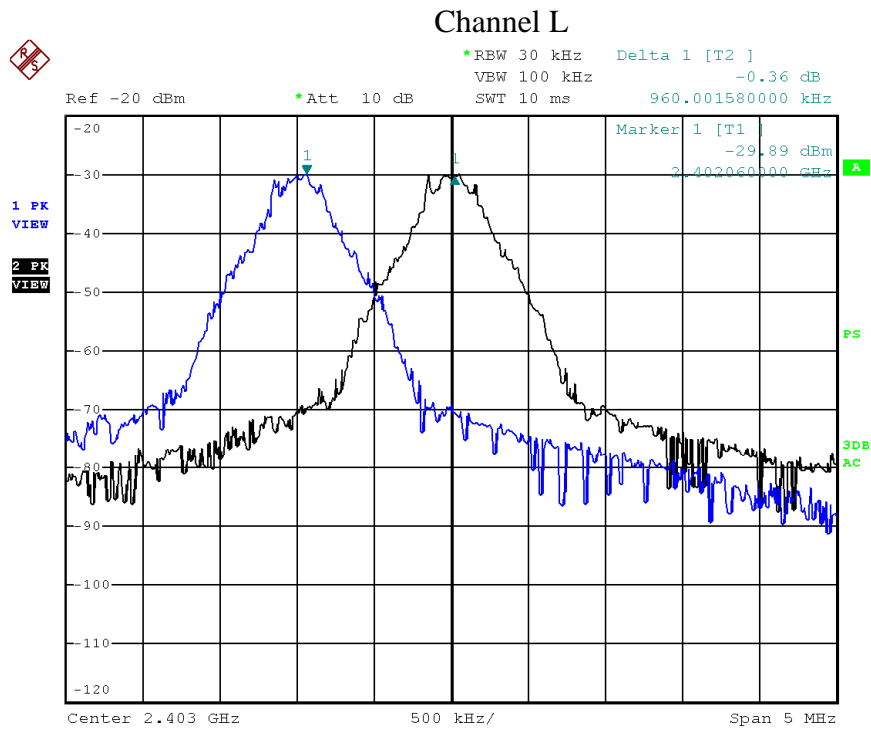
Date: 24.MAR.2015 16:16:39

Channel M
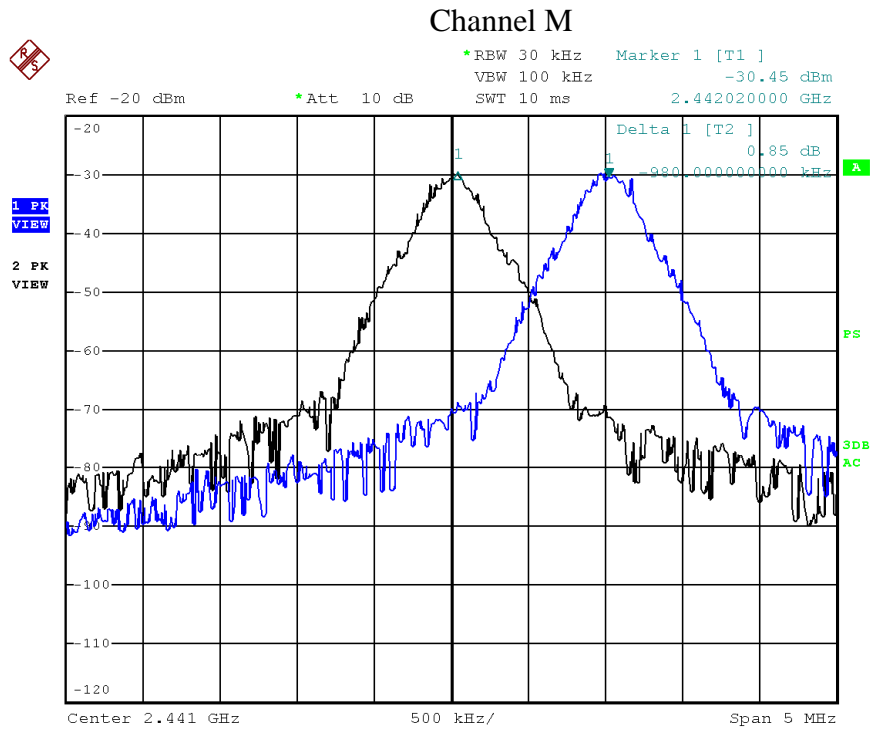
Date: 24.MAR.2015 16:18:02

Channel H
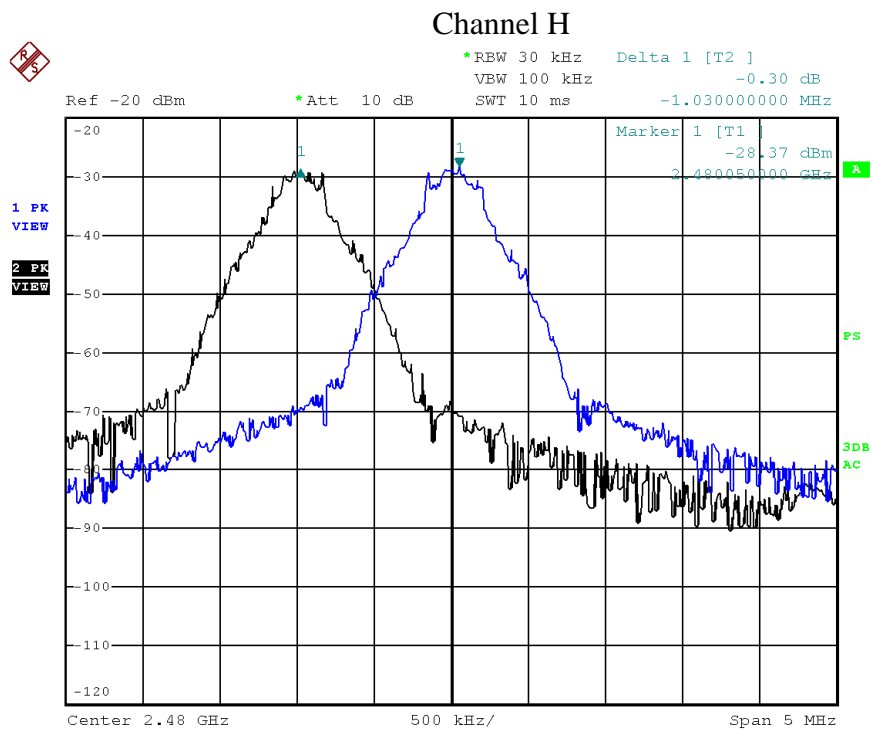
Date: 24.MAR.2015 16:19:10

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
2	L	1010	≥ 2/3 of 20dB BW
	M	1000	≥ 2/3 of 20dB BW
	H	1000	≥ 2/3 of 20dB BW

Channel L
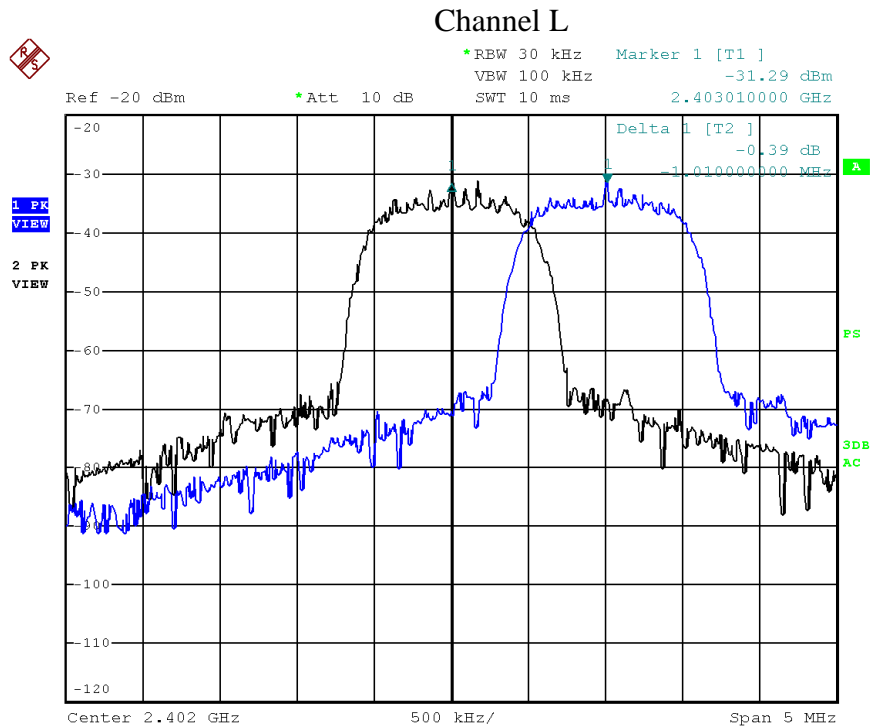
Date: 24.MAR.2015 16:24:24

Channel M
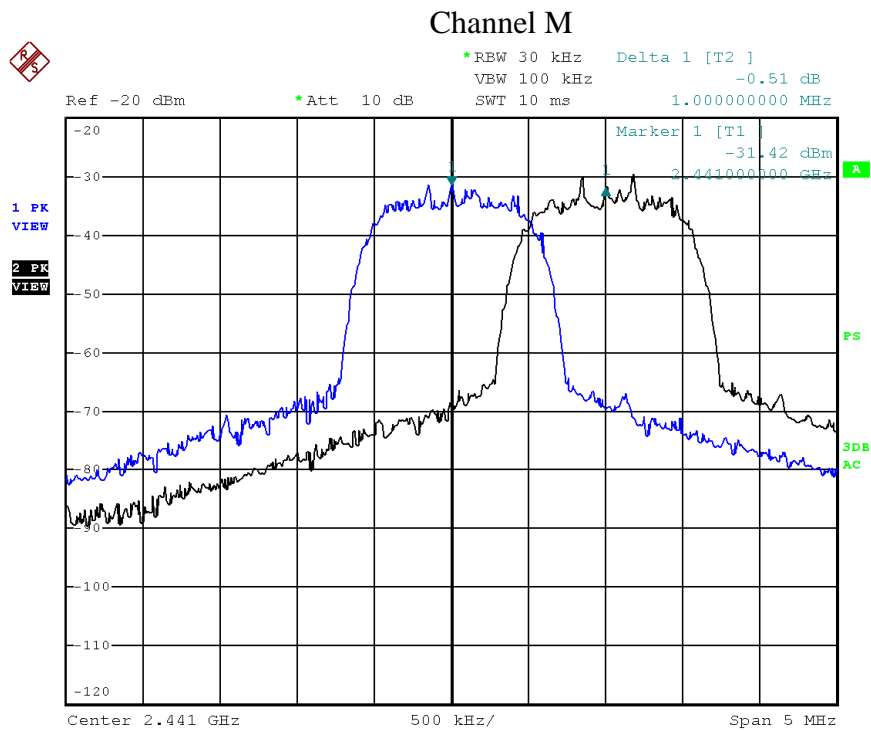
Date: 24.MAR.2015 16:27:42

Channel H
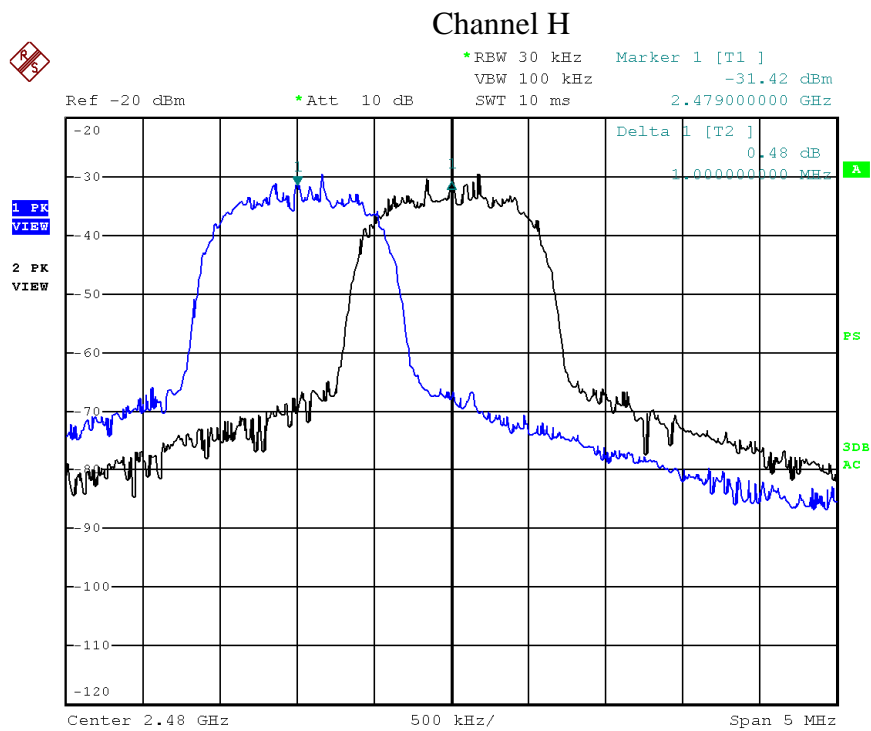
Date: 24.MAR.2015 16:31:32

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
3	L	1000	≥ 2/3 of 20dB BW
	M	1000	≥ 2/3 of 20dB BW
	H	1010	≥ 2/3 of 20dB BW

Channel L
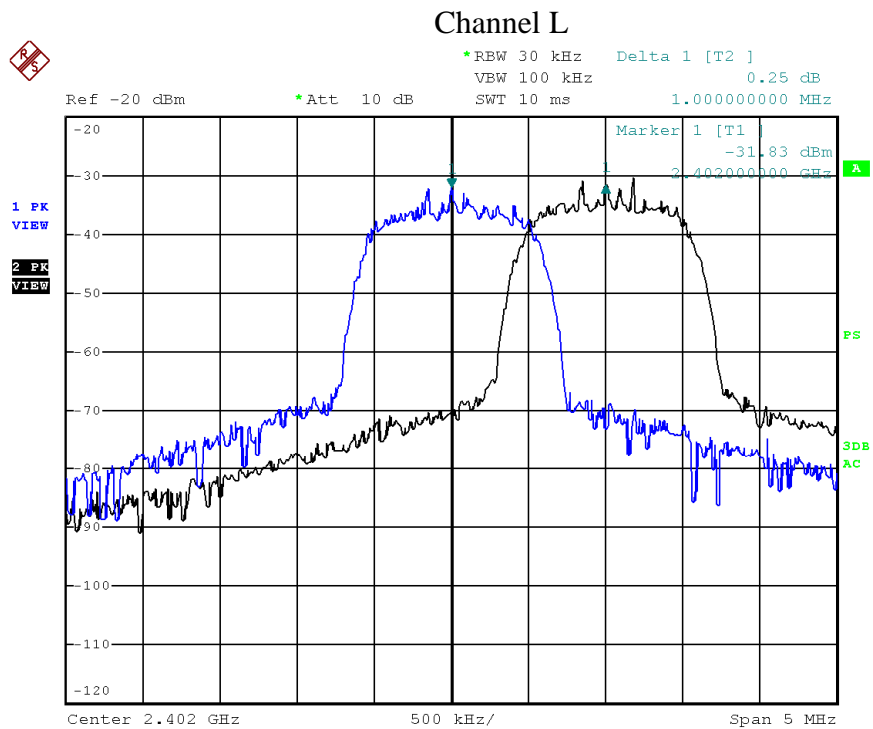
Date: 24.MAR.2015 16:35:40
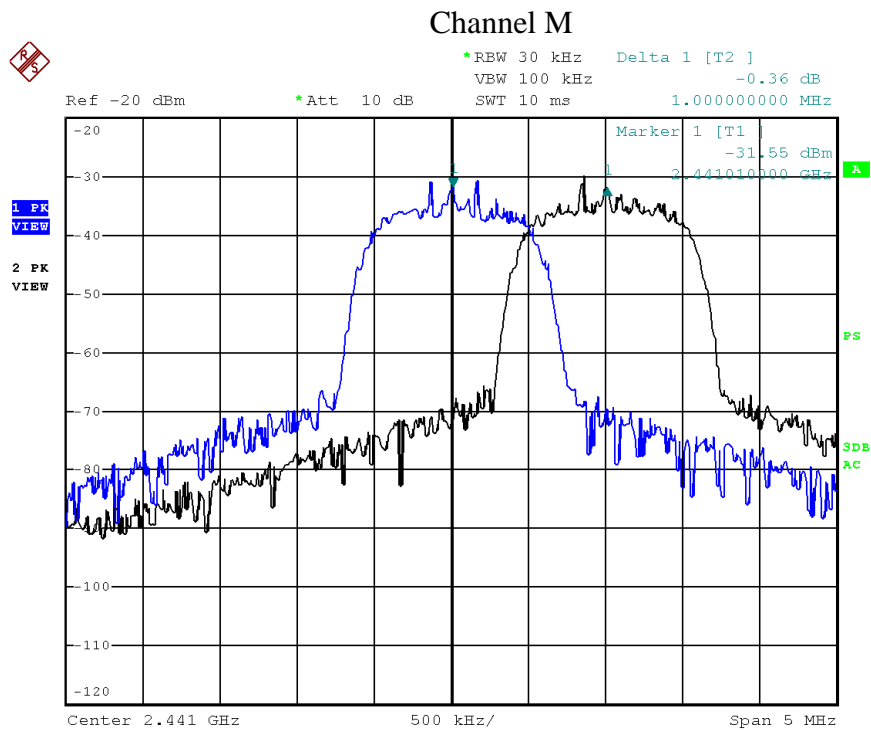
Channel M

Date: 24.MAR.2015 16:40:56
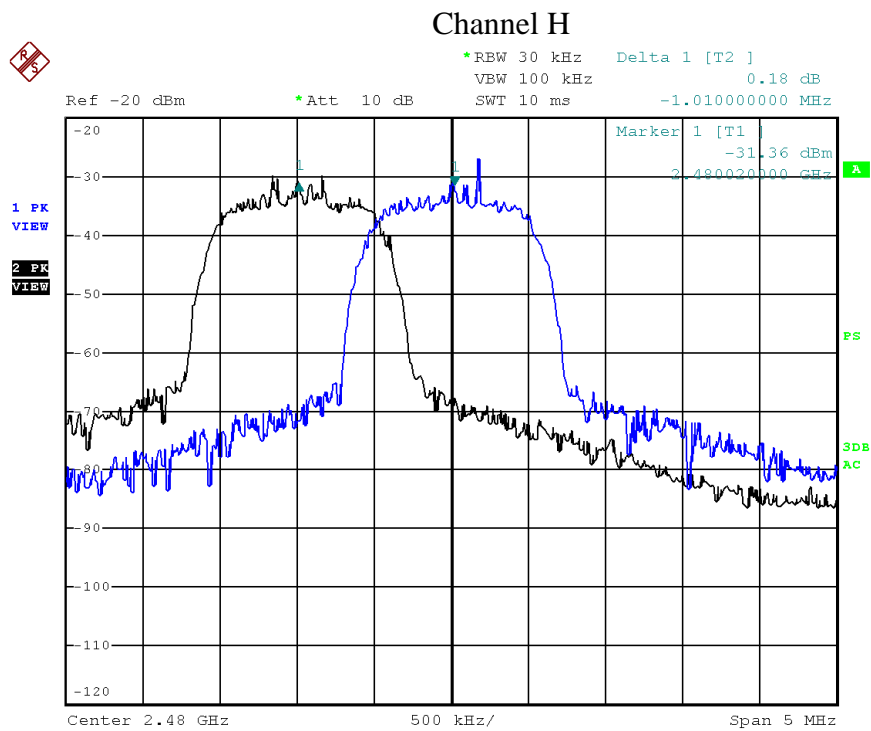
Channel H

Date: 24.MAR.2015 16:44:38

5. Maximum peak output power

Test result: Pass

5.1 Test limit

☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

☒ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

☐ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

```
┌─────────────────────────────────────┐
│         Spectrum Analyzer            │
│                                      │
│                          RF input    │
│                             ◯        │
└─────────────────────────────│───────┘
                              │
                    ┌──────┐  │
                    │ EUT  ├─┐│
                    └──────┘ ↖
                         Antenna connector
```
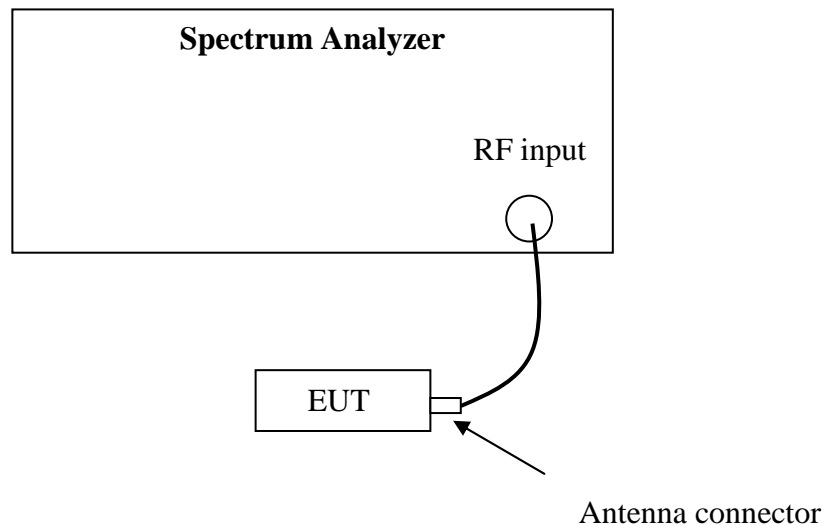
5.3 Test procedure and test setup

The power output per FCC §15.247(b) is measured by setting the Spectrum Analyzer as RBW = 1MHz, VBW = 3MHz, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The test method is following DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

5.4 Test protocol

Temperature   :   25 °C
Relative Humidity :   55 %

Mode	CH	Conducted Power (dBm)	Limit (dBm)
	L	1.10	21
1	M	0.80	21
	H	0.70	21

Mode	CH	Conducted Power (dBm)	Limit (dBm)
	L	0.40	21
2	M	0.10	21
	H	-0.30	21

Mode	CH	Conducted Power (dBm)	Limit (dBm)
	L	0.30	21
3	M	-0.10	21
	H	-0.40	21

6.   Radiated Spurious Emissions

Test result: PASS

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration
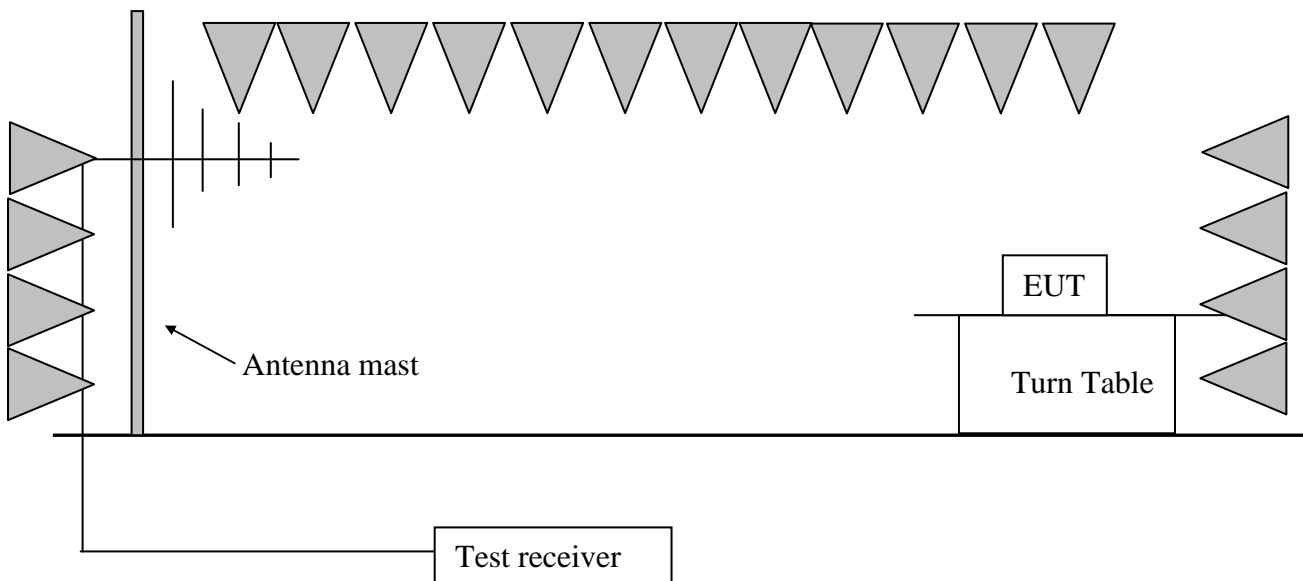
6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.
The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);
RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor".

6.4 Test protocol

Mode 1

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.00	31.20	95.40	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2390.00	31.20	52.20	54.00	1.80	PK
	H	3196.39	-8.20	52.90	54.00	1.10	PK
	V	4795.59	-3.60	41.90	54.00	12.10	PK
	V	7206.00	-2.60	43.70	54.00	10.30	PK
M	V	2440.90	31.20	95.10	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	H	3252.50	-8.00	52.40	54.00	1.60	PK
	V	4882.00	-10.8	40.30	54.00	13.70	PK
	V	7323.00	-2.90	42.60	54.00	11.40	PK
H	V	2479.90	31.20	94.70	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2483.50	31.20	67.20	74.00	6.80	PK
	V	2483.50	31.20	50.20	54.00	3.80	AV
	H	3294.58	-7.80	53.10	54.00	0.90	PK
	V	4960.00	-10.50	41.20	54.00	12.80	PK
	H	7440.00	-3.00	43.10	54.00	10.90	PK

Mode 2

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.00	31.20	95.10	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2390.00	31.20	52.00	54.00	2.00	PK
	H	3196.39	-8.20	52.80	54.00	1.20	PK
	V	4795.59	-3.60	41.70	54.00	12.30	PK
	V	7206.00	-2.60	43.60	54.00	10.40	PK
M	V	2440.90	31.20	94.70	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	H	3252.50	-8.00	52.10	54.00	1.90	PK
	V	4882.00	-10.8	40.40	54.00	13.60	PK
	V	7323.00	-2.90	42.50	54.00	11.50	PK
H	V	2479.90	31.20	94.40	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2483.50	31.20	68.10	74.00	5.90	PK
	V	2483.50	31.20	50.50	54.00	3.50	AV
	H	3294.58	-7.80	53.10	54.00	0.90	PK
	V	4960.00	-10.50	41.30	54.00	12.70	PK
	H	7440.00	-3.00	43.20	54.00	10.80	PK

Mode 3

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.00	31.20	95.00	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2390.00	31.20	52.00	54.00	2.00	PK
	H	3196.39	-8.20	53.10	54.00	0.90	PK
	V	4795.59	-3.60	41.60	54.00	12.40	PK
	V	7206.00	-2.60	43.60	54.00	10.40	PK
M	V	2440.90	31.20	94.80	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	H	3252.50	-8.00	52.30	54.00	1.70	PK
	V	4882.00	-10.8	40.50	54.00	13.50	PK
	V	7323.00	-2.90	42.70	54.00	11.30	PK
H	V	2479.90	31.20	94.50	/	/	PK
	V	70.82	8.90	35.60	40.00	4.40	PK
	V	175.79	12.80	40.10	43.50	3.40	PK
	V	399.33	18.90	36.00	46.00	10.00	PK
	H	461.54	19.50	30.40	46.00	15.60	PK
	V	2483.50	31.20	68.20	74.00	5.80	PK
	V	2483.50	31.20	50.70	54.00	3.30	AV
	H	3294.58	-7.80	52.50	54.00	1.50	PK
	V	4960.00	-10.50	41.40	54.00	12.60	PK
	H	7440.00	-3.00	43.10	54.00	10.90	PK

Remark: 1. For fundamental emission, no amplifier is employed.

      2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)

      3. Corrected Reading = Original Receiver Reading + Correct Factor

      4. Margin = limit – Corrected Reading

      5. If the PK reading is lower than AV limit, the AV test can be elided.

      6. The emission was conducted from30MHz to 25GHz.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

      Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.

      Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading =
      10dBuV + 0.20dB/m = 10.20dBuV/m

      Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =
      54 -10.20 = 43.80dBuV/m

7. Band Edge Emission

Test result: **PASS**

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

```
┌─────────────────────────────────────┐
│  Spectrum Analyzer                   │
│                                      │
│                          RF input    │
│                            ◯         │
│                            │         │
└────────────────────────────┼────────┘
                             │
                             │
              ┌──────────┐   │
              │  EUT     ├──▷┘
              └──────────┘◀─╲
                              ╲
                   Antenna connector
```
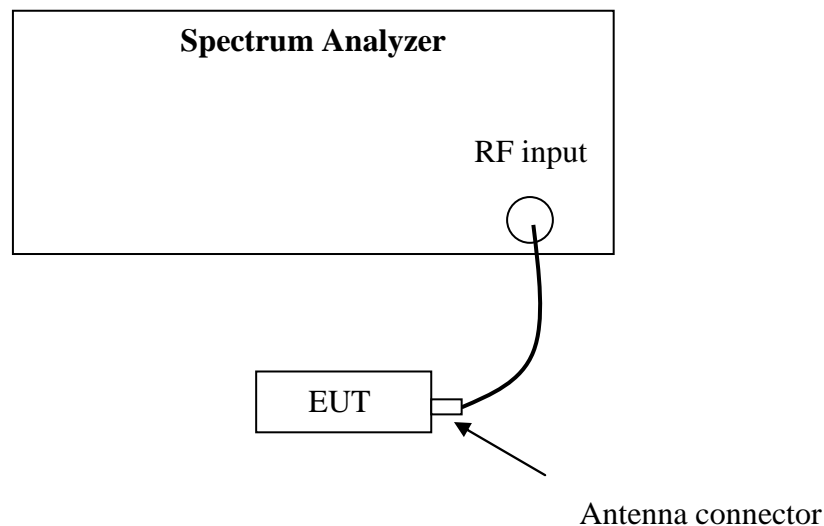
7.3 Test procedure and test setup

The Band Edge Emissions per FCC §15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

7.4 Test protocol

Mode 1, Channel L
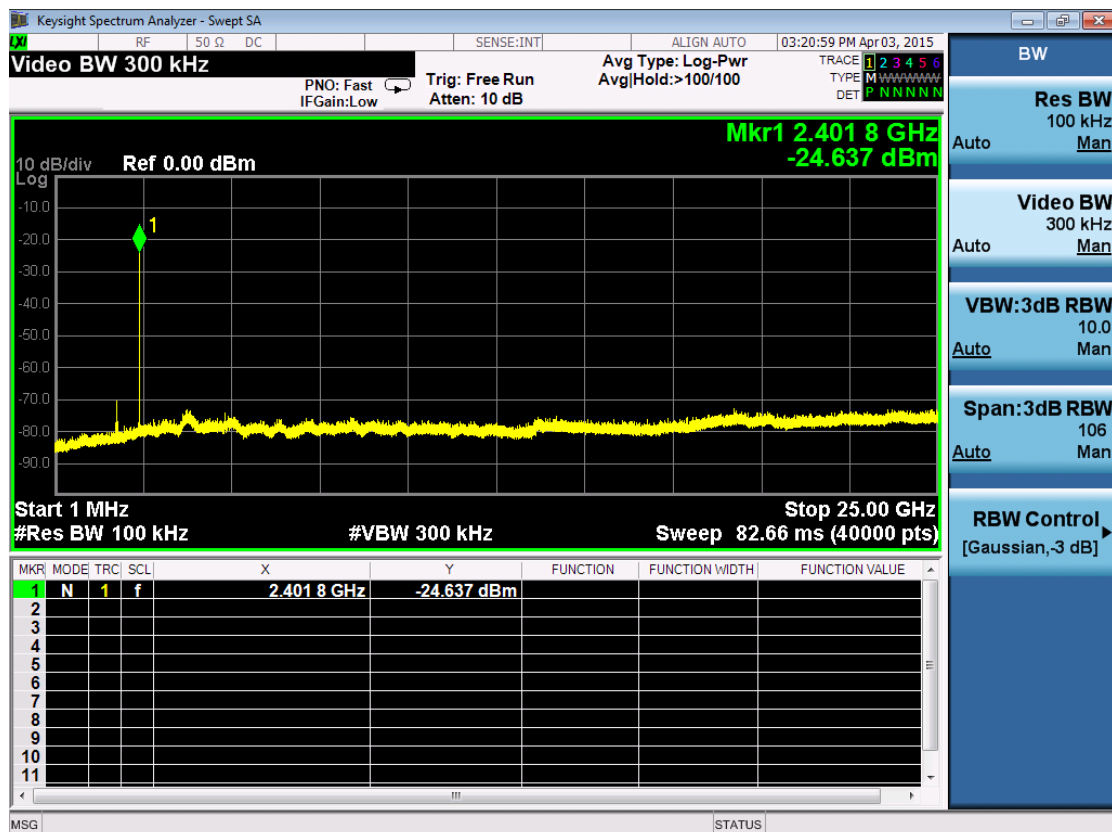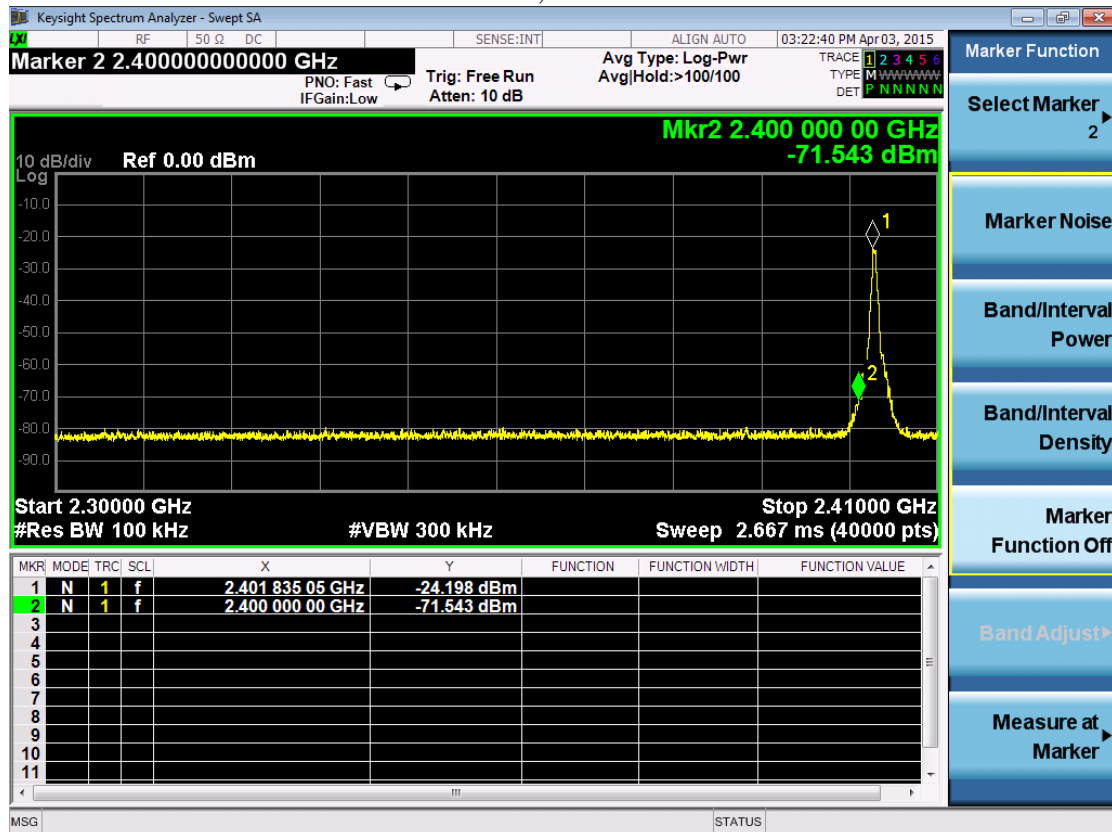
Mode 1, Channel M
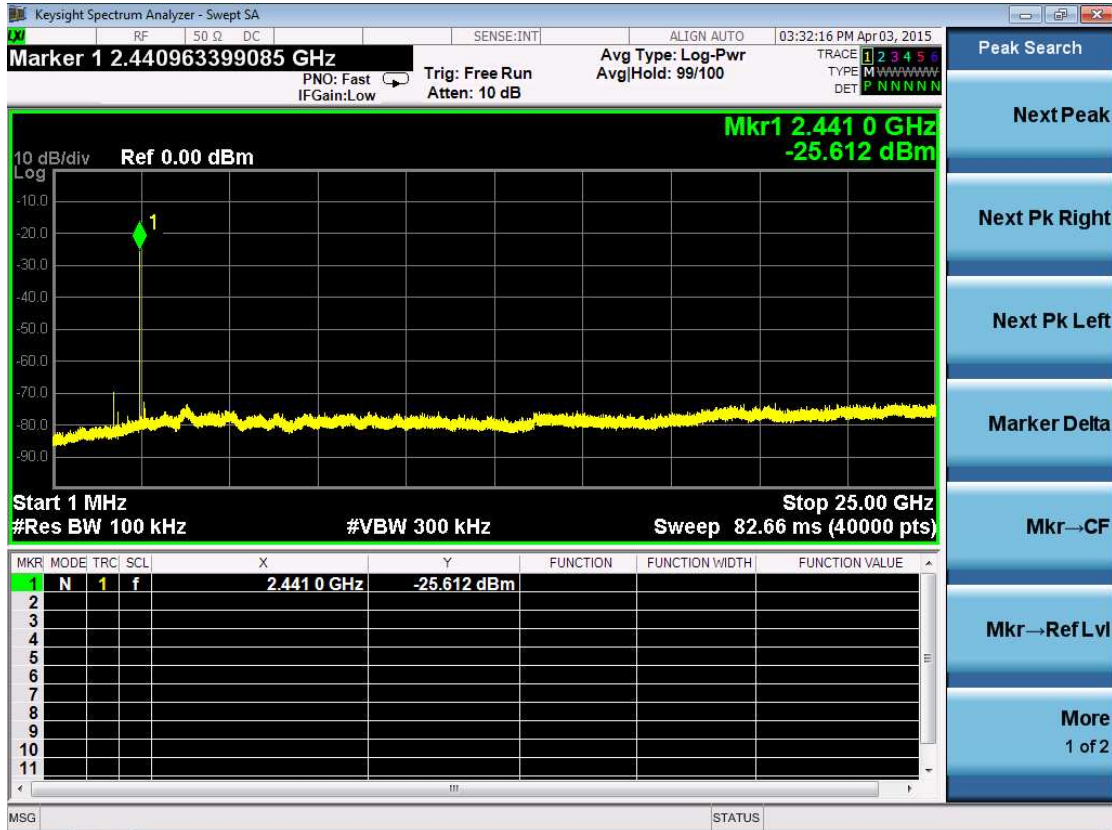
Mode 1, Channel H
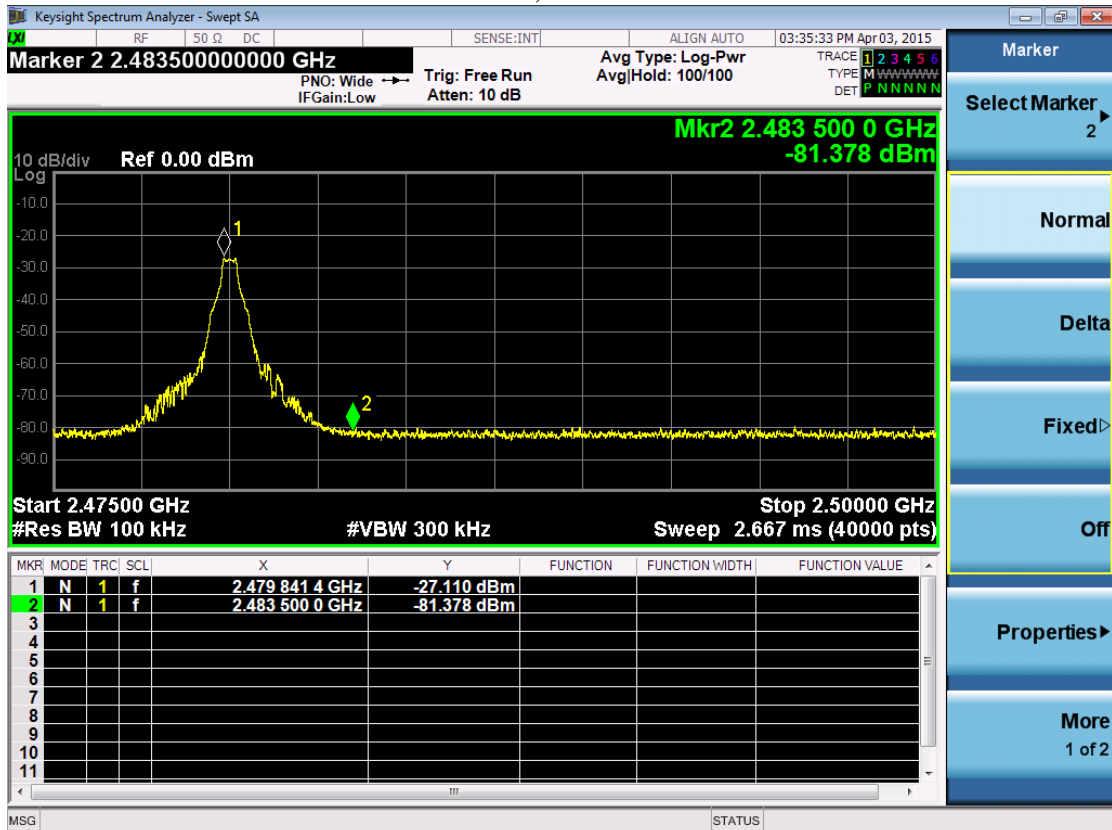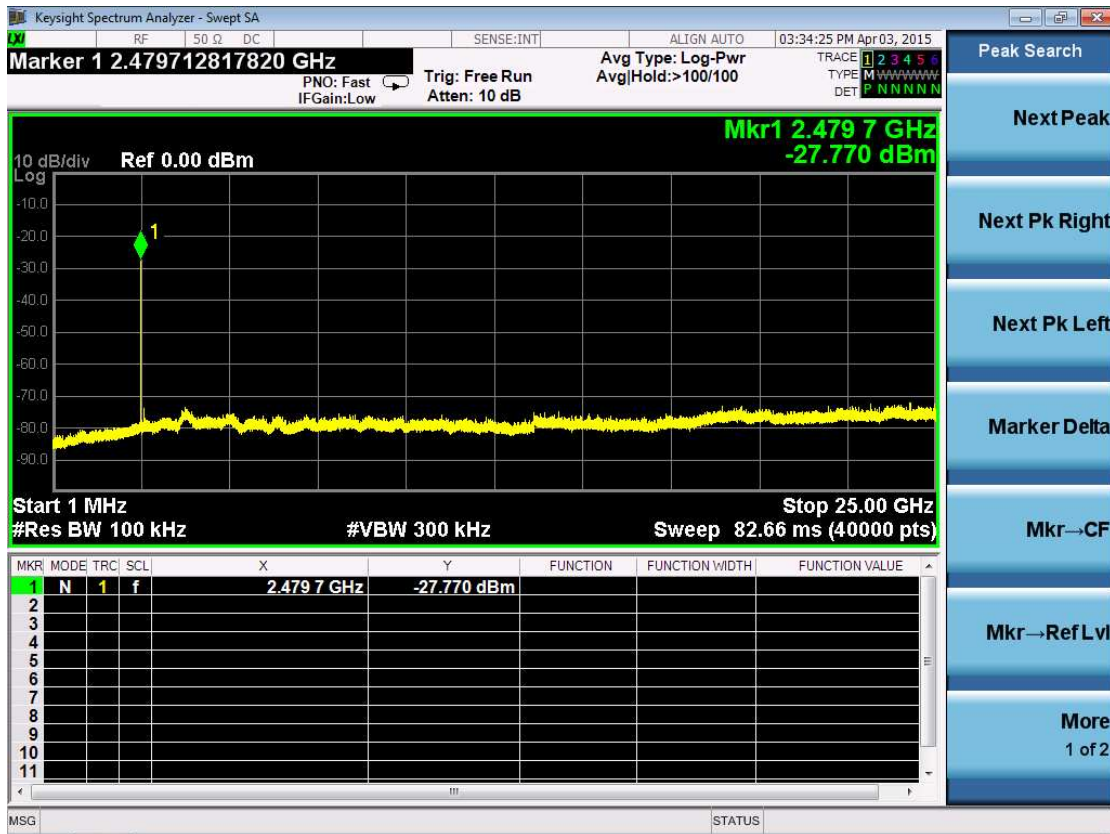
Mode 2, Channel L

Mode 2, Channel M
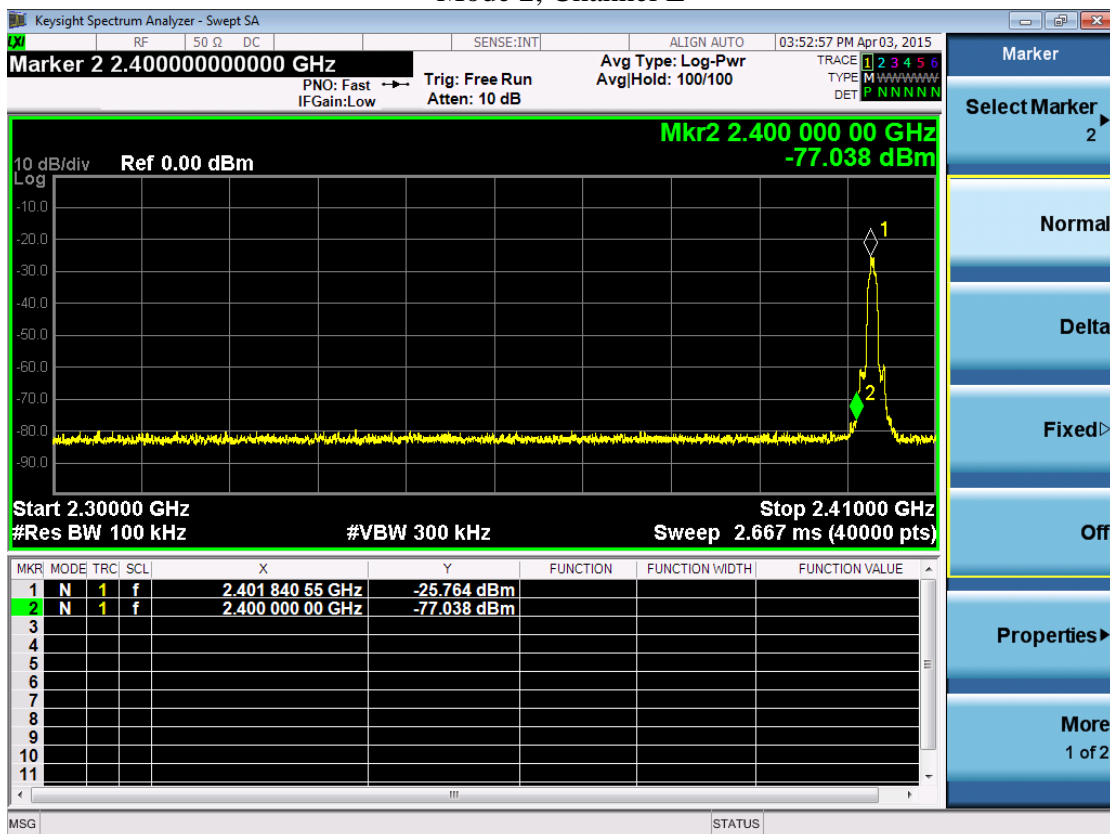
Mode 2, Channel H
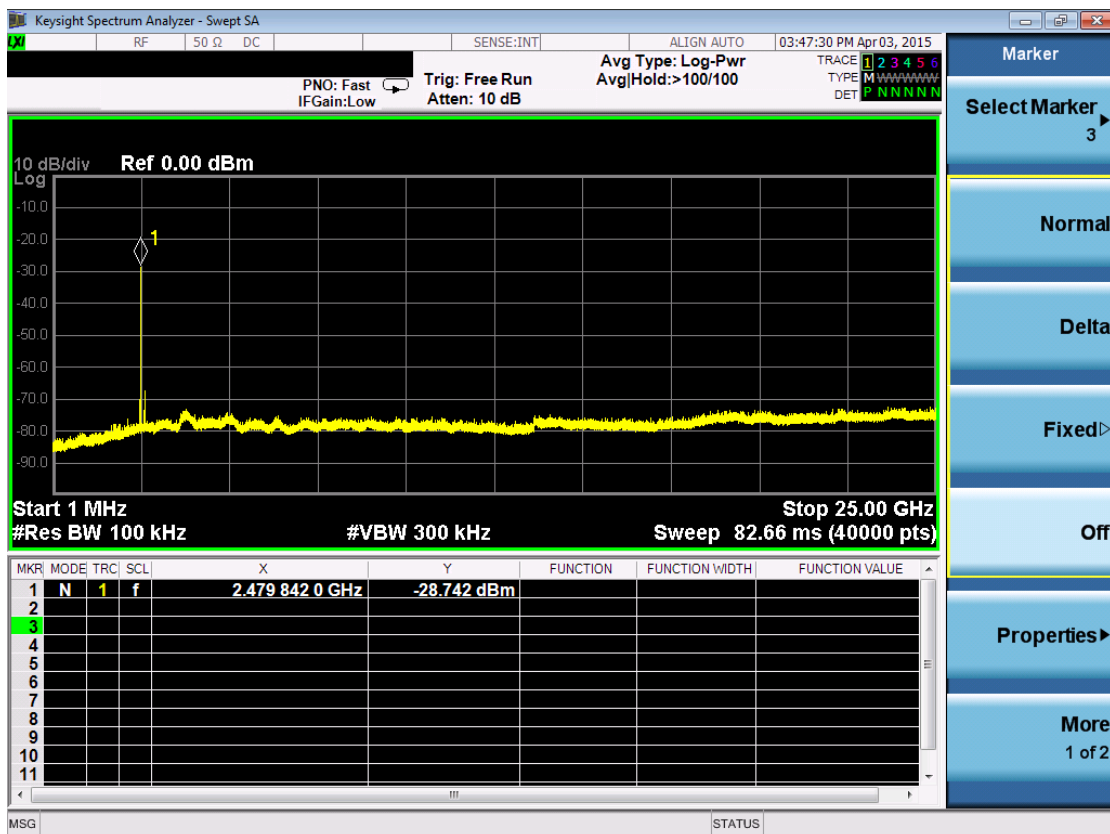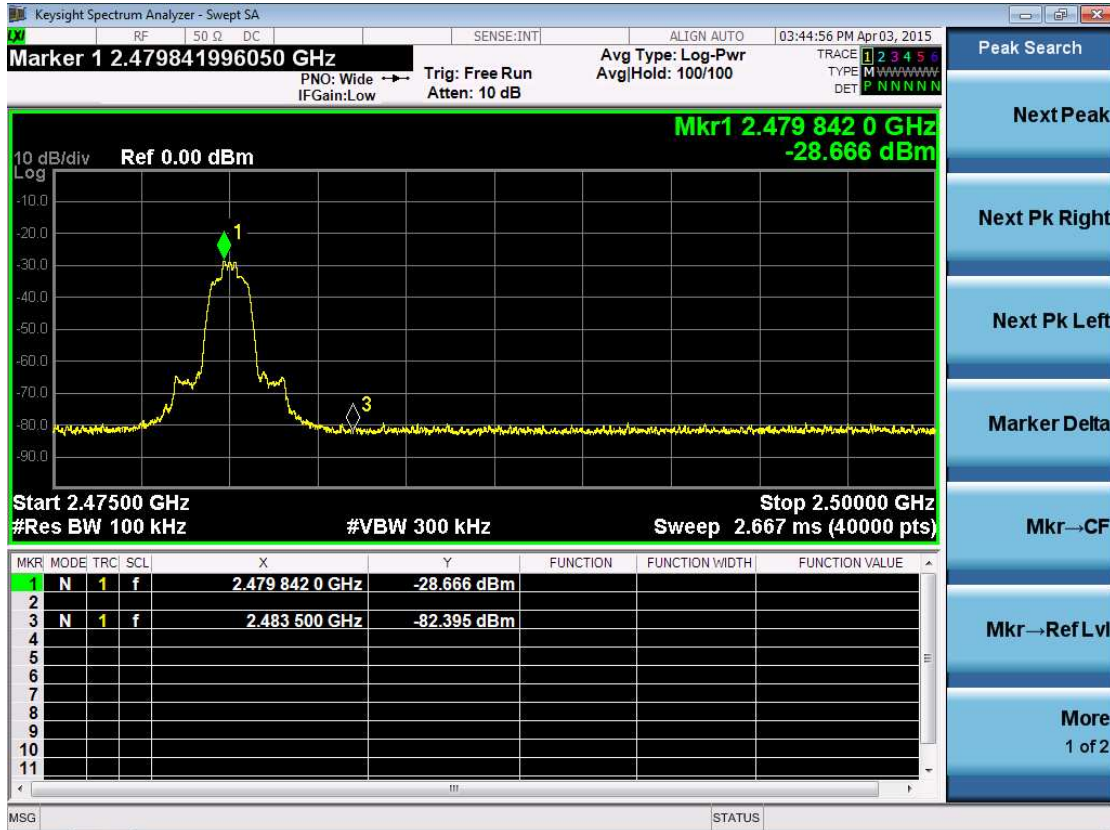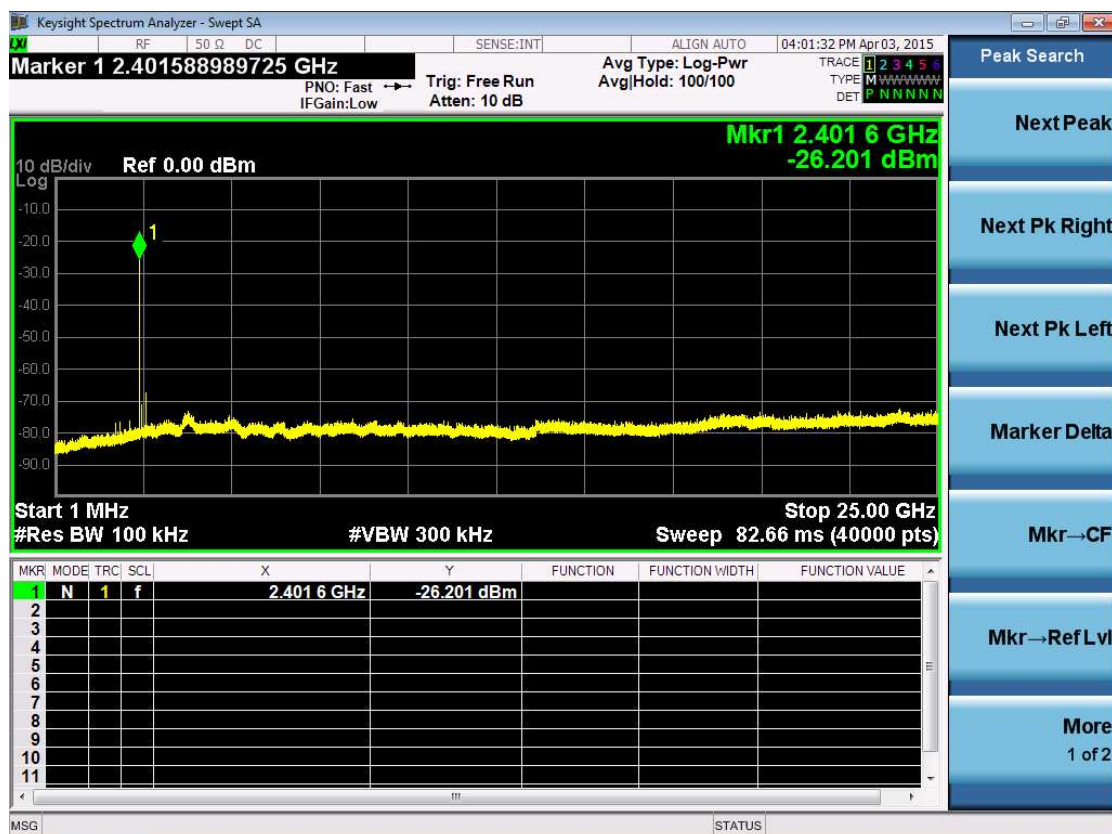
Mode 3, Channel L
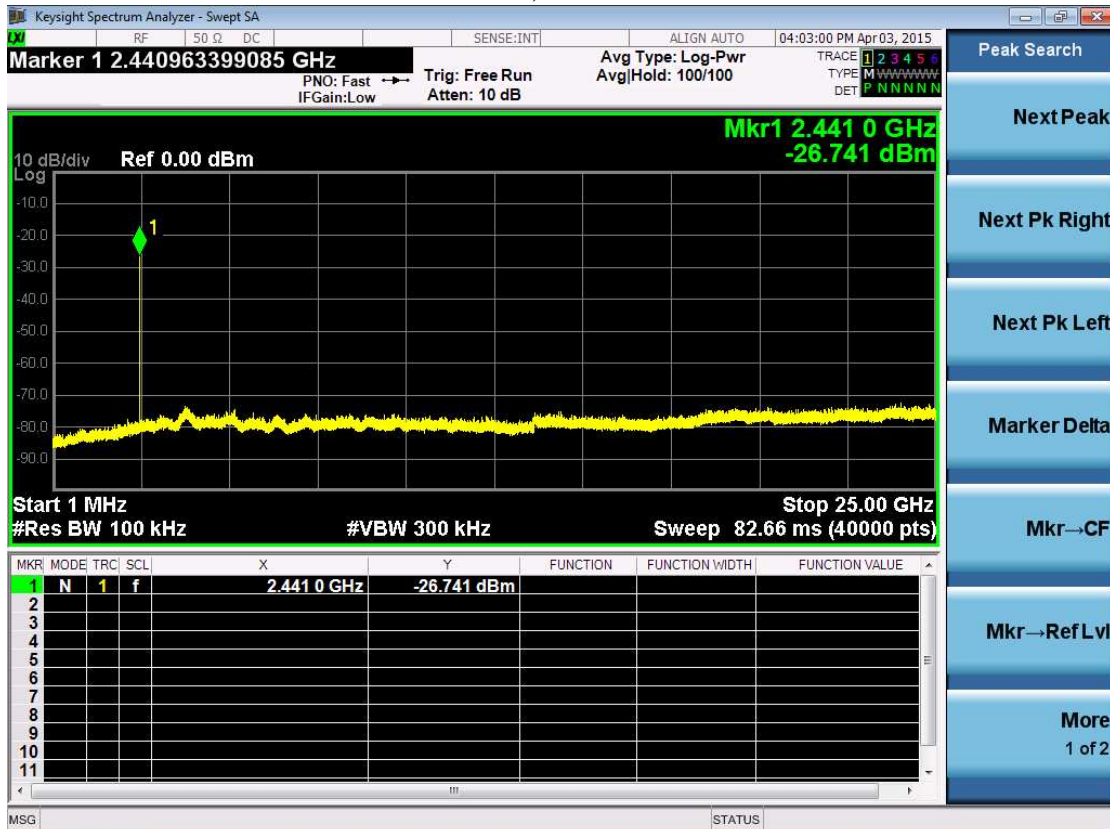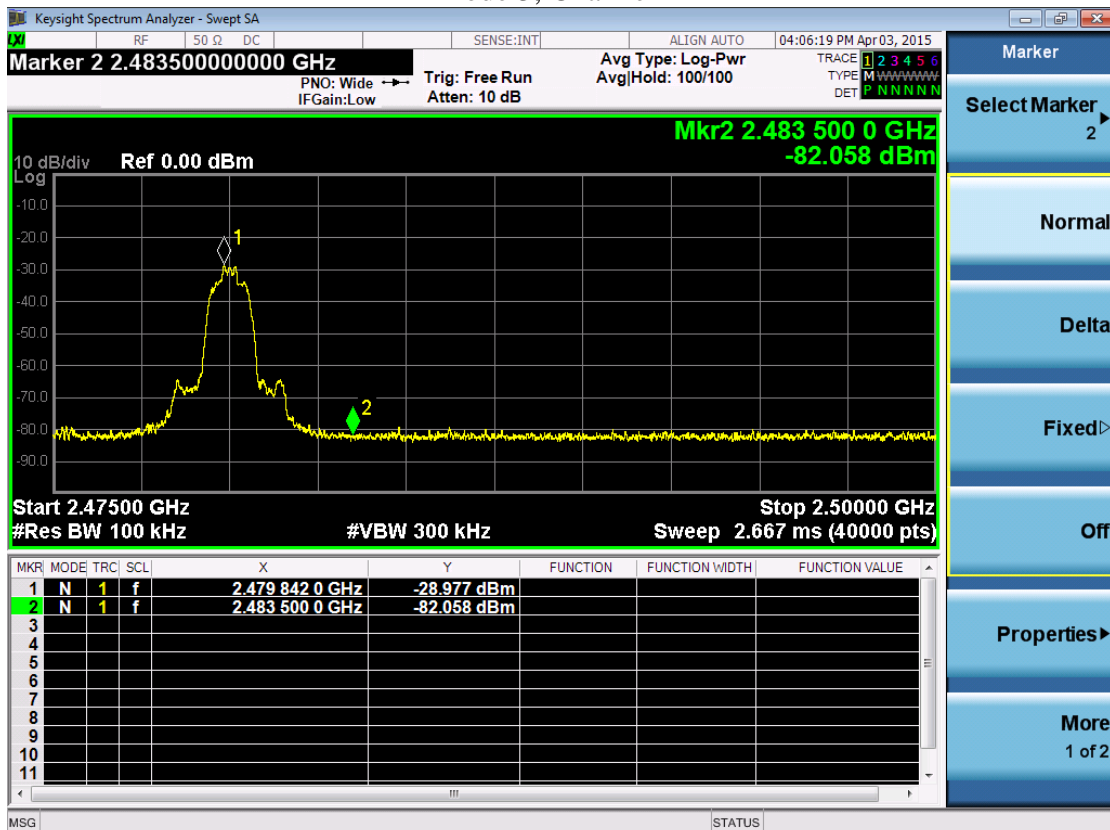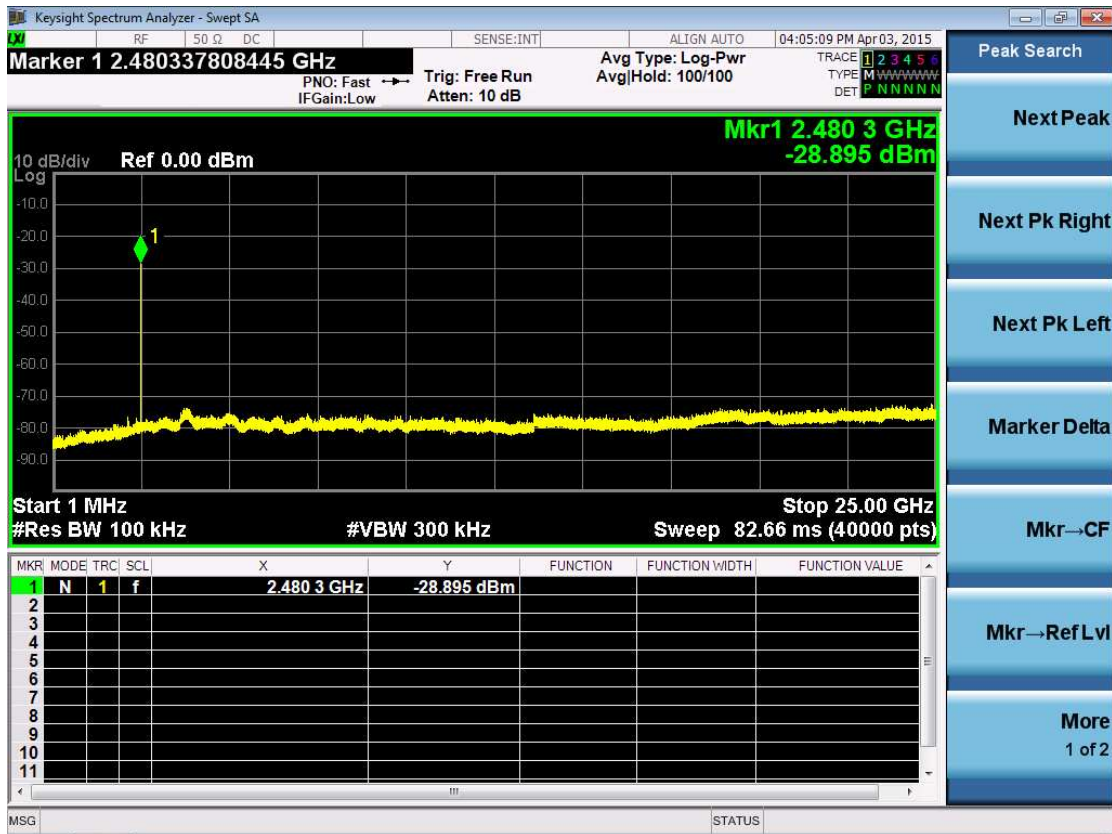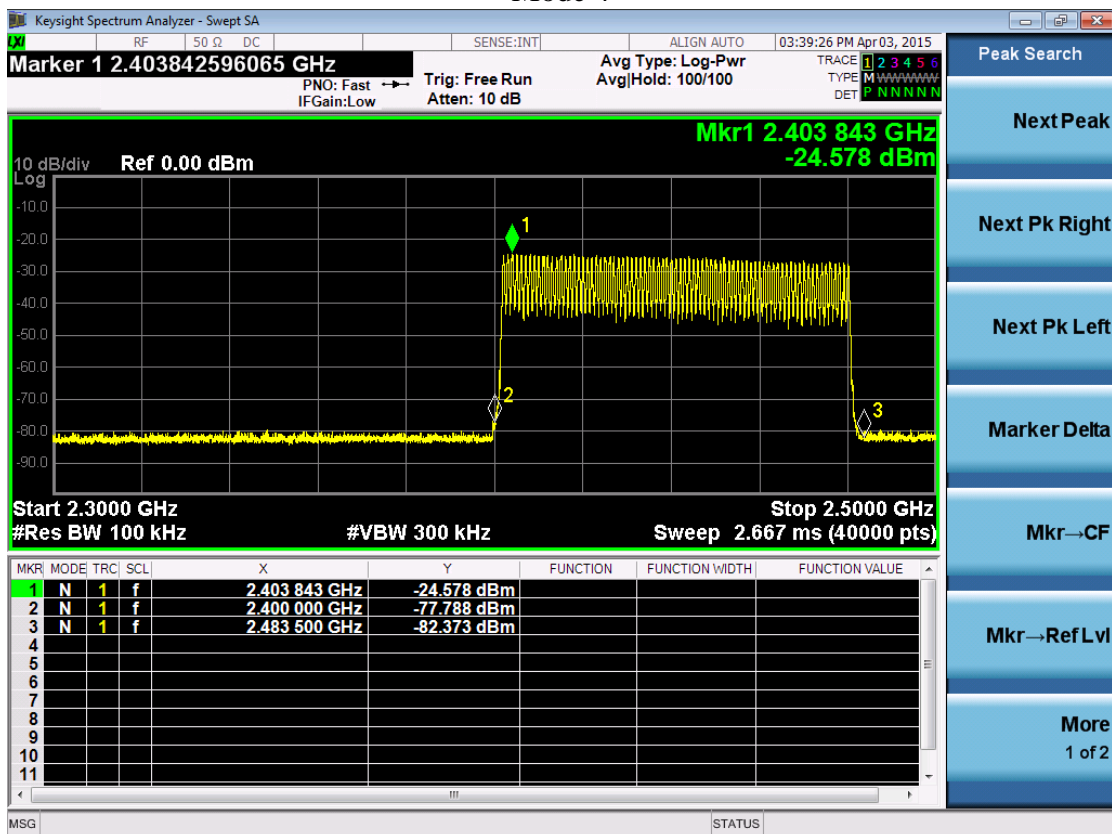
Mode 3, Channel M
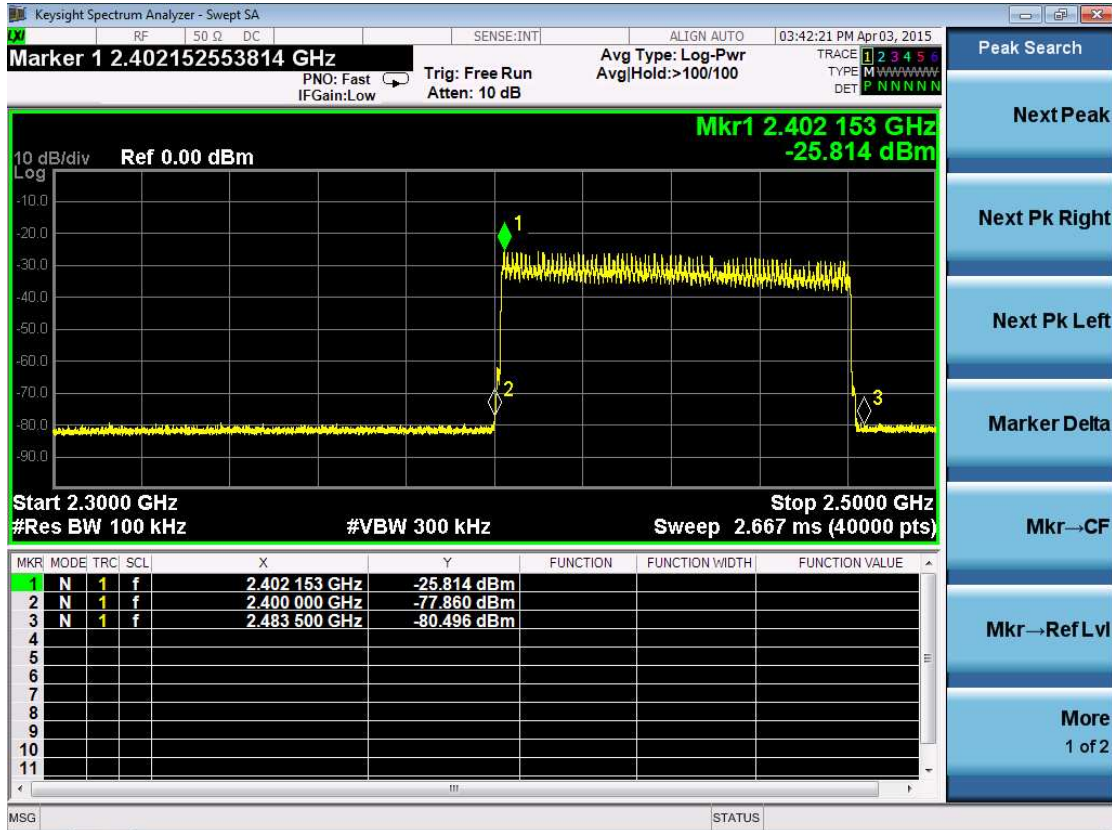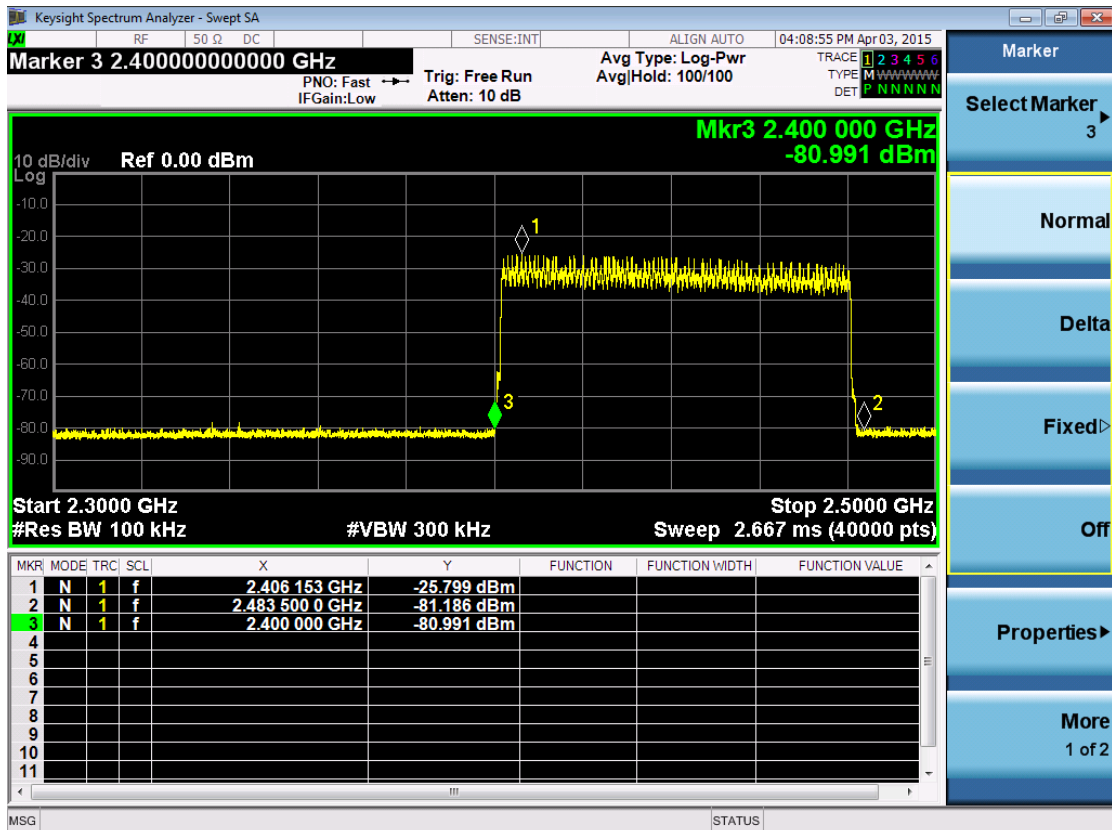

Mode 3, Channel H

Mode 4

Mode 5

Mode 6

8. Power line conducted emission
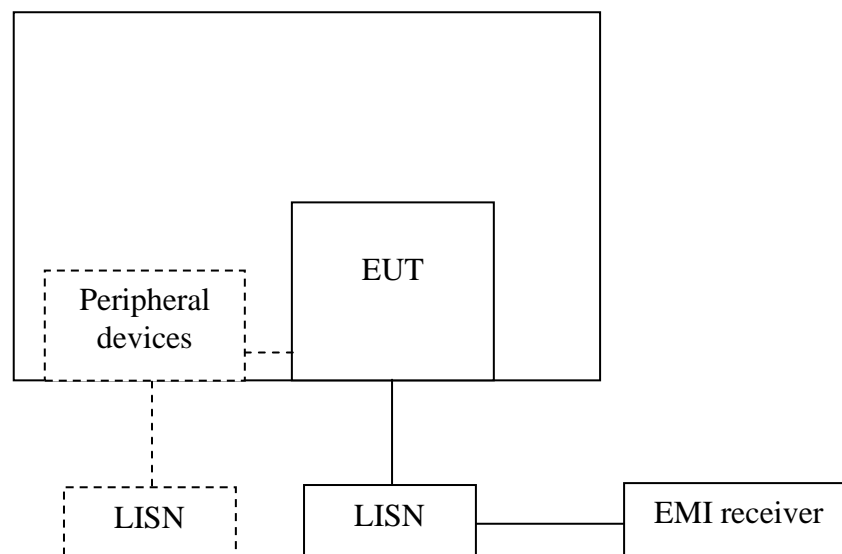
Test result: **Pass**

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50Ω/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω/50uH coupling impedance with 50Ω termination.
Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

8.4 Test protocol
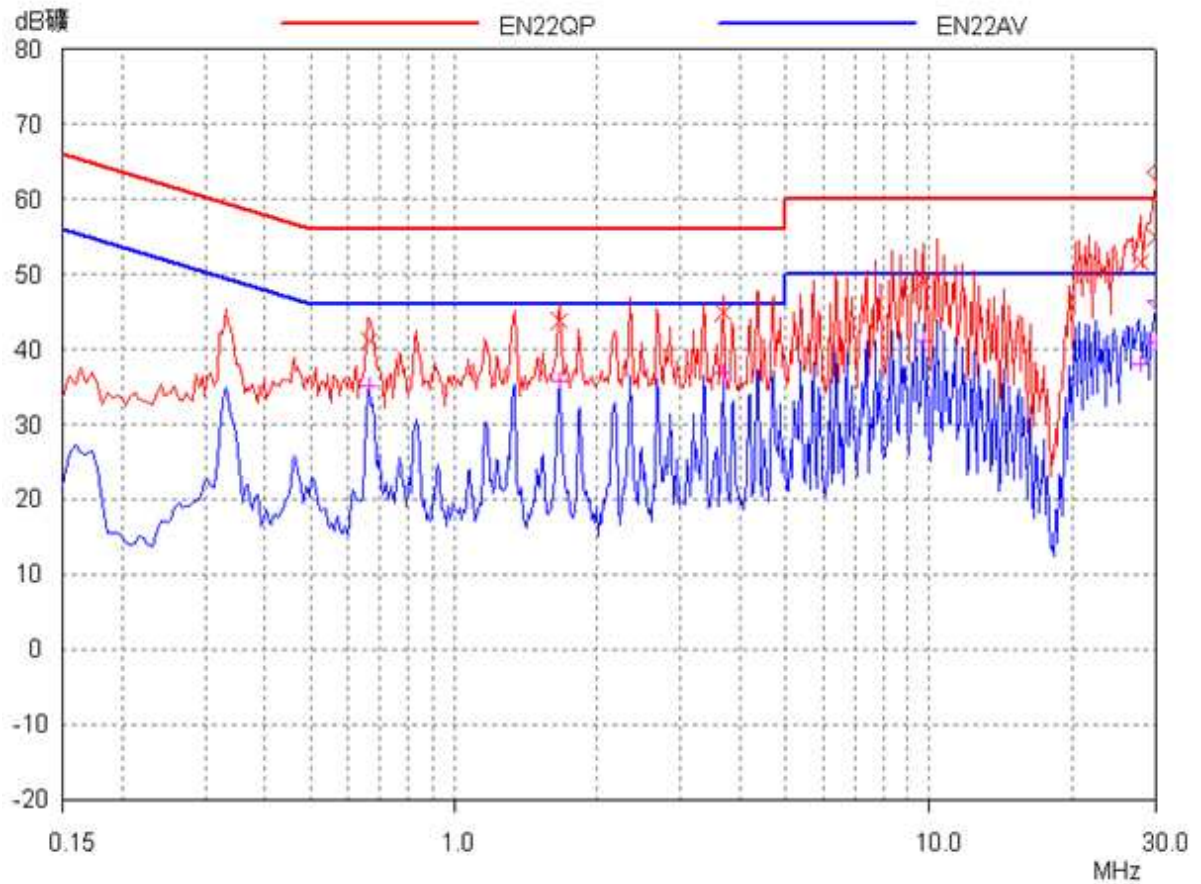
| Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.66 (N)	3.00	41.20	35.18	56.00	46.00	14.80	10.82
1.67 (N)	3.00	43.80	35.86	56.00	46.00	12.20	10.14
3.66 (L)	3.00	44.82	37.01	56.00	46.00	11.18	8.99
9.66 (N)	3.00	49.08	41.07	60.00	50.00	10.92	8.93
27.83 (L)	3.00	51.57	38.00	60.00	50.00	8.43	12.00
29.83 (L)	3.00	54.82	41.01	60.00	50.00	5.18	8.99
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							

9. Number of Hopping Frequencies

Test result: **Pass**

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration
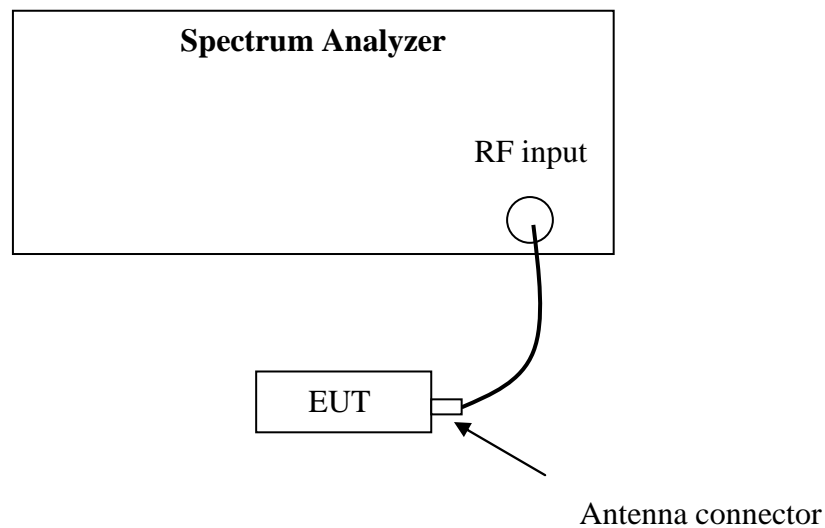
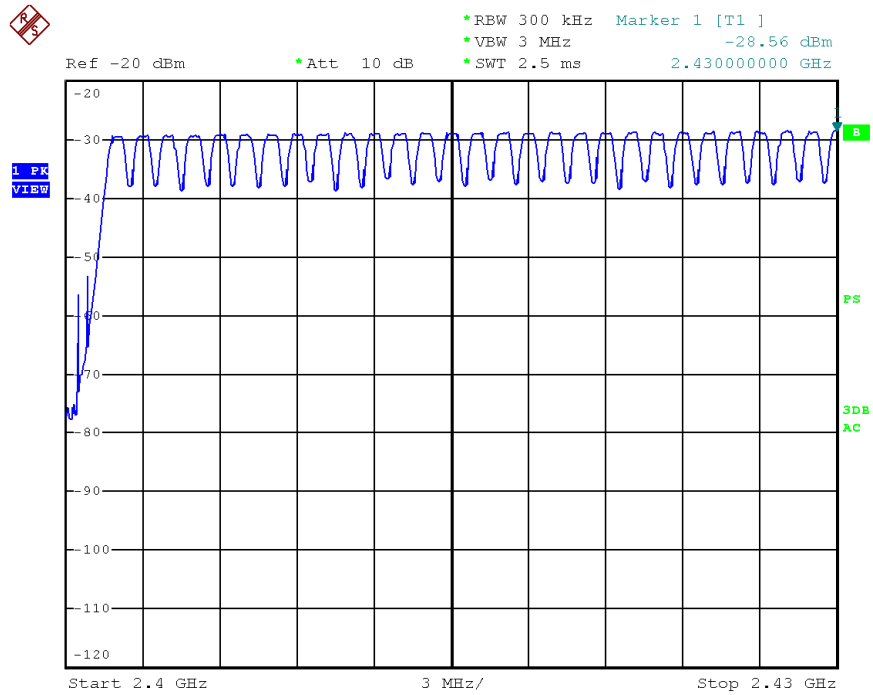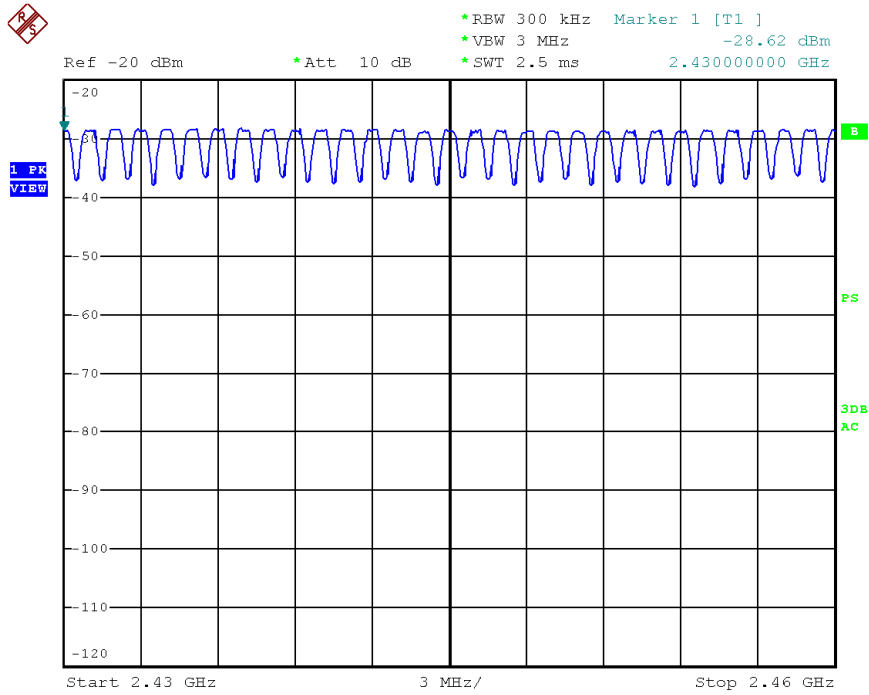## 9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=1MHz, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).
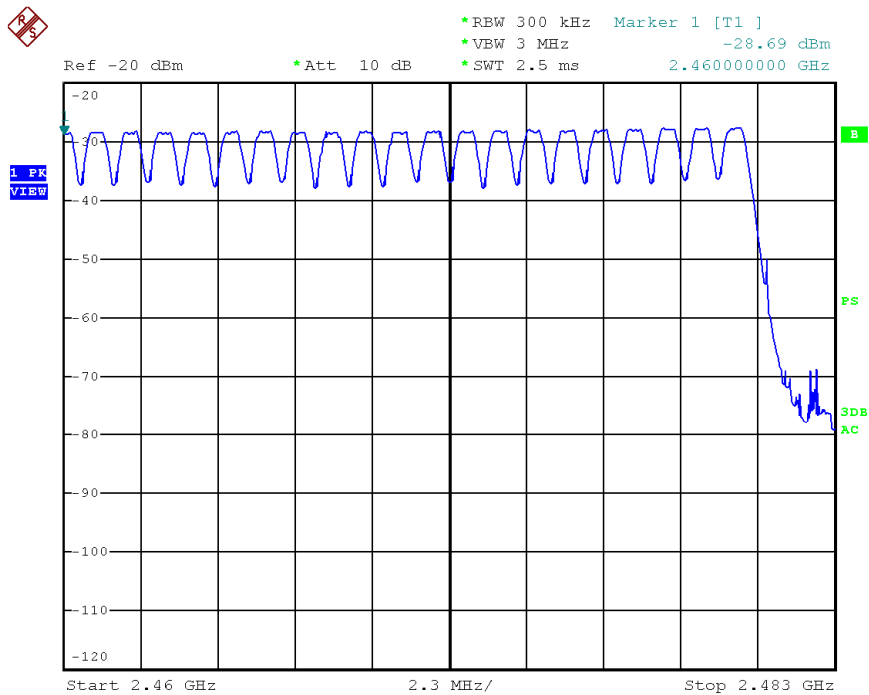
9.4 Test protocol

Mode	Channel Number	Limit
4	79	≥15

Date: 24.MAR.2015 18:21:34

*RBW 300 kHz   Marker 1 [T1]
*VBW 3 MHz   -28.62 dBm
Ref -20 dBm   *Att   10 dB   *SWT 2.5 ms   2.430000000 GHz

```
  -20
                                                                              B
1 PK
VIEW
  -40

  -50

  -60

  -70

  -80                                                                        3DB
                                                                             AC
  -90

 -100

 -110

 -120
Start 2.43 GHz                  3 MHz/                    Stop 2.46 GHz
```

Date: 24.MAR.2015   18:23:28

*RBW 300 kHz   Marker 1 [T1]
*VBW 3 MHz   -28.69 dBm
Ref -20 dBm   *Att   10 dB   *SWT 2.5 ms   2.460000000 GHz

```
  -20
                                                                              B
1 PK
VIEW
  -40

  -50

  -60

  -70                                                                         PS

  -80                                                                        3DB
                                                                             AC
  -90

 -100

 -110

 -120
Start 2.46 GHz                  2.3 MHz/                  Stop 2.483 GHz
```

Date: 24.MAR.2015   18:25:10

Mode	Channel Number	Limit
5	79	≥15

```
                                    *RBW  300 kHz   Marker 1 [T1 ]
                                    *VBW  1 MHz             -73.84 dBm
        Ref -20 dBm      *Att  10 dB   *SWT 2.5 ms      2.400000000 GHz
```



```
Start 2.4 GHz              3 MHz/            Stop 2.43 GHz
```

Date: 24.MAR.2015 17:58:02

*RBW 300 kHz   Marker 1 [T1]
*VBW 1 MHz   -28.27 dBm
Ref -20 dBm   *Att   10 dB   *SWT 2.5 ms   2.430000000 GHz

-20

-30   B

1 PK
VIEW
-40

-50

-60   PS

-70

-80   3DB
                                                                        AC
-90

-100

-110

-120

Start 2.43 GHz   3 MHz/   Stop 2.46 GHz

Date: 24.MAR.2015   18:00:33

*RBW 300 kHz   Marker 1 [T1]
*VBW 1 MHz   -30.23 dBm
Ref -20 dBm   *Att   10 dB   *SWT 2.5 ms   2.460000000 GHz

-20

-30   B

1 PK
VIEW
-40

-50

-60   PS

-70

-80   3DB
                                                                        AC
-90

-100

-110

-120

Start 2.46 GHz   2.3 MHz/   Stop 2.483 GHz

Date: 24.MAR.2015   18:02:00

Mode	Channel Number	Limit
6	79	≥15

Ref -20 dBm

*RBW 300 kHz
VBW 1 MHz
*Att 10 dB   SWT 2.5 ms

1 PK
VIEW

A

PS

3DB
AC

Start 2.4 GHz   3 MHz/   Stop 2.43 GHz
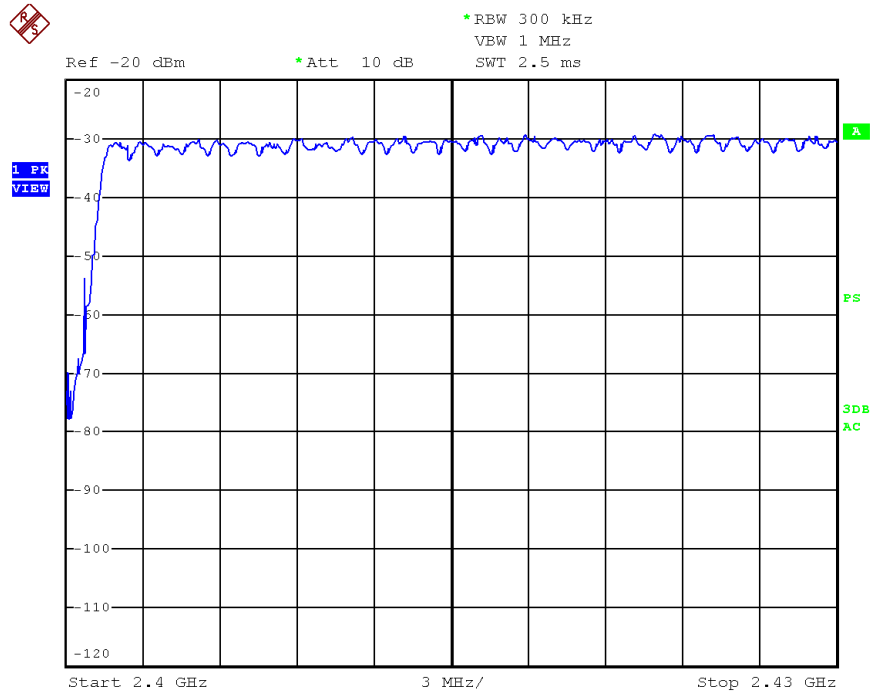
Date: 24.MAR.2015 17:25:37
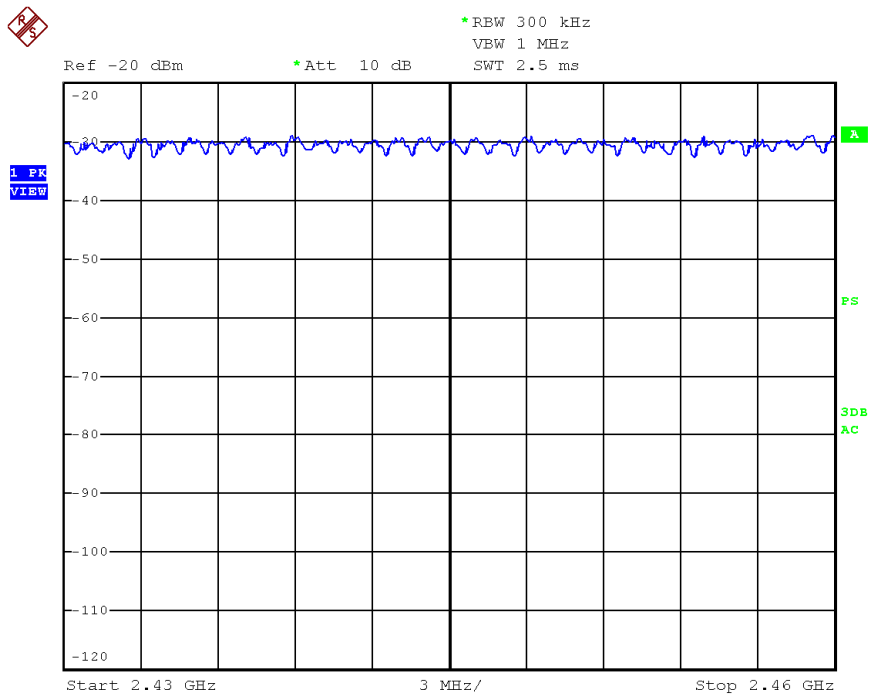
Date: 24.MAR.2015   17:26:15
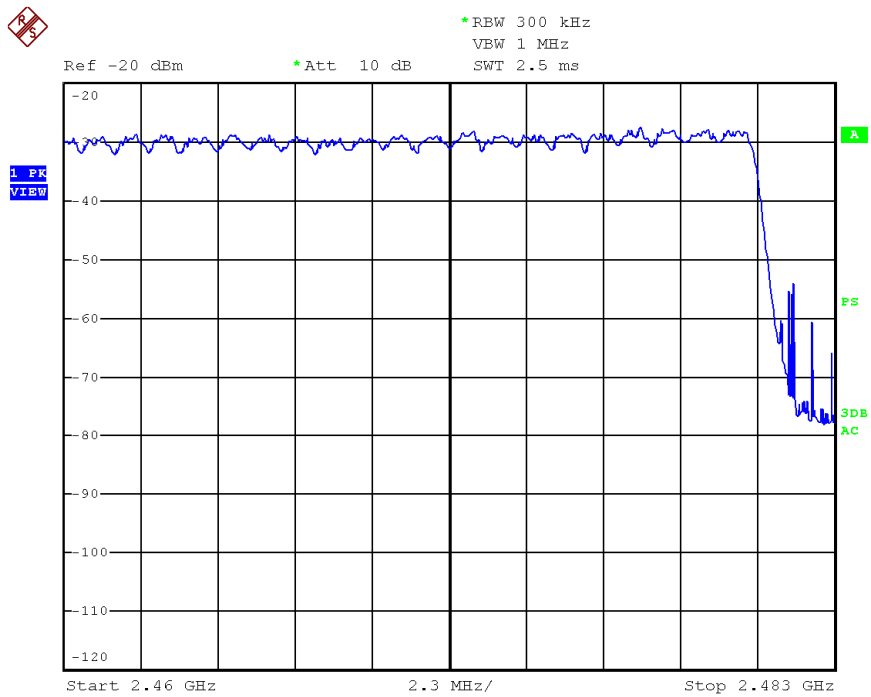
Date: 24.MAR.2015   17:27:01

10. Dwell Time

Test result: **Pass**

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

Spectrum Analyzer

RF input

EUT

Antenna connector
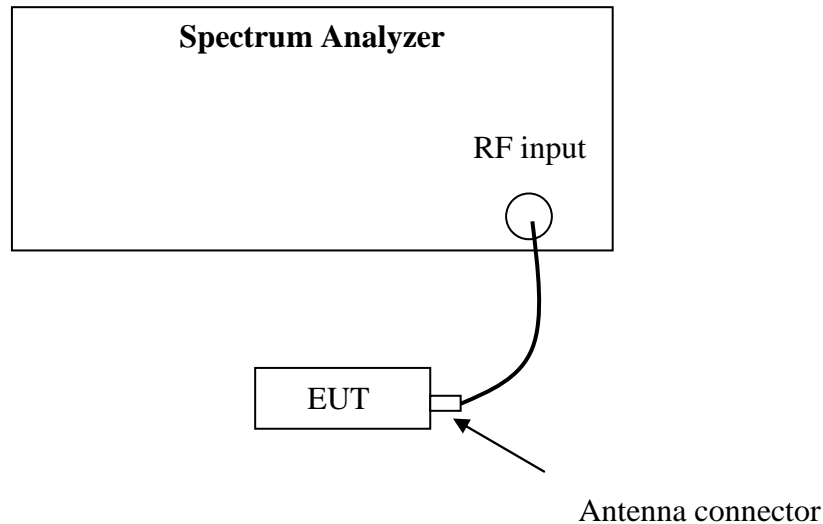
10.3 Test procedure and test setup

Dwell time per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW≥RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

10.4 Test protocol

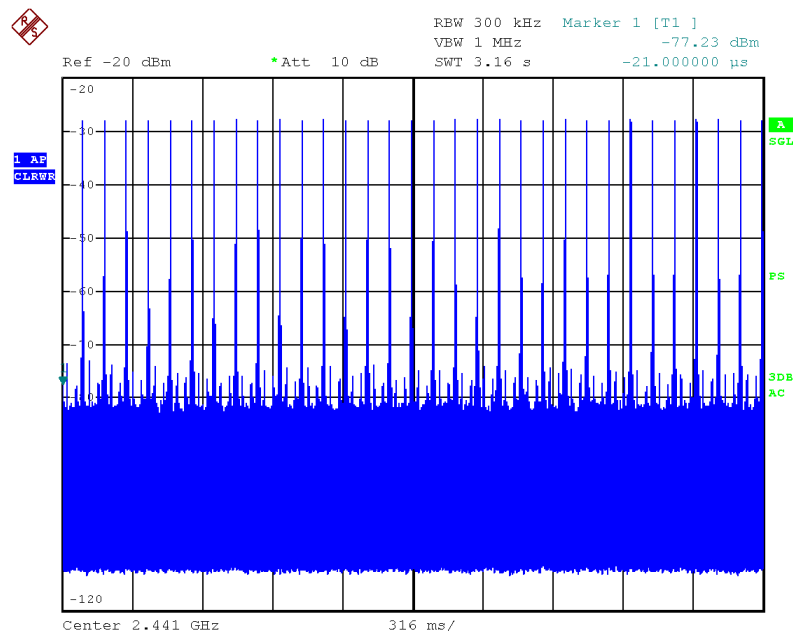| Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH1	131.2	≤400

Dwell time for single hop: 0.41ms; Hopping numbers within 1sec: 32hops/3.16s;

Test Time Period: 0.4*79=31.6sec;

The Maximum Occupancy Time within 31.6s: 0.41* (32/3.16) * 31.6= 131.2ms
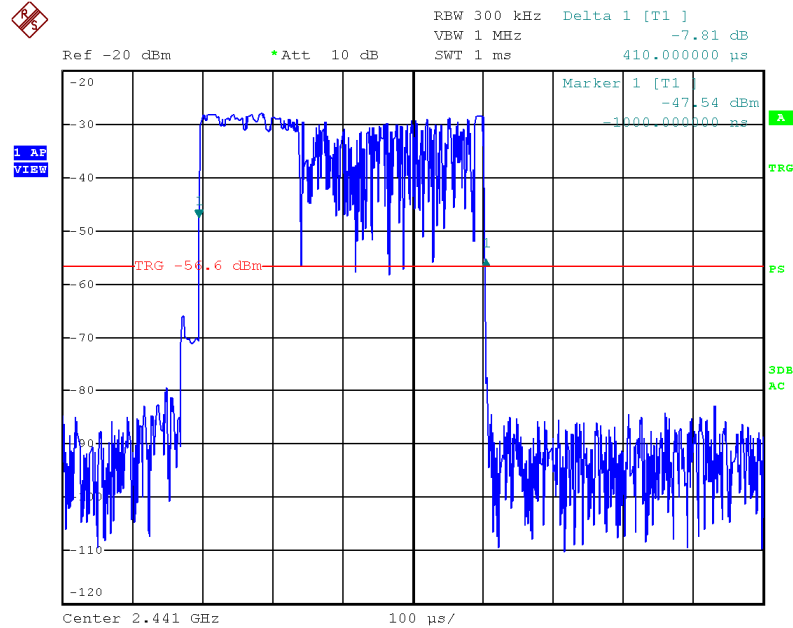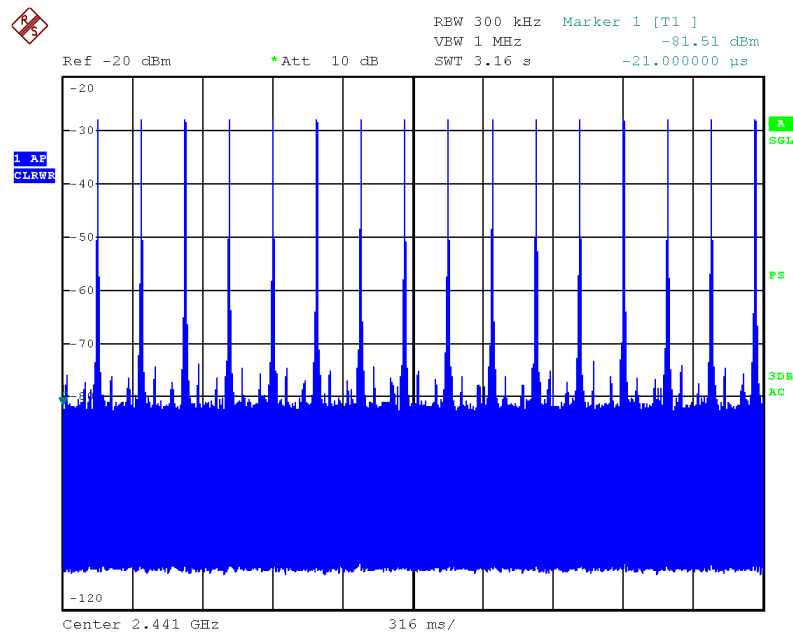

Date: 24.MAR.2015 17:37:16

Date: 24.MAR.2015 17:41:47

Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH3	268.8	≤400

Dwell time for single hop: 1.68ms; Hopping numbers within 1sec: 16hops/3.16s;

Test Time Period: 0.4*79=31.6sec;

The Maximum Occupancy Time within 31.6s: 1.68* (16/3.16) * 31.6= 268.8ms
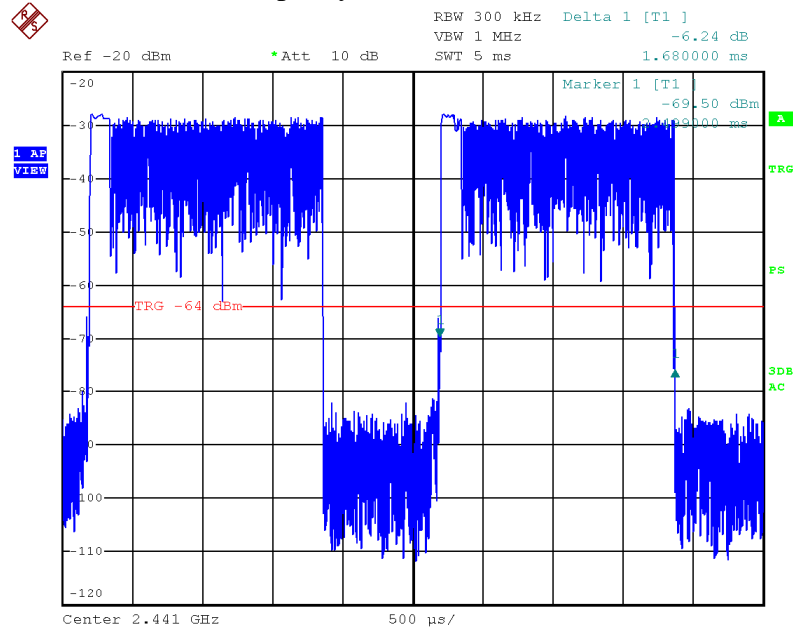
Date: 24.MAR.2015 17:38:38

Date: 24.MAR.2015 17:42:31

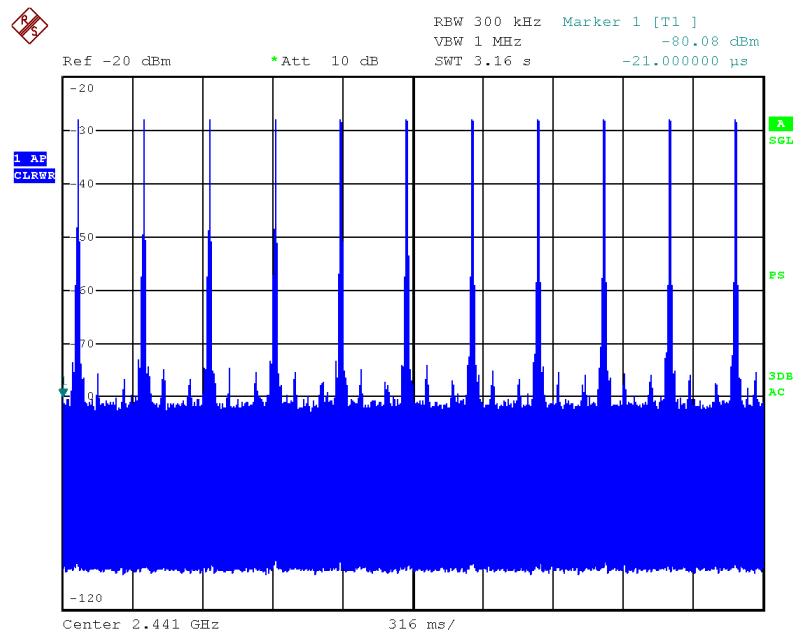| Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH5	323.4	≤400

Dwell time for single hop: 2.94ms; Hopping numbers within 1sec: 11hops/3.16s;

Test Time Period: 0.4*79=31.6sec;

The Maximum Occupancy Time within 31.6s: 2.94* (11/3.16) * 31.6= 323.4ms
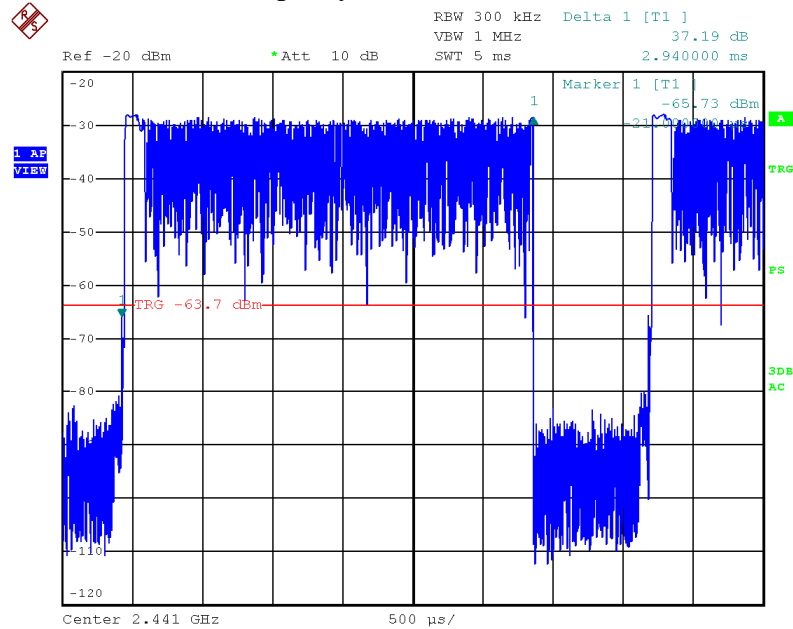
Date: 24.MAR.2015 17:39:52

Date: 24.MAR.2015 17:43:07

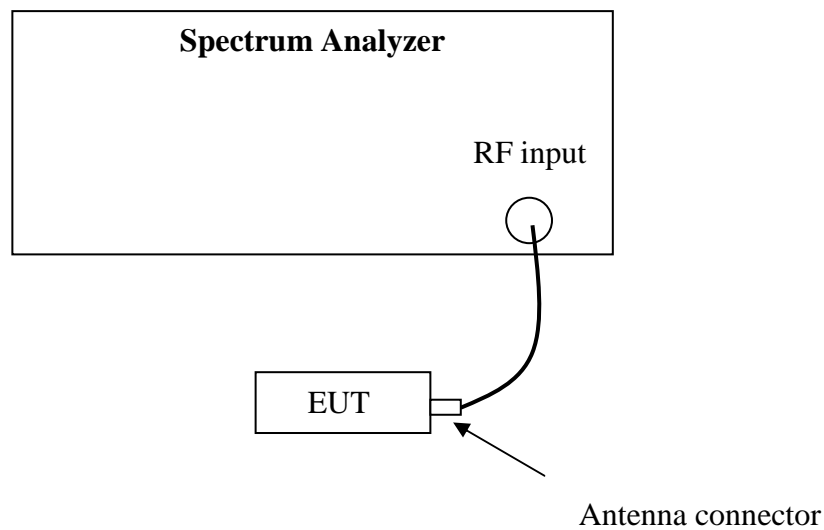## 11. Occupied Bandwidth

Test Status: NA

11.1 Test limit

None

11.2 Test Configuration

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 * RBW Detector = Sample, Sweep = Auto.

11.4 Test protocol

Temperature   :   °C

Relative Humidity   :   %

Mode	CH	Occupied Bandwidth (kHz)
1	L	/
	M	/
	H	/

Mode	CH	Occupied Bandwidth (kHz)
2	L	/
	M	/
	H	/

Mode	CH	Occupied Bandwidth (kHz)
3	L	/
	M	/
	H	/