

# TEST REPORT

**Reference No.**..... : WTS19S09068238W005  
**FCC ID** ..... : 2AEPIELEMENT4PLUS  
**Applicant**..... : COLOMBIANA DE COMERCIO S.A.  
**Address**..... : Car. 43E No 8-71, Medellin, Colombia  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product**..... : SMARTPHONE  
**Model(s)** ..... : ELEMENT 4 PLUS  
**Brand Name**..... : Kalley  
**Standards** ..... : FCC PART15 SUBPART B: 2018  
**Date of Receipt sample** .... : 2019-10-30  
**Date of Test** ..... : 2019-10-31 to 2019-11-11  
**Date of Issue**..... : 2019-11-12  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:



*Philip Zhong*

Philip Zhong / Manager

## 2 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 CONTENTS .....</b>	<b>2</b>
<b>3 REVISION HISTORY .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 STANDARDS APPLICABLE FOR TESTING .....	4
4.4 SUBCONTRACTED .....	4
4.5 ABNORMALITIES FROM STANDARD CONDITIONS .....	5
<b>5 TEST SUMMARY .....</b>	<b>6</b>
<b>6 EQUIPMENT USED DURING TEST .....</b>	<b>7</b>
6.1 EQUIPMENT LIST.....	7
6.2 DESCRIPTION OF SUPPORT UNITS.....	8
6.3 MEASUREMENT UNCERTAINTY.....	8
<b>7 EMISSION TEST RESULTS.....</b>	<b>9</b>
7.1 POWER LINE CONDUCTED EMISSION, 150kHz TO 30MHz .....	9
7.2 RADIATION EMISSION, 30MHz TO 1000MHz.....	12
7.3 RADIATION EMISSION, ABOVE 1000MHz.....	15
<b>8 PHOTOGRAPHS – TEST SETUP FCC ID 2AEPIELEMENT4PLUS .....</b>	<b>18</b>
8.1 PHOTOGRAPH –POWER LINE CONDUCTED EMISSION TEST SETUP AT TEST SITE 1#.....	18
8.2 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR 30~1000MHz AT TEST SITE 2#.....	18
8.3 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR ABOVE 1GHz AT TEST SITE 1#.....	19

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S09068 238W005	2019-10-30	2019-10-31 to 2019-11-11	2019-11-12	original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	SMARTPHONE
Model(s):	ELEMENT 4 PLUS
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS Class:	12
WCDMA Band(s):	FDD Band II/V
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	V00
Software Version:	ELEMENT4PLUS_V1_20191015
Highest frequency (Exclude Radio):	1.3GHz
Storage Location:	Internal Storage

Note: This EUT has two SIM card slots, and use same one RF module. We found that RF parameters are the same, when we insert the card 1 and card 2. So we usually performed the test under main card slot 1.

### 4.2 Details of E.U.T.

Ratings:	Battery DC 3.8V, 1500mAh DC 5V, 550mA, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.15A)
Adapter:	Manufacturer: Dongguan Aohai Power Technology Co.,Ltd Model No.: A31A-050055U-US1

### 4.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC PART 15, SUBPART B Electronic Code of Federal Regulations- Unintentional Radiators

### 4.4 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

#### **4.5 Abnormalities from Standard Conditions**

None.

## 5 Test Summary

Test Items	Test Requirement	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B	ANSI C63.4: 2014	Pass
Radiated Emission 30MHz to 1GHz)	FCC PART 15, SUBPART B	ANSI C63.4: 2014	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B	ANSI C63.4: 2014	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

## 6 Equipment Used during Test

### 6.1 Equipment List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-12	2020-09-11
2.	LISN	R&S	ENV216	101215	2019-09-12	2020-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-12	2020-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-12	2020-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-12	2020-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-12	2020-09-11
4.	Cable	LARGE	RF300	-	2019-09-12	2020-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2019-04-29	2020-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2019-04-09	2020-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2019-04-09	2020-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-12	2020-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-04-09	2020-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2019-04-09	2020-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-04-13	2020-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2019-04-13	2020-04-12
9	Universal Radio Communication Tester	R&S	CMU 200	112461	2019-09-12	2020-09-11
10	Smart Antenna	SCHWARZBECK	HA08	-	2019-04-09	2020-04-08
11	Signal Generator	R&S	SMR20	100046	2019-09-12	2020-09-11
12.	Universal Radio Communication Tester	R&S	CMW 500	127818	2019-04-13	2020-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last	Calibration

					Calibration Date	Due Date
1	Test Receiver	R&S	ESCI	101296	2019-04-13	2020-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-04-09	2020-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2019-04-13	2020-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2019-04-13	2020-04-12

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
MacBook Air	APPLE	A1465	C17KTQDNF5N7
Power Supply	LPS DELTA ELECTRONICS UIANG CO.,LTD	ADP-45GD	-

## 6.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction Emission	150kHz~30MHz	$\pm 3.64\text{dB}$	(1)
Radiation Emission	30MHz~1000MHz	$\pm 5.03\text{dB}$	(1)
	1GHz~18GHz	$\pm 5.47\text{dB}$	(1)
Confidence interval: 95%. Confidence factor:k=2			



## 7 Emission Test Results

### 7.1 Power Line Conducted Emission, 150kHz to 30MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4: 2014  
 Test Result ..... : Pass  
 Frequency Range ..... : 150kHz to 30MHz  
 Class ..... : Class B  
 Limit ..... :

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

#### 7.1.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 23°C  
 Humidity ..... : 53.6%RH  
 Atmospheric Pressure ..... : 101kPa

EUT Operation:

Input Voltage ..... : DC 5V by PC  
 Operating Mode ..... : Data transmitting mode, Earphone mode, Adapter mode  
 Remark ..... : The worse case Data transmitting mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 7.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with ANSI C63.4:2014.

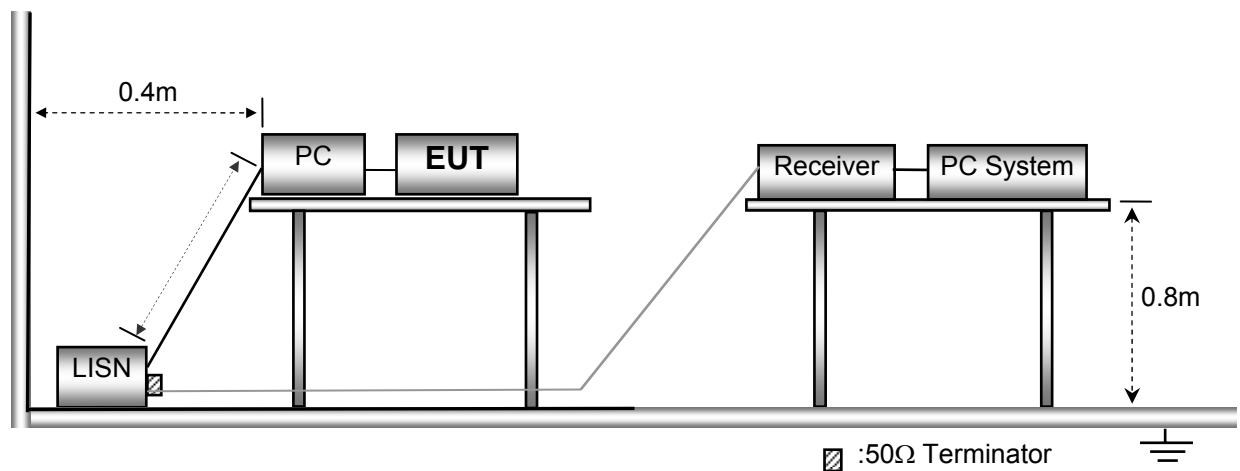


### 7.1.3 Measurement Data


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line. According to the data in below section, the EUT complied with the FCC PART 15, SUBPART B standards.

### 7.1.4 Power Line Conducted Emission Test Data

Live Line:

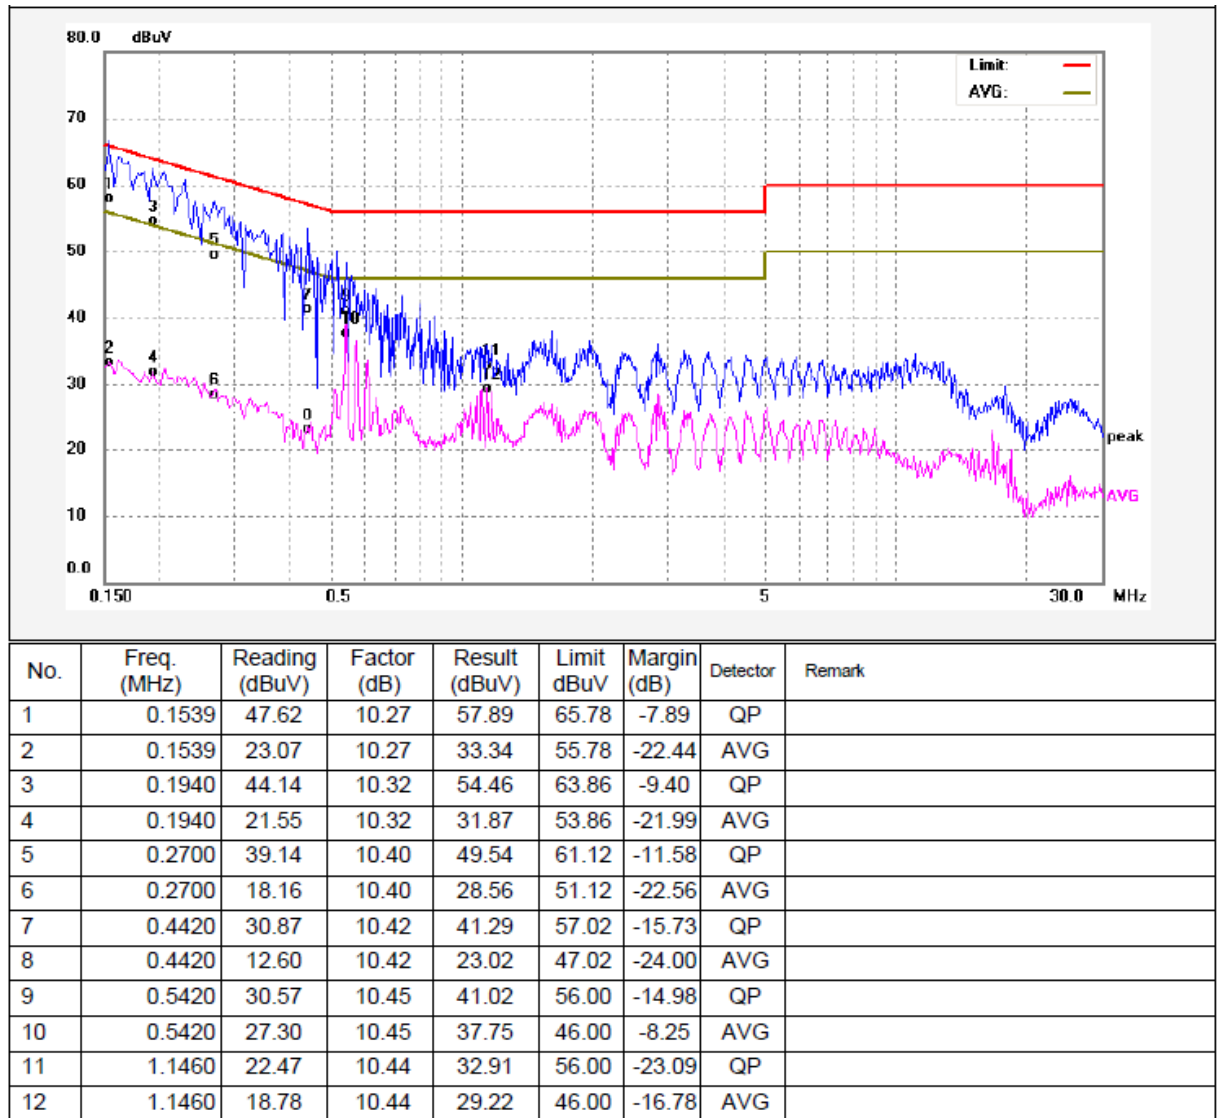

Neutral Line:

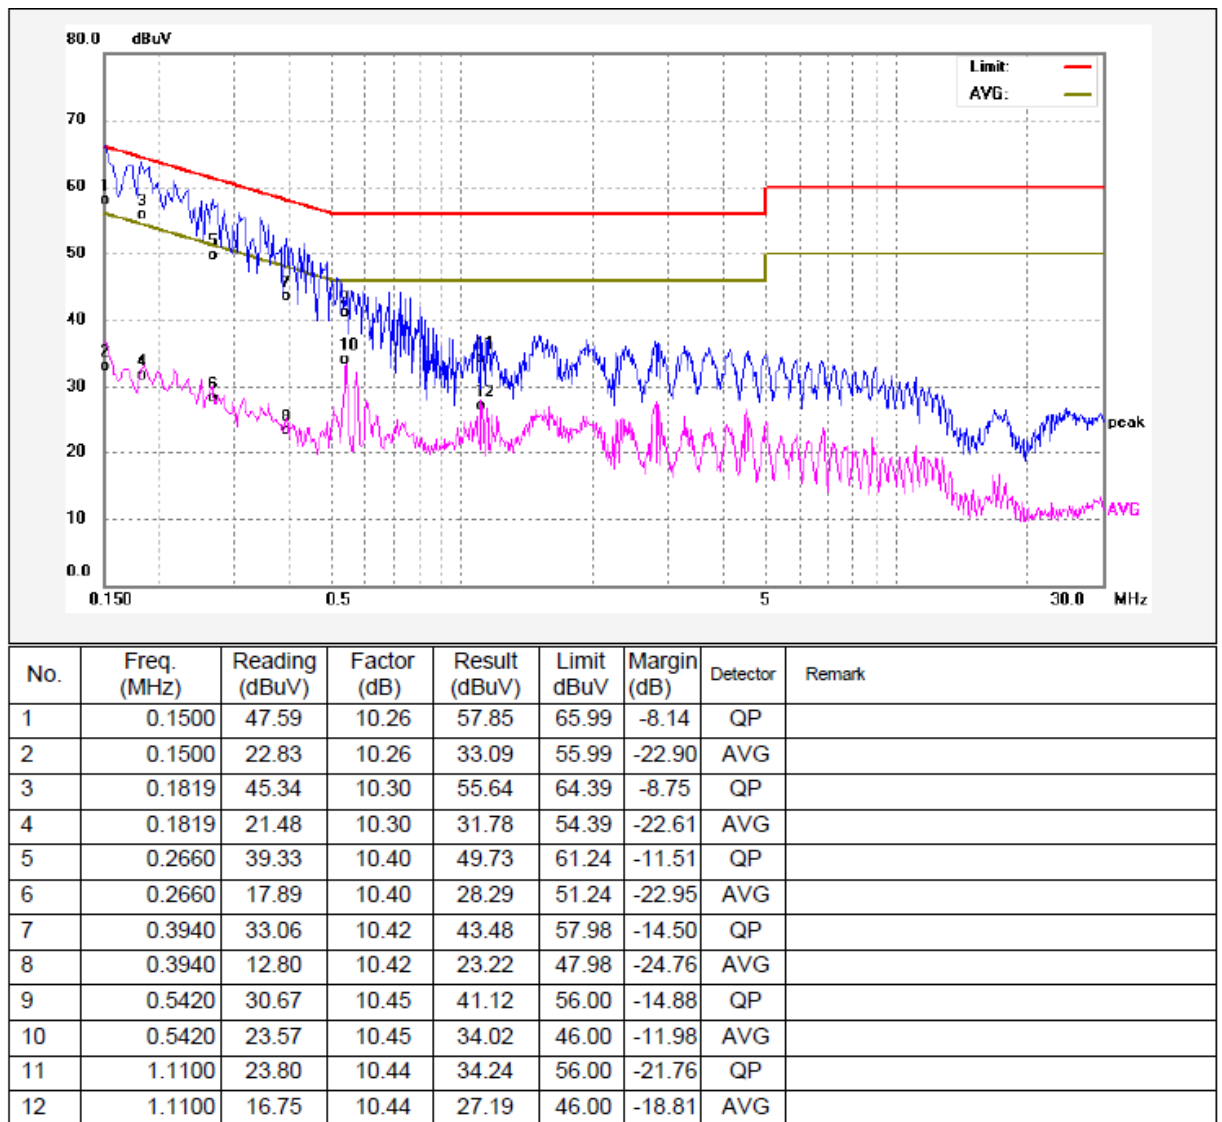

## 7.2 Radiation Emission, 30MHz to 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4: 2014  
 Test Result ..... : Pass  
 Frequency Range ..... : 30MHz to 1000MHz  
 Class. .... : Class B  
 Limit..... :

Frequency (MHz)	Distance (Meter)	Limit (dB $\mu$ V/m)
		Quasi-peak
30 to 88	3	40
88 to 216	3	43.5
21 to 960	3	46
960 to 1000	3	54

### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.5°C  
 Humidity ..... : 52.6%RH  
 Atmospheric Pressure ..... : 101.2kPa

EUT Operation:

Input Voltage..... : DC 5V by PC  
 Operating Mode ..... : Data transmitting with PC mode, Earphone mode, Adapter mode  
 Remark ..... : The worse case Data transmitting with PC mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

### 7.2.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2014.

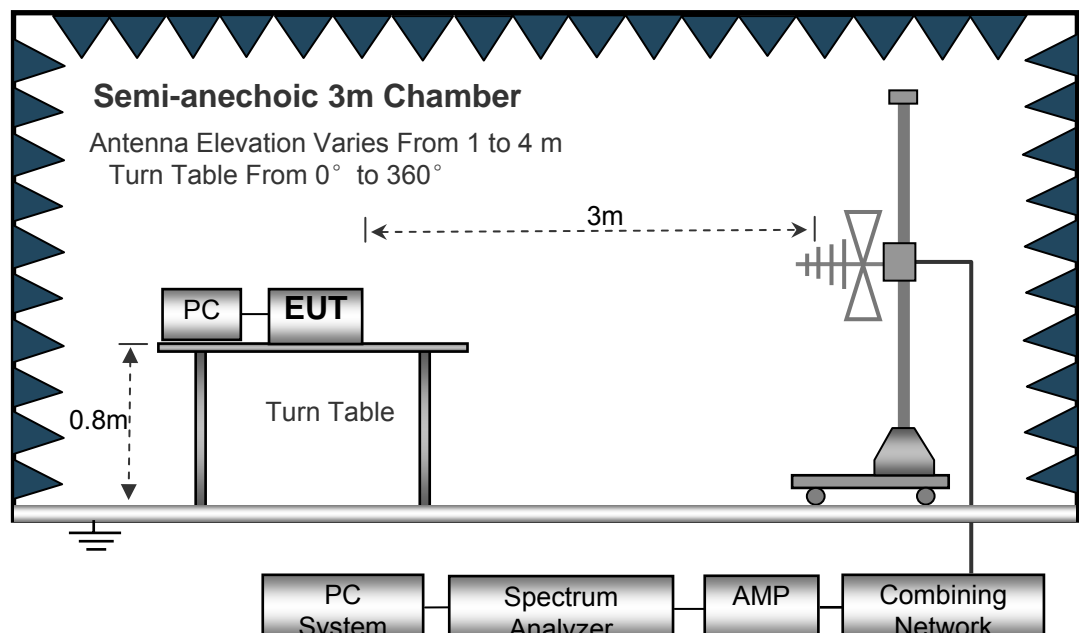


### 7.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Quasi-peak measurements were performed if peak emissions were within 6dB of the Quasi-peak limit line.

### 7.2.4 Radiated Emission Test Data, 30MHz to 1000MHz

Antenna Polarization: Vertical

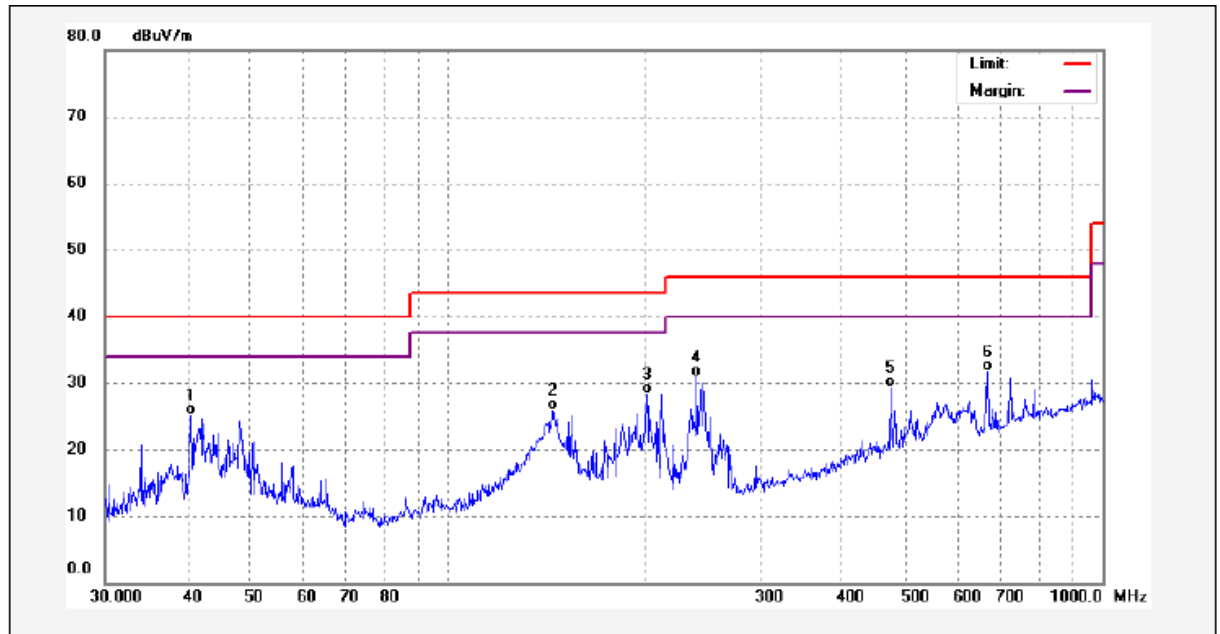


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	40.5591	41.02	-15.96	25.06	40.00	-14.94	QP	
2	144.8418	40.48	-14.60	25.88	43.50	-17.62	QP	
3	201.3930	45.85	-17.58	28.27	43.50	-15.23	QP	
4	239.9873	47.23	-16.24	30.99	46.00	-15.01	QP	
5	473.8347	39.69	-10.32	29.37	46.00	-16.63	QP	
6	665.8035	38.35	-6.57	31.78	46.00	-14.22	QP	

Factor= antenna factor + cable loss - preamplifier factor

Result = Reading + Factor

Antenna Polarization: Horizontal

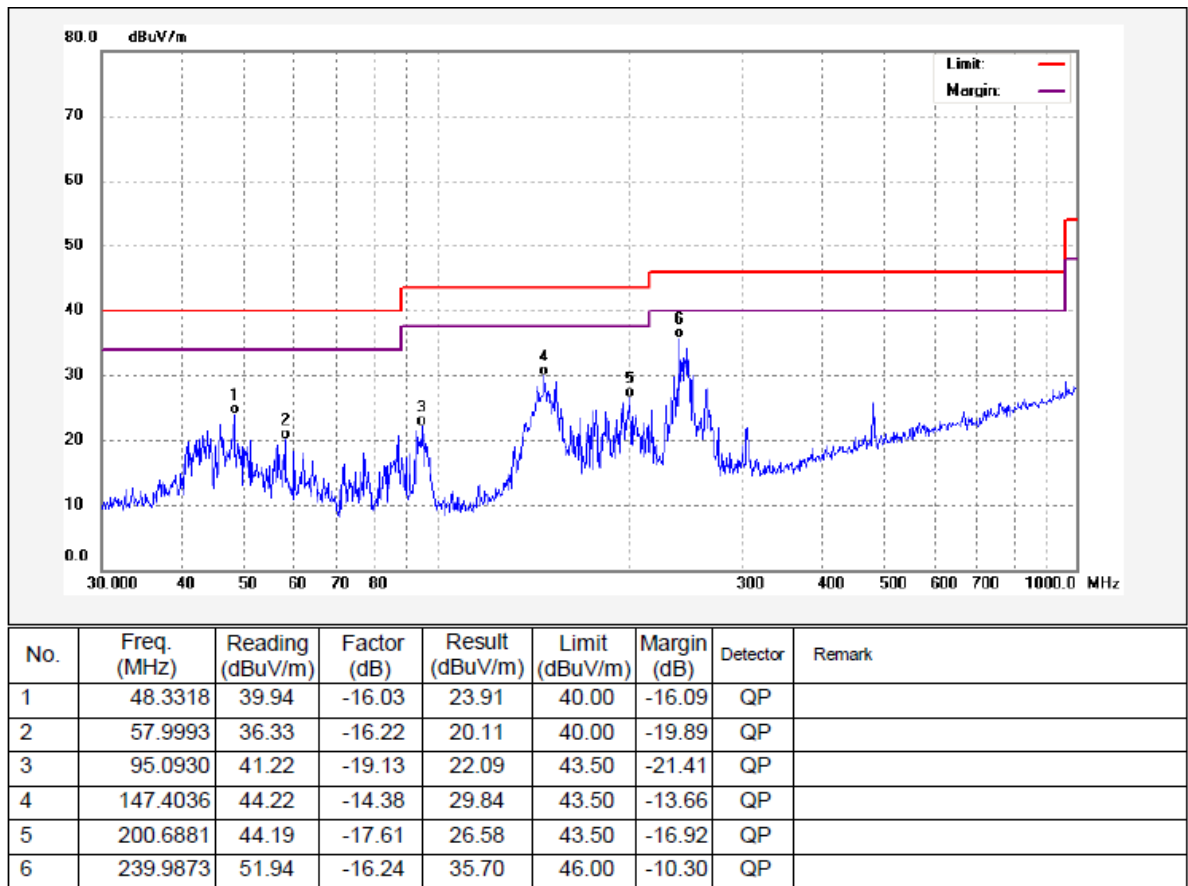

Factor= antenna factor + cable loss - preamplifier factor

Result = Reading + Factor

### 7.3 Radiation Emission, Above 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4: 2014  
 Test Result..... : Pass  
 Frequency Range ..... : 1GHz~18GHz  
 Class. : Class B  
 Limit. .... :

Frequency Range (MHz)	Distance (Meter)	Average Limit dB(uV/m)	Peak Limit (dBuV/m)
Above 1GHz	3	54	74

#### 7.3.1 E.U.T. Operation

Operating Environment:


Temperature..... : 22.4°C  
 Humidity ..... : 52.3%RH  
 Atmospheric Pressure..... : 101.3kPa

EUT Operation:

Input Voltage ..... : DC 5V by PC  
 Operating Mode ..... : Data transmitting with PC mode, Earphone mode, Adapter mode  
 Remark..... : The worse case Data transmitting mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 7.3.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2014.

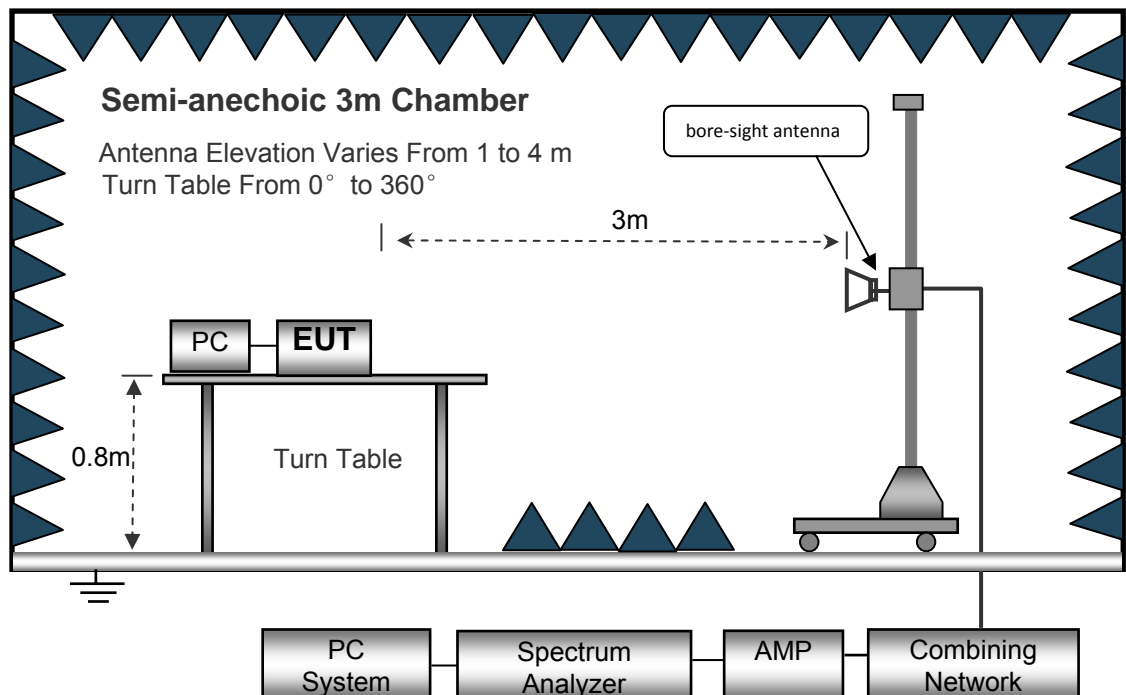


### 7.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.3.4 Radiated Emission Test Data, Above 1000MHz

Antenna Polarization: Vertical

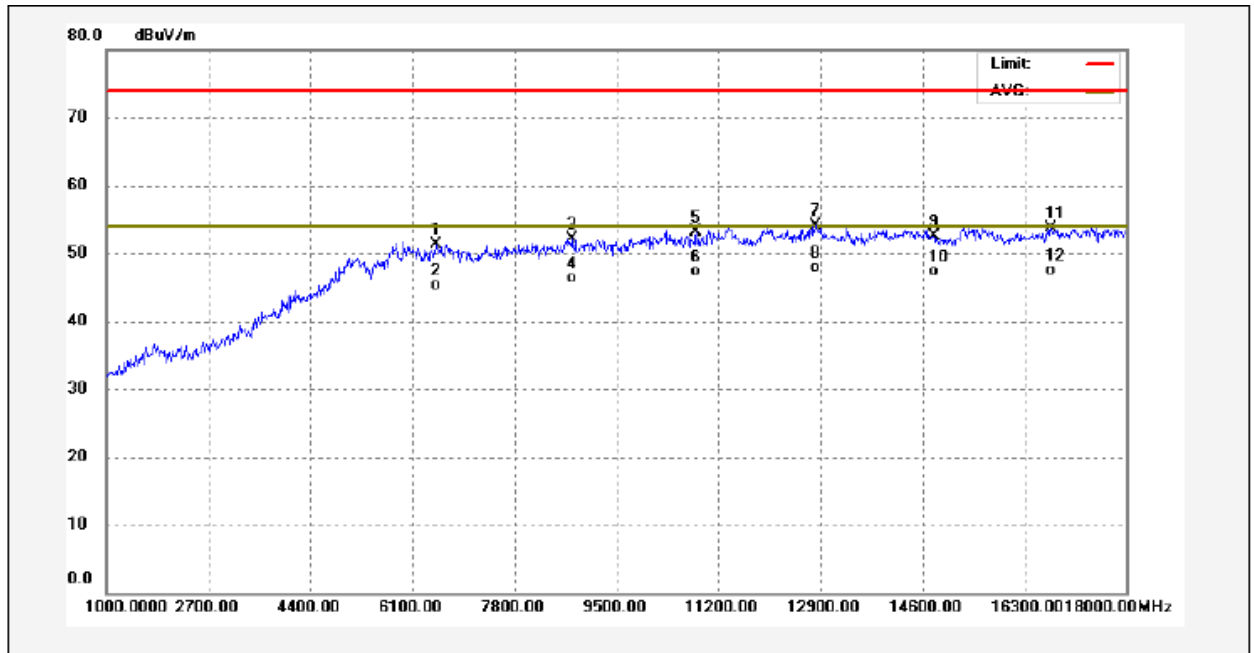


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	6491.000	50.36	0.93	51.29	74.00	-22.71	peak	
2	6491.000	44.44	0.93	45.37	54.00	-8.63	AVG	
3	8752.000	49.55	2.57	52.12	74.00	-21.88	peak	
4	8752.000	43.71	2.57	46.28	54.00	-7.72	AVG	
5	10826.000	47.93	5.21	53.14	74.00	-20.86	peak	
6	10826.000	42.05	5.21	47.26	54.00	-6.74	AVG	
7	12815.000	46.00	8.08	54.08	74.00	-19.92	peak	
8	12815.000	39.87	8.08	47.95	54.00	-6.05	AVG	
9	14787.000	41.97	10.57	52.54	74.00	-21.46	peak	
10	14787.000	36.74	10.57	47.31	54.00	-6.69	AVG	
11	16742.000	42.11	11.56	53.67	74.00	-20.33	peak	
12	16742.000	35.96	11.56	47.52	54.00	-6.48	AVG	

Factor= antenna factor + cable loss - preamplifier factor

Result = Reading + Factor



Antenna Polarization: Horizontal

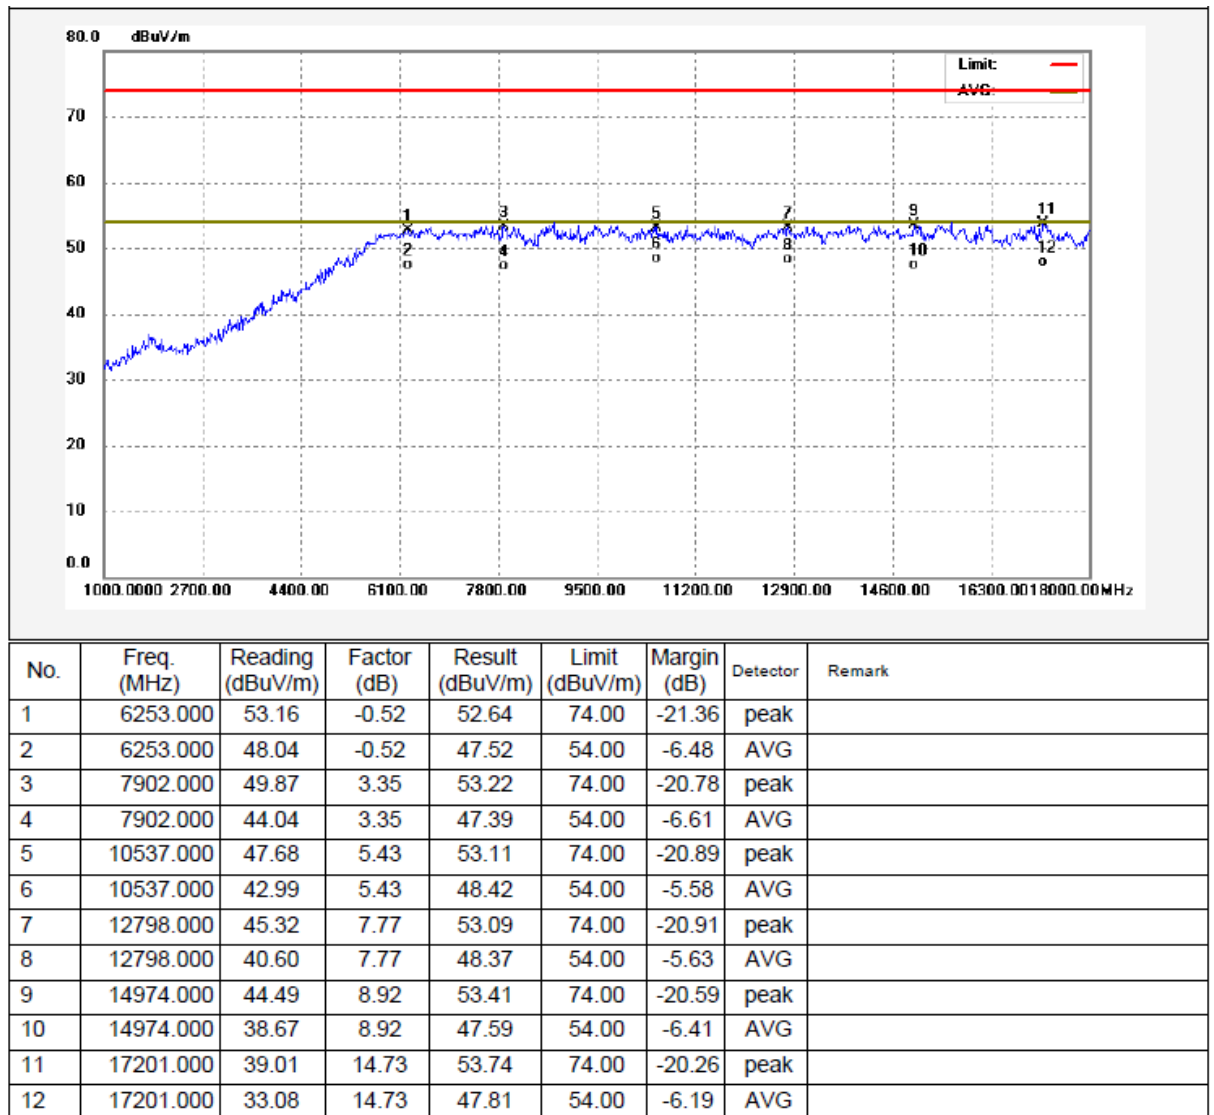

Factor= antenna factor + cable loss - preamplifier factor


Result = Reading + Factor

## **8 Photographs – Test Setup FCC ID 2AEP1ELEMENT4PLUS**

### **8.1 Photograph –Power Line Conducted Emission Test Setup at Test Site 1#**



### **8.2 Photograph – Radiated Emission Test Setup for 30~1000MHz at Test Site 2#**

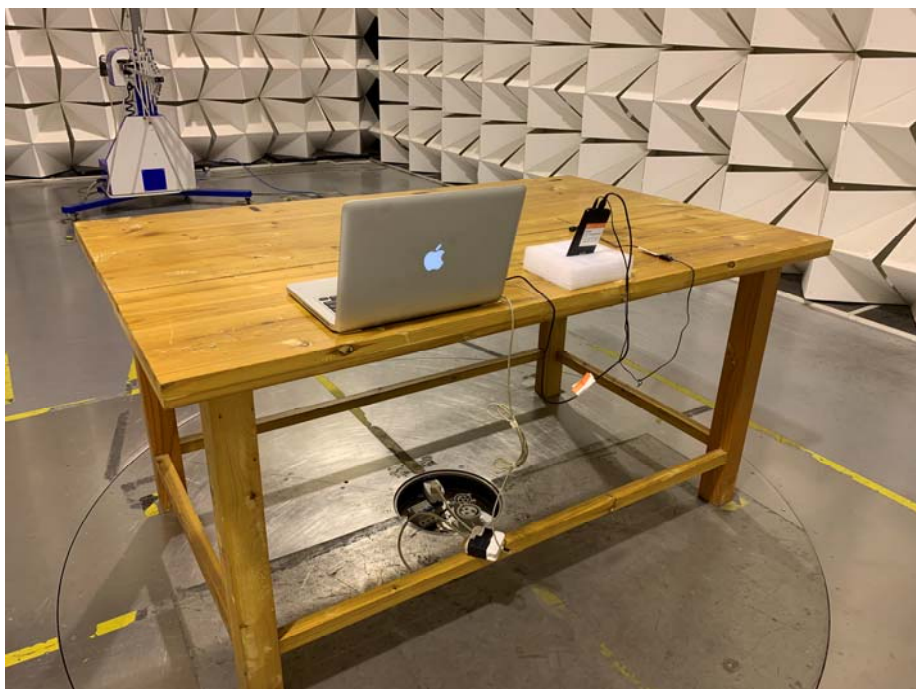

### 8.3 Photograph – Radiated Emission Test Setup for Above 1GHz at Test Site 1#



=====End of Report=====