


Main charge


ISET1: 10K, fast charge current, 54mA

Pre-term: 1K, stop charge current, 5% of I_{prgram}


ISET2: Float, max charge current 100mA

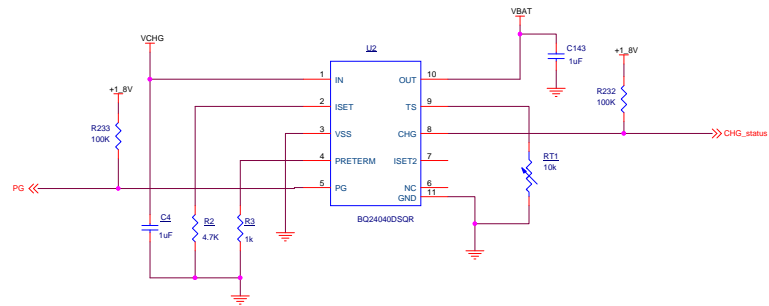

DC-DC +5.0V

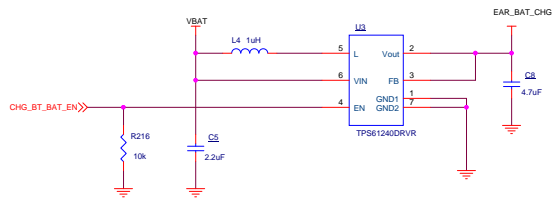


I/O Expander

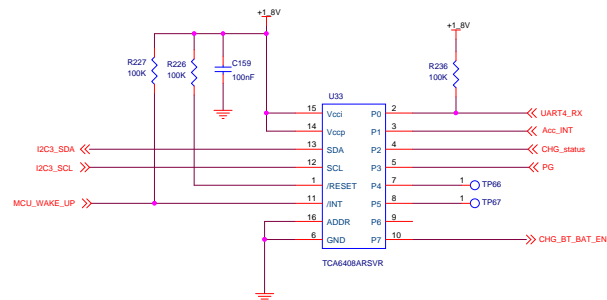


Title			<Title>		
Size	Document Number				Rev
C	<Doc>				<Rev Code>
Date:	Wednesday, April 08, 2015		Sheet	1 of 5	

Serial NOR Flash

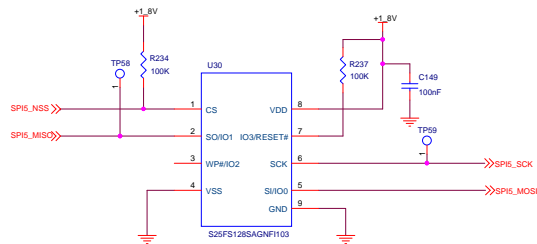


Pedometer

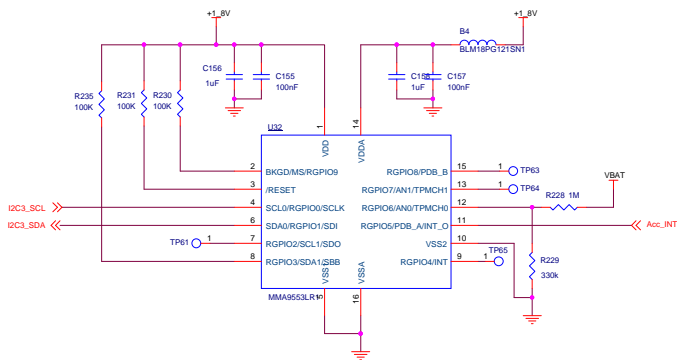


File		<Title>	Rev
Size	Document Number	<Doc>	
Date:		Wednesday, April 08, 2015	Sheet 1 of 5

FPC Connector


Include HX7309, laser diode, vibrator

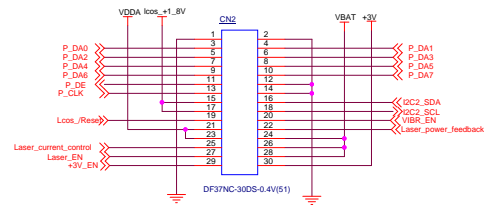


Prox connector

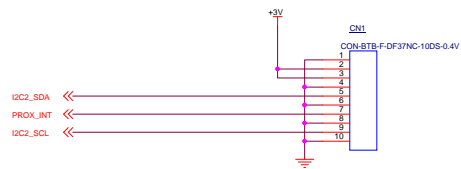

BT Ear Set PADS




File		<Title>	Rev
Size	Document Number		<Rev Code>
C	<Doc>		
Date:	Wednesday, April 08, 2015	Sheet 2 of 5	

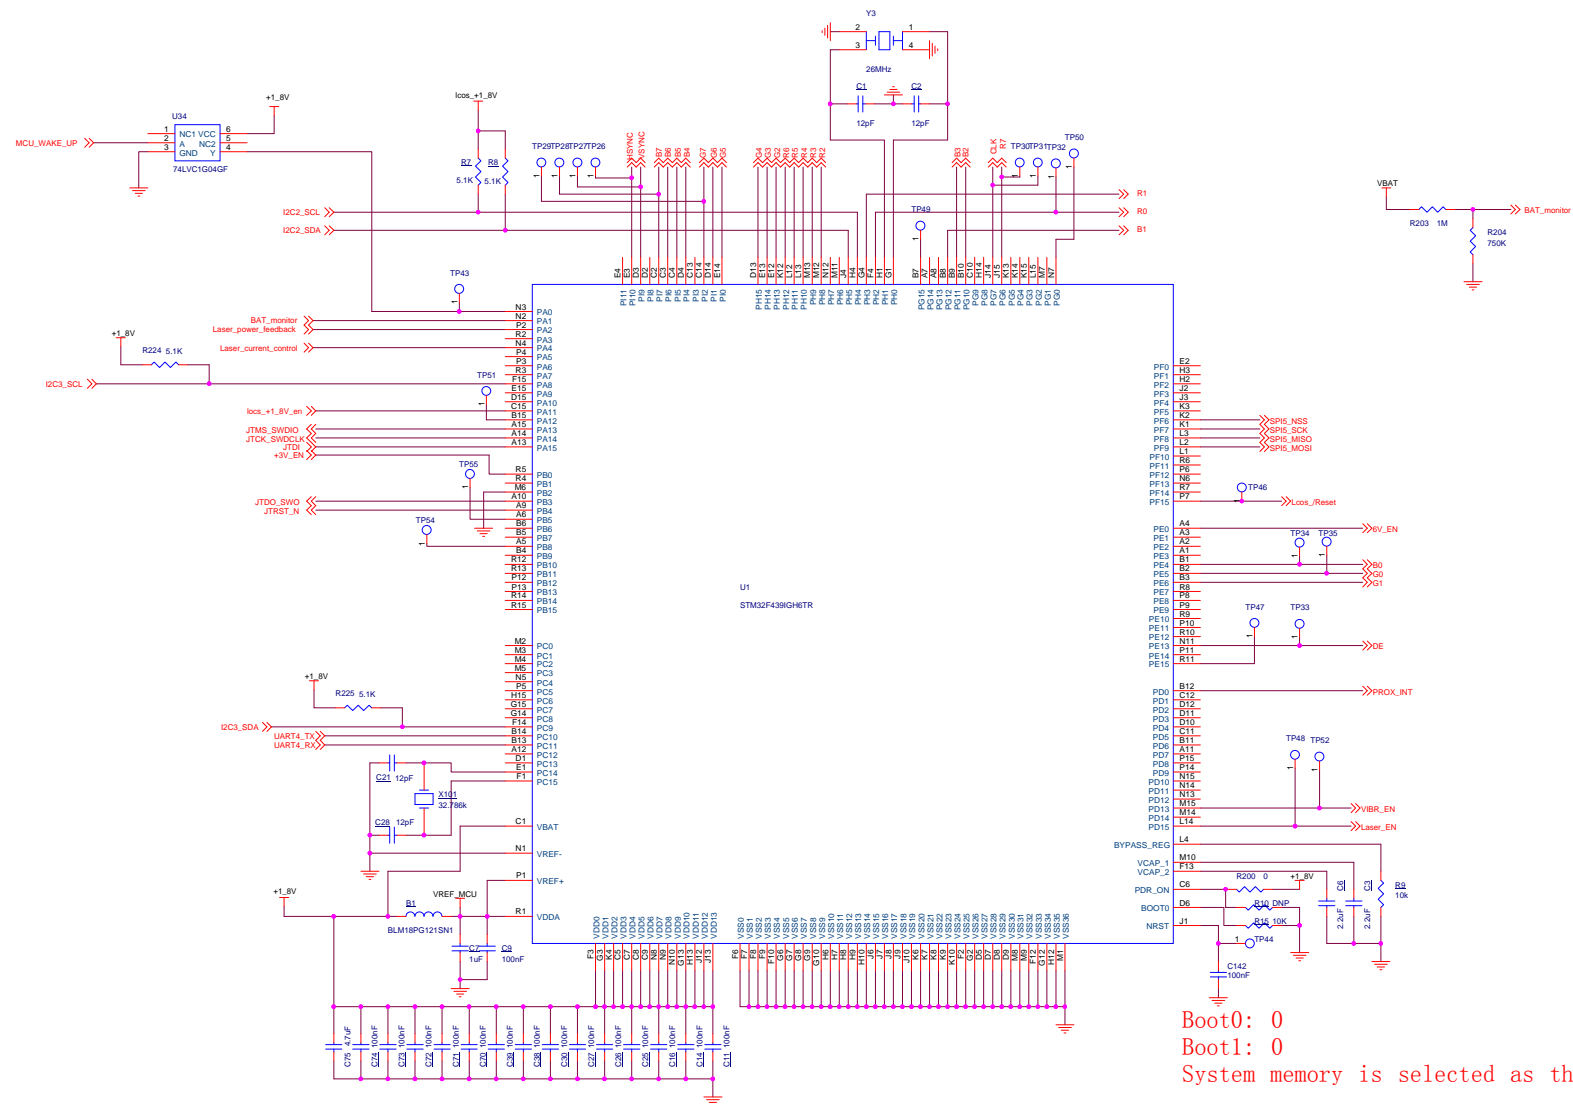


File	<Title>	Rev
Size	Document Number	<RevCode>
C	<Doc>	
Date:	Wednesday, April 08, 2015	Sheet 4 of 5

DC-DC 1.8V + 3.0V


1.8V / 600mA+1000mA

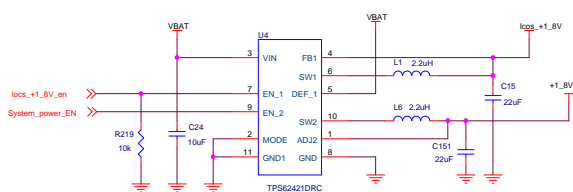


DC-DC 6.0V

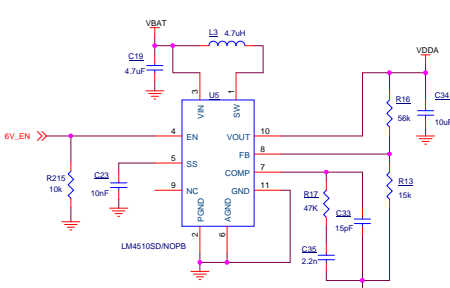

Debug interface



Voltage Monitor

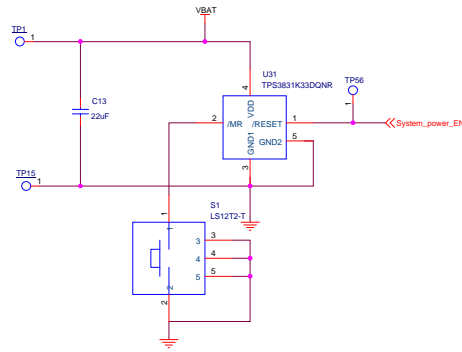

File	<Title>		
Size	Document	Number	Rev
C	<Doc>		<Rev Code>
Date:	Wednesday, April 08, 2015	Sheet	5 of 5