

MerchSource, LLC.

# TEST REPORT

**SCOPE OF WORK**

SAR ASSESSMENT-1011030, 1009166

**REPORT NUMBER**

190711030SZN-004

**ISSUE DATE**

AUGUST 3, 2019

**[REVISED DATE]**

[-----]

**PAGES**

4

**DOCUMENT CONTROL NUMBER**

RF Exposure

© 2017 INTERTEK



## Test Report

Applicant: MerchSource, LLC. Number: 190711030SZN-004

Applicant Address: 7755 Irvine Center Drive, Suite 100, Irvine, California, United States Date: August 3, 2019

**Sample Description**Product : Charging Stand Wireless with Bluetooth Speaker 4inch  
Model No. : 1011030, 1009166Brand Name : Sharper Image  
Electrical Rating : DC 9V/3A

Date Received : 11 July 2019

Date Test Conducted : 11 July 2019 to 1 August 2019

Test Requested : Test for compliance with CFR 47 part 1

Test Method : Environmental evaluation and exposure limit according to FCC  
CFR 47 part 1, 1.1307(c) and (d), 1.1310

Test Result : Pass

Conclusion : When determining of test conclusion, measurement uncertainty of tests have  
been considered.

\*\*\*\*\* End of Page \*\*\*\*\*

**Prepared and Checked By:****Approved By:**

---

**Leo Li**  
**Project Engineer**

---

**Kidd Yang**  
**Technical Supervisor**  
**Date: August 3, 2019**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.


**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## Test Report

### Test Setup Configuration

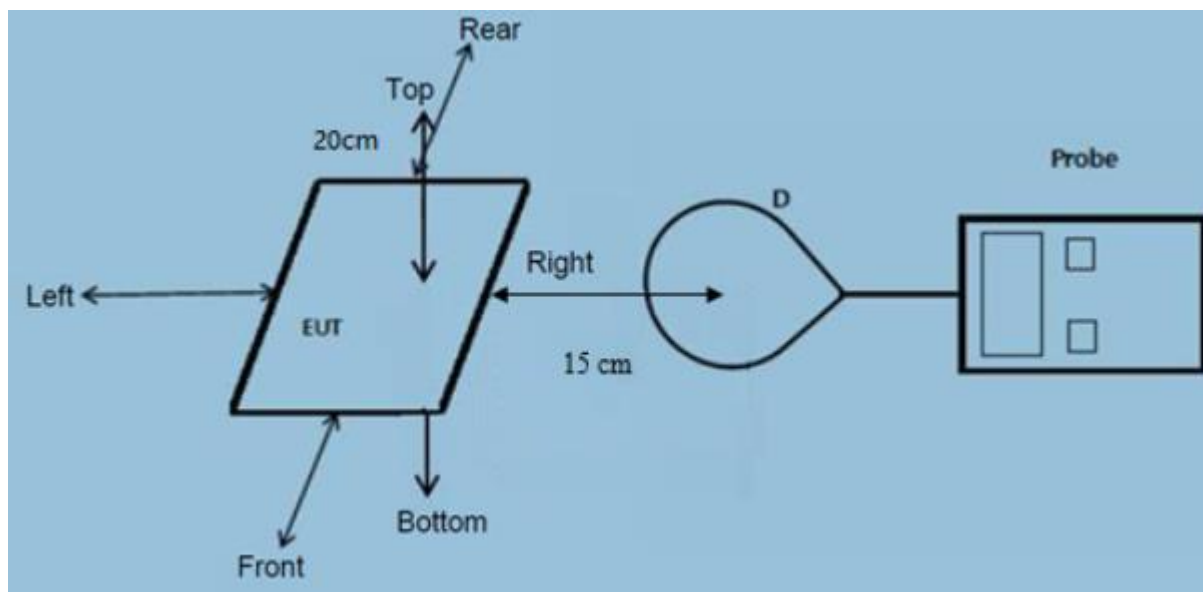

#### Note

- The RF exposure test is performed in the shield room.
- The test distance is between the edge of the charger and the geometric centre of probe.

The Model: 1009166 is the same as the Model: 1011030 in hardware and electrical aspect. The difference in model number serves as marketing strategy.

### Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Exposure Level Tester	EHP-50F	Narda	01-Apr-2019	01-Apr-2020

## Reference Limit:

**Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310**

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

## LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100)*	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100)*	30

Note: \* = Plane wave equivalent power density

## Test Result:

**H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT**

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.215	1% battery level	0.403	0.285	0.295	0.346	0.348	1.63
0.110-0.215	50% battery level	0.412	0.291	0.303	0.353	0.357	1.63
0.110-0.215	99% battery level	0.392	0.272	0.282	0.331	0.335	1.63

**E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT**

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.215	1% battery level	5.3	3.3	3.8	3.9	3.6	614
0.110-0.215	50% battery level	5.5	3.4	4.0	4.3	3.8	614
0.110-0.215	99% battery level	5.0	3.1	3.5	3.6	3.3	614

TEST REPORT

**Configuration photo of the test:**

For electronic filing, the RF exposure configuration photographs are saved with filename: RF exposure photos.pdf.

\*\*\*\*\* End of Report\*\*\*\*\*