



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM170200080202
Page: 1 of 51

TEST REPORT

Application No.: SZEM1702000802CR
Applicant: BRAGI GMBH
Address of Applicant: Sendlinger Strasse 7 / Angerblock 2. OG, 80331 München, Germany
Manufacturer: BRAGI GMBH
Address of Manufacturer: Sendlinger Strasse 7 / Angerblock 2. OG, 80331 München, Germany
Factory: VTech (Dongguan) Communications Ltd.
Address of Factory: Xia Ling Bei Management Zone, Liaobu Town, Dongguan City, Guangdong Province, China

Equipment Under Test (EUT):

EUT Name: The Dash Pro
Model No.: B1002-01R
Trade mark: Bragi
FCC ID: 2AF5T-B1002R
Standards: 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2017-02-13
Date of Test: 2017-02-14 to 2017-03-17
Date of Issue: 2017-04-20

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-04-20		Original

Authorized for issue by:			
Tested By			
	Hank Yan /Project Engineer	2017-04-20	Date
Checked By			
	Eric Fu /Reviewer	2017-04-20	Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Disturbance at AC Power Line(150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	N/A
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS	8
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION	9
4.5 TEST FACILITY	9
4.6 DEVIATION FROM STANDARDS	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	12
6.1 ANTENNA REQUIREMENT	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
7 RADIO SPECTRUM MATTER TEST RESULTS	13
7.1 CONDUCTED PEAK OUTPUT POWER	13
7.1.1 E.U.T. Operation	14
7.1.2 Test Setup Diagram	14
7.1.3 Measurement Data	14
7.2 MINIMUM 6dB BANDWIDTH	15
7.2.1 E.U.T. Operation	15
7.2.2 Test Setup Diagram	15
7.2.3 Measurement Data	15
7.3 POWER SPECTRUM DENSITY	16
7.3.1 E.U.T. Operation	16
7.3.2 Test Setup Diagram	16
7.3.3 Measurement Data	16
7.4 CONDUCTED SPURIOUS EMISSIONS	17
7.4.1 E.U.T. Operation	17
7.4.2 Test Setup Diagram	17
7.4.3 Measurement Data	17
7.5 RADIATED SPURIOUS EMISSIONS	18
7.5.1 E.U.T. Operation	19
7.5.2 Test Setup Diagram	19
7.5.3 Measurement Data	20
7.6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	25
7.6.1 E.U.T. Operation	25
7.6.2 Test Setup Diagram	25
7.6.3 Measurement Data	26
7.7 CONDUCTED BAND EDGES MEASUREMENT	31
7.7.1 E.U.T. Operation	31
7.7.2 Test Setup Diagram	31
7.7.3 Measurement Data	31



8	PHOTOGRAPHS	32
8.1	RADIATED SPURIOUS EMISSIONS TEST SETUP	32
8.2	EUT CONSTRUCTIONAL DETAILS	34
9	APPENDIX	35
9.1	APPENDIX 15.247	35-51



4 General Information

4.1 Details of E.U.T.

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0 Dual-mode
	This report is for BLE mode
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	-6dBi
Power Supply:	Right headphone: DC 3.7V, 100mAh rechargeable battery Charged by the docking(Charged from Adapter via USB cable)
Cable:	USB charging line: 18.5cm, shielded



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz



4.2 Description of Support Units

The EUT has been tested independently.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 ⁻⁸
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Disturbance at AC Power Line(150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09



Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2016-05-18	2017-05-18

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.1.2 Conclusion


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

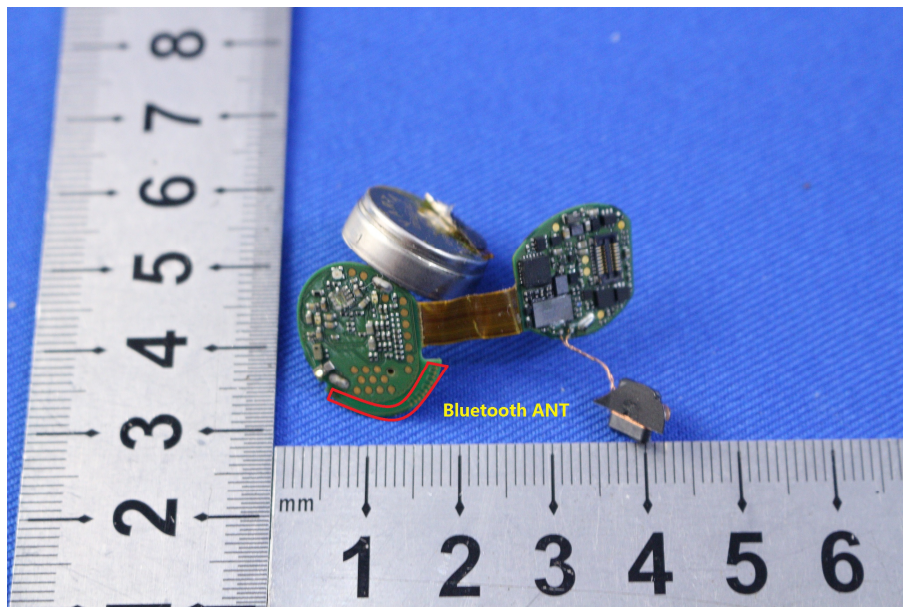

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -6dBi.



7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode Transmitting with GFSK modulation.

7.1.2 Test Setup Diagram

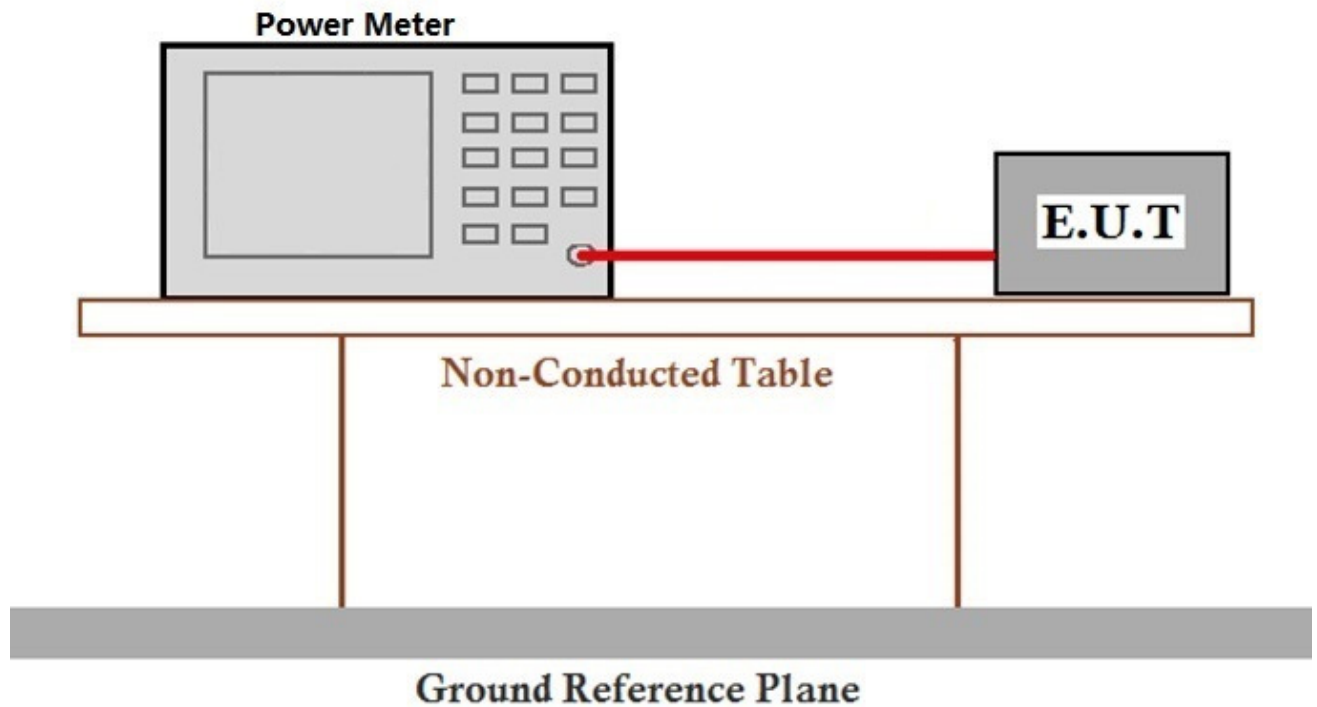

7.1.3 Measurement Data

The detailed test data see: Appendix 15.247


7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
Test mode Transmitting with GFSK modulation.

7.2.2 Test Setup Diagram

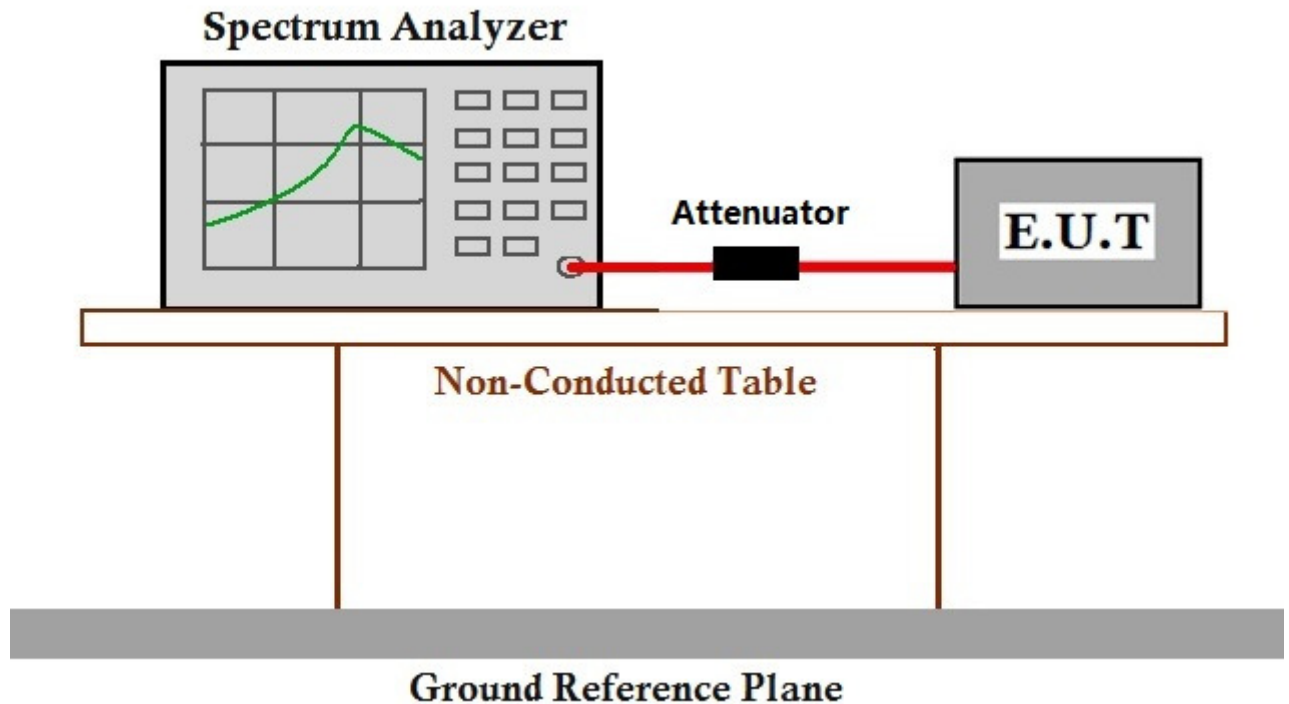

7.2.3 Measurement Data

The detailed test data see: Appendix 15.247

7.3 Power Spectrum Density


Test Requirement	47 CFR Part 15, Subpart C 15.247(e)
Test Method:	ANSI C63.10 (2013) Section 11.10.2
Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation

Operating Environment:

Temperature:	23 °C	Humidity:	56 % RH	Atmospheric Pressure:	1020 mbar
Test mode	Transmitting with GFSK modulation.				

7.3.2 Test Setup Diagram

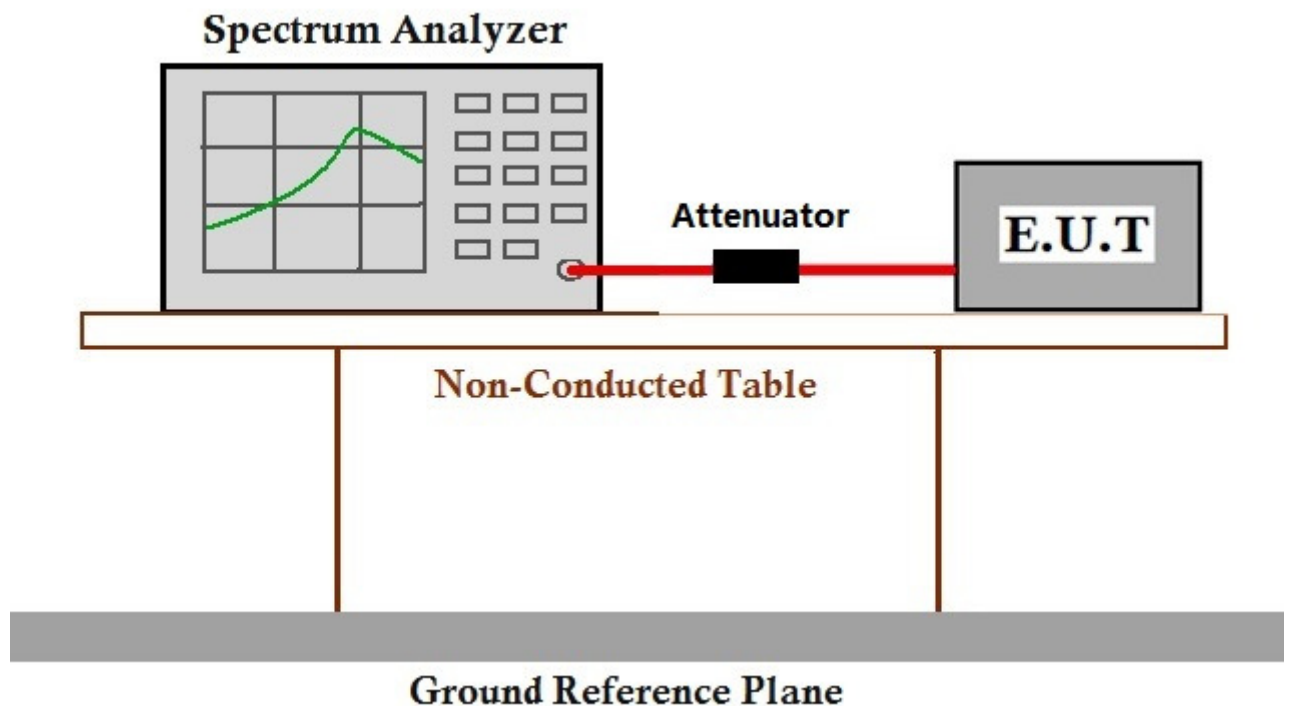

7.3.3 Measurement Data

The detailed test data see: Appendix 15.247


7.4 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.4.1 E.U.T. Operation

Operating Environment:			
Temperature:	23 °C	Humidity:	56 % RH
Atmospheric Pressure:	1020 mbar		
Test mode	Transmitting with GFSK modulation.		

7.4.2 Test Setup Diagram

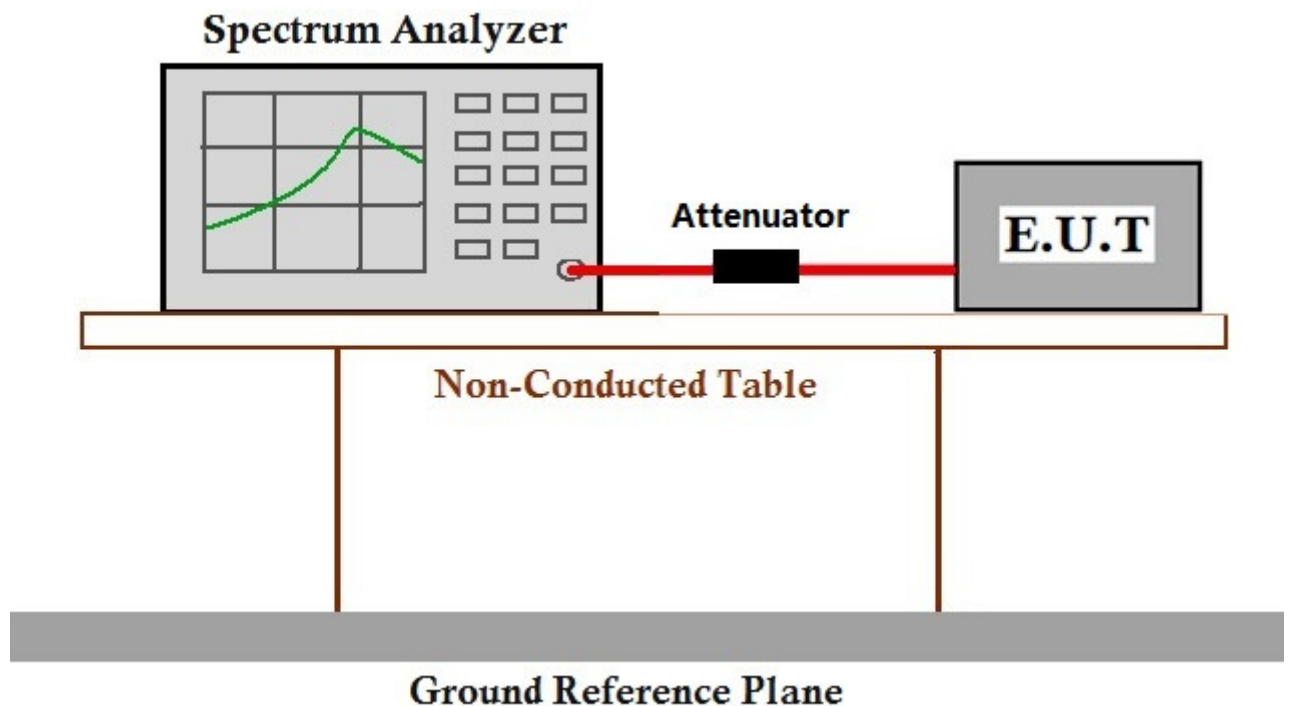

7.4.3 Measurement Data

The detailed test data see: Appendix 15.247



7.5 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 25 °C Humidity: 50 % RH

Atmospheric Pressure: 1020 mbar

Test mode Transmitting with GFSK modulation.

7.5.2 Test Setup Diagram

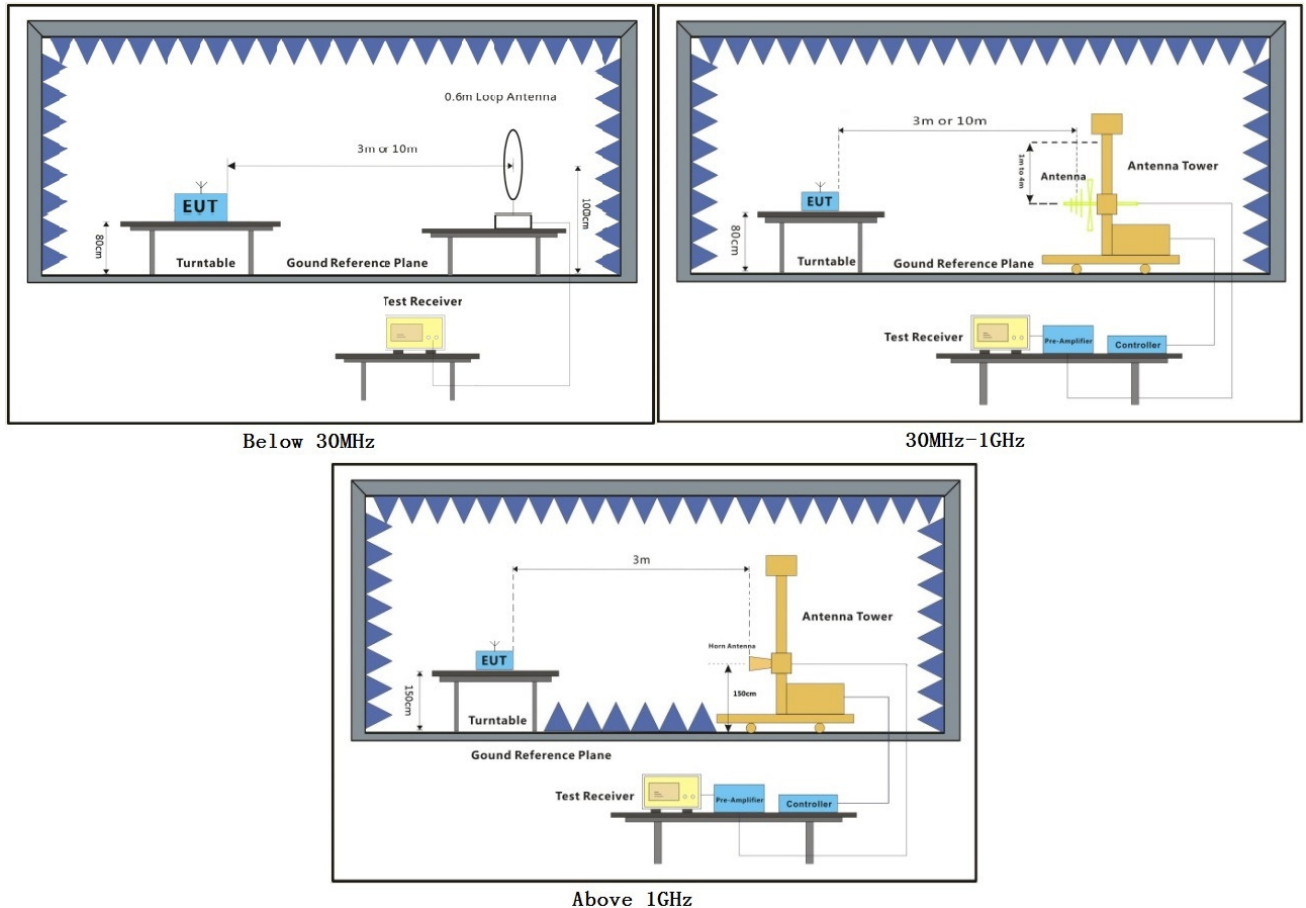




7.5.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

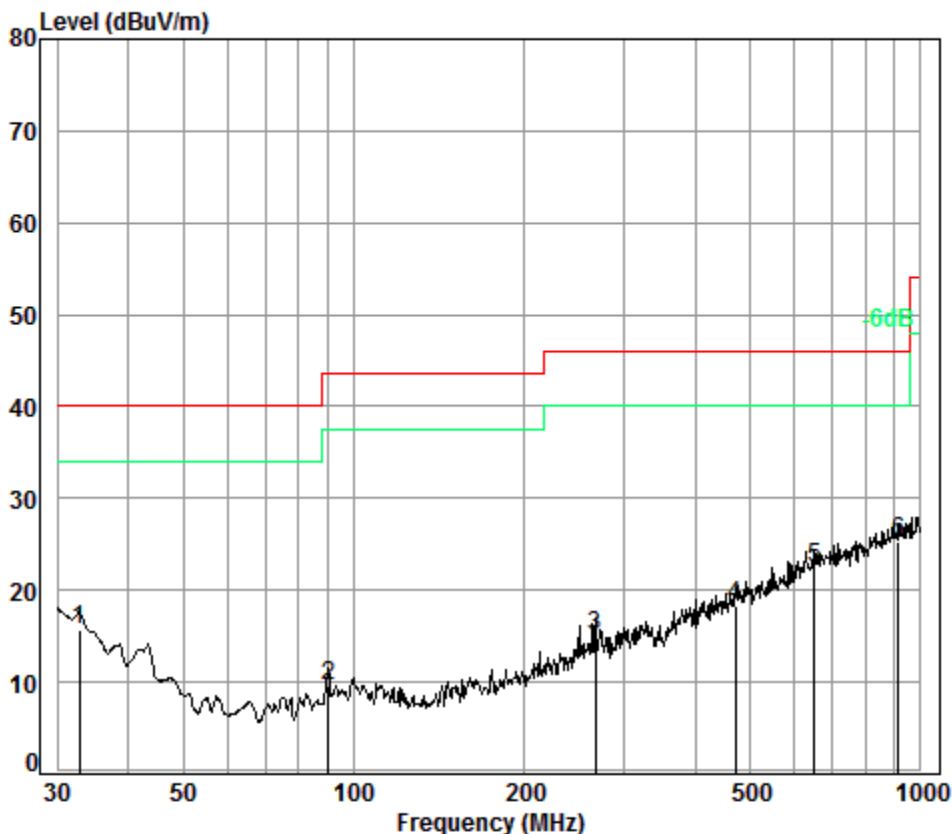

Condition: 3m VERTICAL

Job No. : 0802CR

Test mode: TX mode

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.86	0.60	17.10	27.35	25.43	15.78	40.00	-24.22
2	90.22	1.10	8.71	27.21	27.03	9.63	43.50	-33.87
3	266.61	1.75	12.63	26.49	27.17	15.06	46.00	-30.94
4	472.18	2.50	17.70	27.56	25.64	18.28	46.00	-27.72
5	649.66	2.80	20.60	27.47	26.42	22.35	46.00	-23.65
6 pp	912.86	3.61	23.25	26.71	25.18	25.33	46.00	-20.67




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200080202

Page: 22 of 51

Test mode:	Transmitting	Horizontal
------------	--------------	------------

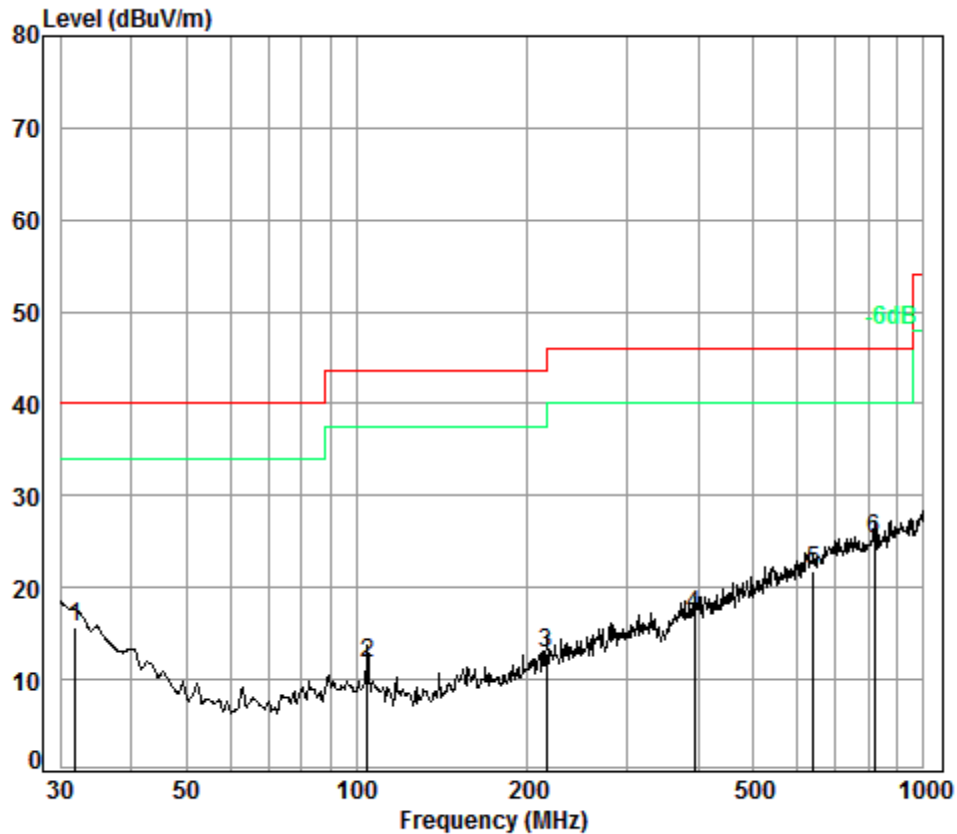

Condition: 3m HORIZONTAL

Job No. : 0802CR

Test mode: TX mode

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	24.76	15.62	40.00	-24.38
2	104.54	1.21	8.87	27.17	28.92	11.83	43.50	-31.67
3	216.02	1.49	11.03	26.64	26.91	12.79	46.00	-33.21
4	393.47	2.18	16.22	27.09	25.62	16.93	46.00	-29.07
5	638.37	2.78	20.55	27.49	25.99	21.83	46.00	-24.17
6 pp	818.83	3.28	22.33	27.20	26.93	25.34	46.00	-20.66



Transmitter Emission above 1GHz								
Test mode:		GFSK		Test channel:		Lowest		Remark:
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1479.955	25.72	4.45	38.06	43.56	36.15	74.00	-37.85	Vertical
3342.042	31.93	6.19	38.39	44.43	44.74	74.00	-29.26	Vertical
4804.000	34.17	7.73	39.03	50.33	53.59	74.00	-20.41	Vertical
7206.000	36.41	9.65	38.18	43.54	51.68	74.00	-22.32	Vertical
9608.000	37.52	11.06	36.99	40.51	52.55	74.00	-21.45	Vertical
12272.340	38.76	12.81	38.58	39.50	53.17	74.00	-20.83	Vertical
1173.943	24.35	4.04	38.02	42.04	32.86	74.00	-41.14	Horizontal
3041.641	31.38	5.96	38.22	43.68	43.82	74.00	-30.18	Horizontal
4804.000	34.17	7.73	39.03	49.15	52.41	74.00	-21.59	Horizontal
7206.000	36.41	9.65	38.18	42.93	51.07	74.00	-22.93	Horizontal
9608.000	37.52	11.06	36.99	40.77	52.81	74.00	-21.19	Horizontal
11633.540	38.24	12.35	37.94	39.70	53.04	74.00	-20.96	Horizontal

Test mode:		GFSK		Test channel:		Middle		Remark:
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1655.354	26.49	4.65	38.07	42.58	36.18	74.00	-37.82	Vertical
3151.992	31.59	6.05	38.29	44.50	44.50	74.00	-29.50	Vertical
4880.000	34.30	7.84	39.06	52.56	56.05	74.00	-17.95	Vertical
7319.964	36.37	9.73	38.07	39.93	48.20	74.00	-25.80	Vertical
9759.591	37.55	11.21	36.92	37.94	50.24	74.00	-23.76	Vertical
12717.590	38.86	13.24	39.03	39.53	53.14	74.00	-20.86	Vertical
1273.572	24.83	4.18	38.03	45.05	36.51	74.00	-37.49	Horizontal
2995.538	31.28	5.93	38.20	44.61	44.81	74.00	-29.19	Horizontal
4880.000	34.30	7.84	39.06	46.62	50.11	74.00	-23.89	Horizontal
7320.000	36.37	9.73	38.07	40.38	48.65	74.00	-25.35	Horizontal
9760.000	37.55	11.21	36.92	38.45	50.75	74.00	-23.25	Horizontal
12272.340	38.76	12.81	38.58	38.72	52.39	74.00	-21.61	Horizontal



Test mode:		GFSK		Test channel:		Middle		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
4880.000	34.30	7.84	39.06	39.51	43.00	54.00	-11.00	Vertical	

Test mode:		GFSK		Test channel:		Highest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1333.284	25.10	4.26	38.04	44.69	36.51	74.00	-37.49	Vertical	
3168.080	31.62	6.06	38.29	43.97	44.01	74.00	-29.99	Vertical	
4960.000	34.43	7.94	39.09	47.33	51.04	74.00	-22.96	Vertical	
7440.000	36.37	9.73	38.07	44.01	52.28	74.00	-21.72	Vertical	
9920.000	37.58	11.35	36.84	40.09	52.64	74.00	-21.36	Vertical	
12210.020	38.73	12.71	38.52	39.55	53.17	74.00	-20.83	Vertical	
1601.472	26.26	4.59	38.07	42.63	35.90	74.00	-38.10	Horizontal	
3308.185	31.87	6.16	38.37	43.00	43.26	74.00	-30.74	Horizontal	
4960.000	34.43	7.94	39.09	48.05	51.76	74.00	-22.24	Horizontal	
6412.427	35.03	9.01	38.74	45.10	50.72	74.00	-23.28	Horizontal	
7440.000	36.33	9.81	37.95	44.18	52.59	74.00	-21.41	Horizontal	
9920.000	37.58	11.35	36.84	40.56	53.11	74.00	-20.89	Horizontal	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

7.6 Radiated Emissions which fall in the restricted bands


Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2013) Section 6.10.5
 Measurement Distance: 3m

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 54 % RH Atmospheric Pressure: 1015 mbar
 Test mode Transmitting with GFSK modulation.

7.6.2 Test Setup Diagram

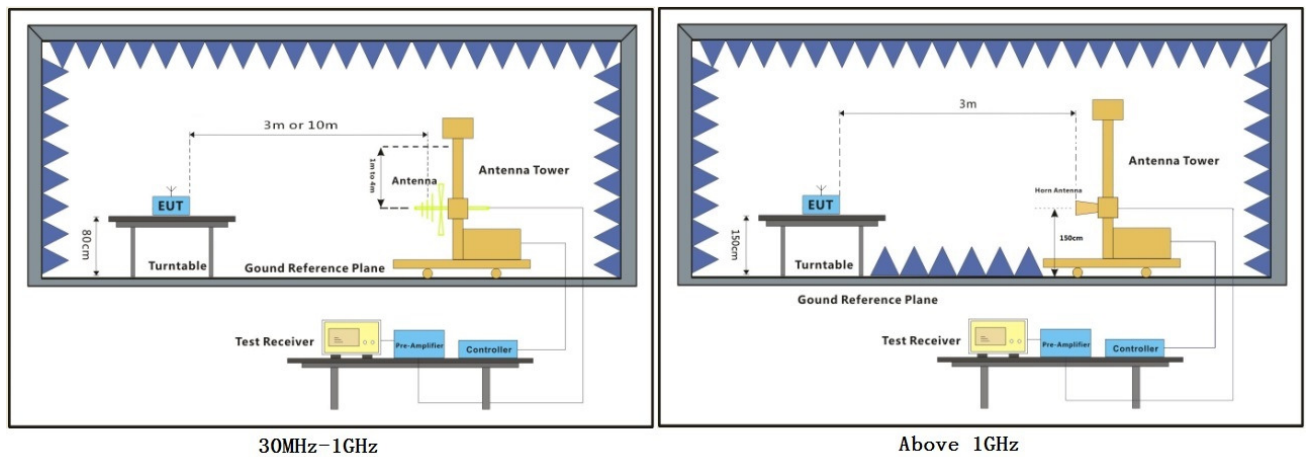




7.6.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

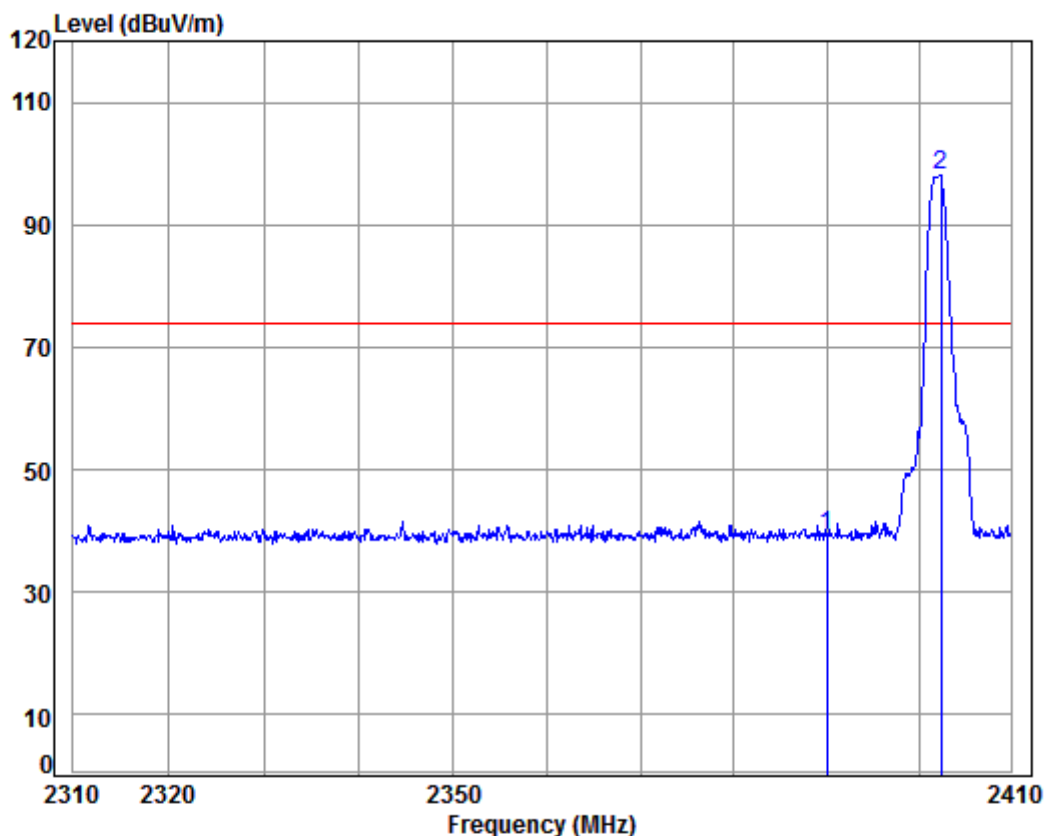

Condition: 3m HORIZONTAL

Job No: : 802CR


Mode: : 2402 Band edge

: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	29.08	38.14	42.84	39.12	74.00	-34.88	
2 pp	2402.352	5.35	29.11	38.15	101.68	97.99	74.00	23.99	




Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

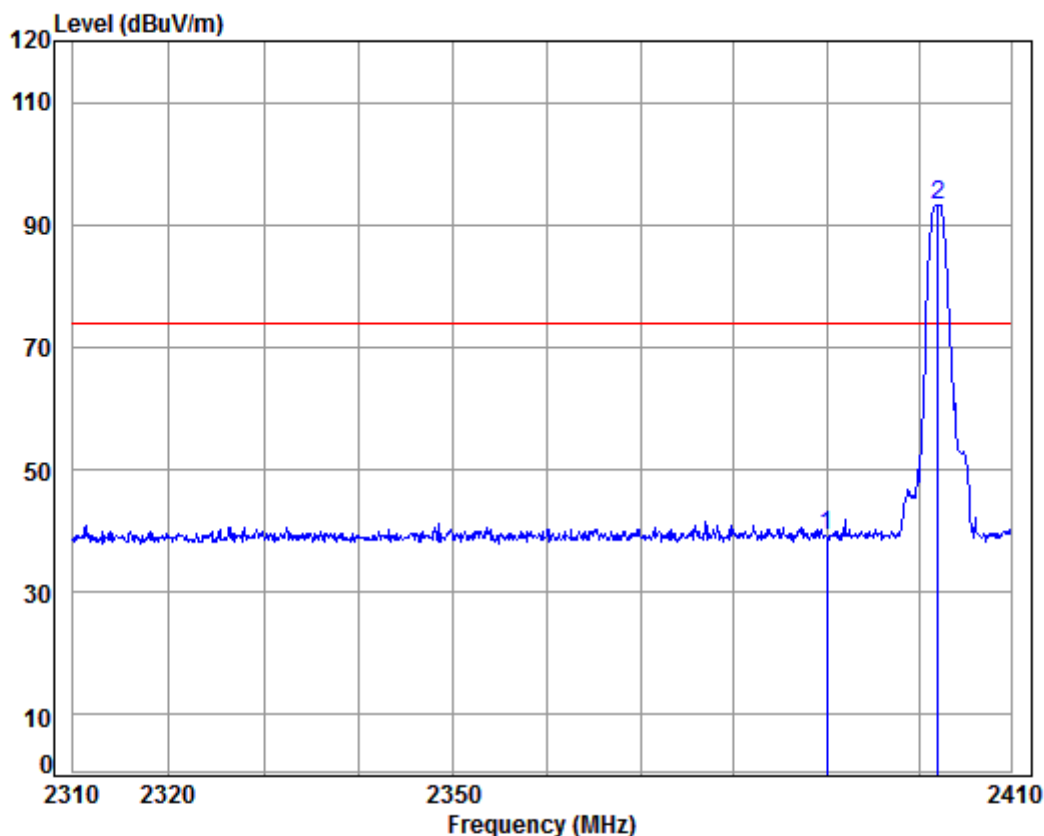

Condition: 3m VERTICAL
Job No: : 802CR
Mode: : 2402 Band edge
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	29.08	38.14	43.05	39.33	74.00	-34.67	
2 pp	2402.047	5.35	29.11	38.15	96.88	93.19	74.00	19.19	


Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

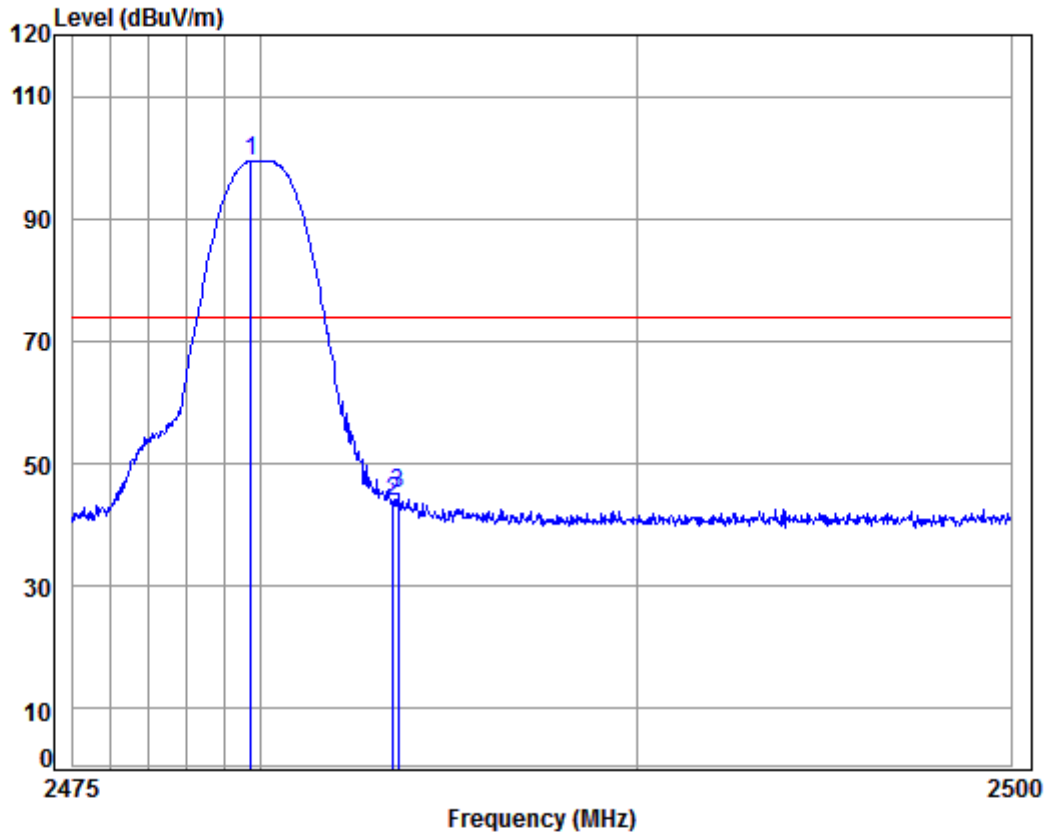

Condition: 3m HORIZONTAL
Job No: : 802CR
Mode: : 2480 Band edge
: BLE

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.731	5.41	29.34	38.15	102.85	99.45	74.00	25.45	
2	2483.500	5.41	29.35	38.15	47.11	43.72	74.00	-30.28	
3	2483.646	5.41	29.35	38.15	48.45	45.06	74.00	-28.94	

Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

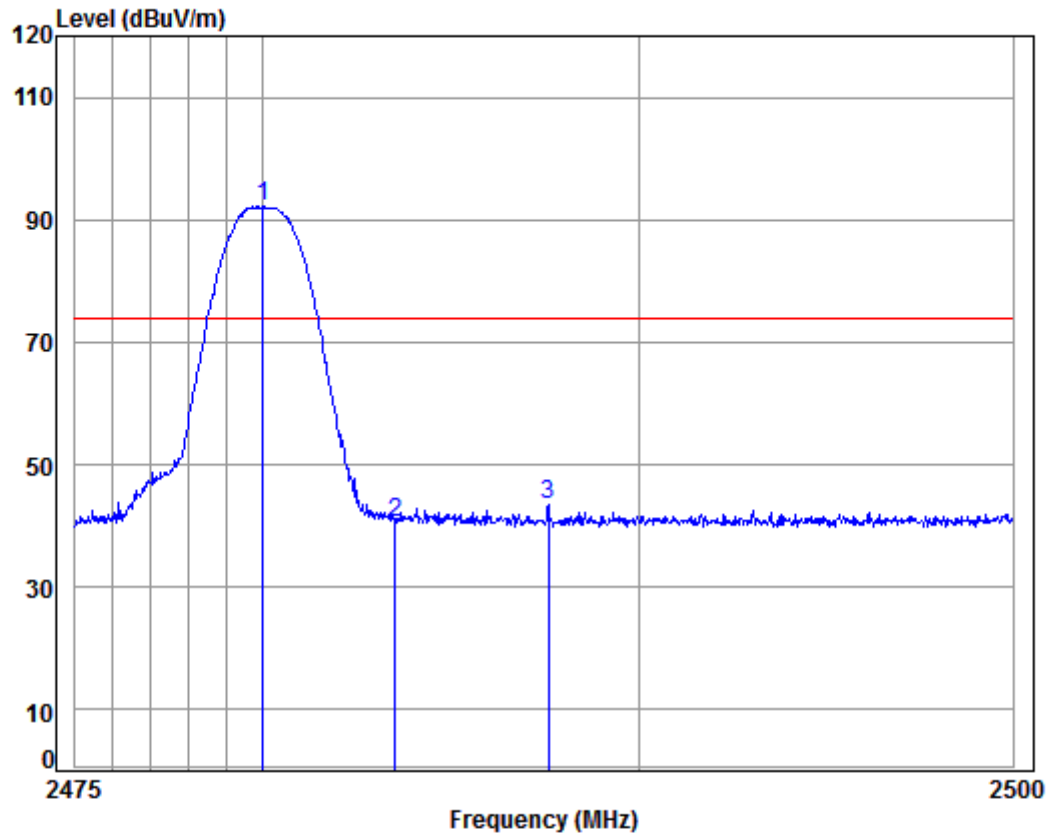

Condition: 3m VERTICAL

Job No: : 802CR

Mode: : 2480 Band edge

: BLE

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.980	5.41	29.34	38.15	95.46	92.06	74.00	18.06	
2	2483.500	5.41	29.35	38.15	43.96	40.57	74.00	-33.43	
3	2487.594	5.41	29.36	38.15	46.71	43.33	74.00	-30.67	

7.7 Conducted Band Edges Measurement


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 11.13.3.2

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
 Test mode Transmitting with GFSK modulation.

7.7.2 Test Setup Diagram

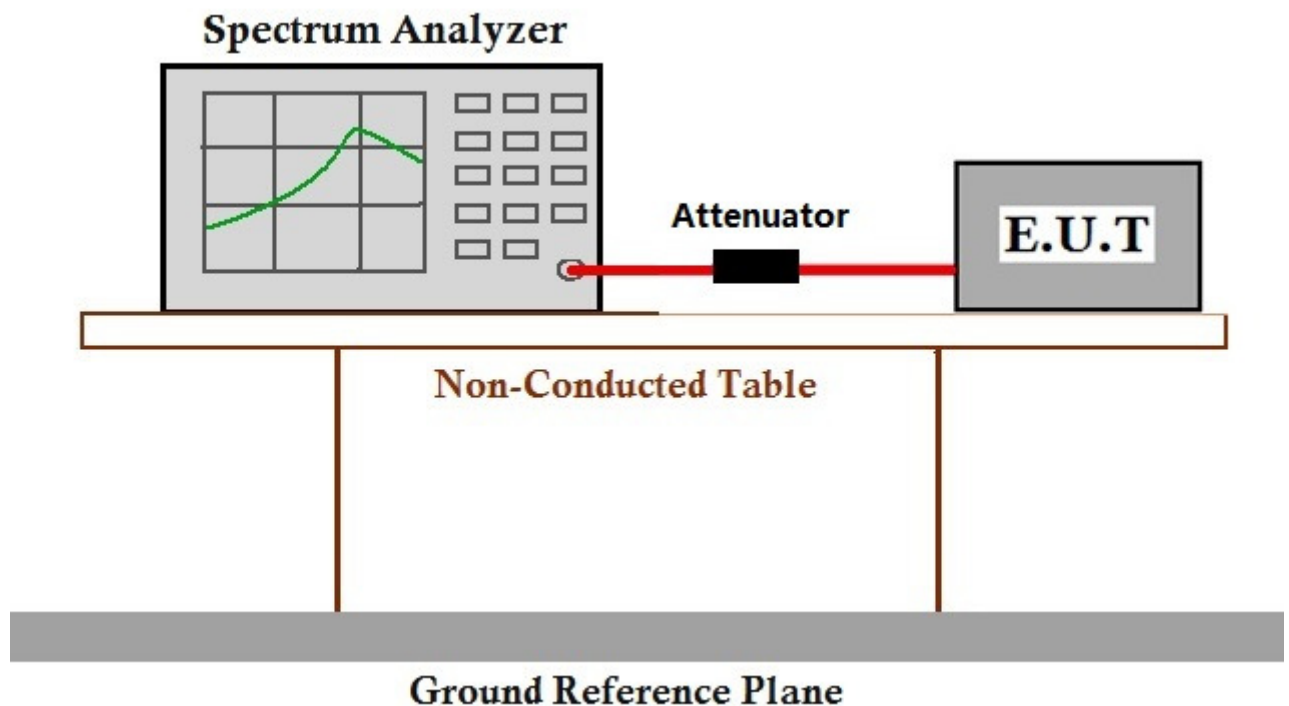


7.7.3 Measurement Data

The detailed test data see: Appendix 15.247

8 Photographs

8.1 Radiated Spurious Emissions Test Setup

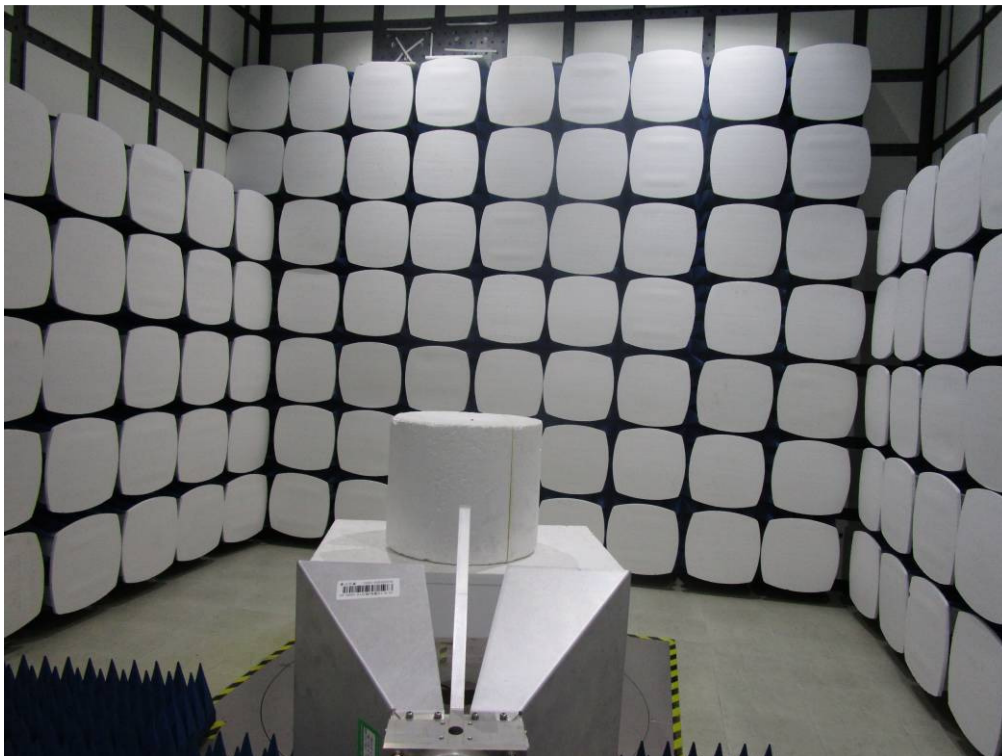





8.2 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1702000802CR.





9 Appendix

9.1 Appendix 15.247

1.6dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	Limit [MHz]	Verdict
BLE	2402	0.705	≥ 0.5	PASS
BLE	2440	0.705	≥ 0.5	PASS
BLE	2480	0.702	≥ 0.5	PASS

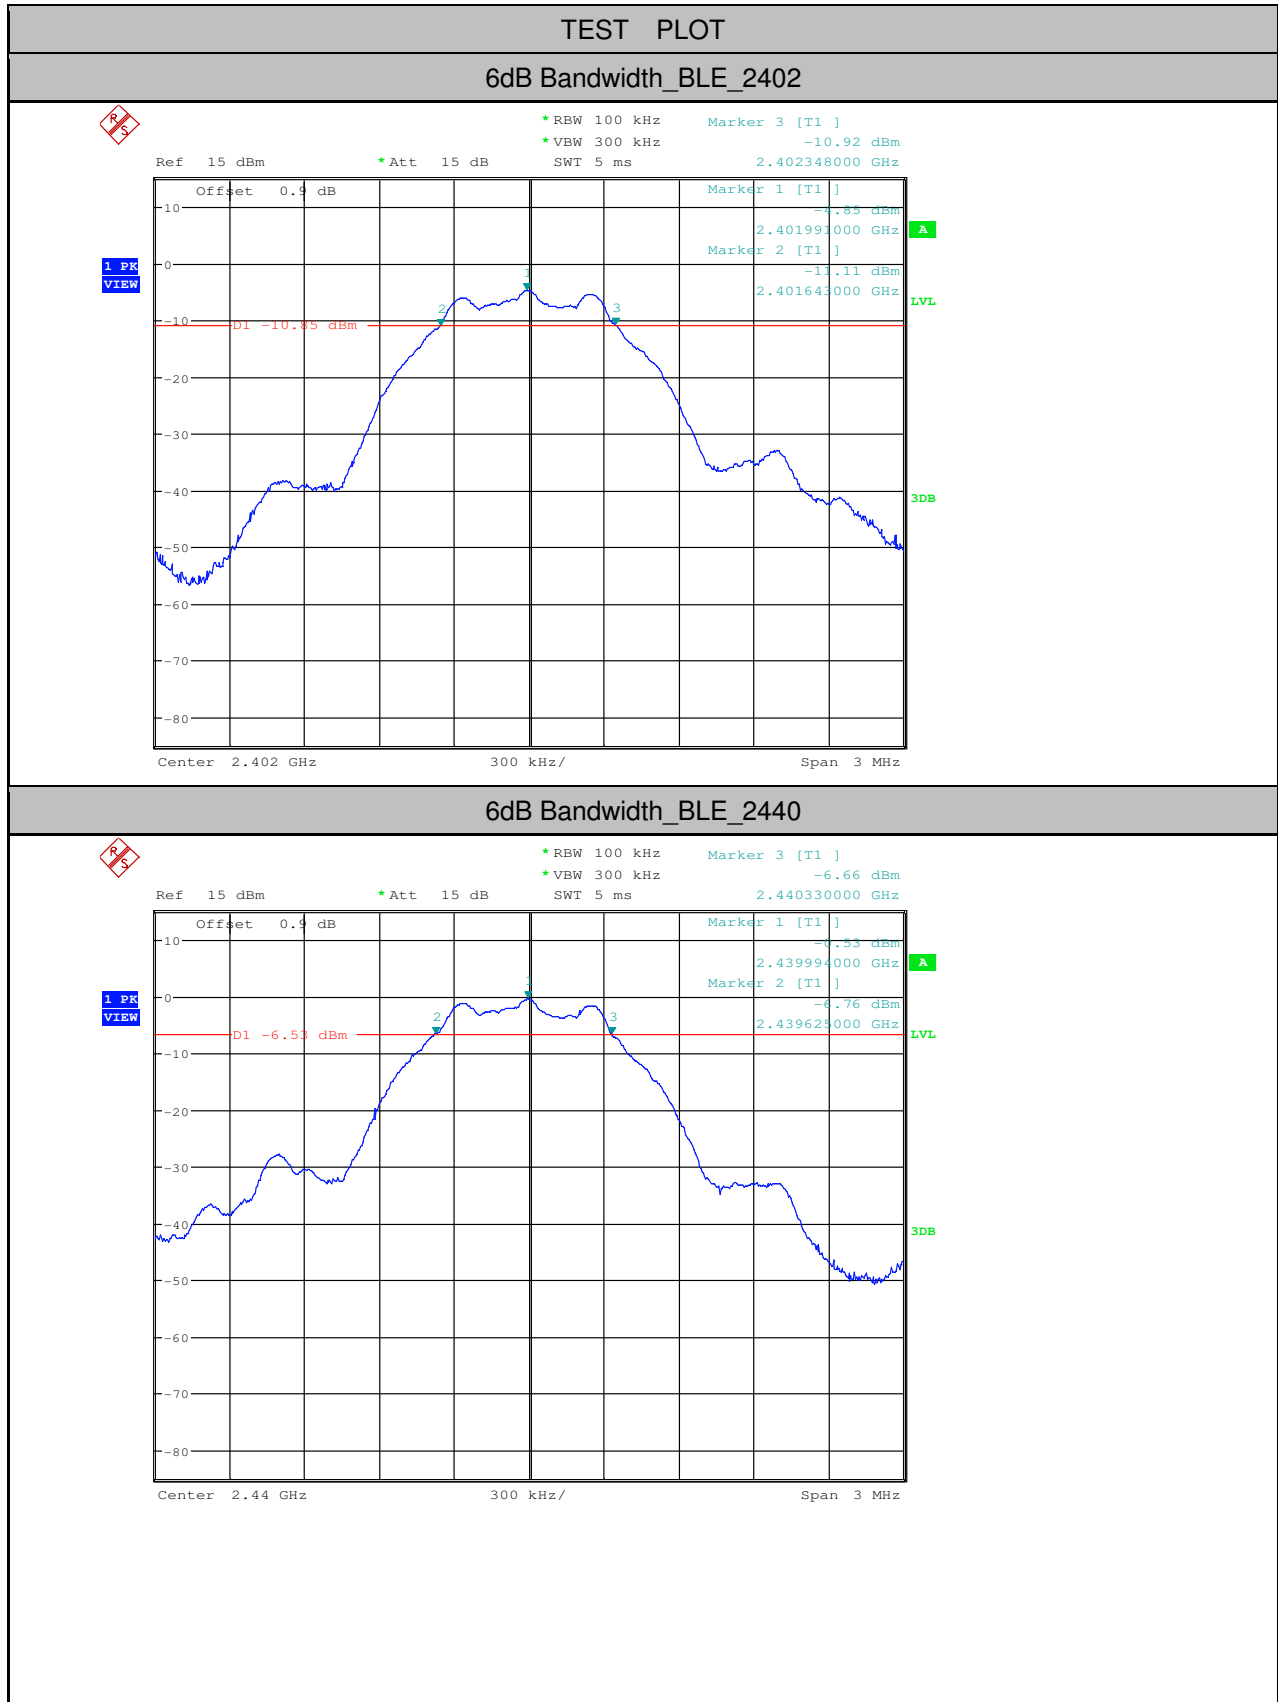


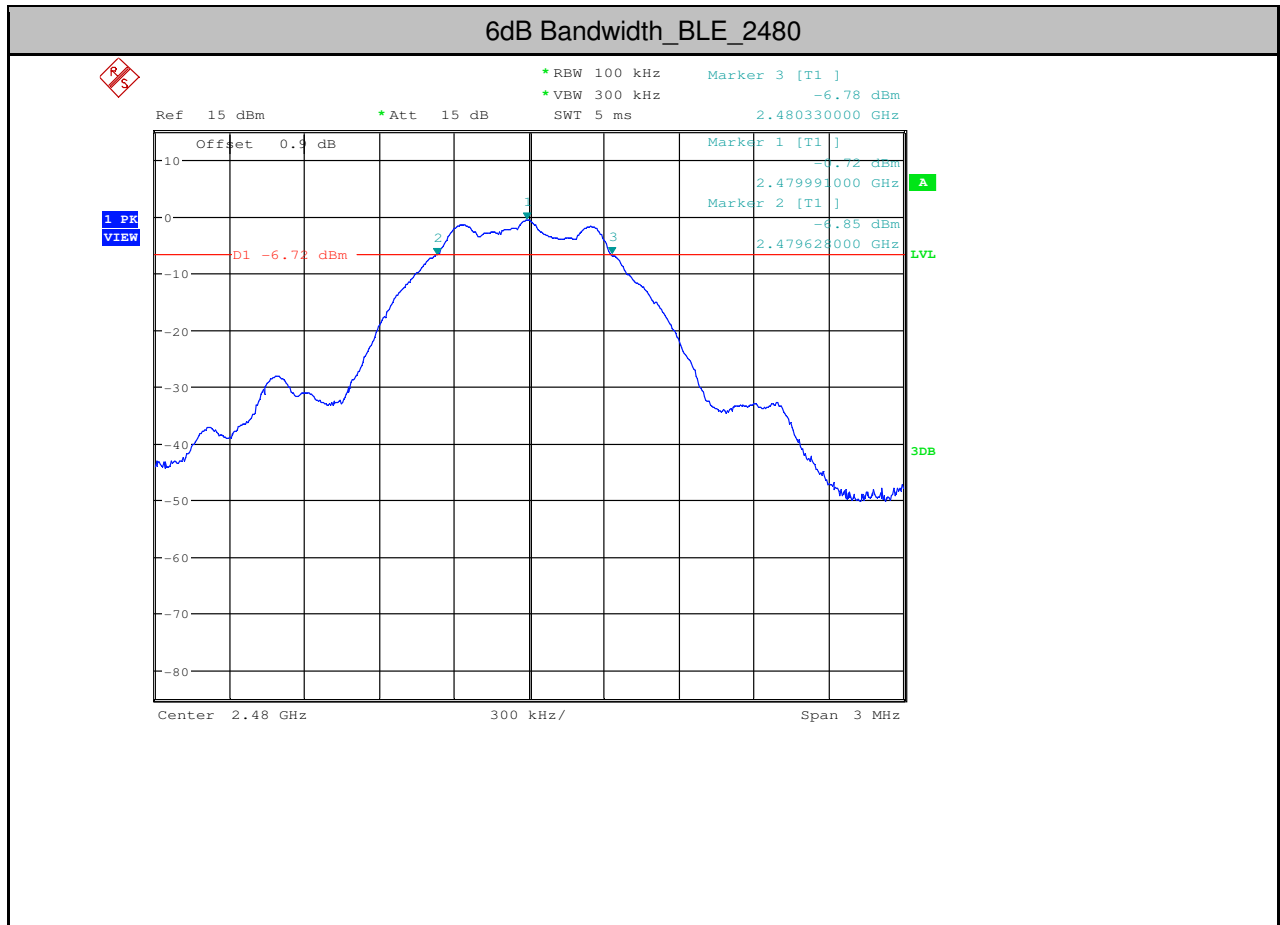




2.Maximum peak conducted output power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	-4.23	<30	PASS
BLE	2440	0.15	<30	PASS
BLE	2480	-0.05	<30	PASS

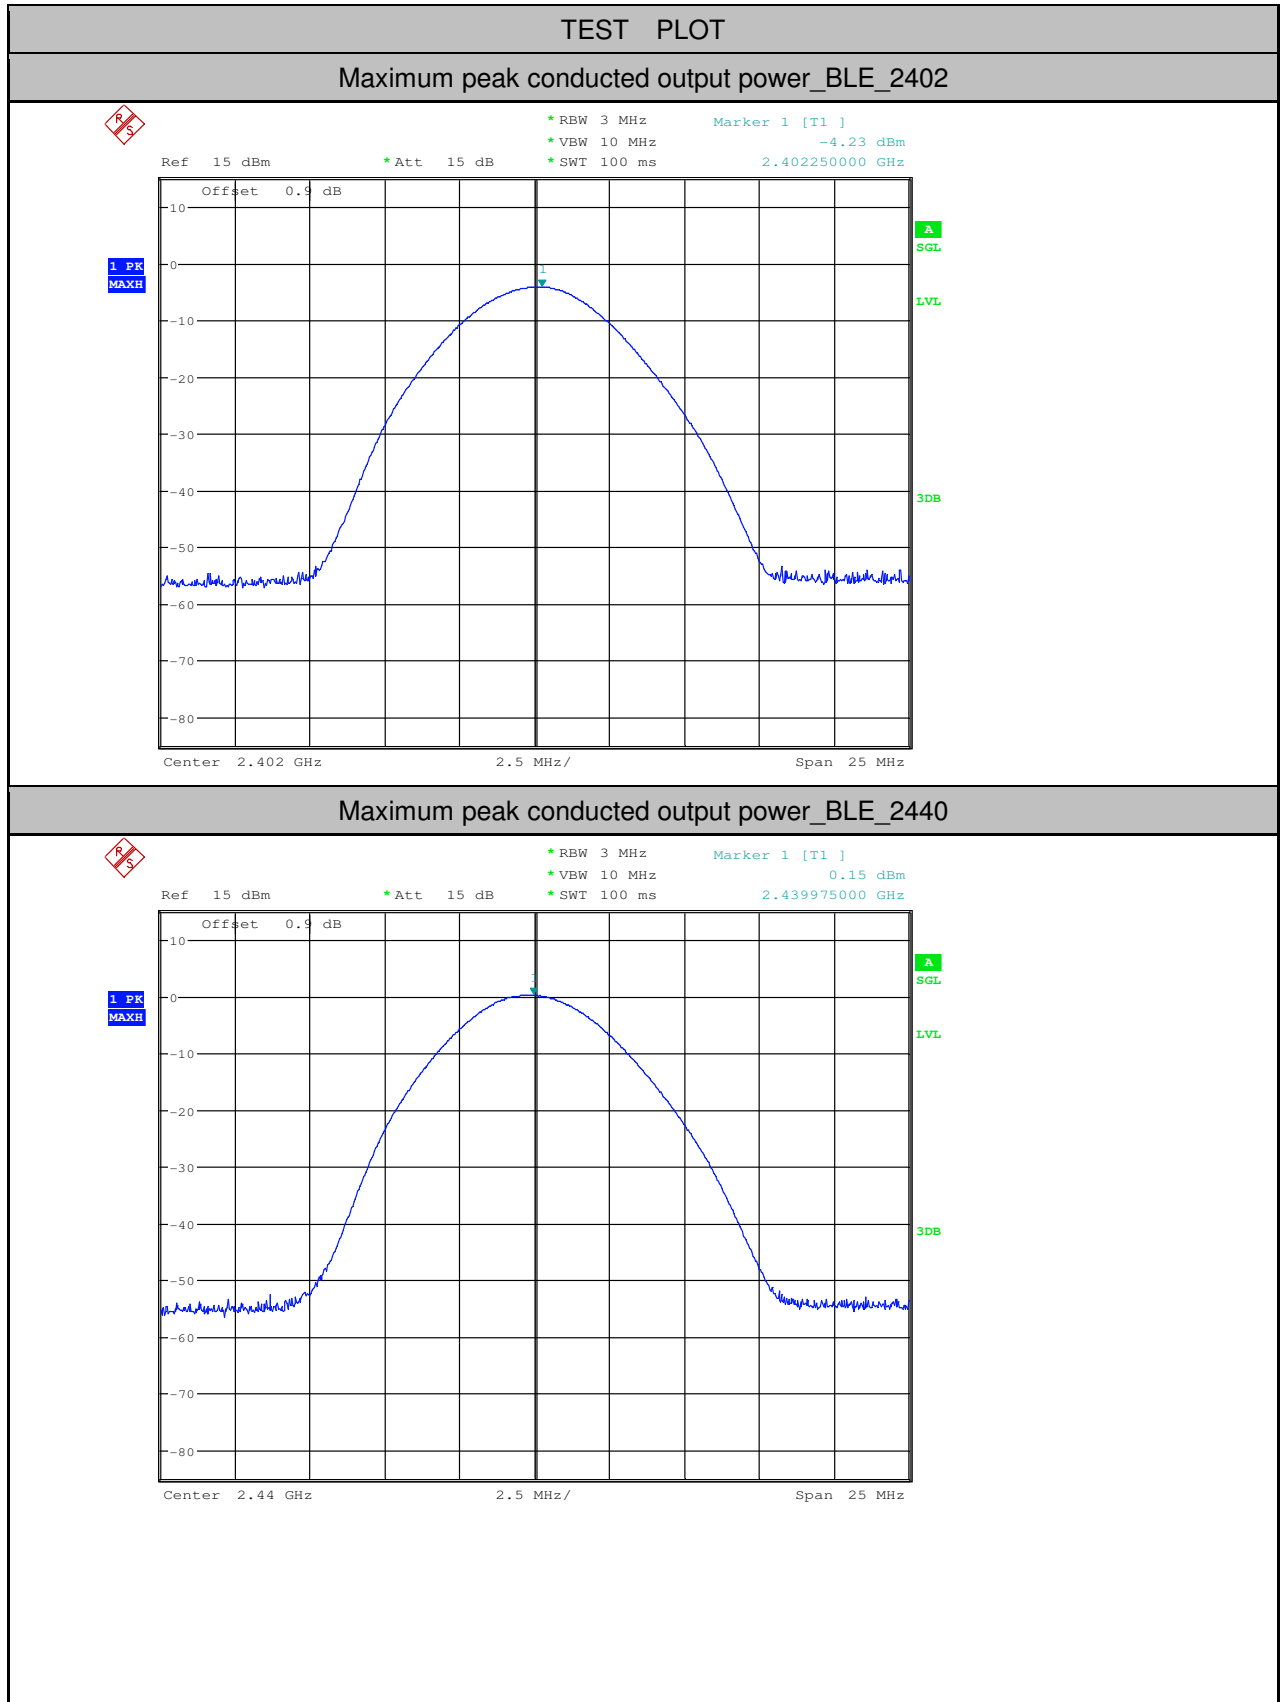


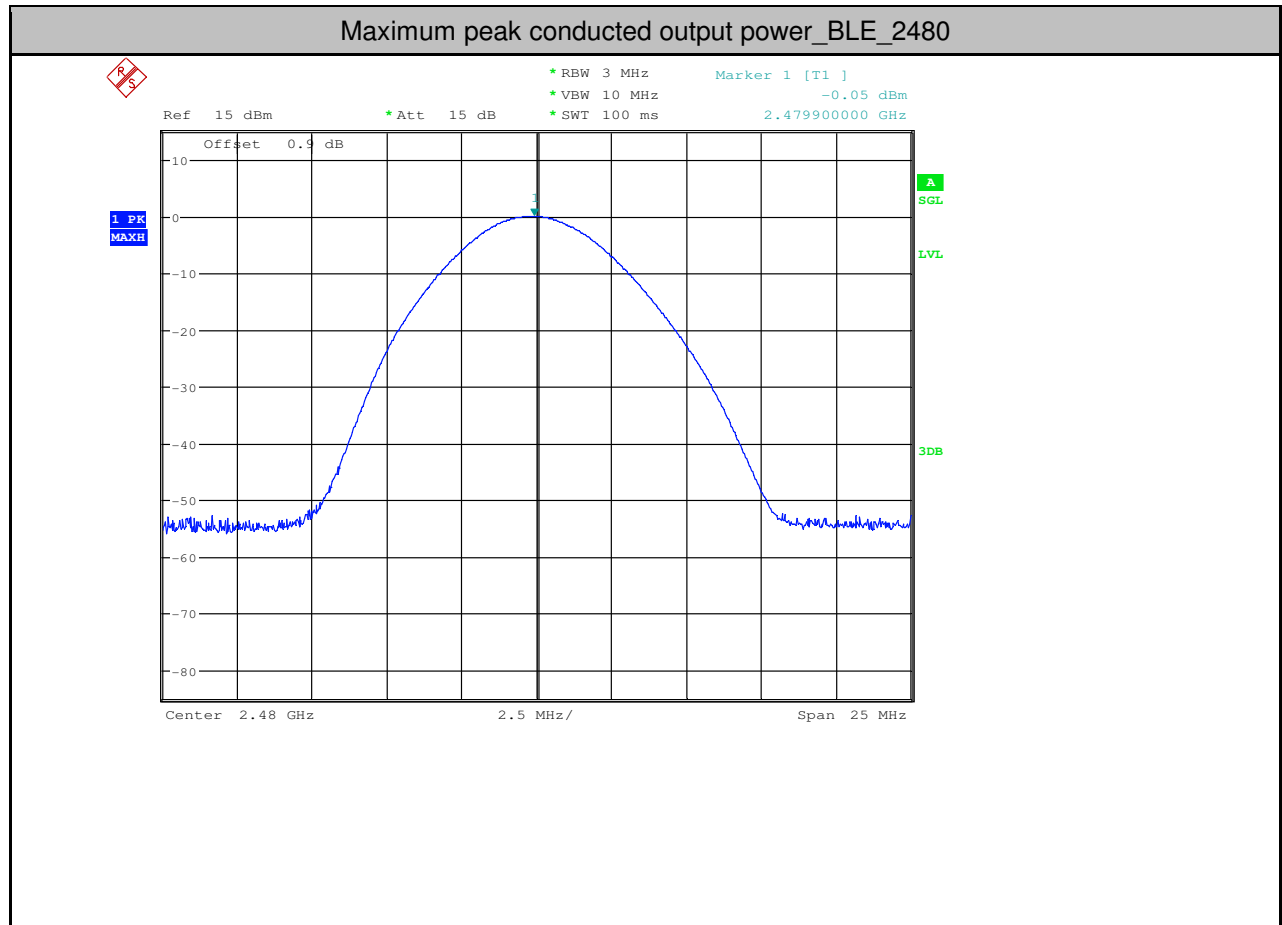




3. Maximum Peak power spectral density

Test Mode	Test Channel	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	2402	-20.35	<8.00	PASS
BLE	2440	-15.82	<8.00	PASS
BLE	2480	-16.16	<8.00	PASS

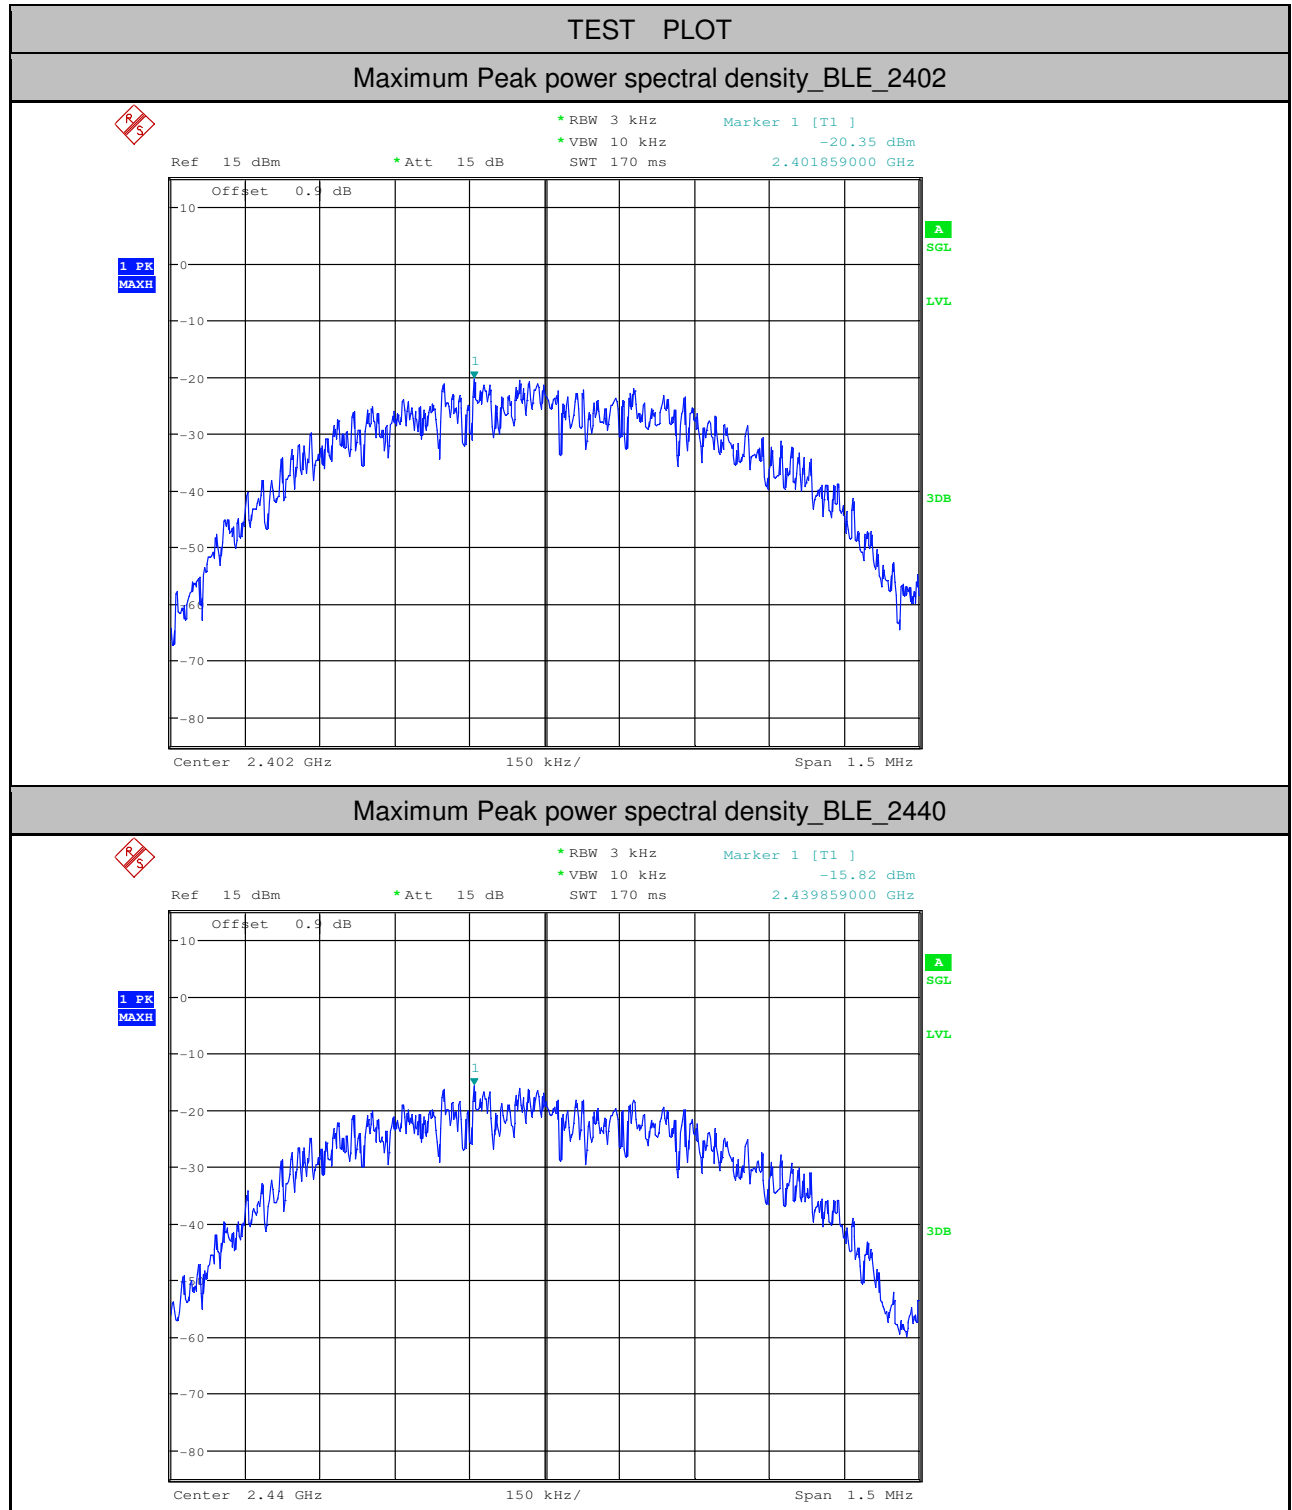


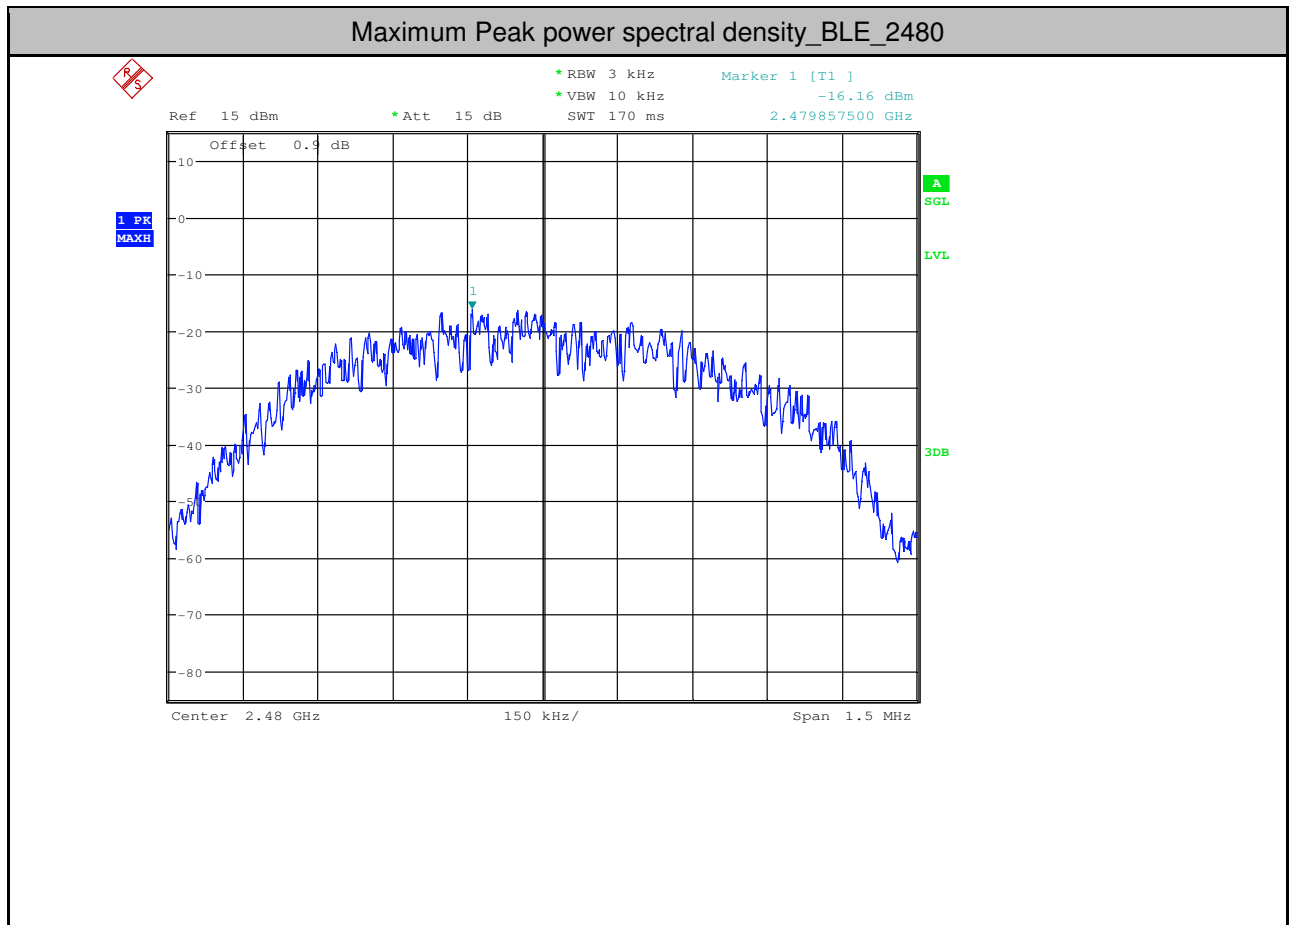



4. Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	-4.750	-60.516	<-24.75	PASS
BLE	2480	-0.740	-58.271	<-20.74	PASS

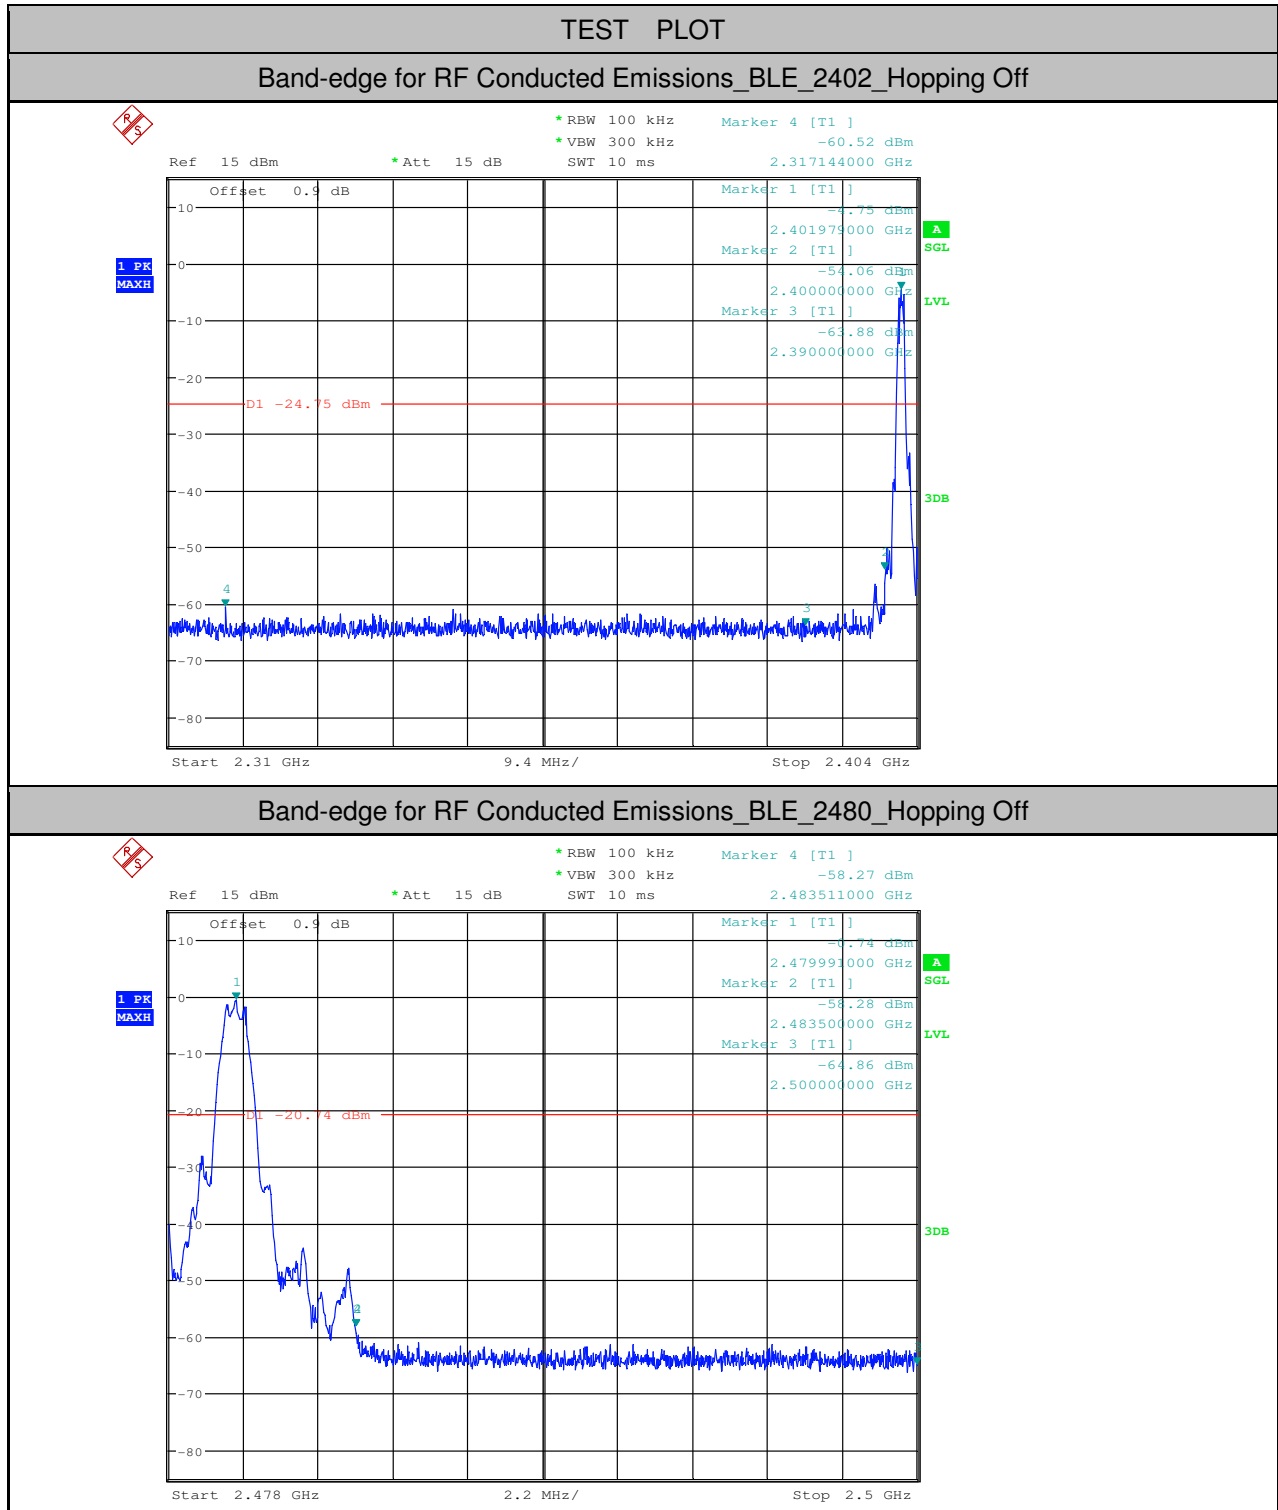



5.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	30	10000	1000	3000	-4.68	-49.880	<-24.68	PASS
BLE	2402	10000	25000	1000	3000	-4.68	-60.110	<-24.68	PASS
BLE	2440	30	10000	1000	3000	-0.43	-49.400	<-20.43	PASS
BLE	2440	10000	25000	1000	3000	-0.43	-59.280	<-20.43	PASS
BLE	2480	30	10000	1000	3000	-0.62	-49.490	<-20.62	PASS
BLE	2480	10000	25000	1000	3000	-0.62	-59.420	<-20.62	PASS

