

## FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

TAI-DER Electric Manufacture Co. Ltd.

RF Remote Controller

Model Number: TD-433RF

FCC ID: 2AF8XTD433RF

Prepared for : TAI-DER Electric Manufacture Co. Ltd.  
Dongxing Industrial Zone, Ta-Gang Village, Dong-Keng  
Town , Dong guan, Guangdong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F15273  
Date of Test : Aug.30~Sep.22, 2015  
Date of Report : Oct.21, 2015

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. EUT Configuration and operation conditions for test. ....	2-1
2.3. Test Facility .....	2-2
2.4. Measurement Uncertainty (95% confidence levels, k=2).....	2-2
<b>3. POWER LINE CONDUCTED EMISSION TEST.....</b>	<b>3-1</b>
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-1</b>
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup .....	4-2
4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.231 .....	4-3
4.4. EUT Configuration on Test .....	4-3
4.5. Operating Condition of EUT .....	4-3
4.6. Test Procedure .....	4-3
4.7. Radiated Emission Test Results.....	4-4
<b>5. STOP TRANSMITTING TIME TEST.....</b>	<b>5-1</b>
5.1. Test Equipment.....	5-1
5.2. Limit .....	5-1
5.3. Test Results .....	5-1
<b>6. 20 DB BANDWIDTH TEST .....</b>	<b>6-3</b>
6.1. Test Equipment.....	6-3
6.2. Test Results .....	6-3
<b>7. ANTENNA REQUIREMENT .....</b>	<b>7-5</b>
<b>8. RADIO FREQUENCY EXPOSURE COMPLIANCE.....</b>	<b>8-1</b>
<b>9. DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>9-1</b>
<b>10. PHOTOGRAPH OF TEST.....</b>	<b>10-1</b>
10.1. Photos of Radiated Emission Test .....	10-1
<b>11. PHOTOGRAPH OF EUT .....</b>	<b>11-1</b>

**TEST REPORT CERTIFICATION**

Applicant : TAI-DER Electric Manufacture Co. Ltd.  
Manufacturer : SHENZHEN HOTBROAD TECHNOLOGY Co., Ltd.  
EUT Description : RF Remote Controller  
FCC ID : 2AF8XTD433RF  
(A) MODEL NO. : TD-433RF  
(B) SERIAL NO. : N/A  
(C) POWER SUPPLY : DC 3V  
(D) TEST VOLTAGE : DC 3V

Tested for comply with:  
FCC Rules and Regulations Part 15 Subpart C: 2014

Test procedure used:  
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Aug.30~Sep.22, 2015 Report of date: Oct.21, 2015

Prepared by : Sonia Lee Reviewed by : Sunny Lu  
Sonia Lee / Assistant Sunny Lu / Assistant Manager



Approved & Authorized Signer :

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Conducted Emission Test	FCC Part 15C: 15.231 ANSI C63.10: 2009	N/A
Radiated Emission Test	FCC Part 15C: 15.231 ANSI C63.10: 2009	PASS
Stop Transmitting Time Test	FCC Part 15C: 15.231	PASS
20 dB Bandwidth Test	FCC Part 15C: 15.231	PASS
N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name	: RF Remote Controller
Model Number	: TD-433RF
FCC ID	: 2AF8XTD433RF
Operation frequency	: 433.92MHz
Applicant	: TAI-DER Electric Manufacture Co. Ltd. Dongxing Industrial Zone, Ta-Gang Village, Dong-Keng Town , Dong guan, Guangdong
Manufacturer	: SHENZHEN HOTBROAD TECHNOLOGY Co., Ltd. A3 building, HuaFeng Century Technology Park, XiXiang, BaoAn, Shenzhen, Guangdong
Antenna Type &Gain	: Spring Loaded Antenna, 2.0dBi
Date of Test	: Aug.30~Sep.14, 2015
Date of Receipt	: Aug.29, 2015
Sample Type	: Prototype production

### 2.2. EUT Configuration and operation conditions for test.

EUT

( EUT: RF Remote Controller)

## 2.3. Test Facility

### Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block, Shenzhen  
Science & Industrial Park, Nantou, Shenzhen,  
Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA  
Registration Number: 90454  
Valid Date: Dec.30, 2017

3m & 10m Anechoic Chamber : Certificated by FCC, USA  
Registration Number: 794232  
Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada  
Registration Number: IC 5183A-1  
Valid Date: May.14, 2017

: Certificated by DAkkS, Germany  
Registration No: D-PL-12151-01-00  
Valid Date: Dec.15, 2016

: Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2016

## 2.4. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.1dB(150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.3dB(30~200MHz, Polarize: H)
	3.3dB(30~200MHz, Polarize: V)
	3.5dB(200M~1GHz, Polarize: H)
	3.4dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.0dB (1~6GHz, Distance: 3m)
	5.0dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%



### 3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Nov.23,14	1 Year
2.	EMI Spectrum	Agilent	E4407B	MY41440292	Apr.28,15	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Apr.28,15	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.28,15	1 Year
5.	Bilog Antenna	TESEQ	CBL6112D	35375	Jun.30,15	1 Year
6.	RF Cable	MIYAZAKI	CFD400-N W(3.5M)	No.3	Apr.28,15	1 Year
7.	RF Cable	MIYAZAKI	CFD400-L W(22M)	No.7	Apr.28,15	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.28,15	1 Year
9.	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A


Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Horn Antenna	ETS	3115	9510-4877	Sep.20,14	1 Year
3.	Amplifier	Agilent	8449B	3008A02495	Apr.28,15	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	Apr.28,15	1 Year
5.	Horn Antenna	ETS	3116	00060089	Sep.20,14	1 Year
6.	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A




## 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

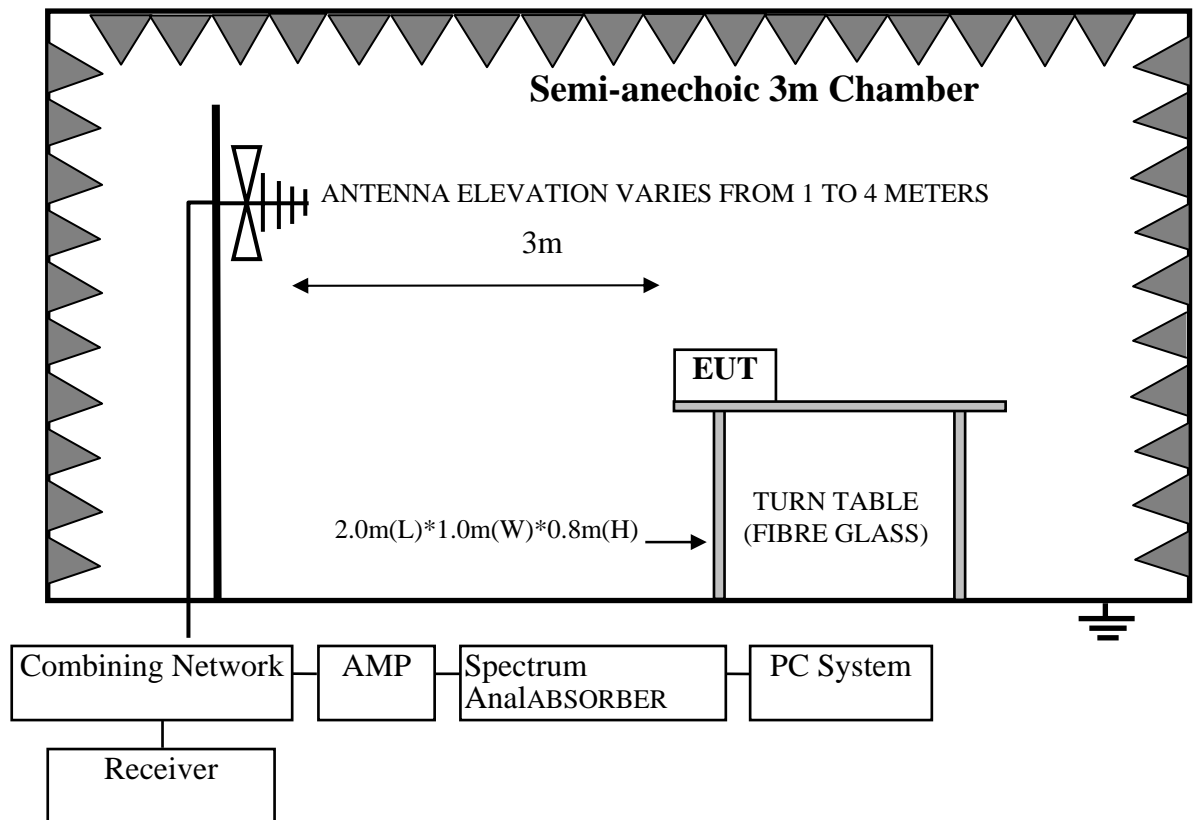

For frequency range above 1GHz

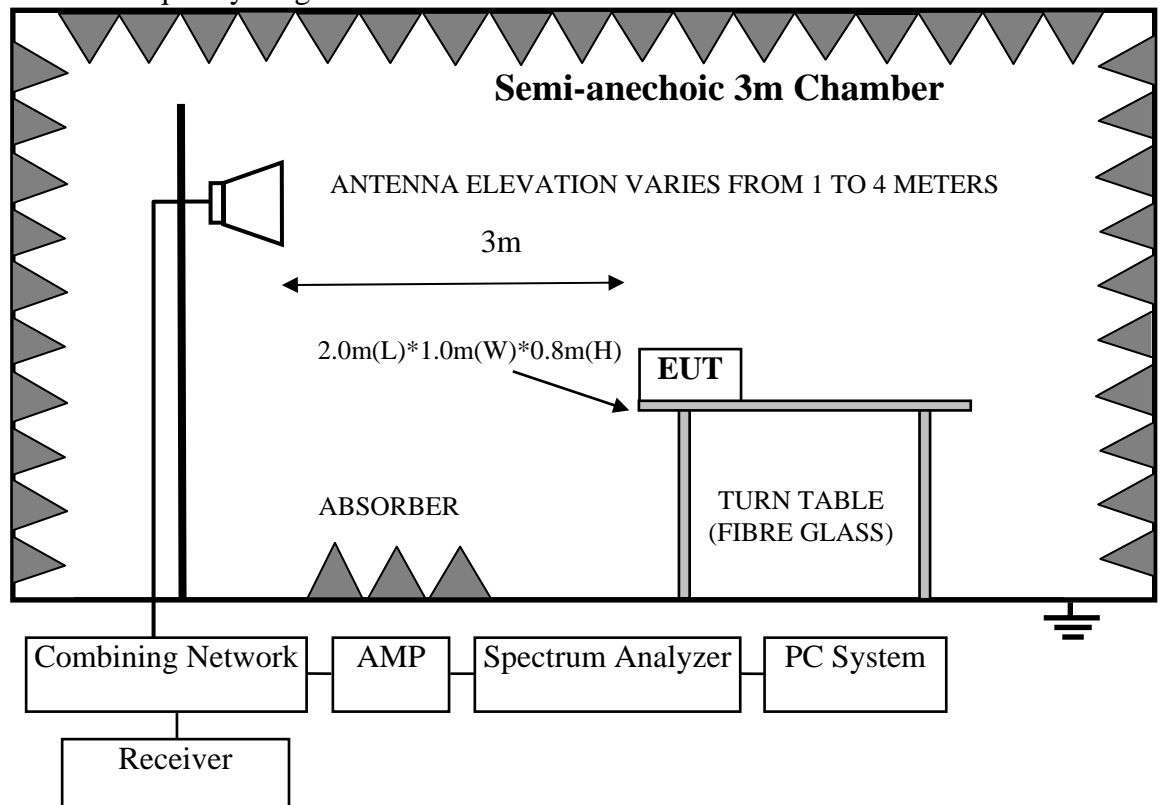

### 4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.231

Fundamental Frequency(MHz)	Field Strength of Fundamental	Field Strength of Spurious emissions
433.92	AV:80.83 dBuV/m at 3m distance PK:100.83 dBuV/m at 3m distance	AV:60.83dBuV/m at 3m distance PK:80.83dBuV/m at 3m distance

Note: The spurious emissions appearing within the frequency band listed in 15.205  
Shall also comply with limits shown in section 15.209

### 4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.5.Operating Condition of EUT

4.5.1.Setup the EUT and simulator as shown as Section 4.2.

4.5.2.Turned on the power of all equipment.

4.5.3.Let EUT work in Tx mode.

### 4.6.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2009 on radiated emission Test.

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation show in the test setup photos.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz



This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

#### 4.7.Radiated Emission Test Results

**PASS.**

The frequency range from 30MHz to 5000MHz was investigated. When PK measured Levels comply with average limit, then the average levels were deemed to comply with Average limit. When PK measured levels exceed average limit, then the duty cycle factor of 100ms was used to calculate average level.

Duty cycle factor =  $20\log(\text{duty cycle}) = -9.643$

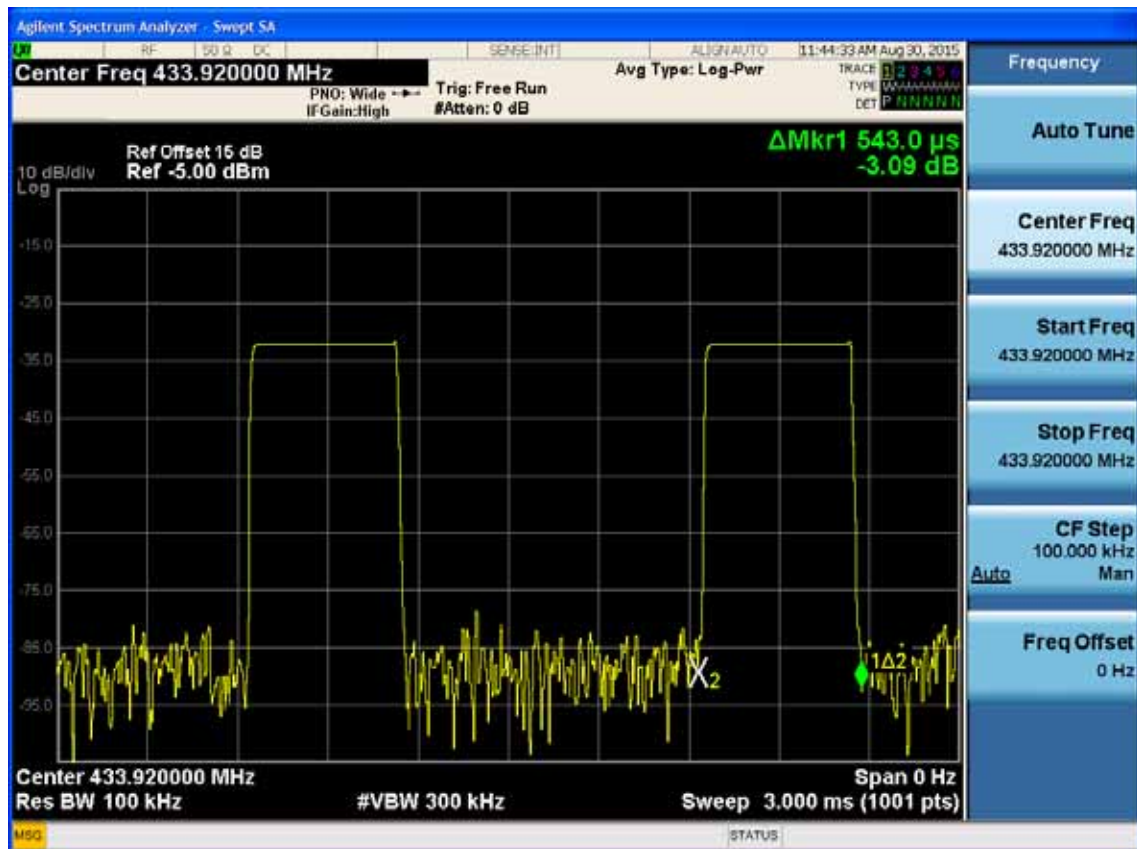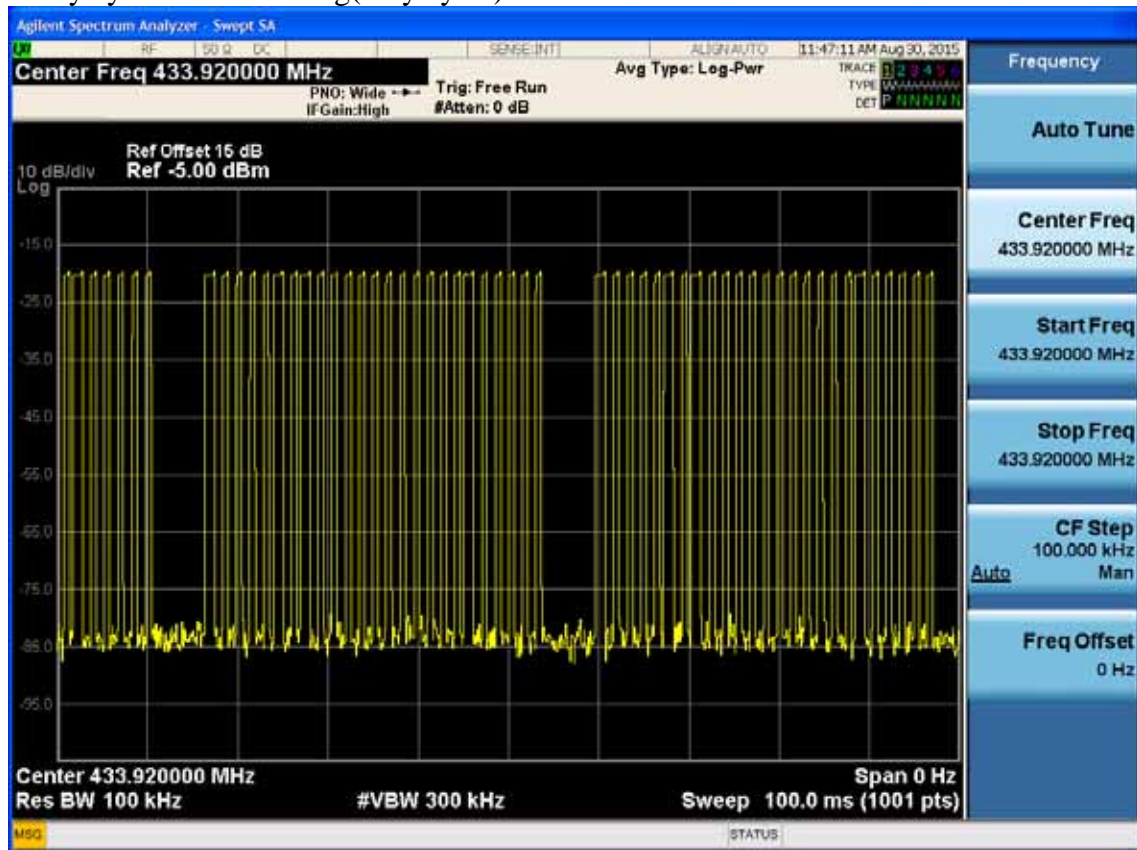


# Frequency: 30MHz~1GHz

Data: 13

File: E:\2015 Report Data\RF\ACS15Q1522.EM6 (14)

Date: 2015-09-14

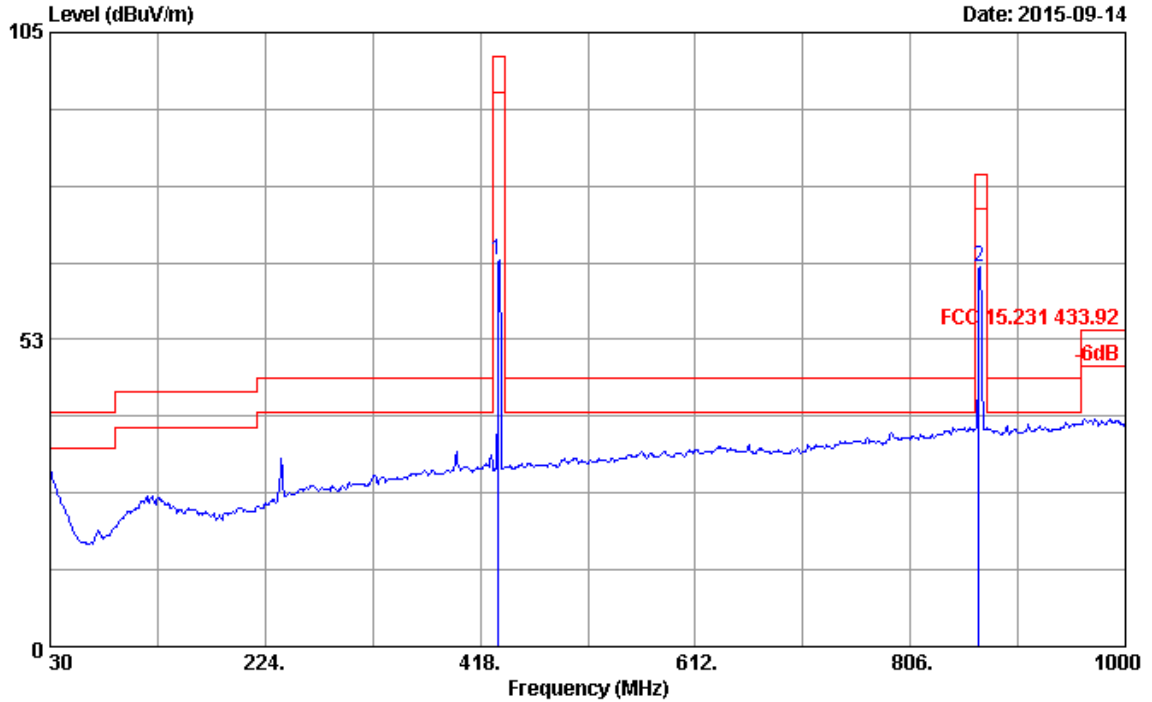


Site no. : 3m Chamber Data no. : 13  
 Dis. / Ant. : 3m 2015 CBL6112D 35375 Ant. pol. : HORIZONTAL  
 Limit : FCC 15.231 433.92  
 Env. / Ins. : 24°C/56% Engineer : THOMAX  
 EUT : RF remote controller M/N:TD-433RF  
 Power rating : DC 12V  
 Test Mode : TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	433.920	17.17	2.31	74.19	66.21	100.83	34.62	Peak
2	867.840	21.76	3.42	66.93	64.81	80.83	16.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
867.840	64.81	-9.643	55.167	60.83	PASS

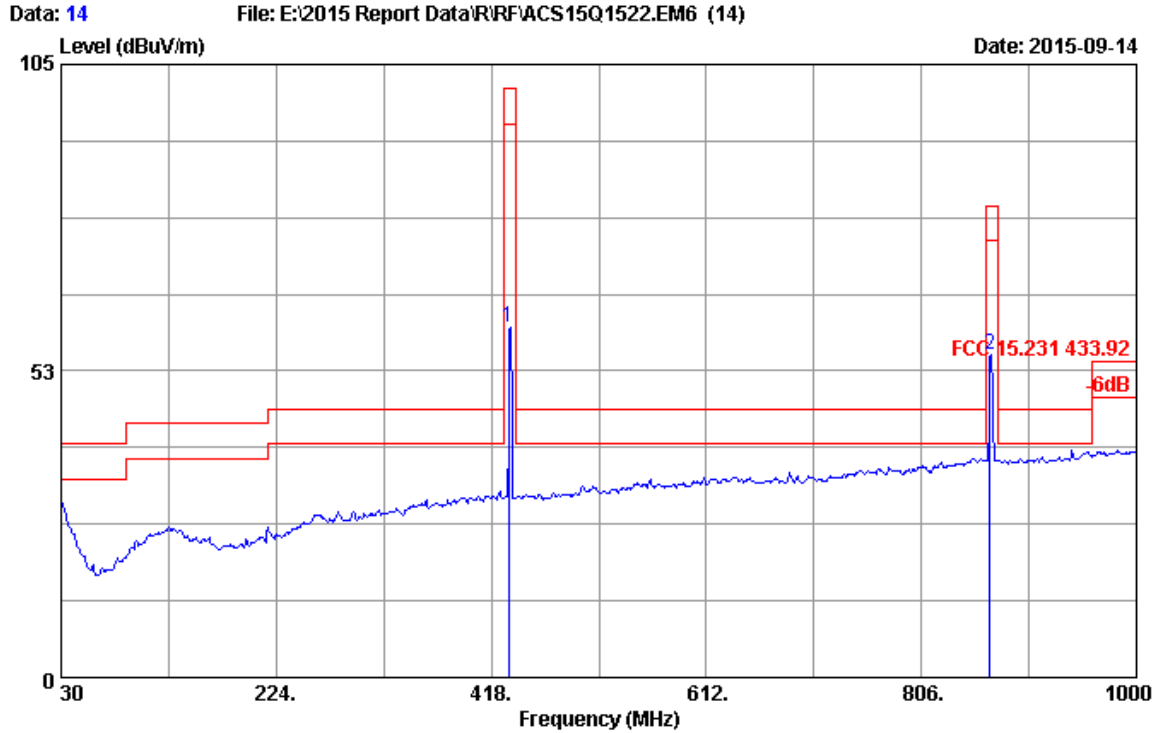

Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2015 CBL6112D 35375 Ant. pol. : VERTICAL  
 Limit : FCC 15.231 433.92  
 Env. / Ins. : 24°C/56% Engineer : THOMAX  
 EUT : RF remote controller M/N:TD-433RF  
 Power rating : DC 12V  
 Test Mode : TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	433.920	17.17	2.31	67.82	59.84	100.83	40.99	Peak
2	867.840	21.76	3.42	57.53	55.41	80.83	25.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

**Frequency: 1GHz~18GHz**

Data: 9

File: E:\2015 Report Data\RF\ACS15Q1522.EM6 (14)

Date: 2015-09-14

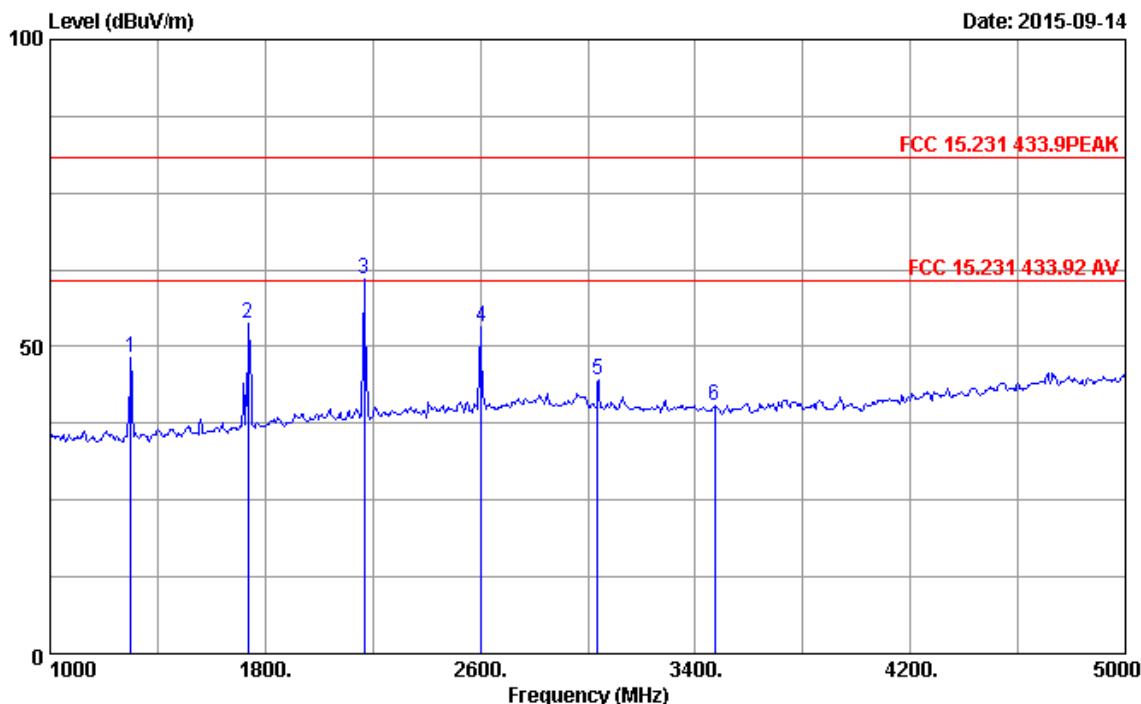

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 2015 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC 15.231 433.9PEAK  
Env. / Ins. : 24°C/56% Engineer : THOMAX  
EUT : RF remote controller M/N:TD-433RF  
Power rating : DC 12V  
Test Mode : TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1301.76	24.88	2.13	35.48	56.73	48.26	80.83	32.57	Peak
2	1735.68	26.14	2.57	34.98	60.15	53.88	80.83	26.95	Peak
3	2169.60	27.54	2.74	34.61	65.40	61.07	80.83	19.76	Peak
4	2603.52	28.28	2.83	34.45	56.59	53.25	80.83	27.58	Peak
5	3037.44	28.66	3.16	34.37	47.01	44.46	80.83	36.37	Peak
6	3471.36	29.35	3.36	34.88	42.48	40.31	80.83	40.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.

2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
2169.60	61.07	-9.643	51.427	60.83	PASS



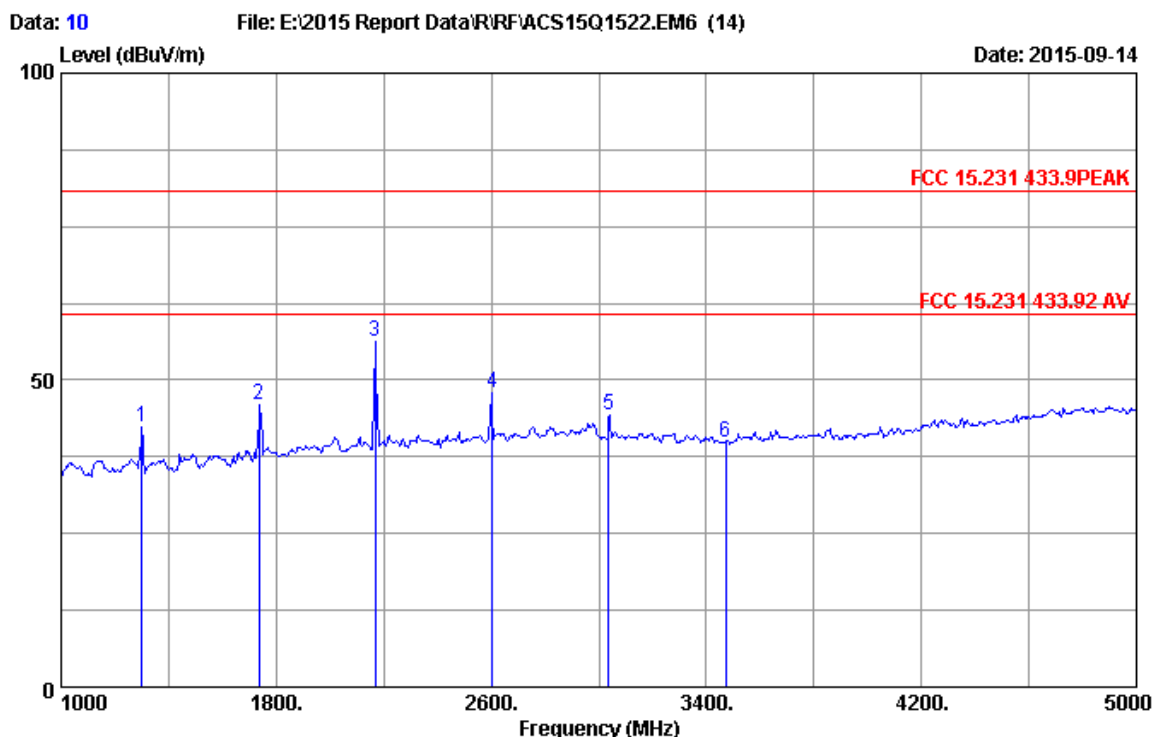

Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2015 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15.231 433.9PEAK  
 Env. / Ins. : 24°C/56% Engineer : THOMAX  
 EUT : RF remote controller M/N:TD-433RF  
 Power rating : DC 12V  
 Test Mode : TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1301.76	24.88	2.13	35.48	50.86	42.39	80.83	38.44	Peak
2	1735.68	26.14	2.57	34.98	52.36	46.09	80.83	34.74	Peak
3	2169.60	27.54	2.74	34.61	60.56	56.23	80.83	24.60	Peak
4	2603.52	28.28	2.83	34.45	51.28	47.94	80.83	32.89	Peak
5	3037.44	28.66	3.16	34.37	46.90	44.35	80.83	36.48	Peak
6	3471.36	29.35	3.36	34.88	42.01	39.84	80.83	40.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. STOP TRANSMITTING TIME TEST

### 5.1. Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29, 14	1Year

### 5.2. Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 5.3. Test Results

Frequency (MHz)	Stop Transmitting Time	Limit	Conclusion
433.900	250ms	5s	PASS

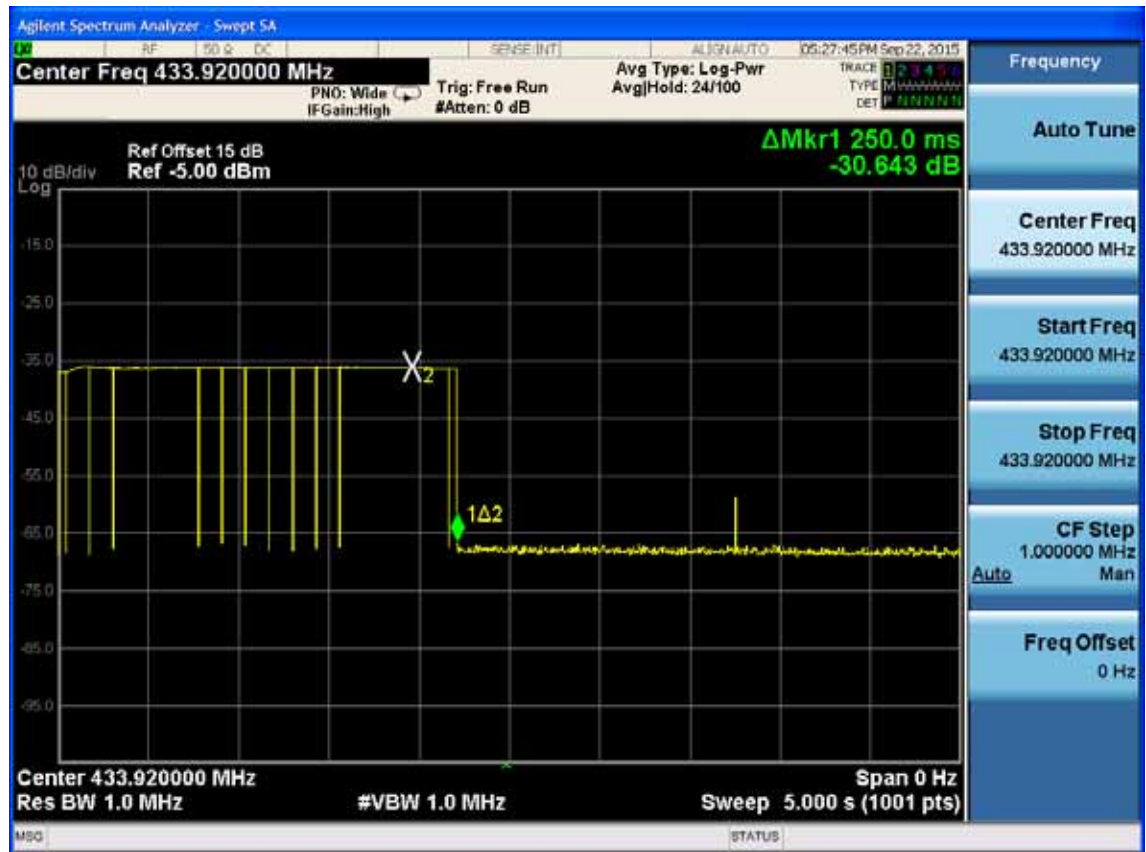

## 6. 20 DB BANDWIDTH TEST


### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29, 14	1 Year
2.	Attenuator (10dB)	Mini-Circuits	VAT-10+	NO.1	Apr.28,15	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Apr. 28,14	1 Year

### 6.2. Test Results

EUT: RF Remote Controller		
M/N: TD-433RF		
Test date: 2015-09-22	Pressure: 101.1±1.0 kpa	Humidity: 51.9±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature: 22.3±0.6℃

Frequency (MHz)	20 dB Bandwidth (kHz)	Limit(kHz): No wider than 0.25% of the center frequency	Conclusion
433.900	268.6	$433.9 \times 0.25\% = 1.08\text{MHz}$	PASS

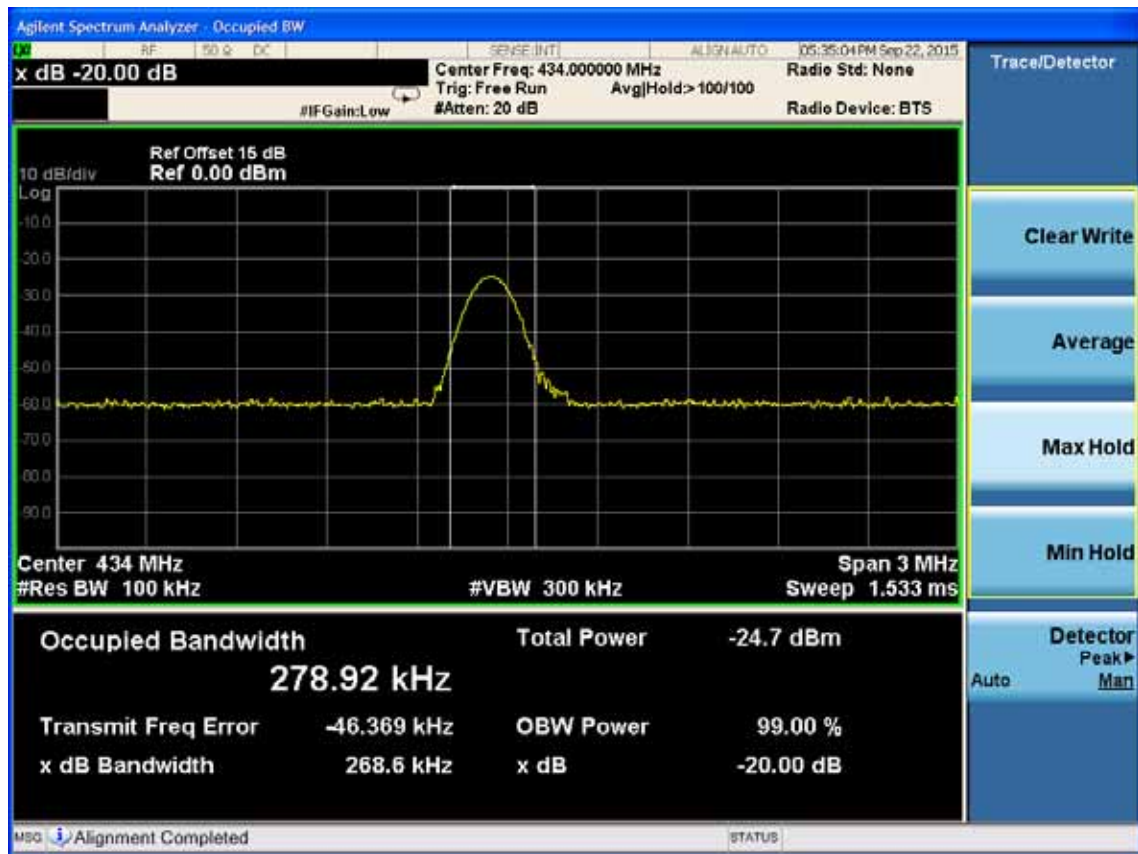

## 7. ANTENNA REQUIREMENT

**RESULT : PASS**

Test Date : Aug.30~Sep.22, 2015

Test standard : FCC Part 15.231

Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision.

## 8. RADIO FRREQUENCY EXPOSURE COMPLIANCE

**RESULT : PASS**

Test standard : FCC KDB Publication 447498 D01 V05

Since maximum peak output power of the transmitter is $<10\text{mW}$ , i.e. $0.009346\text{mW}<10\text{mW}$ , hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01:General RF Exposure Guidance V05.



## 9. DEVIATION TO TEST SPECIFICATIONS

[NONE]