

Page: 1 of 23

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS 210

OF

Product Name: Here One
Brand Name: HERE01011
Model No.: HERE01011R

Model Difference: N/A

FCC ID: 2AF9A01011R

IC: 20747-01011R

Report No.: ER/2017/10021

Issue Date: Jan. 11, 2017

FCC Rule Part: §15.209

IC Rule Part: RSS-210 issue 9 Aug.2016 Annex B

Prepared for Doppler Labs Inc.

611 Broadway, Suite 523, New York, NY

USA 10012

Prepared by SGS Taiwan Ltd.

Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku

District, New Taipei City, Taiwan 24803





Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品會看,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。



Page: 2 of 23

VERIFICATION OF COMPLIANCE

Applicant: Doppler Labs Inc.

611 Broadway, Suite 523, New York, NY USA 10012

Product Name: Here One

Brand Name: HERE01011

Model No.: HERE01011R

Model Difference: N/A

FCC ID: 2AF9A01011R

IC: 20747-01011R

File Number: ER/2017/10021

Date of test: Dec. 20, 2016 ~ Jan. 04, 2017

Date of EUT Received: Dec. 20, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 & ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Iseng	Date:	Jan. 11, 2017
_	Marcus Tseng / Engineer		
Prepared By:	Yuri Tsou	Date:	Jan. 11, 2017
_	Yuri Tsai / Clerk		
Approved By	Sim Chang	Date:	Jan. 11, 2017
_	Jim Chang / Asst. Manager		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 3 of 23

Revision History

Report Number	Revision	Description	Issue Date
ER/2017/10021	Rev.00	Initial creation of document	Jan. 11, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 23

Contents

1.	GENERAL INFORMATION	5
2.	SYSTEM TEST CONFIGURATION	7
3.	SUMMARY OF TEST RESULTS	10
4.	DESCRIPTION OF TEST MODES	10
5.	CONDUCTED EMISSIONS TEST	11
6.	RADIATED EMISSION TEST	14
7.	TIMING OF THE TRANSMITTER (DUTY CYCLE CORRECTION FACTOR)	20
Q	BANDWIDTH OF THE MODI II ATED CAPPIER	22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 5 of 23

1. GENERAL INFORMATION

1.1. Product Description

The frequency becompared.					
Product Name:	Here One				
Brand Name:	HERE010	11			
Model No.:	HERE010	11L			
Model Difference:	N/A	N/A			
Hardware Version:	102				
Software Version:	1.0				
USB Cable:	Model No.: C712 10M008 266 6, Supplier: Amphenol Mobile Connector Solution				
Charging Case:	Model No.: P0788-LF (842326 1S1P), Supplier: EVE				
	3.7Vdc from Rechargeable Li-Ion Battery or 5V from USB Cable				
Power Supply:	Battery:	Model No.: CP1254 A3, Supplier: Varta			

Operating Frequency	10.6MHz
Transmit Power	< 69.54dBuV/m at 3m.
Number of Channels	1
Modulation Type:	8-DPSK
Antenna:	coil antenna
Type of Emission:	512KGXD

The signal is very weak and not able to be capture at all

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) teste



Page: 6 of 23

1.2. Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.209
IC RSS 210 issue 9 Aug.2016 Annex B
RSS-Gen. issue 4 Nov. 2014
ANSI C63.10:2013

Note:

All test items have been performed and record as per the above standards.

1.3. Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan (TAF code 0513)

FCC Registration Numbers are: 735305 Canada Registration Number: 4620A-5 .

1.4. Special Accessories

There are no special accessories used while test was conducted.

1.5. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 7 of 23

2. System Test Configuration

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 8 of 23

2.4. Limitation

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range		Limits B (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

(2) Radiated Emission

- (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:
- (b) In the emission table above, the tighter limit applies at the band edges.
- (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their nwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。



Page: 9 of 23

Frequency (MHz)	Field strength μV/m	Distance (m)
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

2.5. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Ite m	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.
Pk非另有规则,此根告结果僅對測試之樣品負責,同時此樣品僅保留到天。本根告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 10 of 23

3. Summary of Test Results

FCC / IC Rules	Description Of Test	Result
§15.207	Conducted Emission	N/A
§15.209 (a) /	Fieldstrength of harmonics	Compliant
RSS-GEN Issue 4	and spurious	
§15.35 (c) / RSS-GEN Issue 4 § 6.10	Timing of the transmitter (Duty cycle correction factor)	Compliant
§ 15.209 / RSS-Gen issue 4 §6.6	Bandwidth of the modulated carrier	Compliant

4. Description of test modes

The EUT has been tested under continuous operating condition. The Frequency 10.6MHz was chosen for testing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

www.tw.sgs.com




Page: 11 of 23

5. Conducted Emissions Test

5.1. Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.2. Test SET-UP (Block Diagram of Configuration)

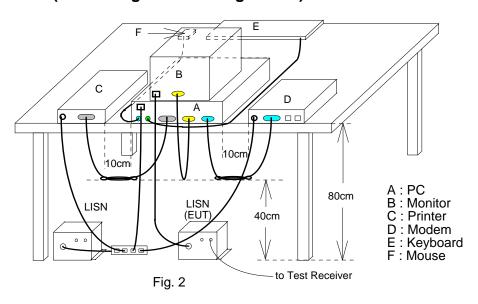

5.3. Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017				
LISN	Rolf-Heine	NNB-2/16Z	99012	05/16/2016	05/15/2017				
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	05/16/2016	05/15/2017				
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017				

5.4. Measurement Result:

Note: Refer to next page for measurement data and plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 12 of 23

Humidity: 60%

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode			Test By:	Nick
Temperature:	20	Humidity:	58 %		

Site ConductionRoom

Limit: FCC Class B Conduction(QP)

Mode: Operation mode


Note:

Conducted Emission

Phase:

Power:

L1 AC 120V/60Hz

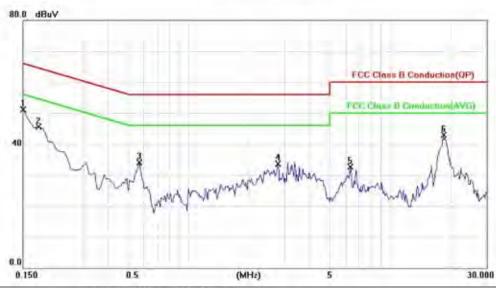

No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.1500	51.04	0.16	51.20	66.00	-14.80	peak		
2		0,1800	45.39	0.16	45.55	64.49	-18.94	peak		
3		0.5700	33.88	0.17	34.05	56.00	-21.95	peak		
4		2.7700	33.54	0.23	33.77	56.00	-22.23	peak		
5		6.3400	32.40	0.30	32.70	60,00	-27.30	peak		
6	4	18.3600	42.58	0.42	43.00	60.00	-17.00	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms end constitutions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Alternation is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 23

Site ConductionRoom

Limit: FCC Class B Conduction(QP)

Mode: Operationmode


Note:

Phase: AC 120V/60Hz Power:

Temperature:

Humidity:

Conducted Emission

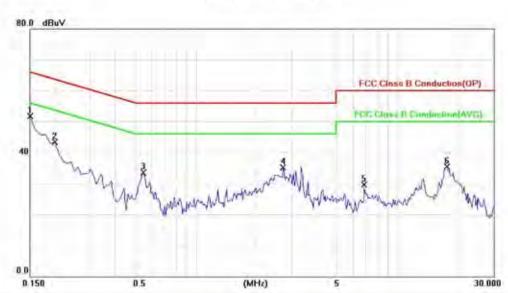

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dΒ	dBuV	dBuV	dB	Detector	Comment	
1		0.1500	51.58	0.18	51.76	66,00	-14.24	peak		
2		0.2000	43.19	0.19	43.38	63.61	-20.23	peak		
3		0.5500	33.39	0.21	33.60	56.00	-22.40	peak		
4		2.7200	34.87	0.27	35.14	56,00	-20,86	peak		
5		6.8600	29.43	0.36	29.79	60.00	-30.21	peak		
6		17.6400	34.82	0.53	35.35	60.00	-24.65	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms end constitutions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Alternation is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 23


6. Radiated Emission Test

6.1. Measurement Procedure


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

6.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

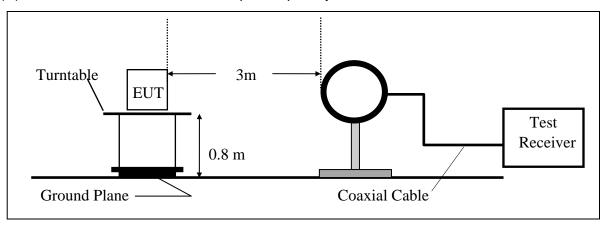

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

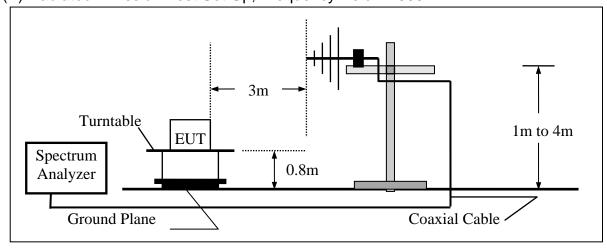

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另右說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。太報告未經本公司書而許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 23

6.3. Measurement Equipment Used:

	9	66 Chamber				
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017	
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2016	01/28/2017	
Loop Antenna	ETS-Lindgren	6502	143303	09/20/2016	09/19/2017	
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/19/2016	12/18/2017	
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017	
Pre-Amplifier	Agilent	8447D	2944A07676	01/02/2016	01/01/2017	
Pre-Amplifier	EMC Instruments	EMC012653	980038	01/02/2016	01/01/2017	
1 10 7 mipmior	Corp.	0		0170272010		
Turn Table	HD	DT420	N/A	N.C.R	N.C.R	
Antenna Tower	ChamPro	AM-BS-4500 -B	060776-ABS	N.C.R	N.C.R	
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R	
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2016	01/01/2017	
3m Site NSA	SGS	966 chamber	N/A	07/01/2016	06/30/2017	
Low Loss Cable	Huber Suhner	966 TX	1	01/02/2016	01/01/2017	
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2016	12/11/2017	
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/02/2016	01/01/2017	

6.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	_	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果做對測試之樣品負責,同時此樣品僅保留例天。太報告表經太公司業而許可,不可部份推製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 23

6.5. Measurement Result

Below 30MHz:

Operation Mode: IFMI Test Date: 12/27/2016

Fundamental Frequency: 10.6 MHz Temp. / Humi.: 22 deg_C / 61 RH

Operation Band: Tx Test Engineer: Kane

EUT Pol.: E2 Plane Measurement Antenna Pol.: VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
10.66	F	Peak	35.76	24.40	11.36	69.54	-33.78
11.80	S	Peak	22.31	10.92	11.39	69.54	-47.23
12.80	S	Peak	22.12	10.71	11.42	69.54	-47.42
16.46	S	Peak	21.08	9.58	11.50	69.54	-48.46
19.46	S	Peak	21.61	10.04	11.57	69.54	-47.93
23.86	S	Peak	20.96	10.48	10.48	69.54	-48.58
28.04	S	Peak	21.28	11.78	9.49	69.54	-48.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 17 of 23

Operation Mode: IFMI Test Date: 12/27/2016

Fundamental Frequency: 10.6 MHz Temp. / Humi.: 22 deg_C / 61 RH

Operation Band: Tx Test Engineer: Kane

EUT Pol.: E2 Plane Measurement Antenna Pol.: HORIZONTAL

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
10.62	F	Peak	35.74	24.39	11.35	69.54	-33.80
12.14	S	Peak	22.30	10.90	11.40	69.54	-47.24
16.30	S	Peak	21.64	10.14	11.50	69.54	-47.90
19.50	S	Peak	21.68	10.11	11.57	69.54	-47.86
21.90	S	Peak	19.69	8.69	11.01	69.54	-49.85
24.86	S	Peak	20.07	9.84	10.23	69.54	-49.47
27.40	S	Peak	21.44	11.80	9.64	69.54	-48.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 18 of 23

Above 30MHz:

Operation Mode: IFMI Test Date: 12/27/2016

Fundamental Frequency: 10.6 MHz Temp. / Humi.: 22 deg_C / 61 RH

Operation Band: Tx Test Engineer: Kane

EUT Pol.: E2 Plane Measurement Antenna Pol.: VERTICAL

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
47.46	S	Peak	19.06	26.90	-7.85	40.00	-20.94
146.40	S	Peak	18.51	26.55	-8.04	43.50	-24.99
221.09	S	Peak	16.68	25.91	-9.23	46.00	-29.32
364.65	S	Peak	23.09	27.78	-4.68	46.00	-22.91
544.10	S	Peak	26.35	27.95	-1.60	46.00	-19.65
742.95	S	Peak	29.35	27.08	2.28	46.00	-16.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。



Page: 19 of 23

Operation Mode: IFMI Test Date: 12/27/2016

Fundamental Frequency: 10.6 MHz Temp. / Humi.: 22 deg_C / 61 RH

Operation Band: Tx Test Engineer: Kane

EUT Pol.: E2 Plane Measurement Antenna Pol.: HORIZONTAL

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
47.46	S	Peak	19.58	27.43	-7.85	40.00	-20.42
225.94	S	Peak	17.16	26.26	-9.10	46.00	-28.84
340.40	S	Peak	21.33	26.43	-5.10	46.00	-24.67
544.10	S	Peak	25.57	27.17	-1.60	46.00	-20.43
741.01	S	Peak	29.18	27.02	2.16	46.00	-16.82
904.94	S	Peak	30.43	25.53	4.90	46.00	-15.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms and conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 23

7. Timing of the transmitter (Duty cycle correction factor)

7.1. Limits:

FCC CFR Part SUBCLAUSE § 15.35 (c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

IC RSS-GEN Issue 4 Section 6.10 When the field strength (or envelope power) is not constant or it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 second, the average value of field strength or output power shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The exact method of calculating the average field strength shall be submitted with any application for

certification or shall be retained in the measurement data file for equipment subject to notification or verification.


7.2. Measurement Result

Refer to next page for measurement chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 21 of 23

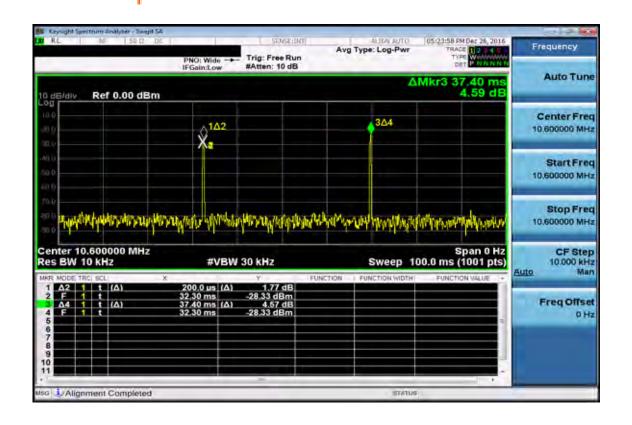

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書而許可,不可部份複製。



Page: 22 of 23

8. Bandwidth of the modulated carrier

8.1. Standard Applicable:

For 99% Bandwidth

RSS-Gen issue 4 §6.6, The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

8.2. Measurement Equipment Used:

Refer to section 7.2 for details.

8.3. Test Set-up:

Refer to section 7.3 for details.

8.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 4. Mark the peak frequency and –20dB (upper and lower) frequency and Turn on the 99% bandwidth function, max reading.
- 5. Repeat above procedure for 99% Bandwidth, but set RBW to 1% of the span, and detector = peak.
- 6 .Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 23 of 23

8.5. Measurement Result:

99% Bandwidth:

Frequency	99%Bandwidth
MHz	(MHz)
10.6	0.512

99% Band Width Test Data



~ End of Report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另右短眼,此親生结果佛幹到很少提品备香,同時此提品佛保密则系。太親生手领太公司東而姓可,不可認於谁刻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Flectronic Documents at <a href="https://www.sgs.com/terms and conditions for Flectronic Documents at <a href="https://www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.