

# **FCC RADIO TEST REPORT**

## **FCC ID:2AFA3RLTP4028**

**Product:** smartphone

**Trade Name:** N/A

**Model Number:** RLTP4028-BLACK

**Serial Model:** V41

**Report No.:** ISOT15070054R1

### **Prepared for**

Shenzhen Vastking Electronic Co.,LTD.  
2/F, Building 6, ZhengZhong Industrial Park, Qiaotou Community,  
Fuyong, Baoan, Shenzhen, China

### **Prepared by**


Shenzhen ISOTek Standards Technical Services Co.,Ltd.  
13/F, HuaFengRui Building, XinHu Rd., XiXiang, Bao'an  
District,Shenzhen,China  
Tel.: +86-755- 23087378 Fax.: +86-755-23087278  
[Http://www.ISOTek.com.cn](http://www.ISOTek.com.cn)

## TEST RESULT CERTIFICATION

**Applicant's name**.....: Shenzhen Vastking Electronic Co.,LTD.  
**Address** .....: 2/F, Building 6, ZhengZhong Industrial Park, Qiaotou  
Community, Fuyong, Baoan, Shenzhen, China  
**Manufacture's Name** .....: Shenzhen Vastking Electronic Co.,LTD.  
**Address** .....: 2/F, Building 6, ZhengZhong Industrial Park, Qiaotou  
Community, Fuyong, Baoan, Shenzhen, China  
**Product name**.....: smartphone  
**Model and/or type reference** ...: RLTP4028-BLACK  
**Serial Model** : V41  
**Standards**.....: FCC Part 22H and 24E and FCC Part 27: 01 Oct. 2014  
**Test procedure** .....: TIA/EIA 603D  
This device described above has been tested by ISOTek, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
This report shall not be reproduced except in full, without the written approval of ISOTek, this document may be altered or revised by ISOTek, personnel only, and shall be noted in the revision of the document.  
**Date of Test**.....  
**Date (s) of performance of tests**..... 06 July. 2015 ~22 July. 2015  
**Date of Issue** ..... 22 July. 2015  
**Test Result** ..... **Pass**

Compiled by:

Approved by:



Lisa Huang/ Project Engineer

Richard Chen/ Manager

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
<b>1.1 PRODUCT DESCRIPTION .....</b>	<b>5</b>
<b>1.2 RELATED SUBMITTAL(S) / GRANT (S).....</b>	<b>7</b>
<b>1.3 TEST METHODOLOGY.....</b>	<b>7</b>
<b>1.4 TEST FACILITY.....</b>	<b>7</b>
<b>1.5 MEASUREMENT INSTRUMENTS.....</b>	<b>7</b>
<b>1.6 SPECIAL ACCESSORIES.....</b>	<b>7</b>
<b>1.7 EQUIPMENT MODIFICATIONS .....</b>	<b>7</b>
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
<b>2.1 EUT CONFIGURATION.....</b>	<b>9</b>
<b>2.2 EUT EXERCISE .....</b>	<b>9</b>
<b>2.3 GENERAL TECHNICAL REQUIREMENTS .....</b>	<b>9</b>
<b>2.4 CONFIGURATION OF EUT SYSTEM.....</b>	<b>10</b>
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>11</b>
<b>5. OUTPUT POWER.....</b>	<b>12</b>
<b>5.1 Conducted Output Power.....</b>	<b>12</b>
<b>5.2 Radiated Output Power.....</b>	<b>18</b>
<b>6. SPURIOUS EMISSION.....</b>	<b>23</b>
<b>6.1 CONDUCTED SPURIOUS EMISSION.....</b>	<b>23</b>
<b>7. FREQUENCY STABILITY .....</b>	<b>32</b>
<b>7.1 MEASUREMENT METHOD .....</b>	<b>32</b>

<b>7.2 PROVISIONS APPLICABLE.....</b>	<b>32</b>
<b>7.3 MEASUREMENT RESULT .....</b>	<b>33</b>
<b>8. BANDWIDTH.....</b>	<b>36</b>
<b>8.1APPLICABLE STANDARD .....</b>	<b>36</b>
<b>8.2 Test Procedure.....</b>	<b>36</b>
<b>8.3 MEASUREMENT RESULT .....</b>	<b>36</b>
<b>9. BAND EDGE .....</b>	<b>39</b>
<b>9.1 Applicable Standard .....</b>	<b>39</b>
<b>9.2 Test Procedure.....</b>	<b>39</b>
<b>9.3 MEASUREMENT RESULT .....</b>	<b>39</b>
<b>10. PEAK-TO-AVERAGE RATIO .....</b>	<b>40</b>
<b>DESCRIPTION OF THE PAR MEASUREMENT .....</b>	<b>40</b>
<b>10.1 MEASURING INSTRUMENTS .....</b>	<b>40</b>
<b>10.2 TEST PROCEDURES .....</b>	<b>40</b>
<b>10.3 TEST SETUP .....</b>	<b>40</b>
<b>10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO .....</b>	<b>41</b>
<b>TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION .....</b>	<b>42</b>
<b>TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) .....</b>	<b>58</b>
<b>EMISSION BANDWIDTH (-26DBC) .....</b>	<b>58</b>
<b>APPENDIX III.....</b>	<b>67</b>
<b>TEST PLOTS FOR BAND EDGES .....</b>	<b>67</b>
<b>APPENDIX IV .....</b>	<b>73</b>
<b>PHOTOGRAPHS OF TEST SETUP .....</b>	<b>73</b>

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	smartphone	
Model Name	RLTP4028-BLACK	
Serial Model	V41	
Model Difference	All the model are the same circuit and RF module,except the model name and colour.	
Hardware version:	MB0MBA4C1-1(WUZHU)	
Software version:	HQD_D133_271_0000_4.4.2_1.1_0721_T05	
Frequency Bands:	WCDMA : <input checked="" type="checkbox"/> HSDPA <input checked="" type="checkbox"/> HSUPA <input type="checkbox"/> Band 1:1920 – 1980 MHz <input checked="" type="checkbox"/> Band 2:1850 – 1910 MHz <input checked="" type="checkbox"/> Band 4:1710 – 1755 MHz <input checked="" type="checkbox"/> Band 5:824 – 849 MHz <input type="checkbox"/> Band 8:880 – 915 MHz	<input checked="" type="checkbox"/> GSM / PCS <input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> EDGE <input checked="" type="checkbox"/> 850MHz <input type="checkbox"/> 900MHz <input type="checkbox"/> EGSM 900MHz <input type="checkbox"/> PGSM 900MHz <input type="checkbox"/> 1800MHz <input checked="" type="checkbox"/> 1900MHz
Emission Designator	824.2-848.8MHz:249KGXW; 1850.2-1909.8MHz:248KGXW 826.4-846.6MHz:4M15F9W; 1852.4-1907.6MHz:4M16F9W 1712.6-1752.4 MHz:4M18F9W	
GPRS/EDGE Class	Multi-Class12; Only 4 timeslots are used for GPRS	
Modulation Technique:	GSM/GPRS: GMSK; EDGE:8PSK;RMC/AMR: QPSK; WCDMA:QPSK & 16QAM	
Supported mode:	2G:GSM Voice for GSM850,EGSM900,DCS1800 and PCS1900,GPRS Level: class 12; support EDGE; WCDMA:RMC/AMR 12.2Kbps Rel 99, HSDPA Release 7 Cat 16, HSUPA Release 6 Cat 6	
Antenna:	FPCB Antenna	
Antenna gain:	1.0 dBi	
Battery parameter:	DC 3.7V,1500mAh	
Adapter Input:	100-240V~,50/60 Hz	
Adapter Output:	5.0V $\overline{\text{---}}$ ,500mA	
SIM CARD	The Phone Two SIM Card sockets	
Extreme Vol. Limits:	DC3.6 V to 4.2 V (Nominal DC3.7V)	

Extreme Temp. Tolerance	-10°C to +50°C
** Note: The High Voltage 4.2V and Low Voltage 3.6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

**1.2 RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID: 2AFA3RLTP4028** filing to comply with the FCC Part 22H&24E&27.

**1.3 TEST METHODOLOGY**

The radiated emission testing was performed according to the procedures of TIA/EIA 603D and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

**1.4 TEST FACILITY**

The test site used to collect the radiated data is located at:  
Shenzhen ISOTek Standards Technical Services Co.,Ltd.  
13/F, HuaFengRui Building, XinHu Rd., XiXiang, Bao'an District, Shenzhen, China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009.

FCC Registration No.: **918037**

**1.5 MEASUREMENT INSTRUMENTS**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4446A	US44300451	2015.07.06	2016.07.05	1 year
2	EMI Test Receiver	R&S	ESCI	101165	2015.07.06	2016.07.05	1 year
3	Communication Tester	r&s	CMU200	A0304247	2015.05.04	2016.05.03	1 year
4	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2015.07.06	2016.07.05	1 year
5	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-439	2015.07.06	2016.07.05	1 year
6	Horn Antenna	Schwarzbeck	BBHA 9170	9170-182	2015.07.06	2016.07.05	1 year
7	Horn Antenna	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	SIGNAL GENERATOR	AGILENT	E4438C	878743	2015.05.04	2016.05.03	1 year
9	Amplifier	Schwarzbeck	BBV9743	9743-019	2015.07.06	2016.07.05	1 year
10	Test Cable Below 1GHz	ATM	R-01	3564	2015.07.06	2016.07.05	1 year
11	Test Cable Above 1GHz	ATM	R-02	3565	2015.07.06	2016.07.05	1 year
12	Horn Antenna	Sunol Sciences	DRH-118	A052604	2015.07.06	2016.07.05	1 year
13	Horn Antenna	Sunol Sciences	DRH-118	A052605	2015.07.06	2016.07.05	1 year

**1.6 SPECIAL ACCESSORIES**

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

**1.7 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.



## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b), §2.1046
		Radiated output power	§ 27.50(c.10); § 27.50(d.4)
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238,
		Radiated spurious emission	§ 2.1051, § 2.1053, § 27.53(h)
3	Frequency Stability		2.1055 /24.235/§ 27.5(h);§ 27.54
4	Occupied Bandwidth		2.1049 (h)(i) /§ 27.53(a.5)
5	Emission Bandwidth		22.917(b) / 24.238 (b)/§ 27.53(a.5)
6	Band Edge		22.917(b) / 24.238 (b)/ § 27.53(h)
7	Peak-to-Average Ratio		24.232(d)

## 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	smartphone	RLTP4028-BLACK	FCC ID: 2AFA3RLTP4028	EUT

*Note: All the accessories have been used during the test.  
the following “EUT” in setup diagram means EUT system.*

### 3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b), §2.1046 § 27.50(c.10); § 27.50(d.4)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238, § 2.1051, § 2.1053, § 27.53(h)	Pass
		Radiated Spurious Emission		
3	Frequency Stability		2.1055 /24.235/§ 27.5(h); § 27.54	Pass
4	Occupied Bandwidth		2.1049 (h)(i) /§ 27.53(a.5)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b)/§ 27.53(a.5)	Pass
6	Band Edge		22.917(b) / 24.238 (b)/ § 27.53(h)	Pass
7	Peak-to-Average Ratio		24.232(d)	Pass

### 4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

**Note:** GSM/GPRS/EDGE 850, GSM/GPRS/EDGE 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV modes have been tested during the test. the worst condition (GSM850, GSM1900, RMC 12.2k) be recorded in the test report if no other modes test data.

The phone has dual SIM Card sockets but can not transmit simultaneously. Pre-test dual SIM Card sockets, only the worst case SIM 1 Card sockets is recorded in the report.


## 5. OUTPUT POWER

### 5.1 Conducted Output Power

#### 5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EDGE 850, GSM/GPRS/EDGE 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V HSDPA band IV, HSUPA band IV) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 5.1.2 TEST SETUP

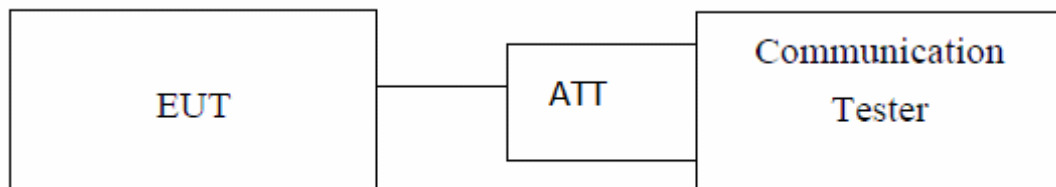

*Note: Measurement setup for testing on Antenna connector*

#### 5.1.3 MEASUREMENT RESULT

**GSM850:**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Burst-Average Output Power</b>
GSM850	824.2	32.85
	836.6	32.92
	848.8	32.89
GPRS850 (1 Slot)	824.2	32.91
	836.6	32.69
	848.8	32.65
GPRS850 (2 Slot)	824.2	32.12
	836.6	31.91
	848.8	31.84
GPRS850 (3 Slot)	824.2	30.44
	836.6	30.16
	848.8	30.04
GPRS850 (4 Slot)	824.2	29.34
	836.6	29.01
	848.8	28.79
EGPRS850 (1 Slot)	824.2	26.91
	836.6	26.89
	848.8	26.85
EGPRS850 (2 Slot)	824.2	26.56
	836.6	26.61
	848.8	26.58
EGPRS850 (3 Slot)	824.2	25.96
	836.6	25.88
	848.8	25.91
EGPRS850 (4 Slot)	824.2	25.44
	836.6	25.39
	848.8	25.37

**PCS1900:**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Burst-Average Output Power</b>
GSM1900	1850.2	29.69
	1880	29.45
	1909.8	29.35
GPRS1900 (1 Slot)	1850.2	29.68
	1880	29.49
	1909.8	29.48
GPRS1900 (2 Slot)	1850.2	28.95
	1880	28.82
	1909.8	28.75
GPRS1900 (3 Slot)	1850.2	27.24
	1880	27.22
	1909.8	27.28
GPRS1900 (4 Slot)	1850.2	26.16
	1880	26.16
	1909.8	26.38
EGPRS1900 (1 Slot)	1850.2	25.82
	1880	25.78
	1909.8	25.74
EGPRS1900 (2 Slot)	1850.2	25.45
	1880	25.51
	1909.8	25.47
EGPRS1900 (3 Slot)	1850.2	24.85
	1880	24.77
	1909.8	24.83
EGPRS1900 (4 Slot)	1850.2	24.33
	1880	24.28
	1909.8	24.26

**UMTS BAND II**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Burst-Average Output Power</b>
WCDMA 1900 RMC	1852.4	22.08
	1880.0	22.02
	1907.6	22.06
WCDMA 1900 AMR	1852.4	21.74
	1880.0	21.65
	1907.6	21.72
HSDPA Subtest 1	1852.4	21.99
	1880	21.89
	1907.6	21.62
HSDPA Subtest 2	1852.4	21.89
	1880	21.70
	1907.6	21.70
HSDPA Subtest 3	1852.4	21.56
	1880	21.67
	1907.6	21.59
HSDPA Subtest 4	1852.4	21.61
	1880	21.68
	1907.6	21.89
HSUPA Subtest 1	1852.4	21.65
	1880.0	21.68
	1907.6	21.97
HSUPA Subtest 2	1852.4	21.50
	1880.0	21.86
	1907.6	21.58
HSUPA Subtest 3	1852.4	21.87
	1880.0	21.77
	1907.6	21.67
HSUPA Subtest 4	1852.4	21.56
	1880.0	21.86
	1907.6	21.58
HSUPA Subtest 5	1852.4	21.46
	1880.0	21.58
	1907.6	21.79

**UMTS BAND IV**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Burst-Average Output Power</b>
WCDMA 1700 RMC	1712.6	22.02
	1732.6	22.02
	1752.4	22.02
WCDMA 1700 AMR	1712.6	21.53
	1732.6	21.35
	1752.4	21.63
HSDPA Subtest 1	1712.6	21.26
	1732.6	21.53
	1752.4	21.32
HSDPA Subtest 2	1712.6	21.22
	1732.6	21.76
	1752.4	21.62
HSDPA Subtest 3	1712.6	21.42
	1732.6	21.34
	1752.4	21.13
HSDPA Subtest 4	1712.6	21.26
	1732.6	21.53
	1752.4	21.32
HSUPA Subtest 1	1712.6	21.22
	1732.6	21.76
	1752.4	21.62
HSUPA Subtest 2	1712.6	21.42
	1732.6	21.34
	1752.4	21.13
HSUPA Subtest 3	1712.6	21.26
	1732.6	21.53
	1752.4	21.32
HSUPA Subtest 4	1712.6	21.22
	1732.6	21.76
	1752.4	21.62
HSUPA Subtest 5	1712.6	21.42
	1732.6	21.34
	1752.4	21.13



**UMTS BAND V**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Burst-Average Output Power</b>
WCDMA 850 RMC	826.4	22.97
	835.0	22.74
	846.6	22.95
WCDMA 850 AMR	826.4	22.71
	835.0	22.73
	846.6	22.63
HSDPA Subtest 1	826.4	21.79
	835.0	21.81
	846.6	22.11
HSDPA Subtest 2	826.4	21.81
	835.0	21.97
	846.6	21.86
HSDPA Subtest 3	826.4	21.93
	835.0	21.99
	846.6	21.75
HSDPA Subtest 4	826.4	21.8
	835.0	22.03
	846.6	22.09
HSUPA Subtest 1	826.4	21.93
	835.0	21.91
	846.6	21.49
HSUPA Subtest 2	826.4	21.84
	835.0	22.06
	846.6	20.81
HSUPA Subtest 3	826.4	21.73
	835.0	22.11
	846.6	21.94
HSUPA Subtest 4	826.4	22.05
	835.0	21.81
	846.6	22.17
HSUPA Subtest 5	826.4	22.13
	835.0	22.25
	846.6	21.94

## 5.2 Radiated Output Power

### 5.2.1 MEASUREMENT METHOD


1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Sample Calculation:

EUT Field Strength (dBm) = Reading (Signal generator) + Antenna Gain (substitution antenna) - Cable loss (From Signal Generator to substitution antenna)


#### Test setup

Below 1GHz

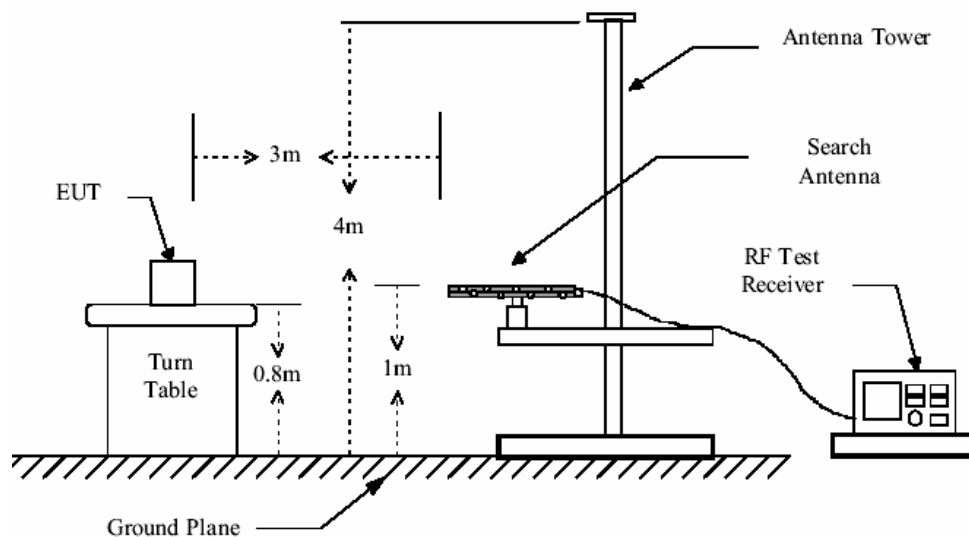

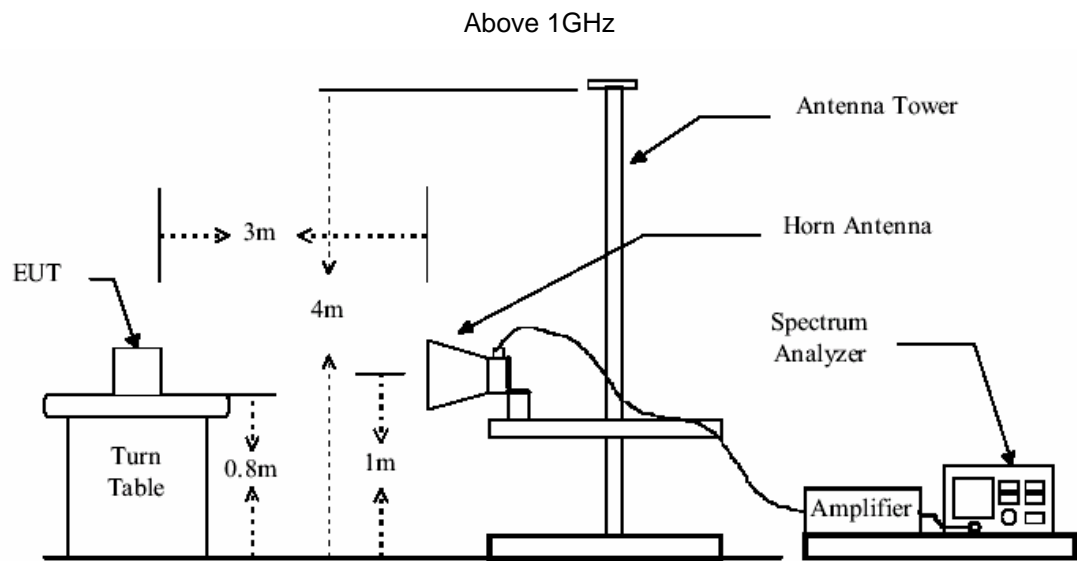

**Substituted method:**

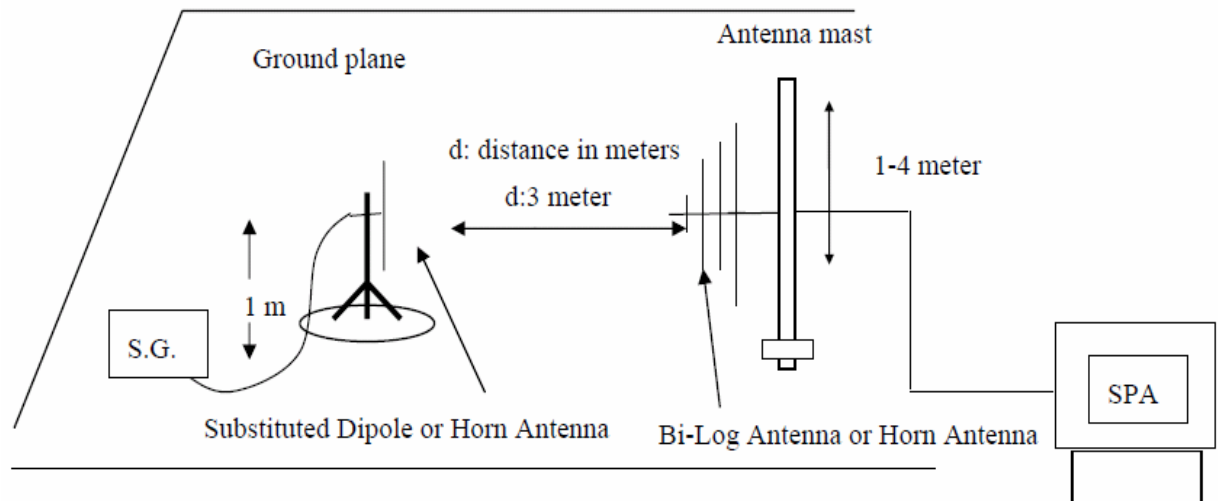

**Test Result: Pass**

### 5.2.2 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	29.98	Horizontal	Pass
	824.2	28.86	Vertical	Pass
	836.6	<b>30.75</b>	Horizontal	Pass
	836.6	27.93	Vertical	Pass
	848.8	30.73	Horizontal	Pass
	848.8	29.98	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	28.47	Horizontal	Pass
	824.2	29.42	Vertical	Pass
	836.6	29.59	Horizontal	Pass
	836.6	29.03	Vertical	Pass
	848.8	29.56	Horizontal	Pass
	848.8	28.69	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EDGE850	824.2	24.12	Horizontal	Pass
	824.2	24.22	Vertical	Pass
	836.6	24.30	Horizontal	Pass
	836.6	24.36	Vertical	Pass
	848.8	24.87	Horizontal	Pass
	848.8	24.31	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS 1900	1850.2	28.63	Horizontal	Pass
	1850.2	27.47	Vertical	Pass
	1880.0	<b>29.52</b>	Horizontal	Pass
	1880.0	27.32	Vertical	Pass
	1909.8	29.42	Horizontal	Pass
	1909.8	28.29	Vertical	Pass

Radiated Power (E.I.R.P) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	27.38	Horizontal	Pass
	1850.2	27.78	Vertical	Pass
	1880.0	27.77	Horizontal	Pass
	1880.0	27.36	Vertical	Pass
	1909.8	27.54	Horizontal	Pass
	1909.8	27.45	Vertical	Pass

Radiated Power (E.I.R.P) for EDGE 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EDGE 1900	1850.2	23.50	Horizontal	Pass
	1850.2	23.10	Vertical	Pass
	1880.0	23.90	Horizontal	Pass
	1880.0	23.96	Vertical	Pass
	1909.8	23.71	Horizontal	Pass
	1909.8	23.99	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1852.4	<b>22.89</b>	Horizontal	Pass
	1852.4	22.47	Vertical	Pass
	1880.0	21.82	Horizontal	Pass
	1880.0	22.87	Vertical	Pass
	1907.6	22.67	Horizontal	Pass
	1907.6	22.35	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band IV				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1712.6	22.56	Horizontal	Pass
	1732.6	22.63	Vertical	Pass
	1752.4	21.68	Horizontal	Pass
	1712.6	22.34	Vertical	Pass
	1732.6	22.47	Horizontal	Pass
	1752.4	<b>22.73</b>	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.4	21.27	Horizontal	Pass
	826.4	22.37	Vertical	Pass
	836.6	<b>22.77</b>	Horizontal	Pass
	836.6	21.46	Vertical	Pass
	846.6	21.11	Horizontal	Pass
	846.6	22.68	Vertical	Pass

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band II and band IV and band V.

## 6. SPURIOUS EMISSION

### 6.1 CONDUCTED SPURIOUS EMISSION

#### 6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6

Typical Channels for testing of UMTS band IV	
Channel	Frequency (MHz)
1313	1712.6
1413	1732.6
1512	1752.4

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

#### 6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### 6.1.3 MEASUREMENT RESULT

**PLEASE REFER TO :** APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

**Note:** 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.  
2. As no emission found in standby or receive mode, no recording in this report.




## 6.2 Radiated Spurious Emission

### 6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603D-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band II/IV/V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.Only shown the worst data.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$  The SA is calibrated using following setup.

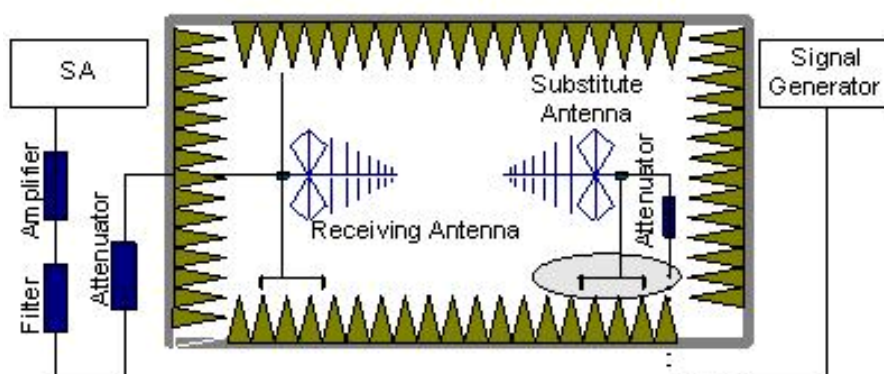

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

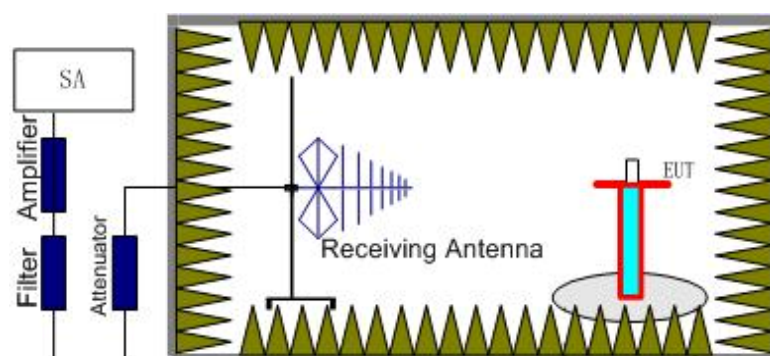

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band IV(1712.6MHz, 1732.6MHz, 1752.4MHz), UMTS band V(826.4MHz, 835.0MHz, 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$

### 6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

**6.2.3 MEASUREMENT RESULT**

GSM 850:

<b>Test Results for Channel 128/824.2 MHz</b>					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1648.4	-32.26	7.8	-24.46	-13	Vertical
1648.4	-32.79	7.8	-24.99	-13	Horizontal
2472.6	-36.29	11	-25.29	-13	Vertical
2472.6	-32.5	11	-21.5	-13	Horizontal
3296.8	-33.23	12.3	-20.93	-13	Horizontal
3296.8	-34.6	12.3	-22.3	-13	Vertical
<b>Test Results for Channel 190/836.6 MHz</b>					
1673.2	-33.4	8	-25.4	-13	Vertical
1673.2	-34.82	8	-26.82	-13	Horizontal
2509.8	-32.71	11.2	-21.51	-13	Vertical
2509.8	-32.04	11.2	-20.84	-13	Horizontal
3346.4	-35.8	12.6	-23.2	-13	Horizontal
3346.4	-33.51	12.6	-20.91	-13	Vertical
<b>Test Results for Channel 251/848.8 MHz</b>					
1697.6	-30.14	8.1	-22.04	-13	Vertical
1697.6	-29.27	8.1	-21.17	-13	Horizontal
2546.4	-31.22	11.69	-19.53	-13	Vertical
2546.4	-31.56	11.69	-19.87	-13	Horizontal
3395.2	-32.47	12.92	-19.55	-13	Horizontal
3395.2	-34.37	12.92	-21.45	-13	Vertical

PCS 1900:

Test Results for Channel 512/1850.2MHz					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3700.4	-37.08	13.42	-23.66	-13	Horizontal
3700.4	-36.01	13.42	-22.59	-13	Vertical
5550.6	-37.86	17.12	-20.74	-13	Vertical
5550.6	-36.41	17.12	-19.29	-13	Horizontal
7400.8	-38.75	19.26	-19.49	-13	Horizontal
7400.8	-41.2	19.26	-21.94	-13	Vertical
Test Results for Channel 661/1880.0MHz					
3760	-36.08	13.76	-22.32	-13	Horizontal
3760	-35.27	13.76	-21.51	-13	Vertical
5640	-40.06	17.56	-22.5	-13	Vertical
5640	-42.08	17.56	-24.52	-13	Horizontal
7520	-41.82	19.6	-22.22	-13	Horizontal
7520	-42.37	19.6	-22.77	-13	Vertical
Test Results for Channel 810/1909.8MHz					
3819.6	-37.91	13.87	-24.04	-13	Horizontal
3819.6	-34.88	13.87	-21.01	-13	Vertical
5729.4	-38.26	17.66	-20.6	-13	Vertical
5729.4	-39.43	17.66	-21.77	-13	Horizontal
7639.2	-39.56	19.75	-19.81	-13	Horizontal
7639.2	-42.2	19.75	-22.45	-13	Vertical

UMTS band II:

Test Results for Channel 9262/1852.4MHz					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3700.8	-32.28	13.42	-18.86	-13	Horizontal
3700.8	-33.49	13.42	-20.07	-13	Vertical
5551.2	-37.28	17.12	-20.16	-13	Vertical
5551.2	-36.97	17.12	-19.85	-13	Horizontal
Test Results for Channel 9400/1880MHz					
3760	-33.9	13.76	-20.14	-13	Horizontal
3760	-33.52	13.76	-19.76	-13	Vertical
5640	-40.02	17.56	-22.46	-13	Vertical
5640	-39.2	17.56	-21.64	-13	Horizontal
Test Results for Channel 9538/1907.6MHz					
3819.2	-34.02	13.87	-20.15	-13	Horizontal
3819.2	-35.91	13.87	-22.04	-13	Vertical
5728.8	-39.02	17.66	-21.36	-13	Vertical
5728.8	-38.02	17.66	-20.36	-13	Horizontal

UMTS band IV:

Test Results for Channel 1313/ 1712.6MHz					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3425.2	-32.54	13.02	-19.52	-13	Horizontal
3425.2	-33.90	13.02	-20.88	-13	Vertical
5137.8	-37.46	16.88	-20.58	-13	Vertical
5137.8	-37.19	16.88	-20.31	-13	Horizontal
Test Results for Channel 1413/ 1732.6MHz					
3465.2	-34.16	13.16	-21.00	-13	Horizontal
3465.2	-33.62	13.16	-20.46	-13	Vertical
5197.8	-40.82	17.02	-23.80	-13	Vertical
5197.8	-39.85	17.02	-22.83	-13	Horizontal
Test Results for Channel 1512/ 1752.4MHz					
3504.8	-34.60	13.08	-21.52	-13	Horizontal
3504.8	-36.62	13.07	-23.55	-13	Vertical
5257.2	-39.57	17.15	-22.42	-13	Vertical
5257.2	-38.74	17.15	-21.59	-13	Horizontal

UMTS band V:

Test Results for Channel 4233/846.6MHz					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1673.2	-31.65	8.1	-23.55	-13	Vertical
1673.2	-29.2	8.1	-21.1	-13	Horizontal
2509.8	-37.12	11.69	-25.43	-13	Horizontal
2509.8	-37.33	11.69	-25.64	-13	Vertical
3346.4	-36.21	12.92	-23.29	-13	Horizontal
3346.4	-42.23	12.92	-29.31	-13	Vertical
Test Results for Channel 4182/836.4MHz					
1672.8	-33.24	8	-25.24	-13	Vertical
1672.8	-28.94	8	-20.94	-13	Horizontal
2509.2	-31.24	11.2	-20.04	-13	Horizontal
2509.2	-32.13	11.2	-20.93	-13	Vertical
3345.6	-35.94	12.6	-23.34	-13	Horizontal
3345.6	-32.89	12.6	-20.29	-13	Vertical
Test Results for Channel 4132/826.4MHz					
1652.8	-30.4	8	-22.4	-13	Vertical
1652.8	-30.6	8	-22.6	-13	Horizontal
2479.2	-31.24	11.2	-20.04	-13	Horizontal
2479.2	-31.23	11.2	-20.03	-13	Vertical
3305.6	-32.55	12.6	-19.95	-13	Horizontal
3305.6	-39.12	12.6	-26.52	-13	Vertical

**Note:** Below 30MHZ no Spurious found.

## 7. FREQUENCY STABILITY

### 7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V and channel 1413 for UMTS band IV measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 7.2 PROVISIONS APPLICABLE

#### 7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.



### 7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

### 7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	19	0.023
3.7	20	0.024
4.2	21	0.025

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
Voltage : DC3.7V		
-10	45	0.054
0	48	0.057
10	32	0.038
20	26	0.031
30	28	0.033
40	37	0.044
50	40	0.048

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	27	0.014
3.7	35	0.019
4.2	31	0.016

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
Nominal Voltage : DC3.7V		
-10	39	0.021
0	25	0.013
10	24	0.013
20	32	0.017
30	36	0.019
40	44	0.023
50	48	0.026

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	30	0.016
3.7	28	0.015
4.2	32	0.017

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
Nominal Voltage : DC3.7V		
-10	43	0.023
0	35	0.019
10	28	0.015
20	25	0.013
30	30	0.016
40	37	0.020
50	42	0.022

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band IV		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	25	0.014
3.7	33	0.019
4.2	37	0.021

Frequency Error Against Temperature for UMTS band IV		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
Nominal Voltage : DC3.7V		
-10	46	0.027
0	37	0.021
10	32	0.018
20	27	0.016
30	47	0.027
40	52	0.030
50	36	0.021

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	24	0.029
3.7	22	0.026
4.2	25	0.030

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
Nominal Voltage : DC3.7V		
-10	36	0.043
0	32	0.038
10	28	0.033
20	35	0.042
30	28	0.033
40	36	0.043
50	42	0.050

Note: The EUT doesn't work below -10°C


## 8. BANDWIDTH

### 8.1 APPLICABLE STANDARD

FCC §2.1049, §22.917, §22.905 and §24.238 and §27.53(a.5)

### 8.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.
3. Details according with KDB 971168 section 4.1 & 4.2.

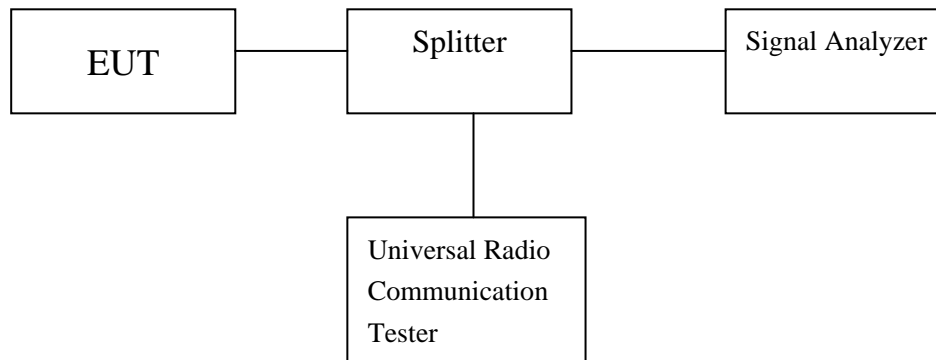

### Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

### 8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	824.2	248.9033
Middle Channel	836.6	248.4883
High Channel	848.8	244.9317

Occupied Bandwidth (99%) for PCS 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
Low Channel	1850.2	242.7375
Middle Channel	1880.0	248.4596
High Channel	1909.8	248.3604

**Occupied Bandwidth (99%) for UMTS band II**

Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)
Low Channel	1852.4	4.1610
Middle Channel	1880.0	4.1551
High Channel	1907.6	4.1513

**Occupied Bandwidth (99%) for UMTS band IV**

Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)
Low Channel	1712.6	4.1808
Middle Channel	1732.6	4.1680
High Channel	1752.4	4.1585

**Occupied Bandwidth (99%) for UMTS band V**

Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)
Low Channel	826.4	4.1423
Middle Channel	836.4	4.1354
High Channel	846.6	4.1527

**Emission Bandwidth (-26dBc) for GSM 850 band**

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	319.160
Middle Channel	836.6	323.934
High Channel	848.8	314.065

**Emission Bandwidth (-26dBc) for PCS 1900 band**

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	319.950
Middle Channel	1880.0	319.707
High Channel	1909.8	317.344

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	1852.4	4.686
Middle Channel	1880.0	4.668
High Channel	1907.6	4.716

Emission Bandwidth (-26dBc) for UMTS band IV		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	1712.6	4.795
Middle Channel	1732.6	4.687
High Channel	1752.4	4.699

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.619
Middle Channel	836.4	4.623
High Channel	846.6	4.639

## 9. BAND EDGE

### 9.1 Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53(h), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 9.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. Details according with KDB 971168 section 6.0.

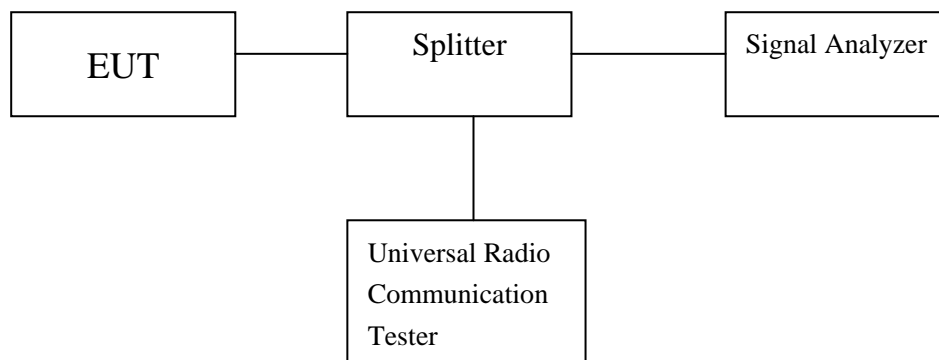

### Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

### 9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges

## 10. Peak-to-Average Ratio

### DESCRIPTION OF THE PAR MEASUREMENT

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


#### 10.1 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

#### 10.2 TEST PROCEDURES

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
  - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
  - b. Set EUT in maximum power output, and triggered the burst signal.
  - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

#### 10.3 TEST SETUP

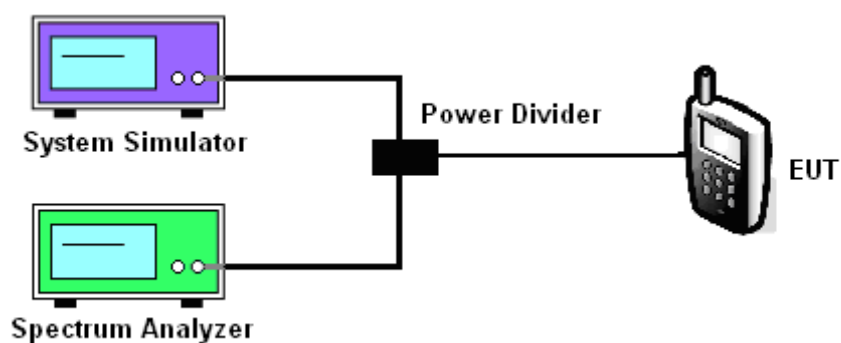




## 10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO

Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.07	-0.03	0.02	0.05	0.00	-0.01
Cellular Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	-0.357	-0.299	-0.182	-0.373	-0.481	-0.116
Cellular Band						
Modes	WCDMA Band IV (RMC 12.2Kbps)			WCDMA Band --		
Channel	1313 (Low)	1413 (Mid)	1512 (High)	(Low)	(Mid)	(High)
Frequency(MHz)	1712.6	1732.6	1752.4	--	--	--
Peak-to-Average Ratio (dB)	0.542	0.245	0.464	--	--	--


# **APPENDIX I**

## **TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION**


CONDUCTED EMISSION IN GSM 850 BAND  
Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

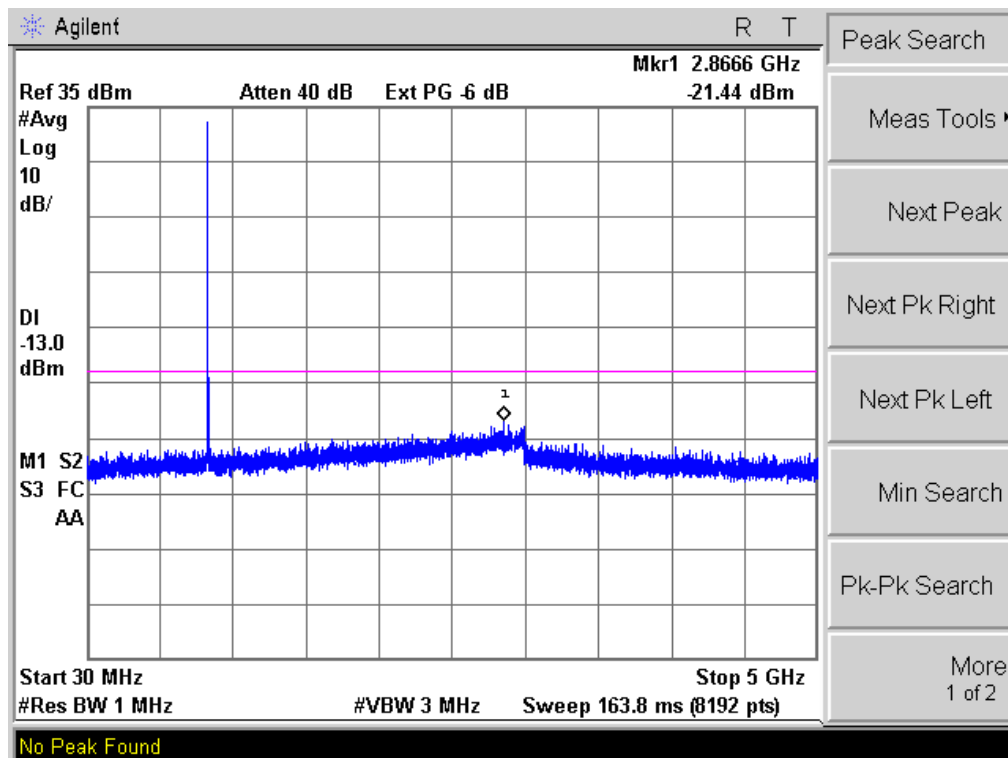


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

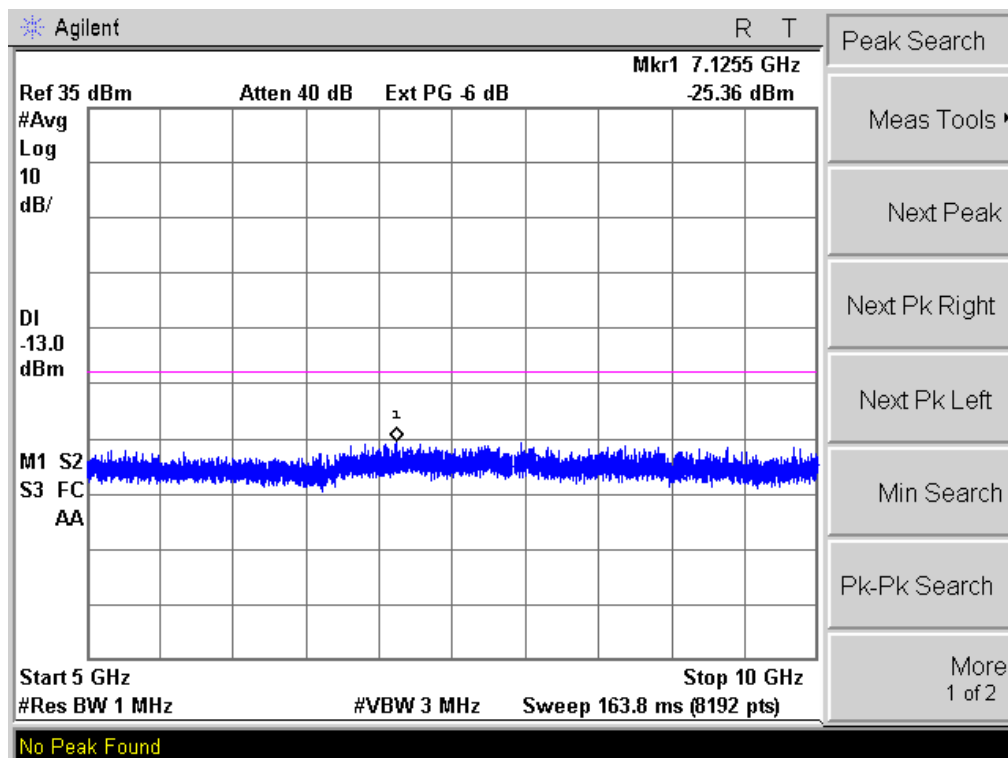


## Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

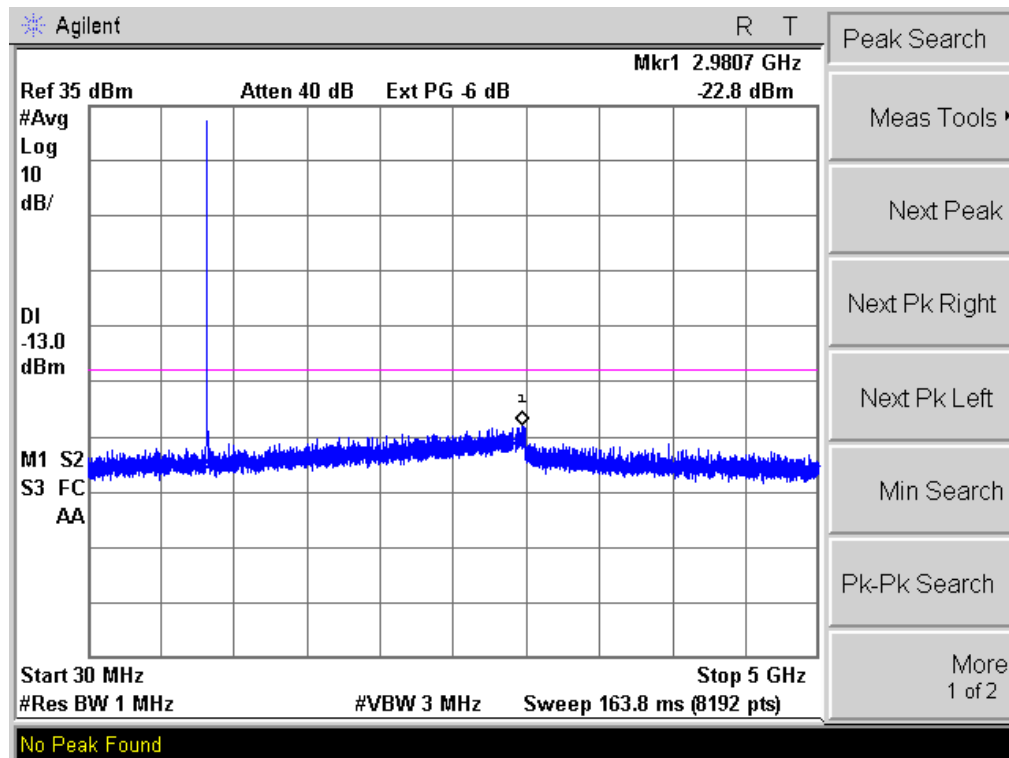


## Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

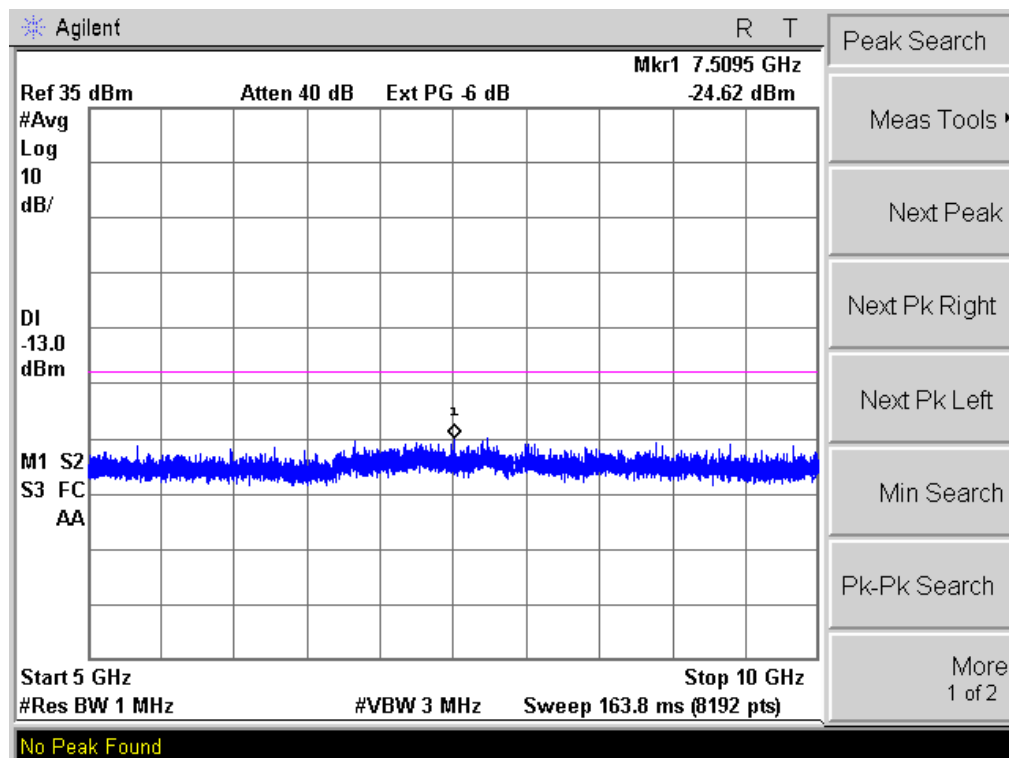


## Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

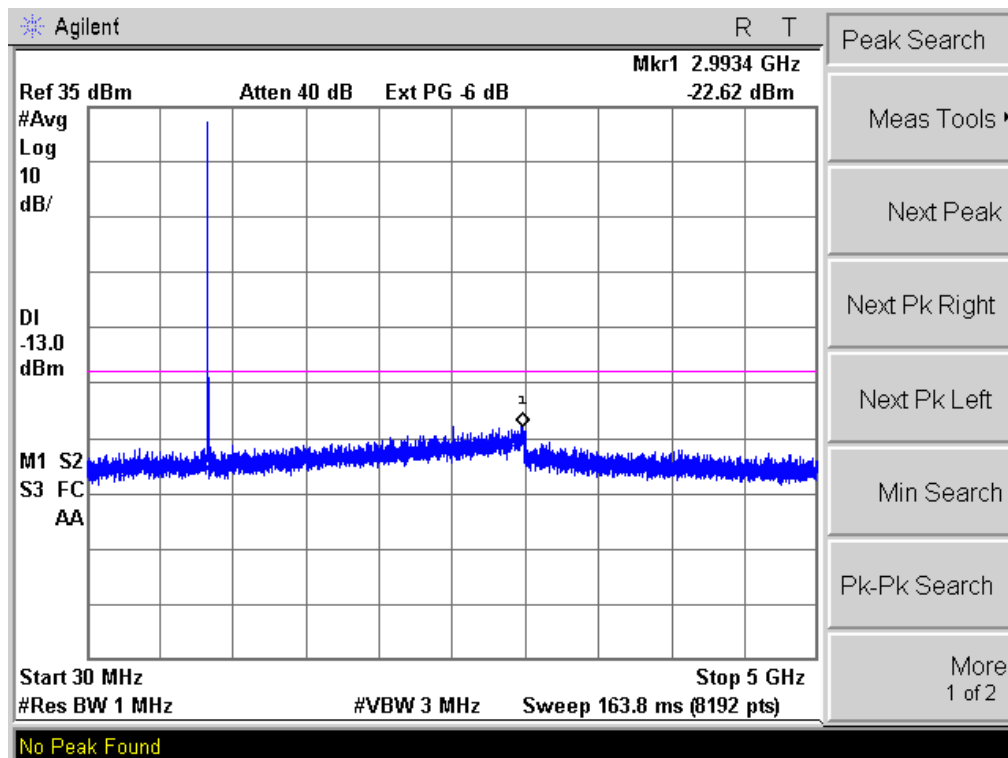


## Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

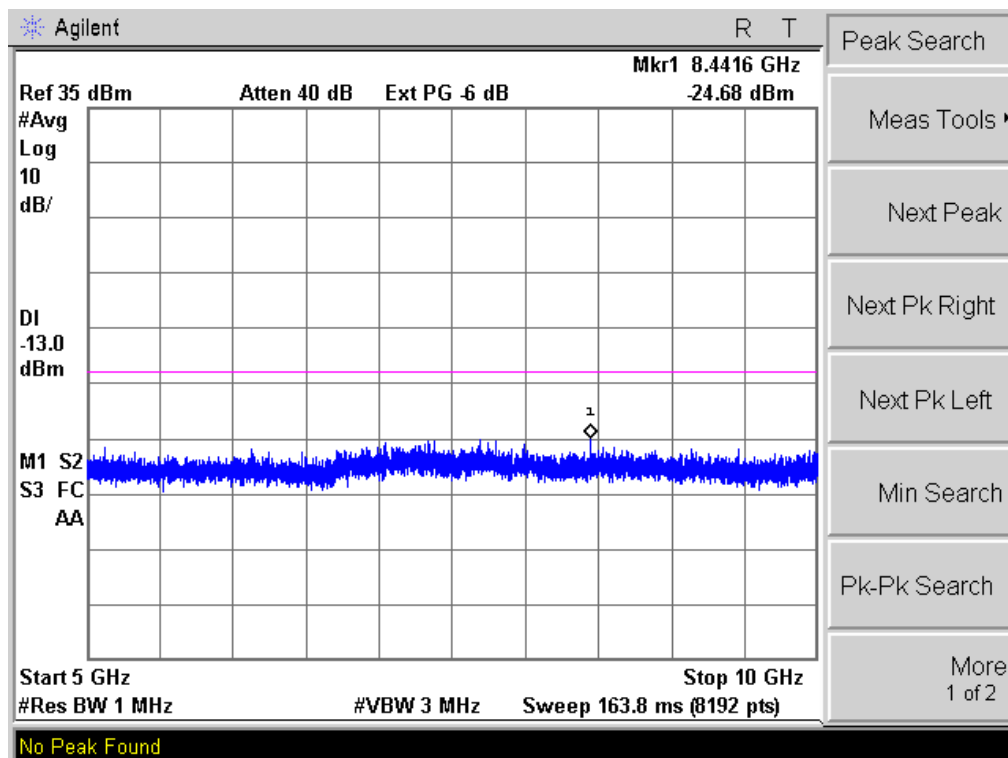


CONDUCTED EMISSION IN PCS1900 BAND  
Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

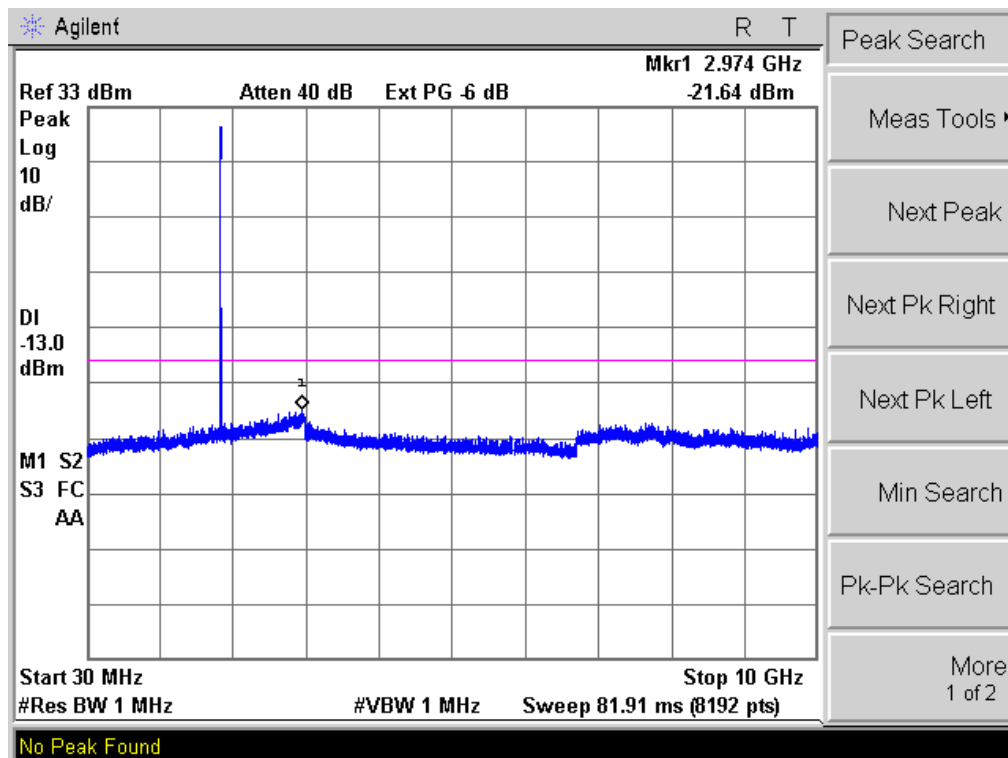


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

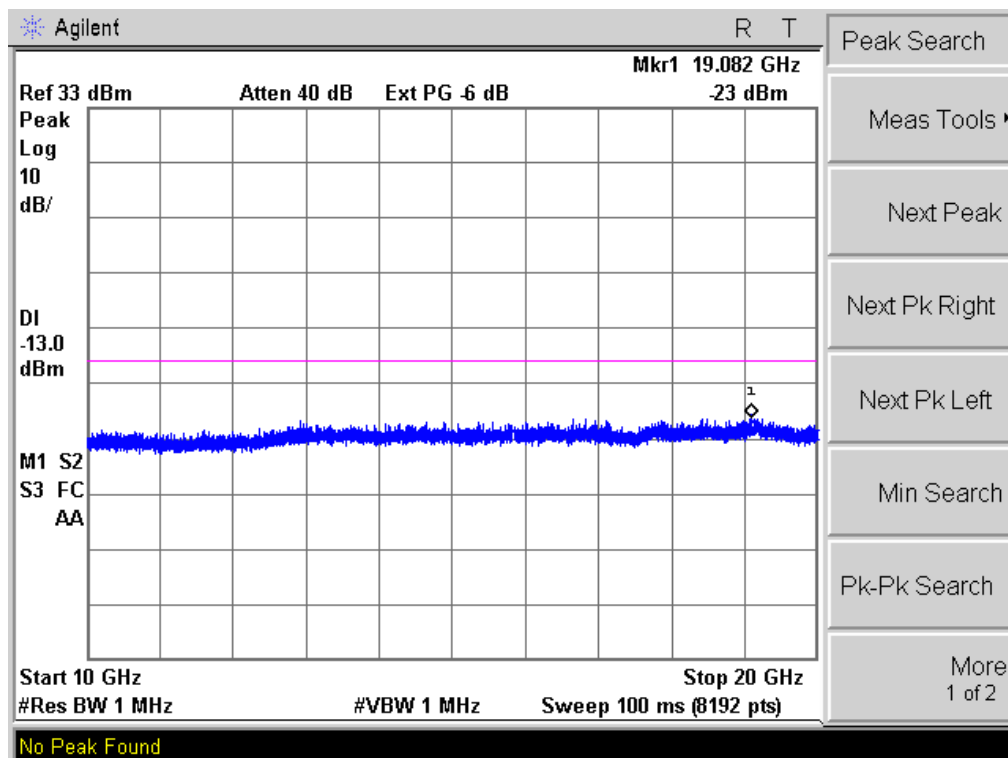


## Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

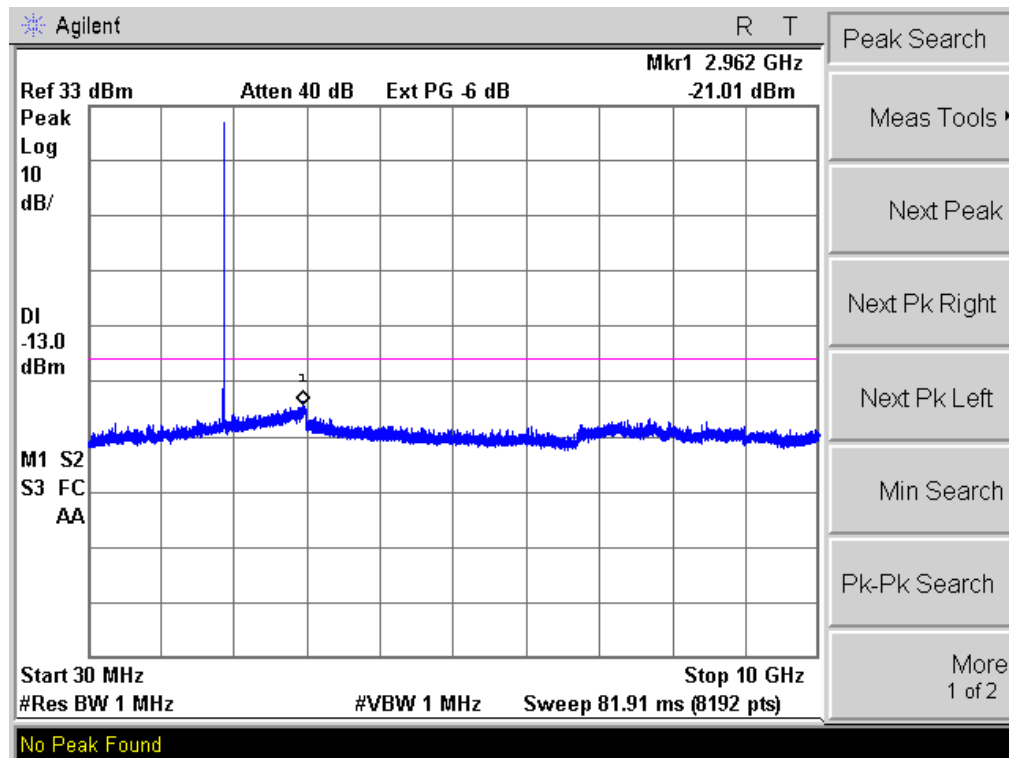


## Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

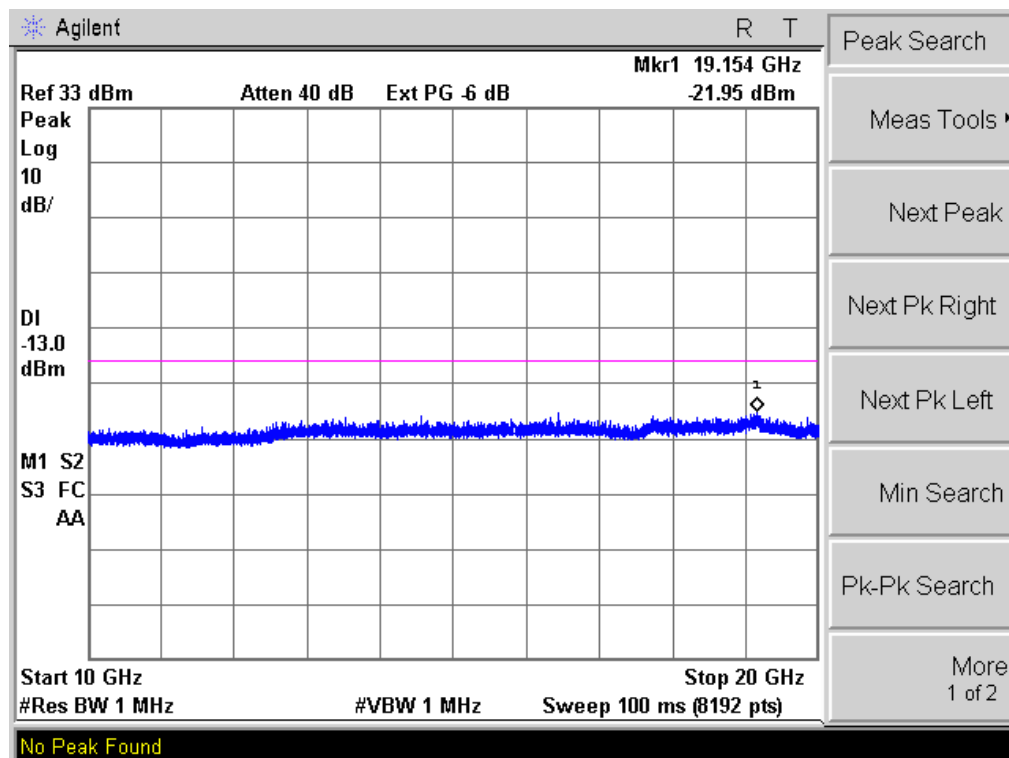

## Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

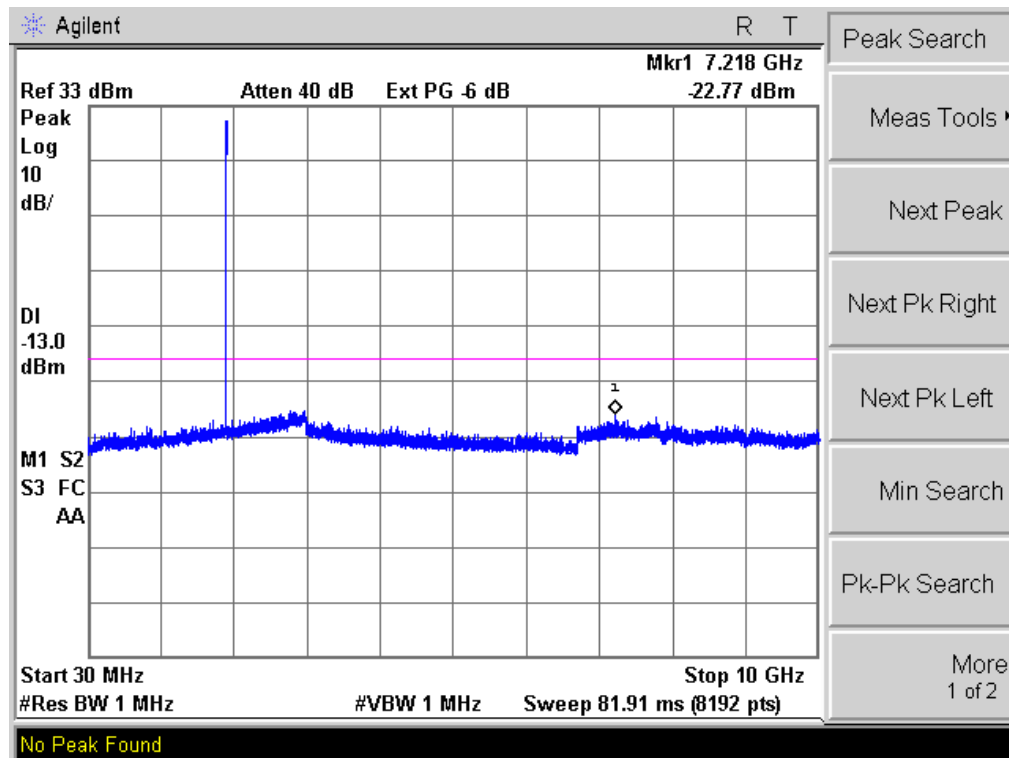


## Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

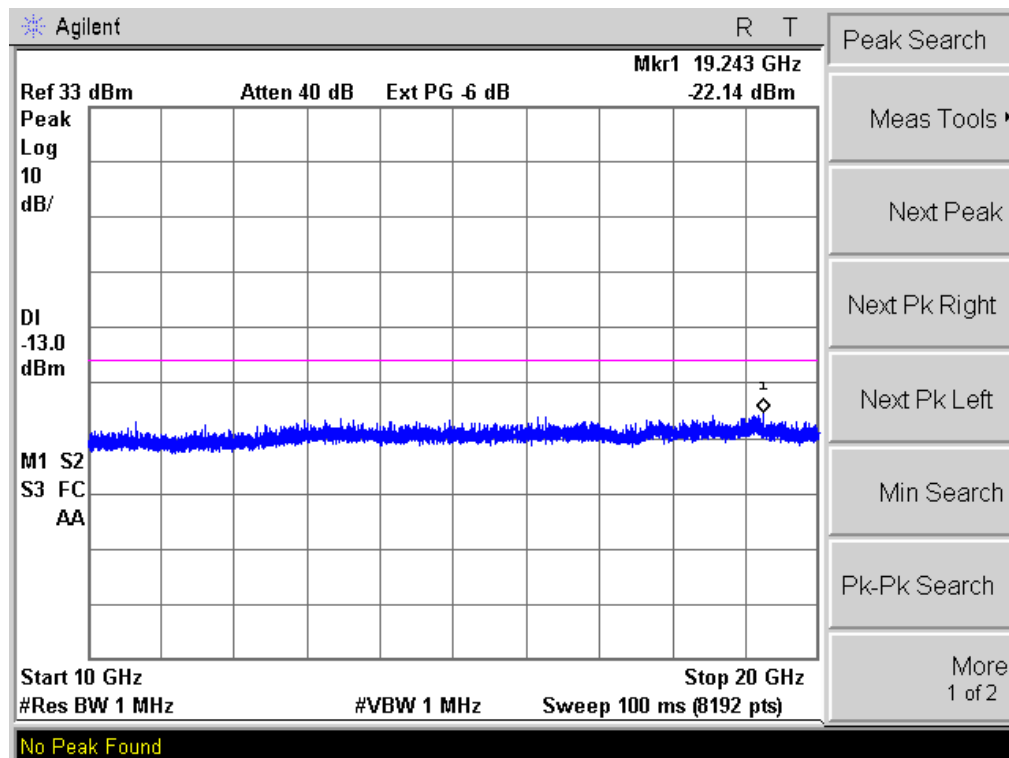





CONDUCTED EMISSION IN UMTS band II  
Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz

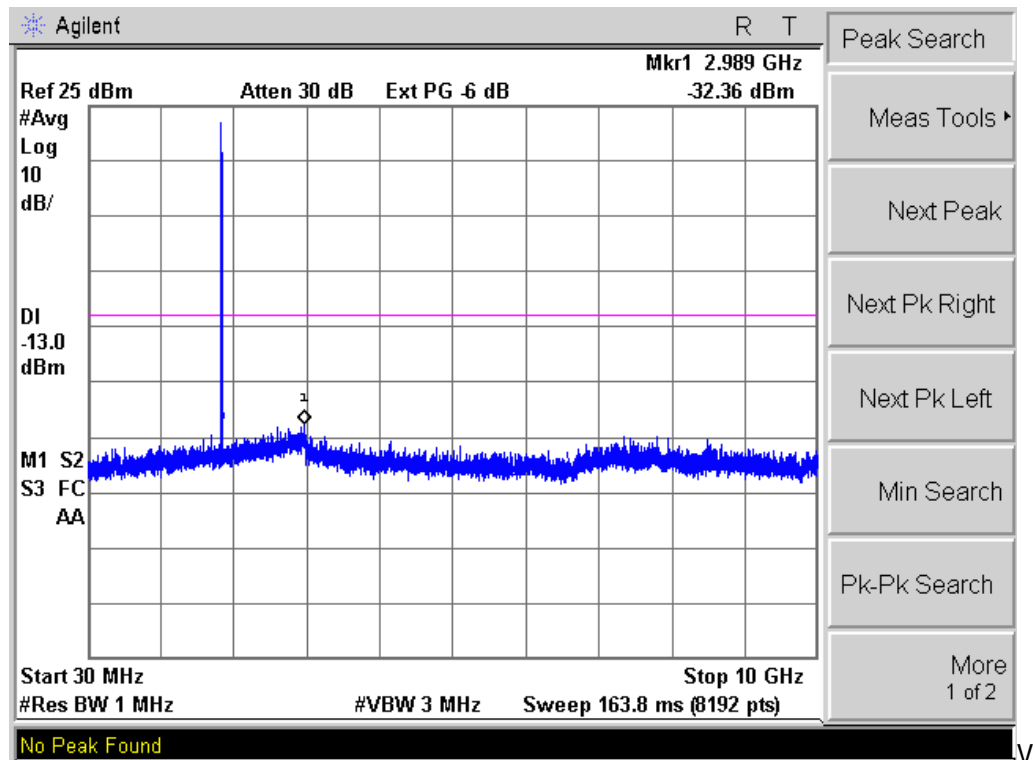


Conducted Emission Transmitting Mode CH 9262 10GHz – 20GHz

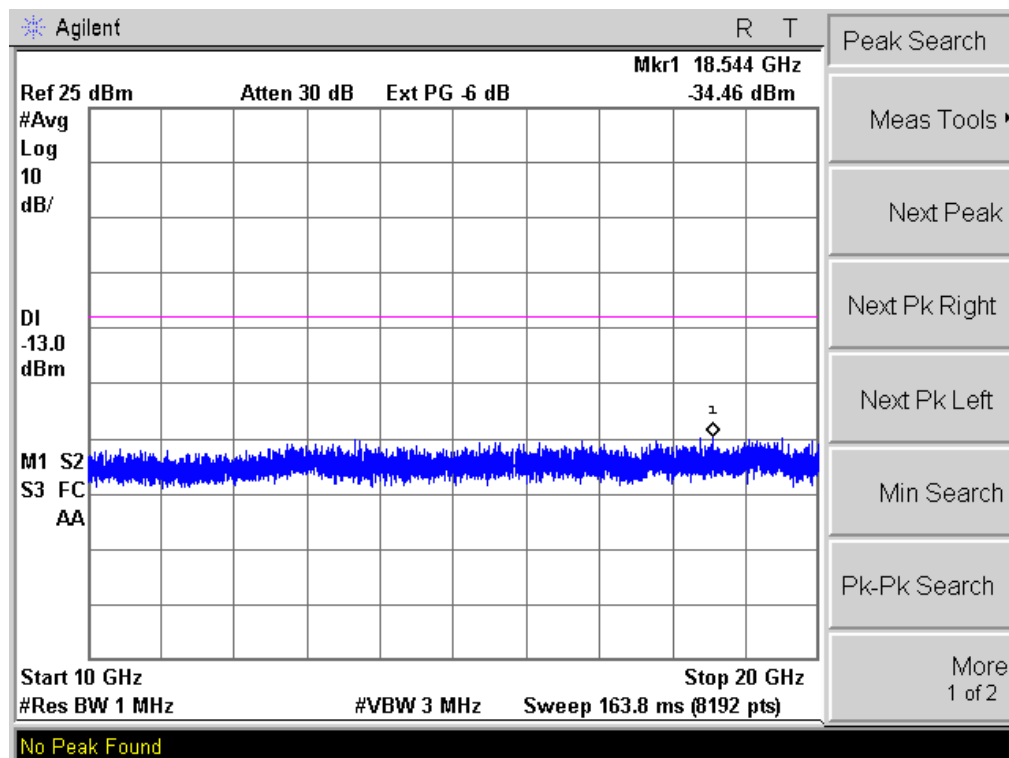


## Conducted Emission Transmitting Mode CH 9400 30MHz – 10GHz

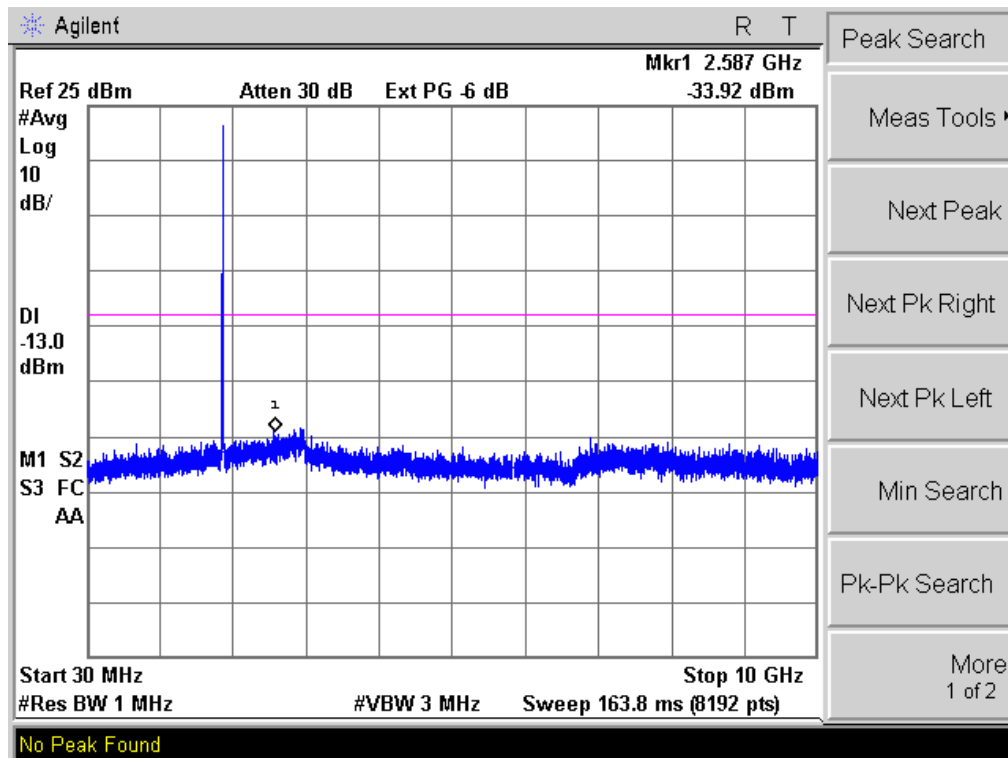


## Conducted Emission Transmitting Mode CH 9400 10GHz – 20GHz

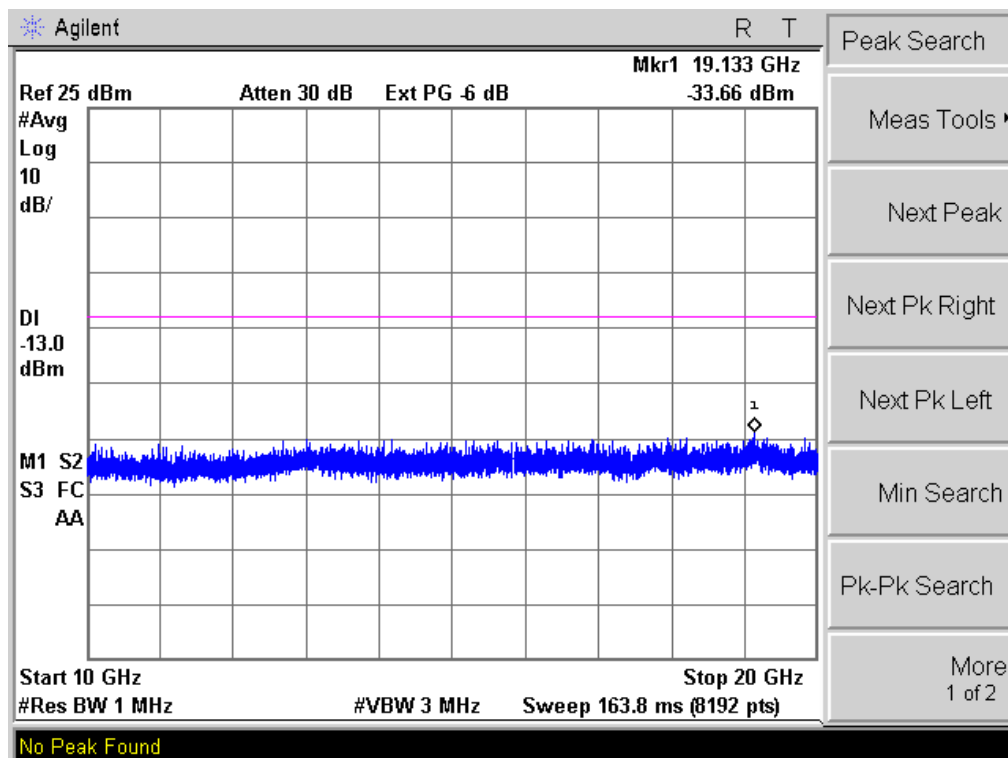


## Conducted Emission Transmitting Mode CH 9538 30MHz – 10GHz

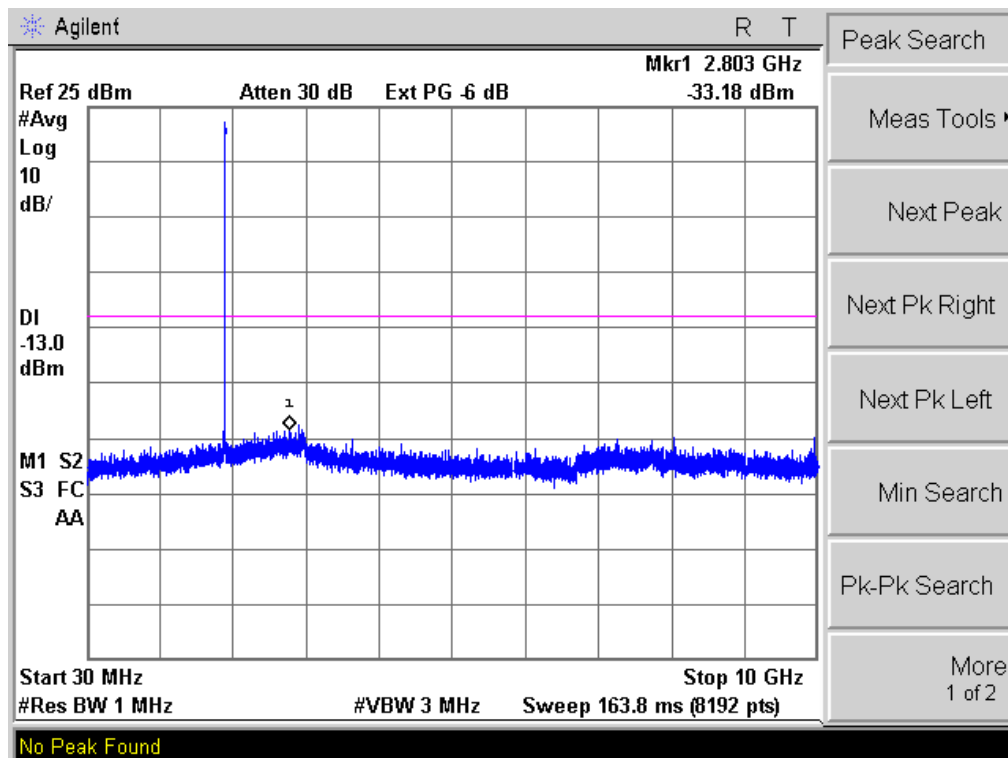


## Conducted Emission Transmitting Mode CH 9538 10GHz – 20GHz

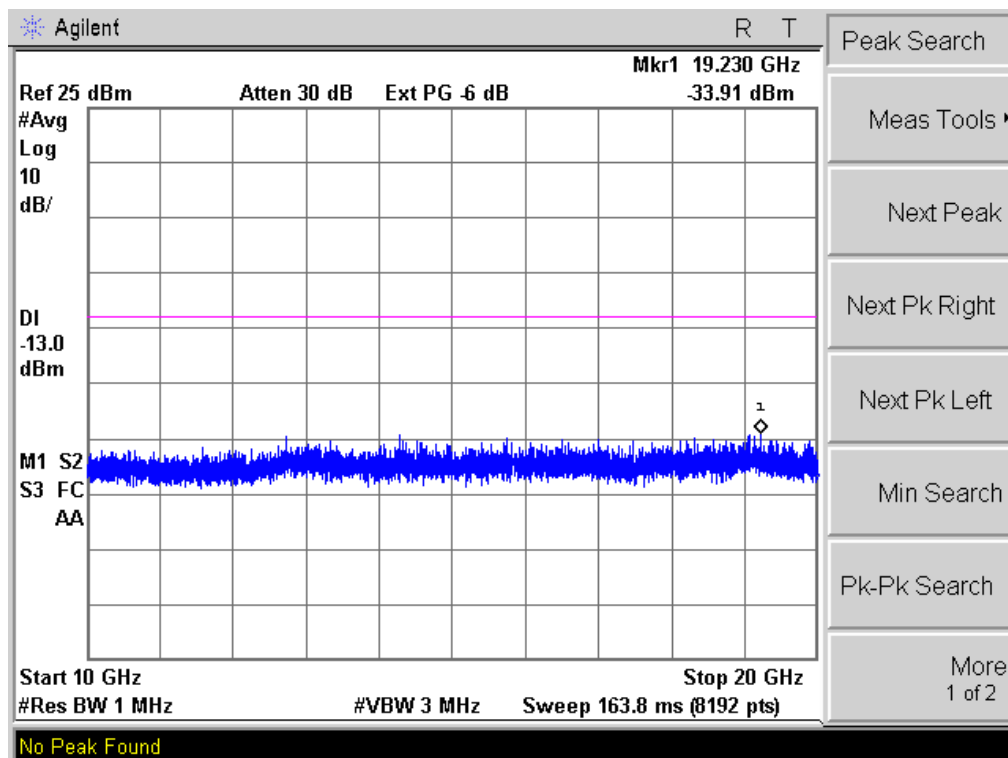


CONDUCTED EMISSION IN UMTS band IV  
Conducted Emission Transmitting Mode CH 1313 30MHz – 10GHz

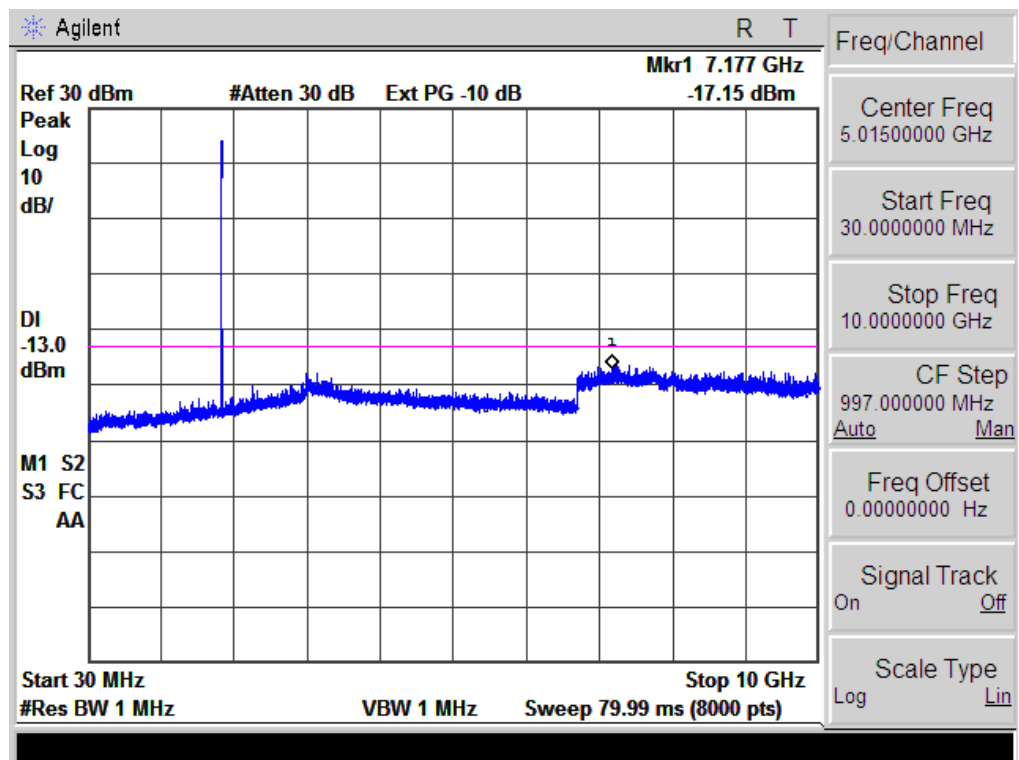


Conducted Emission Transmitting Mode CH 1313 10GHz – 20GHz

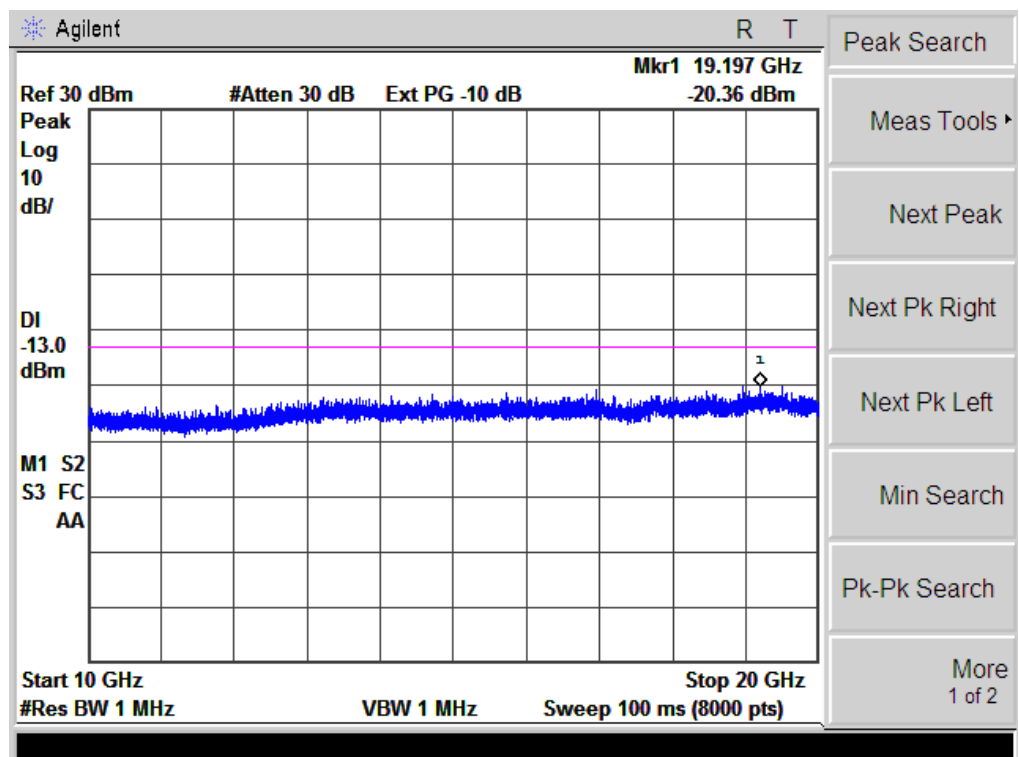


## Conducted Emission Transmitting Mode CH 1413 30MHz – 10GHz

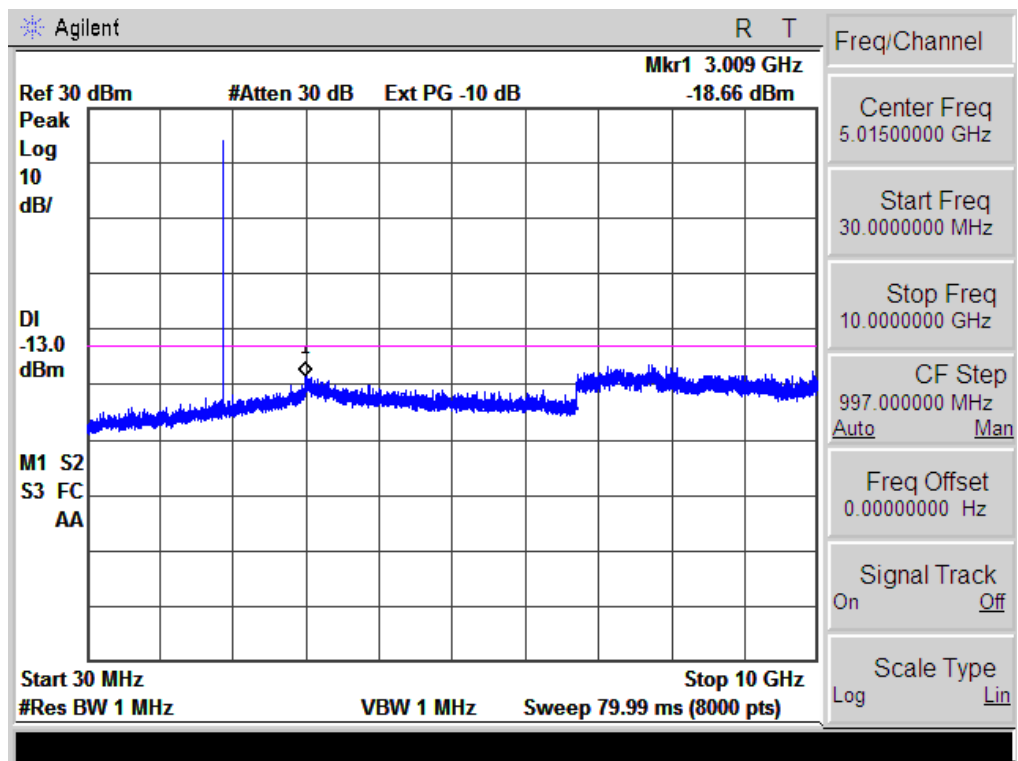


## Conducted Emission Transmitting Mode CH 1413 10GHz – 20GHz

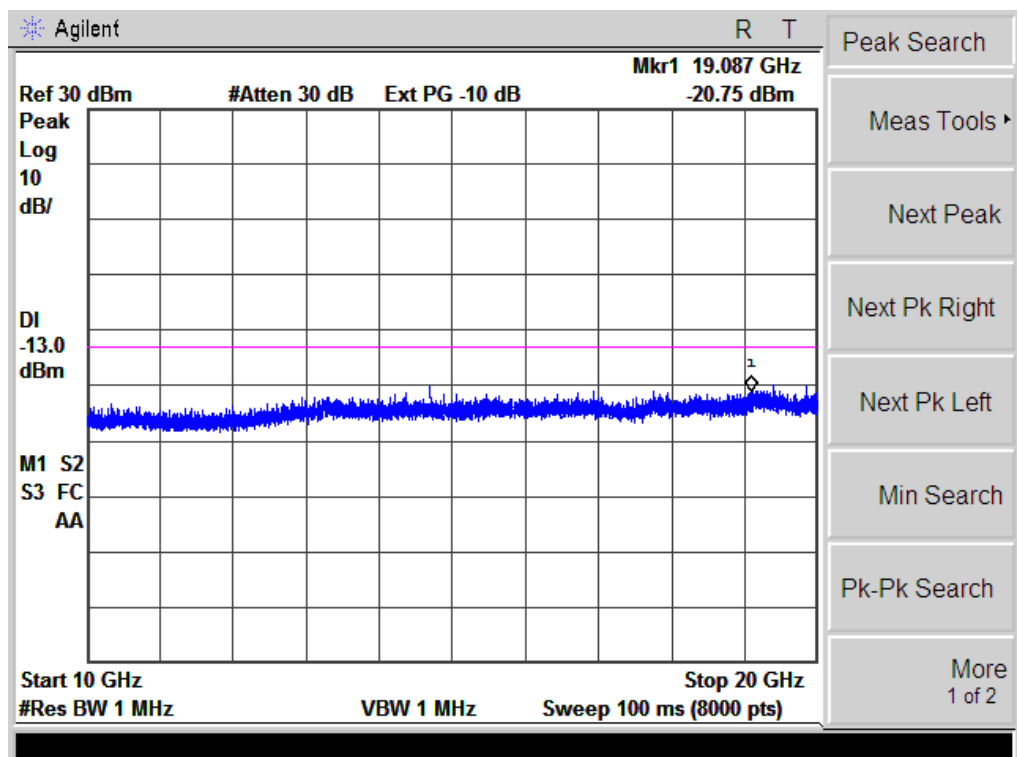


## Conducted Emission Transmitting Mode CH 1512 30MHz – 10GHz

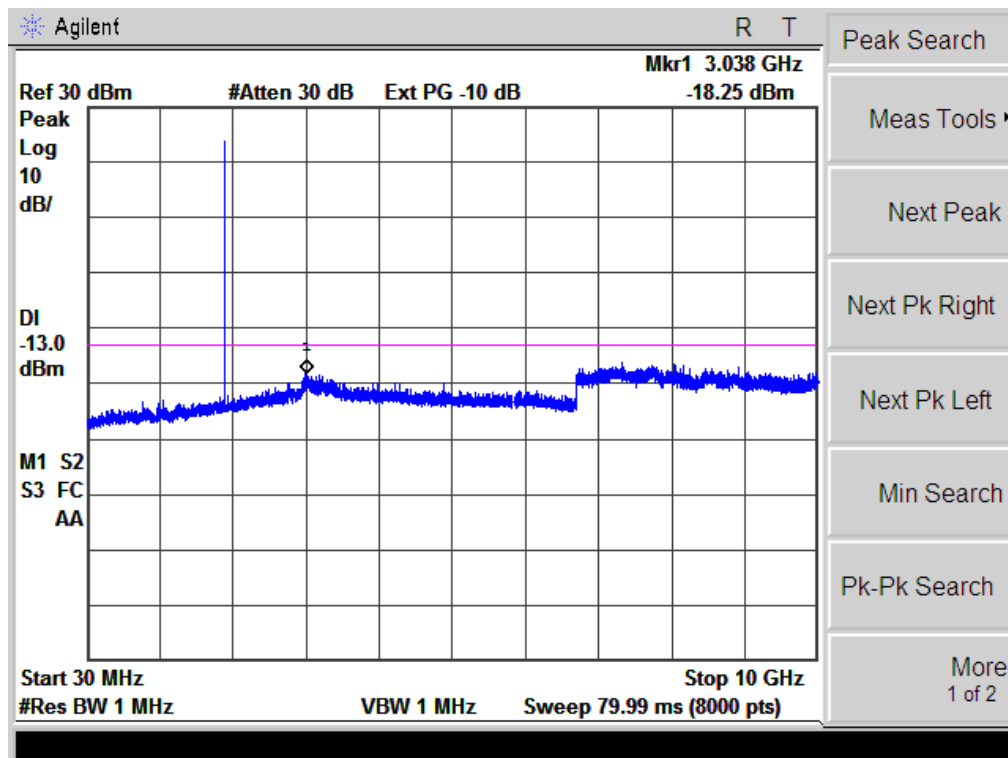


## Conducted Emission Transmitting Mode CH 1512 10GHz – 20GHz

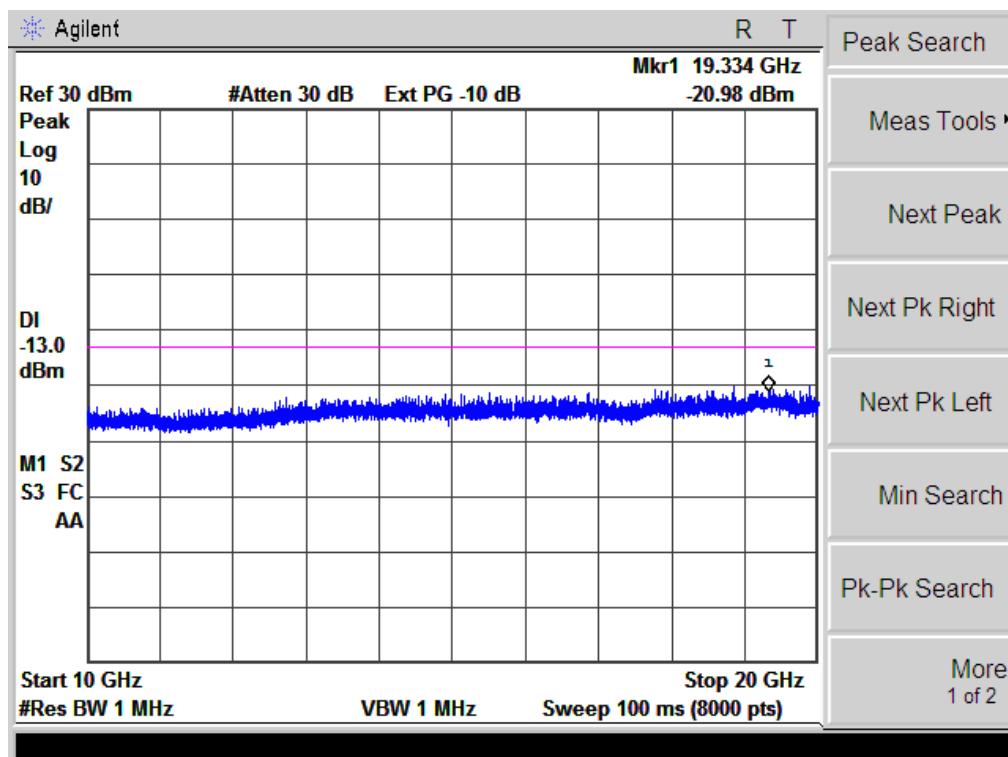


CONDUCTED EMISSION IN UMTS band V  
Conducted Emission Transmitting Mode CH 4132 30MHz – 5GHz

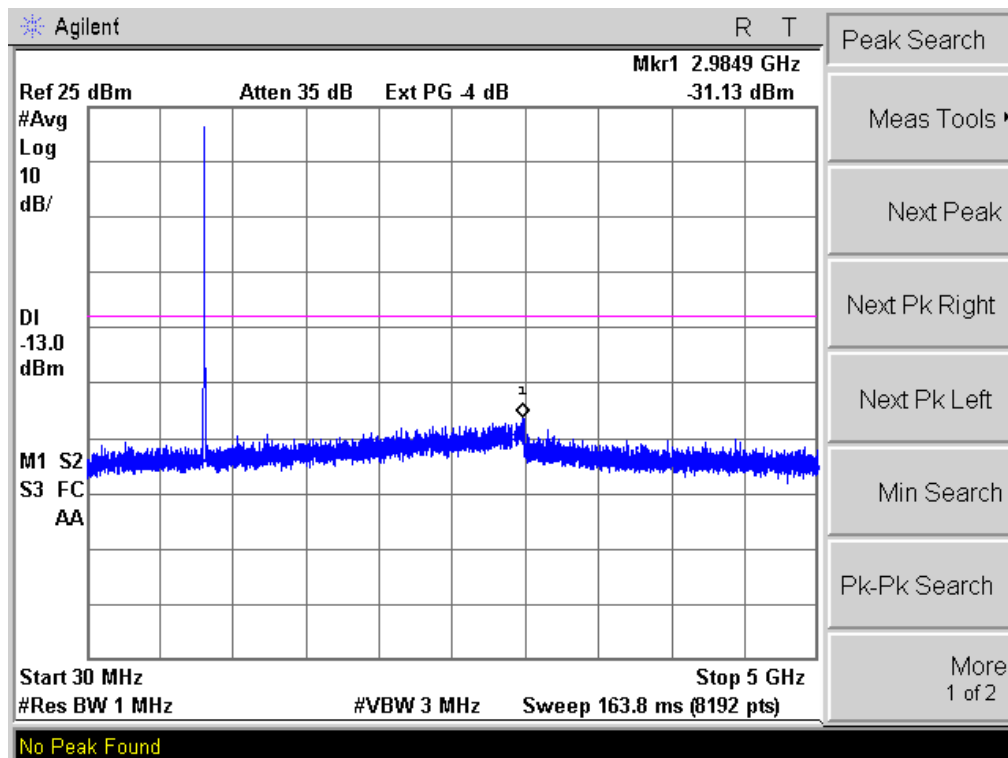


Conducted Emission Transmitting Mode CH 4132 5GHz – 10GHz

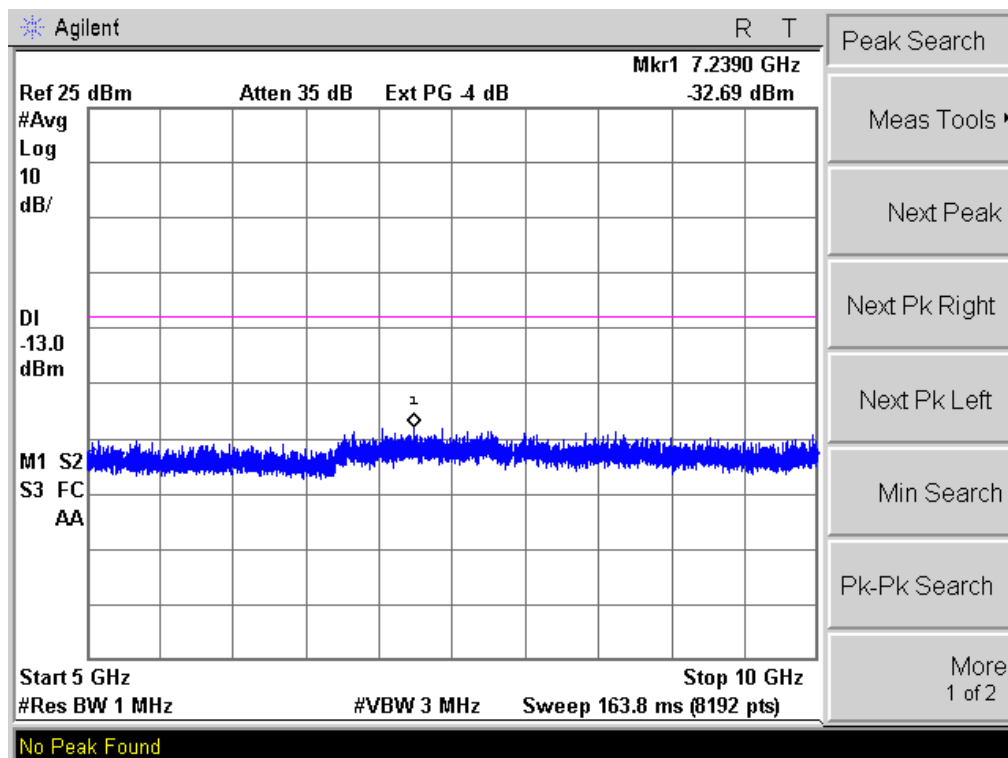

## Conducted Emission Transmitting Mode CH 4183 30MHz –5GHz

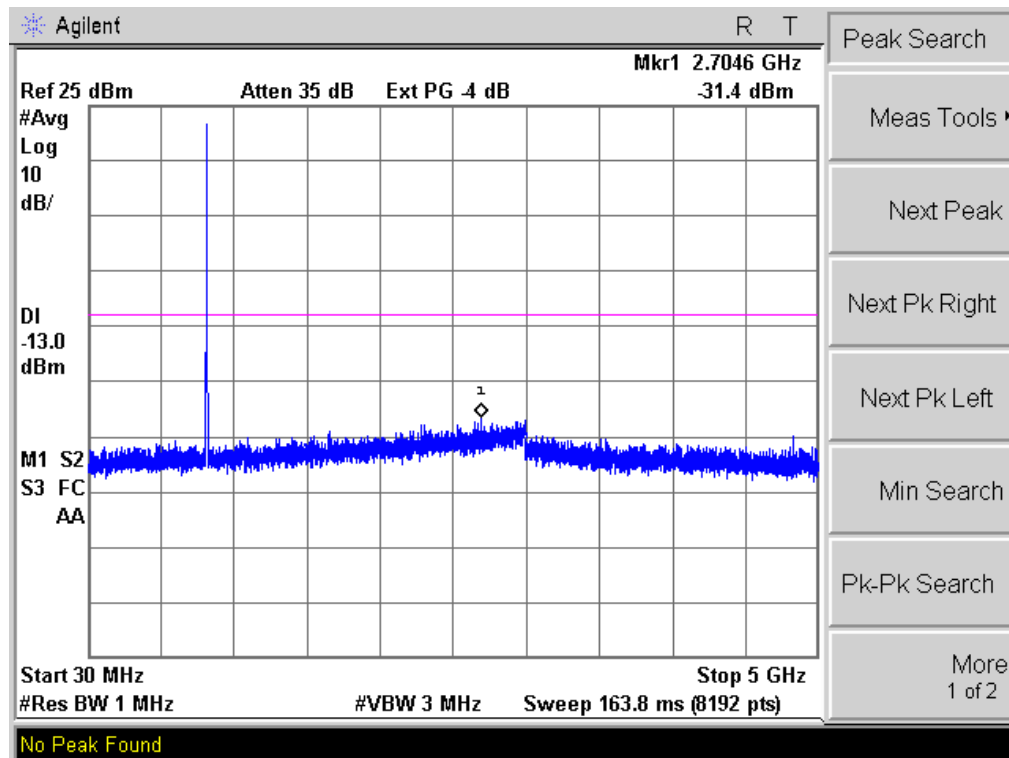


## Conducted Emission Transmitting Mode CH 4183 5GHz – 10GHz

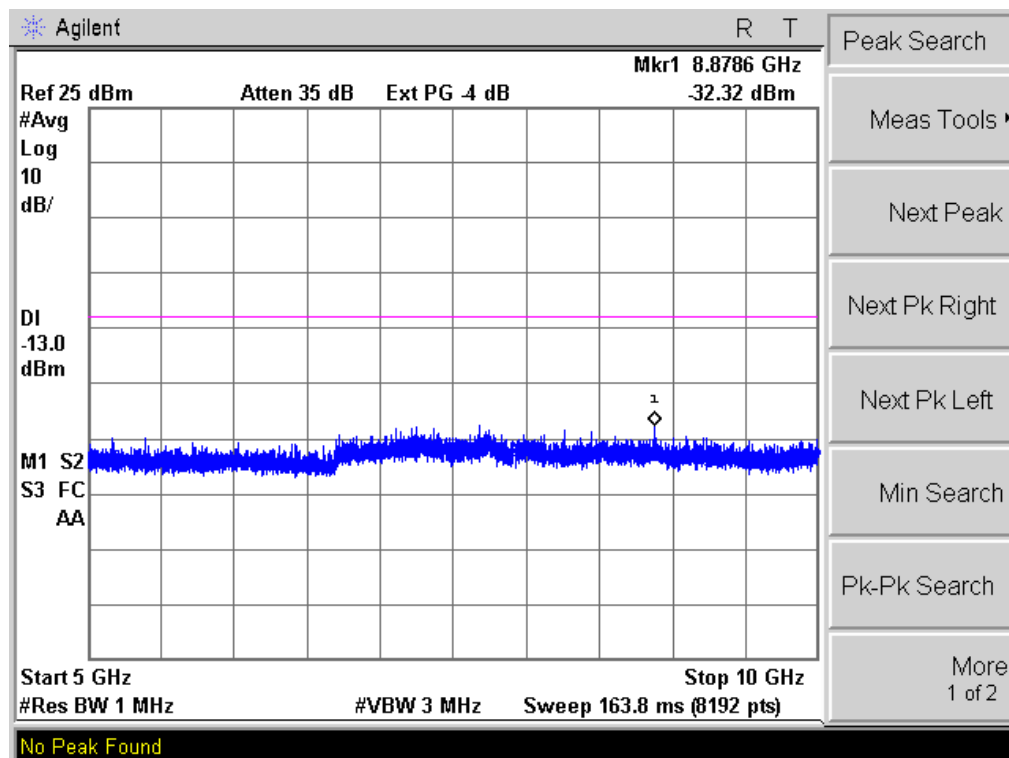




## Conducted Emission Transmitting Mode CH 4233 30MHz – 5GHz

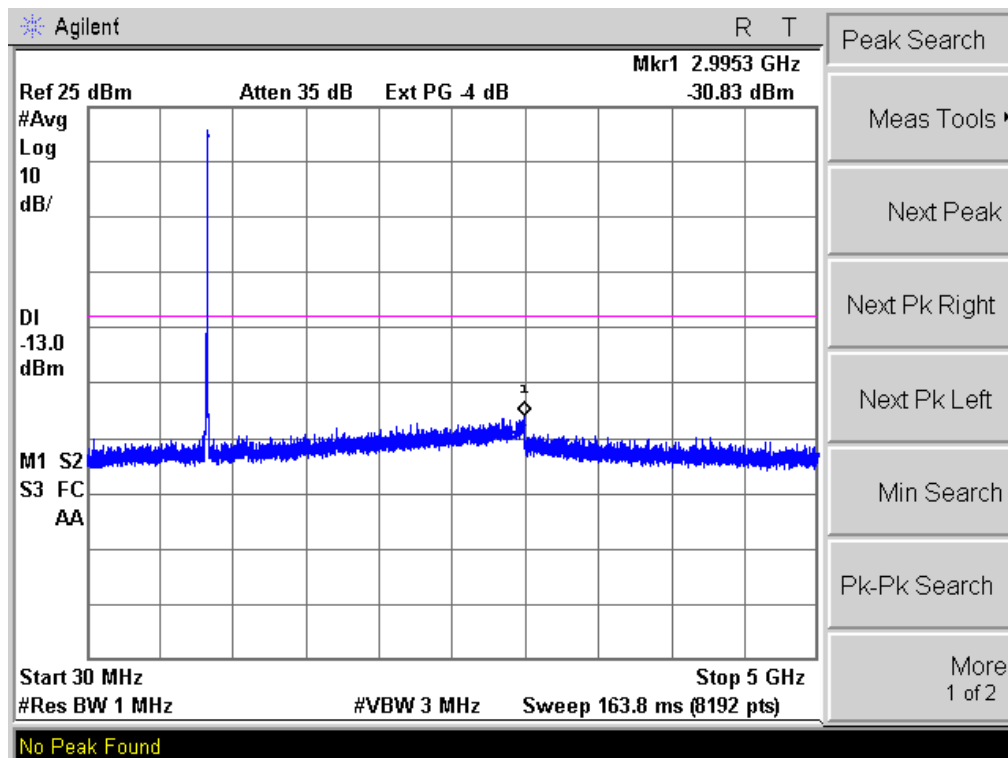

## Conducted Emission Transmitting Mode CH 4233 5GHz – 10GHz

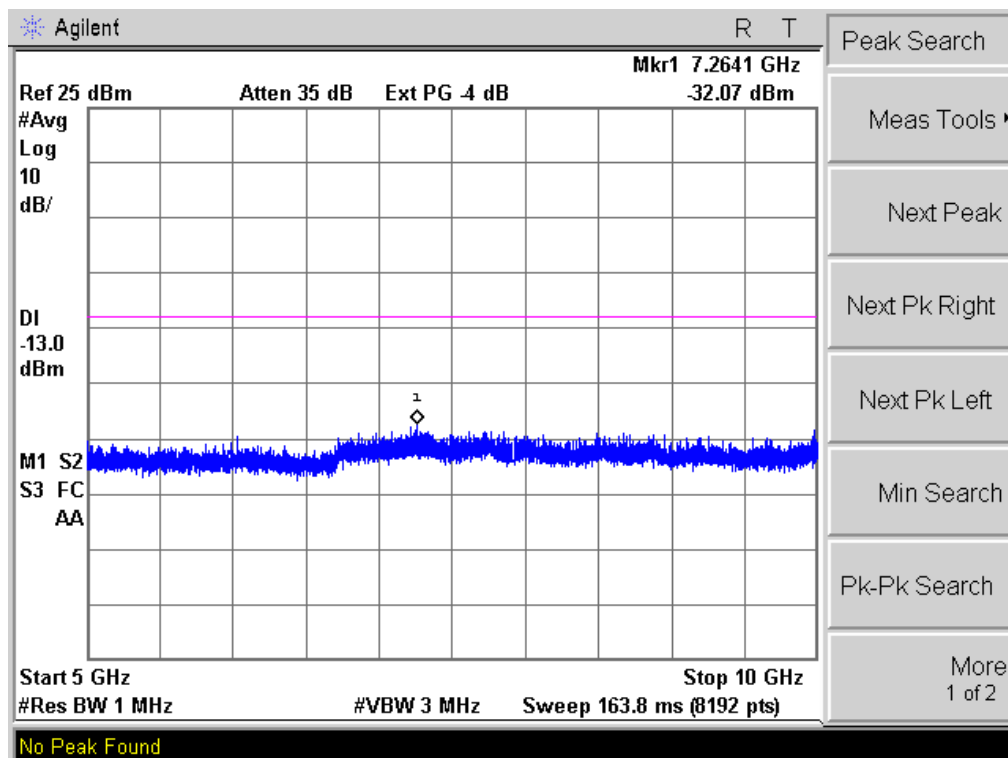


**APPENDIX II**


**TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)**

**EMISSION BANDWIDTH (-26dBC)**


## Occupied Bandwidth (99%) GSM 850 BAND CH 128

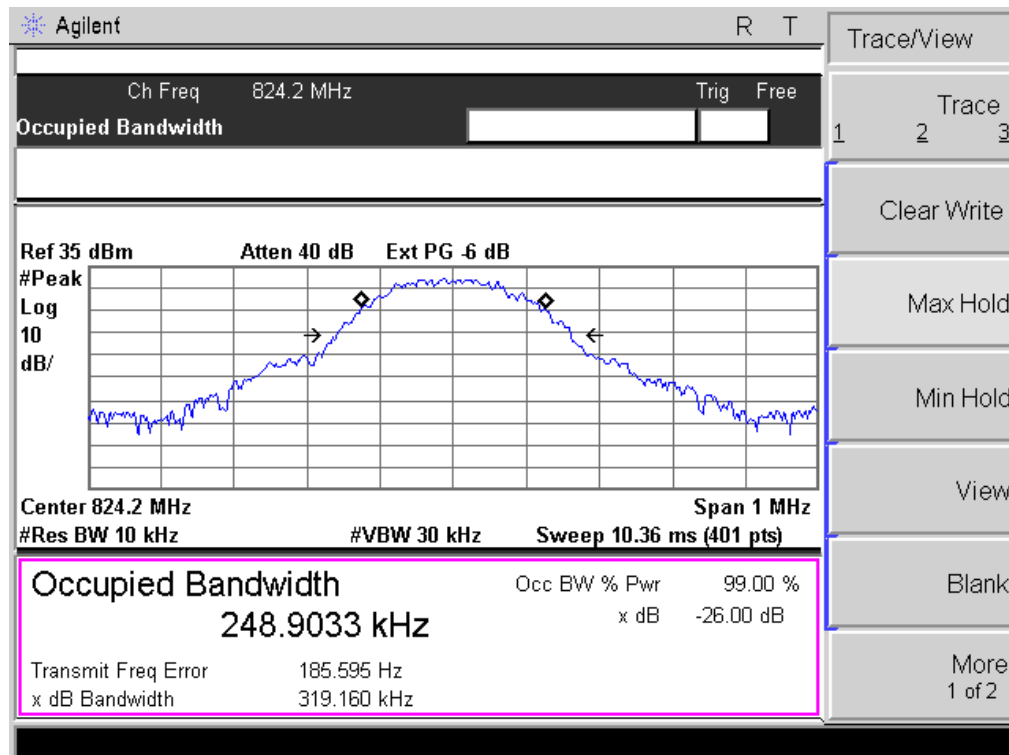


## Occupied Bandwidth (99%) GSM 850 BAND CH 190

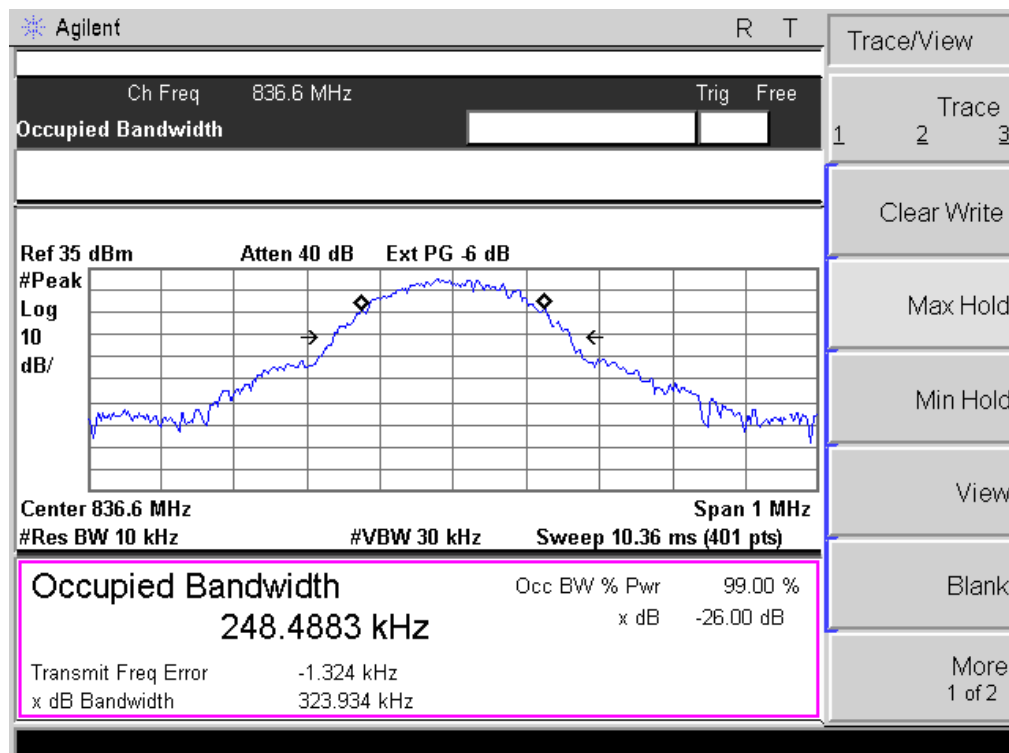


## Occupied Bandwidth (99%) GSM 850 BAND CH 251

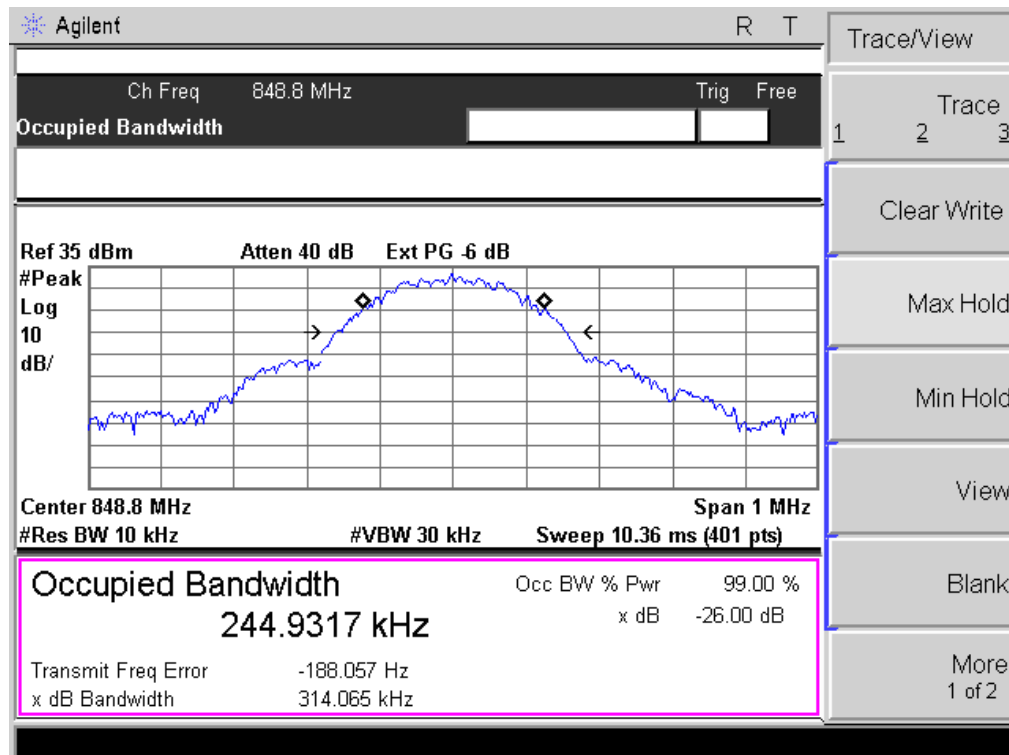


## Occupied Bandwidth (99%) PCS 1900 BAND CH 512

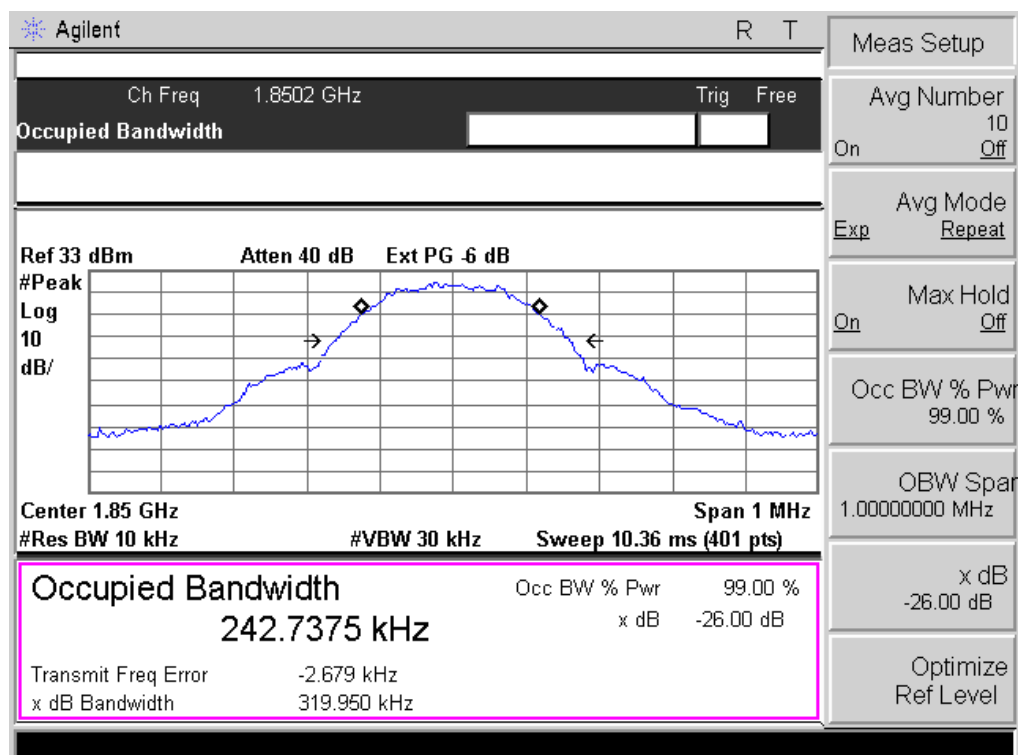


## Occupied Bandwidth (99%) PCS 1900 BAND CH 661

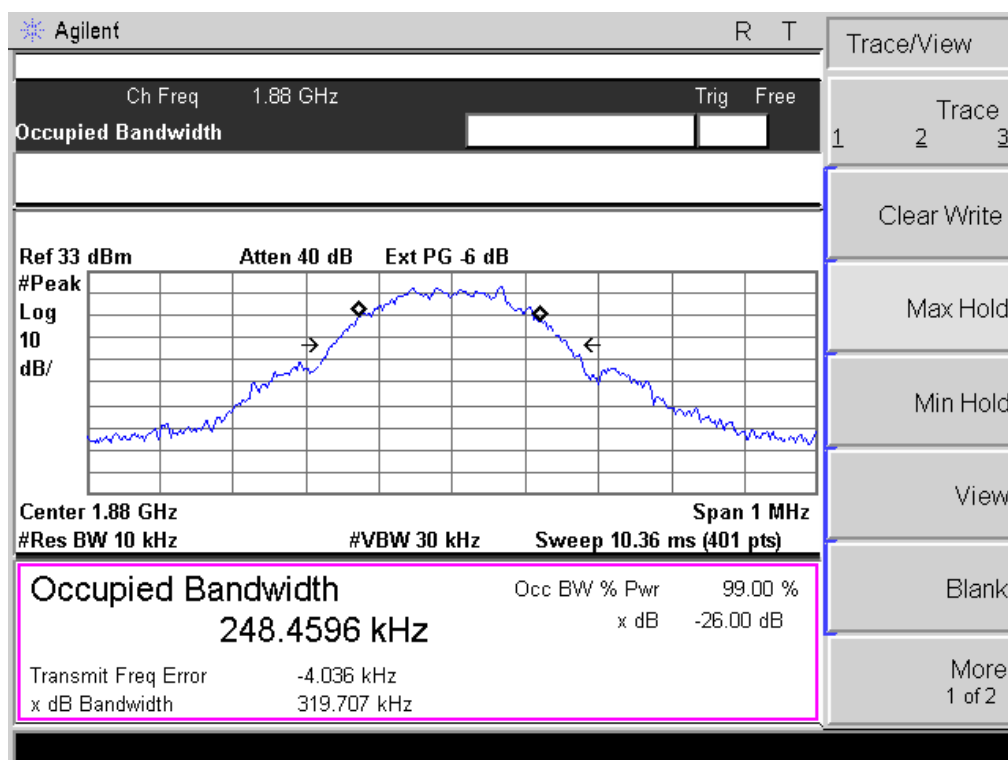


## Occupied Bandwidth (99%) PCS 1900 BAND CH 810

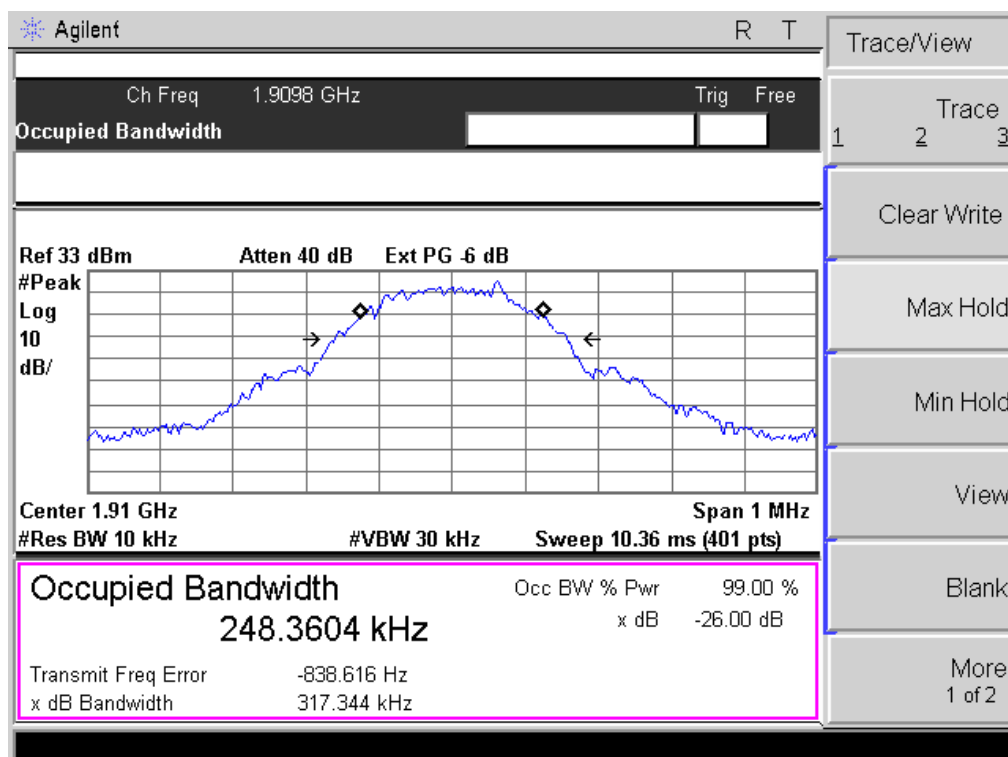


## Occupied Bandwidth (99%) UMTS band II CH 9262

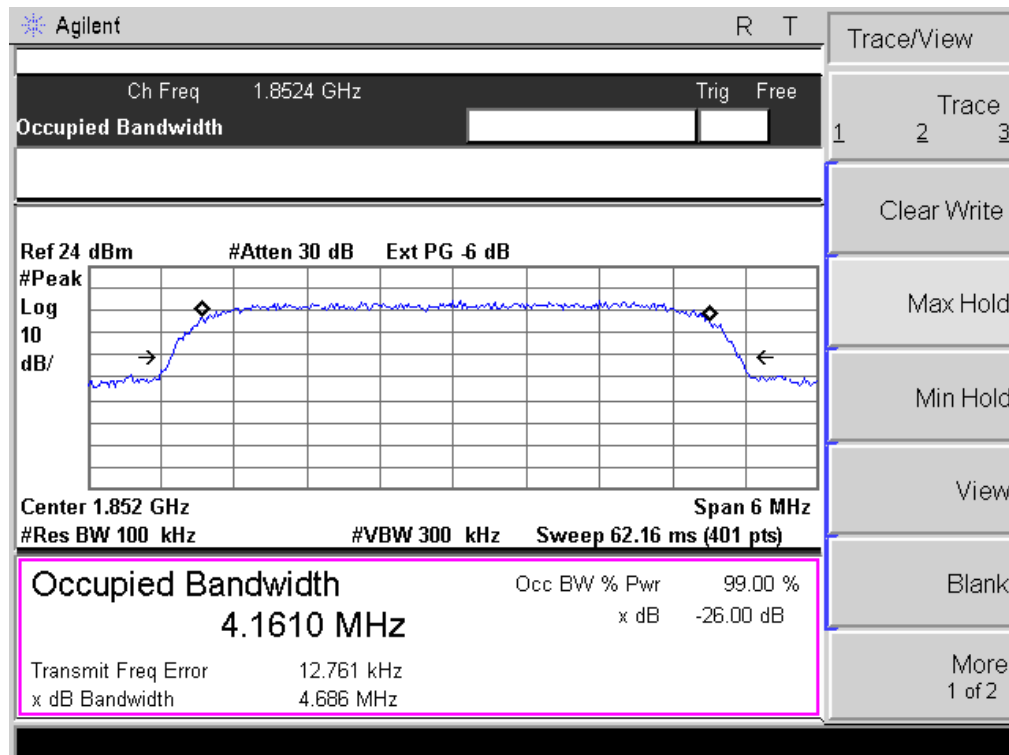


## Occupied Bandwidth (99%) UMTS band II CH 9400

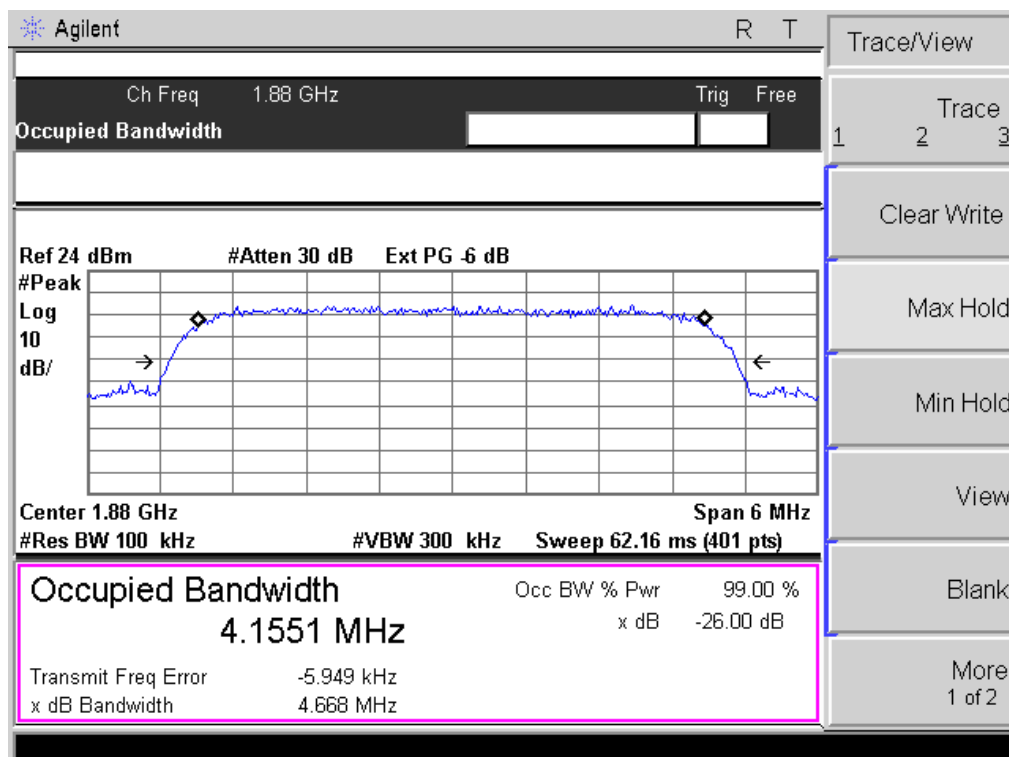


## Occupied Bandwidth (99%) UMTS band II CH 9538

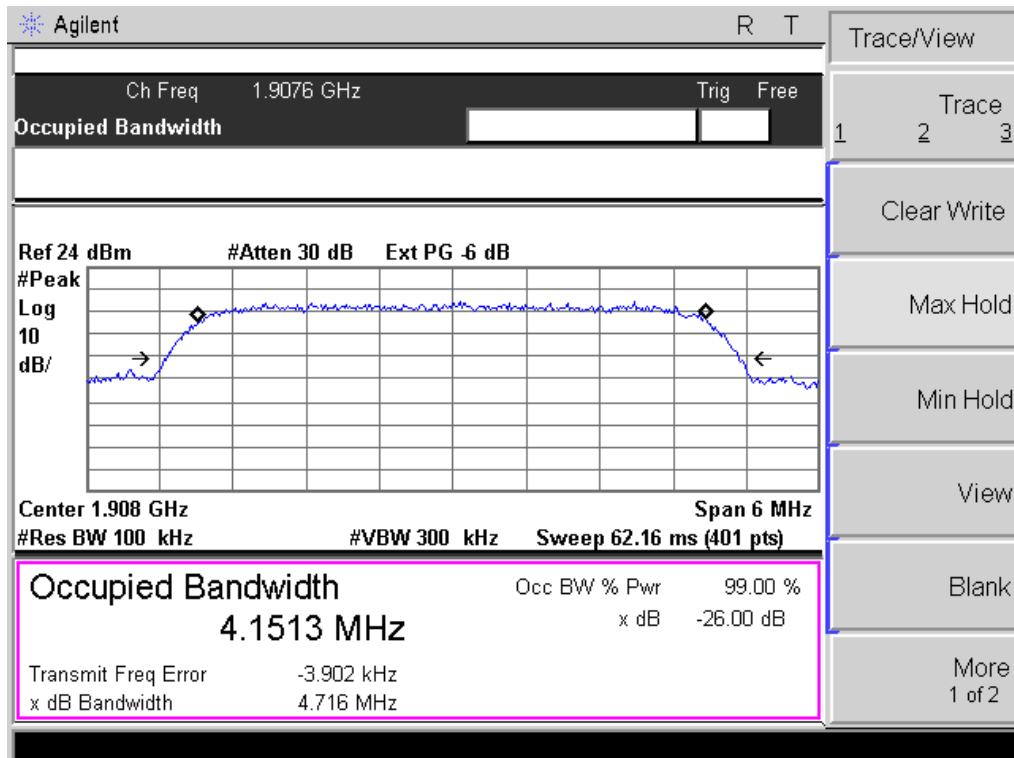


## Occupied Bandwidth (99%) UMTS band IV CH 1313

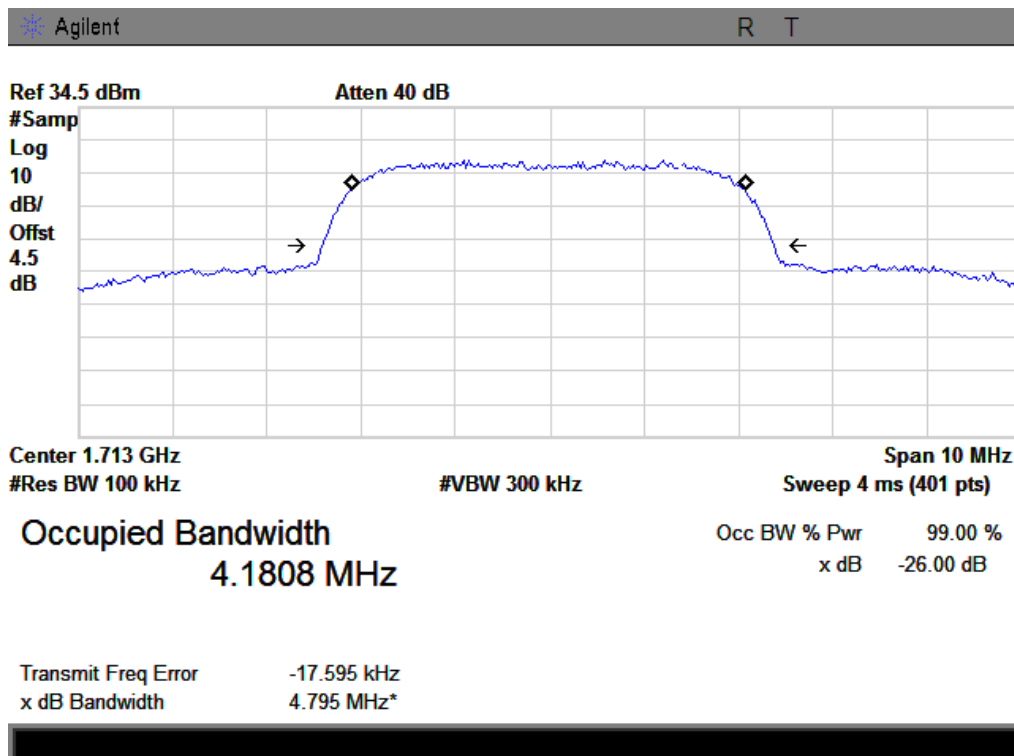

## Occupied Bandwidth (99%) UMTS band IV CH 1413

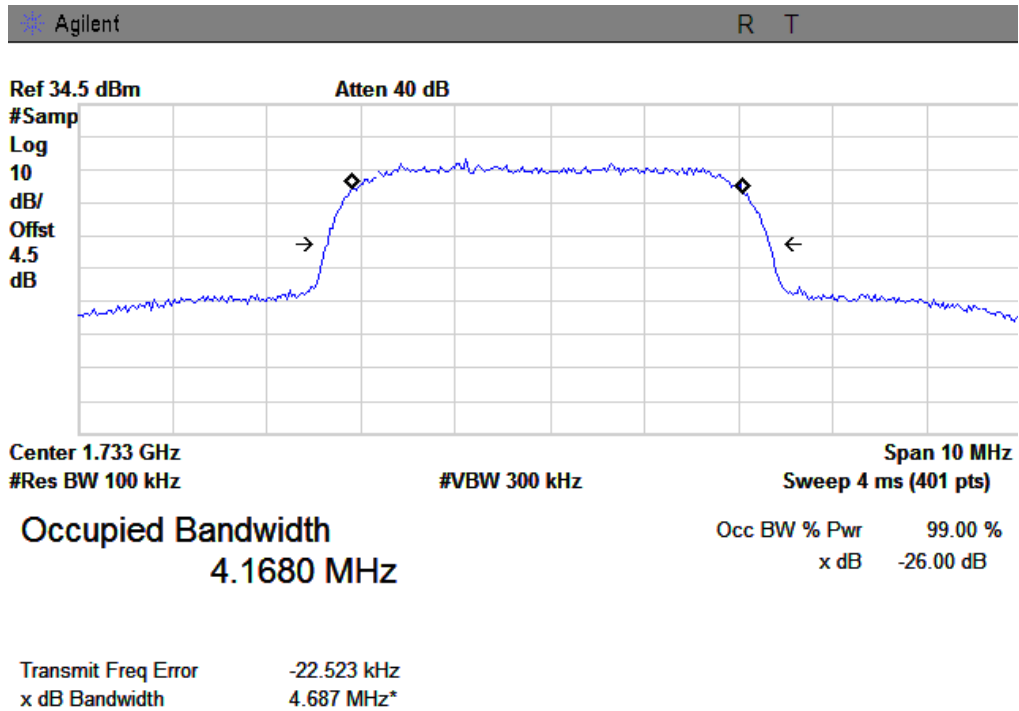


## Occupied Bandwidth (99%) UMTS band IV CH 1512

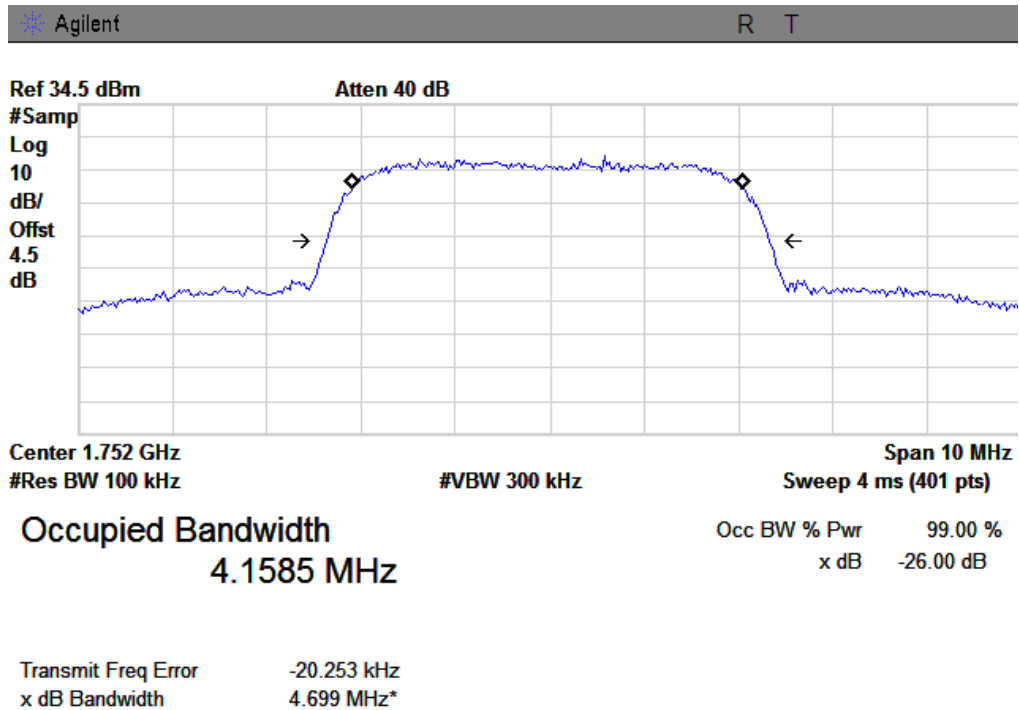





## Occupied Bandwidth (99%) UMTS band V CH 4132

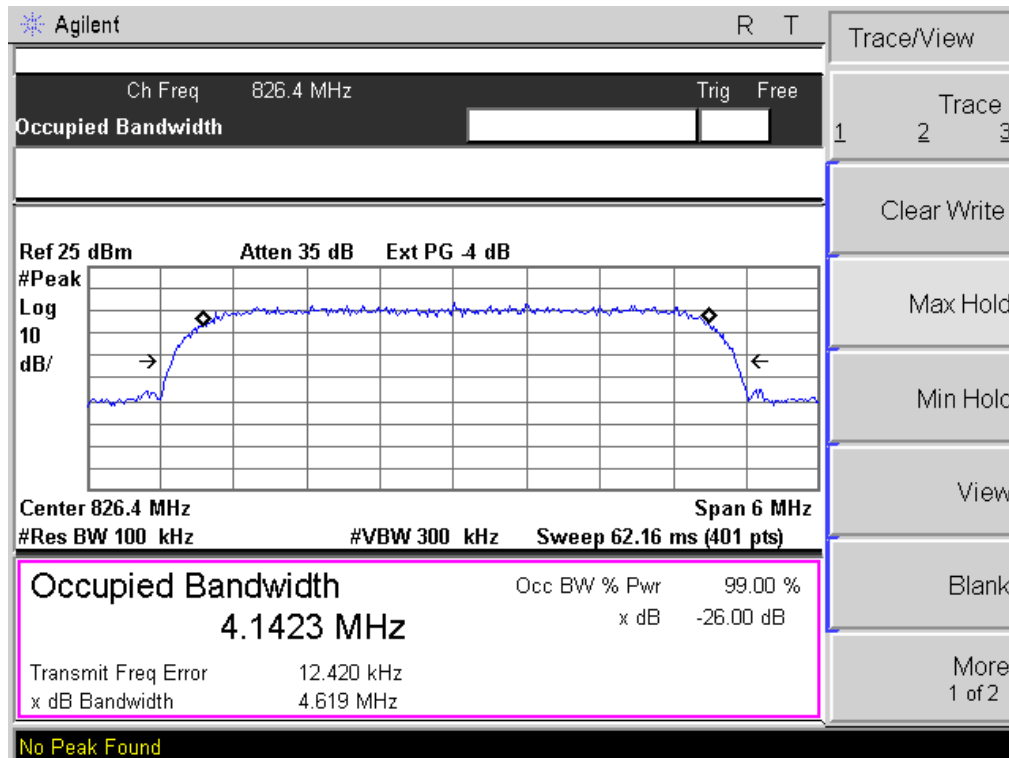

## Occupied Bandwidth (99%) UMTS band V CH 4183

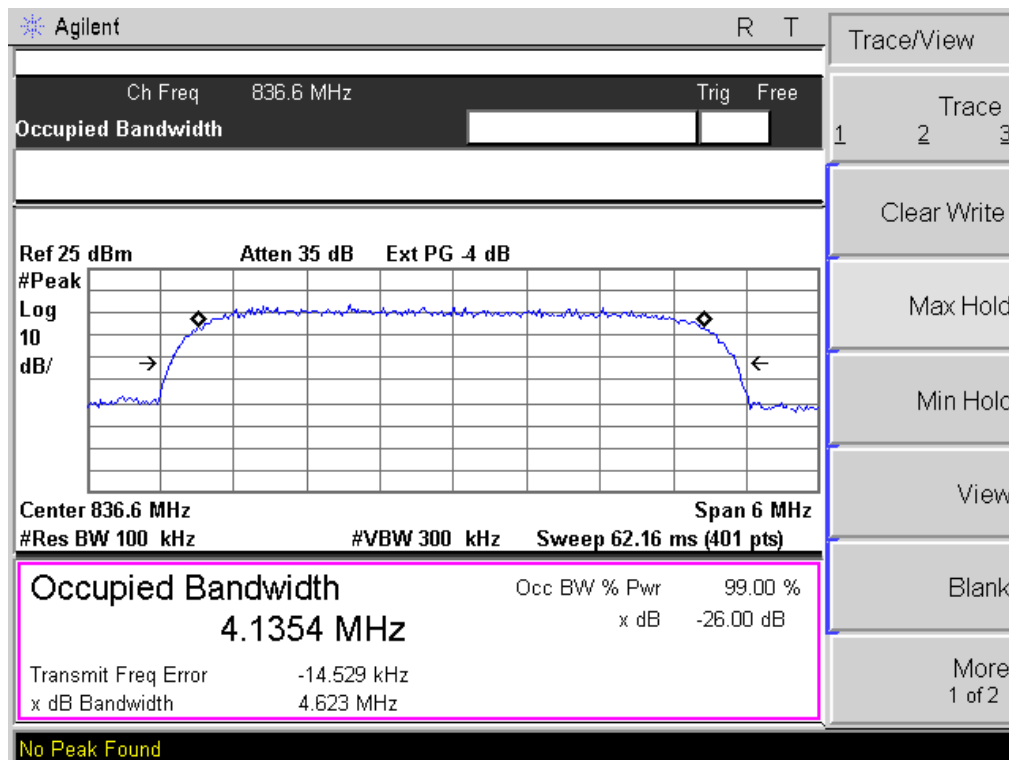


## Occupied Bandwidth (99%) UMTS band V CH 4233

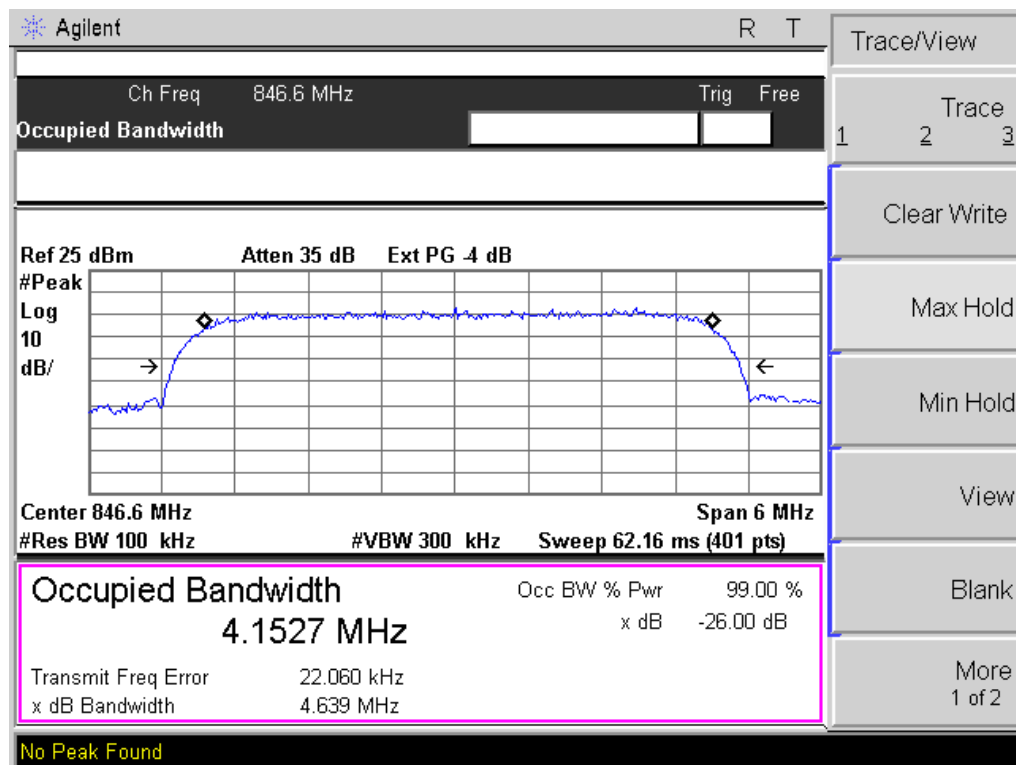


## **APPENDIX III**

### **TEST PLOTS FOR BAND EDGES**


## Low Band Edge GSM 850 BAND CH 128

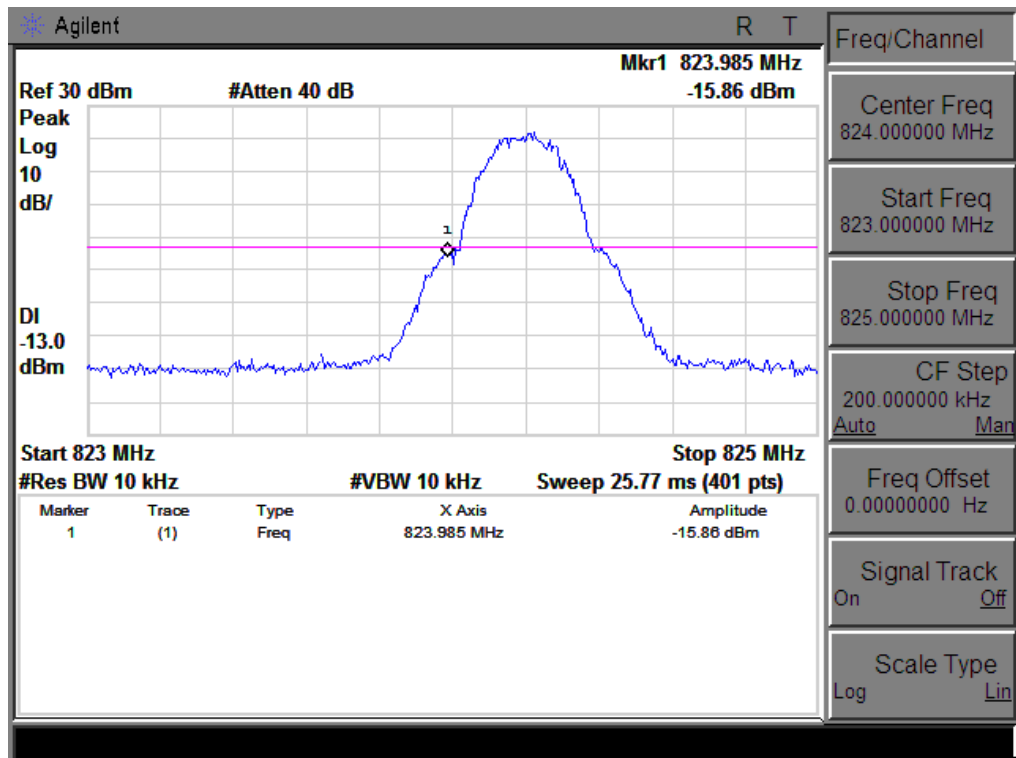


## High Band Edge GSM 850 BAND CH 251

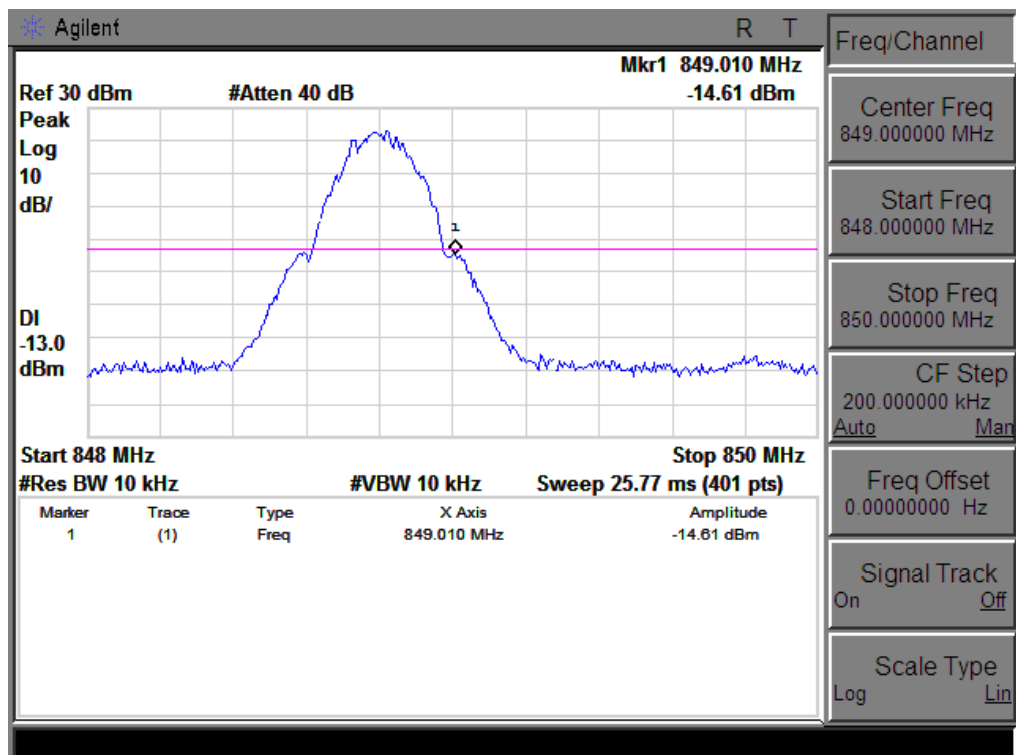


## Low Band Edge PCS 1900 BAND CH 512

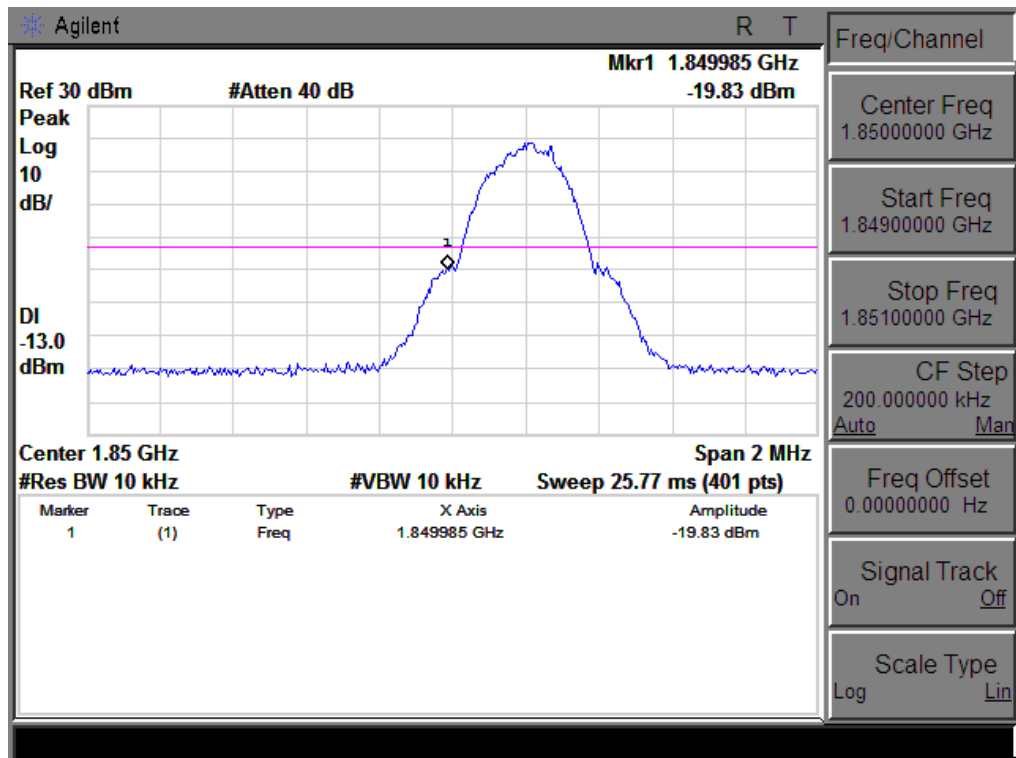


## High Band Edge PCS 1900 BAND CH 810

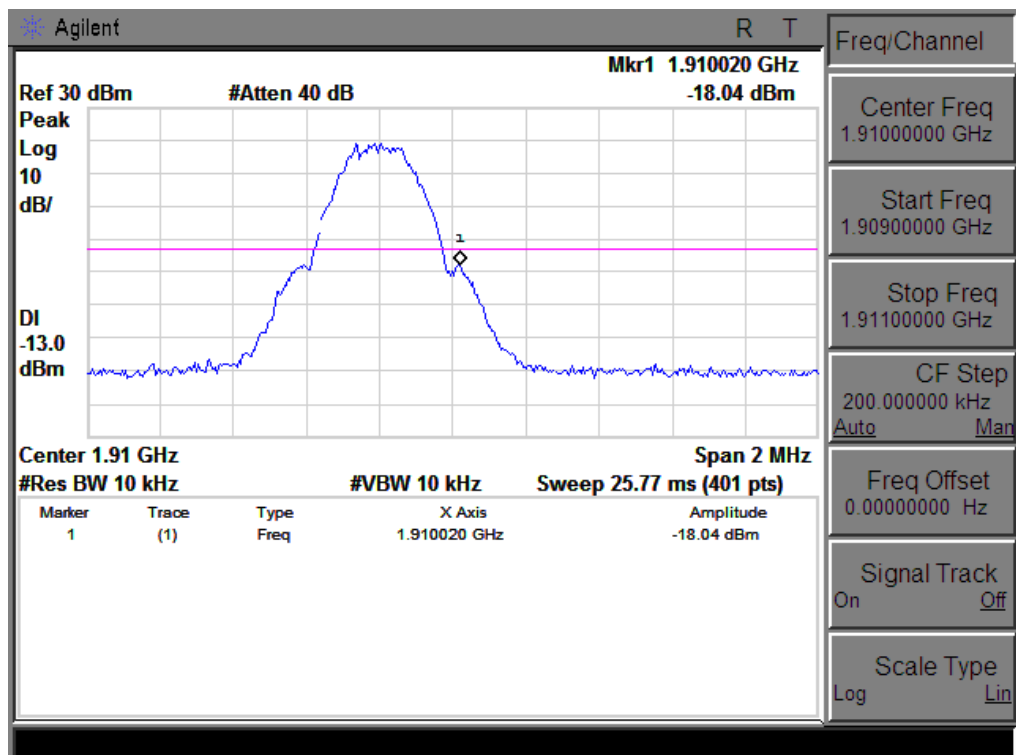


## Low Band Edge UMTS BAND II CH 9262

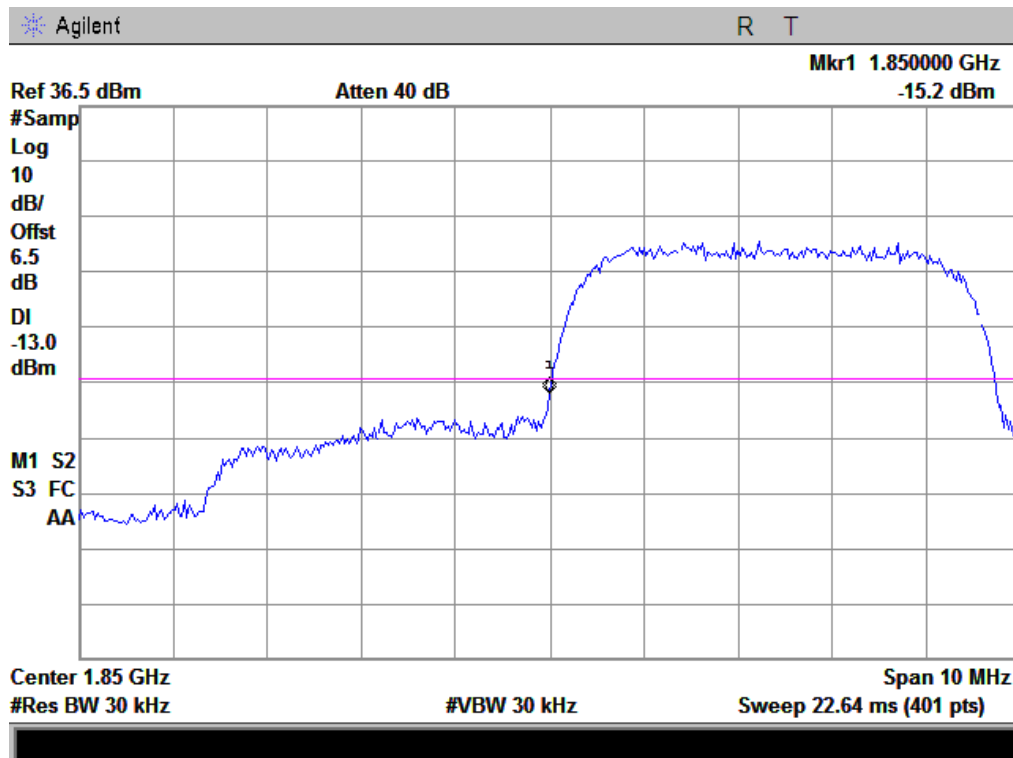


## High Band Edge UMTS BAND II CH 9538

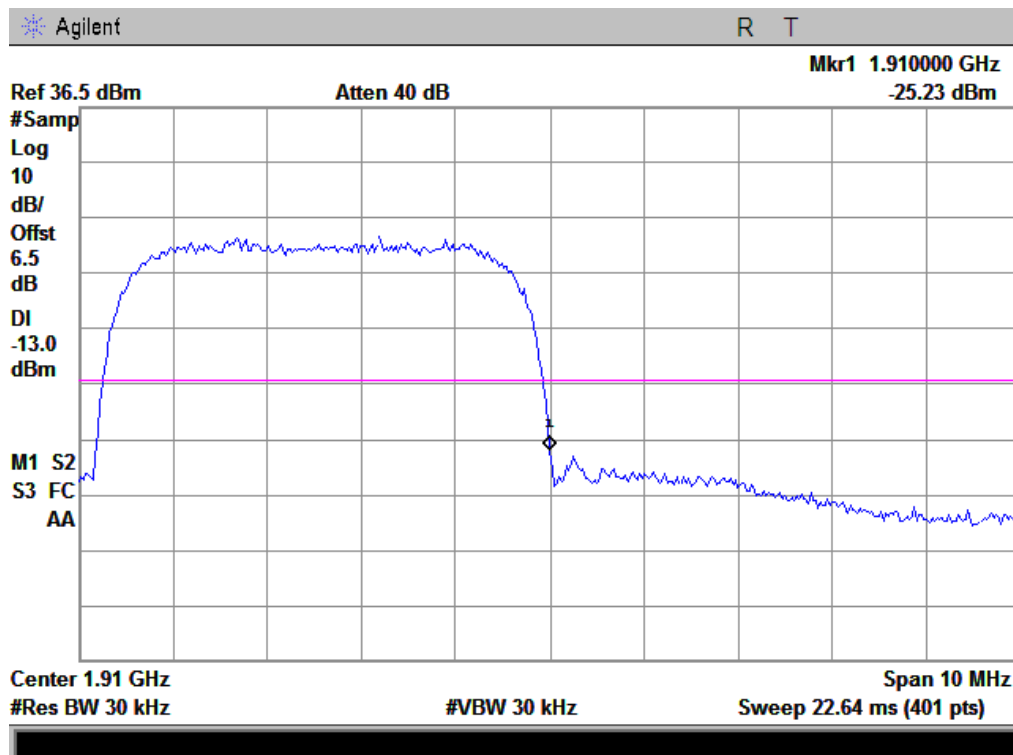


## High Band Edge UMTS BAND IV CH 1313

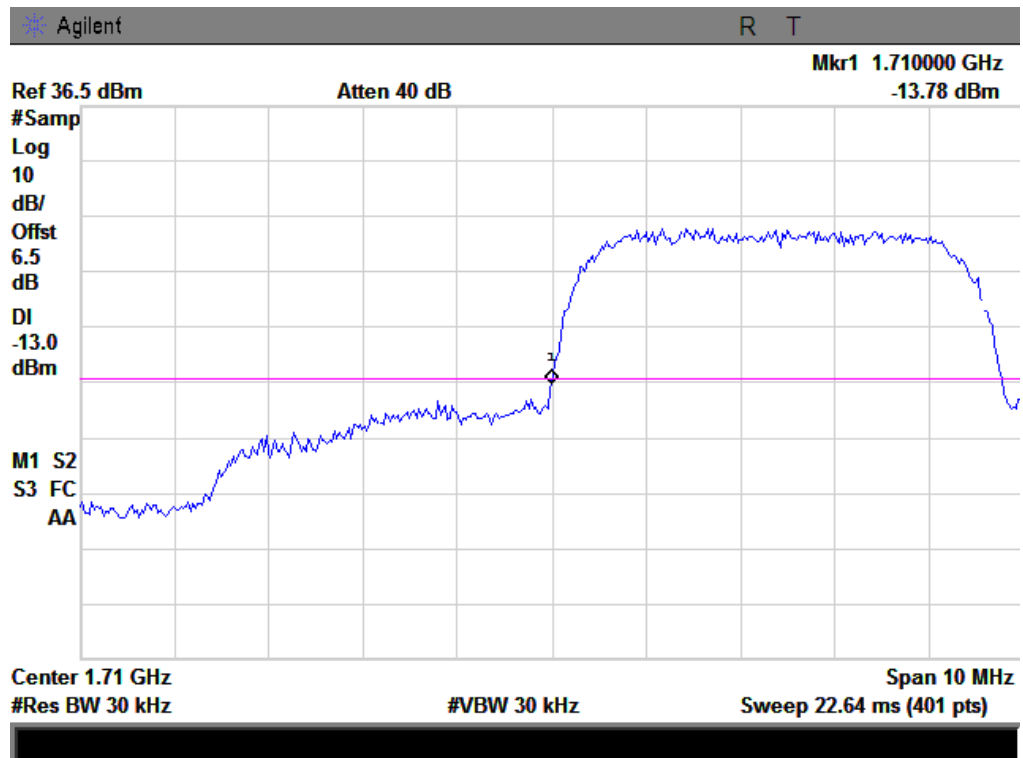


## High Band Edge UMTS BAND IV CH 1512

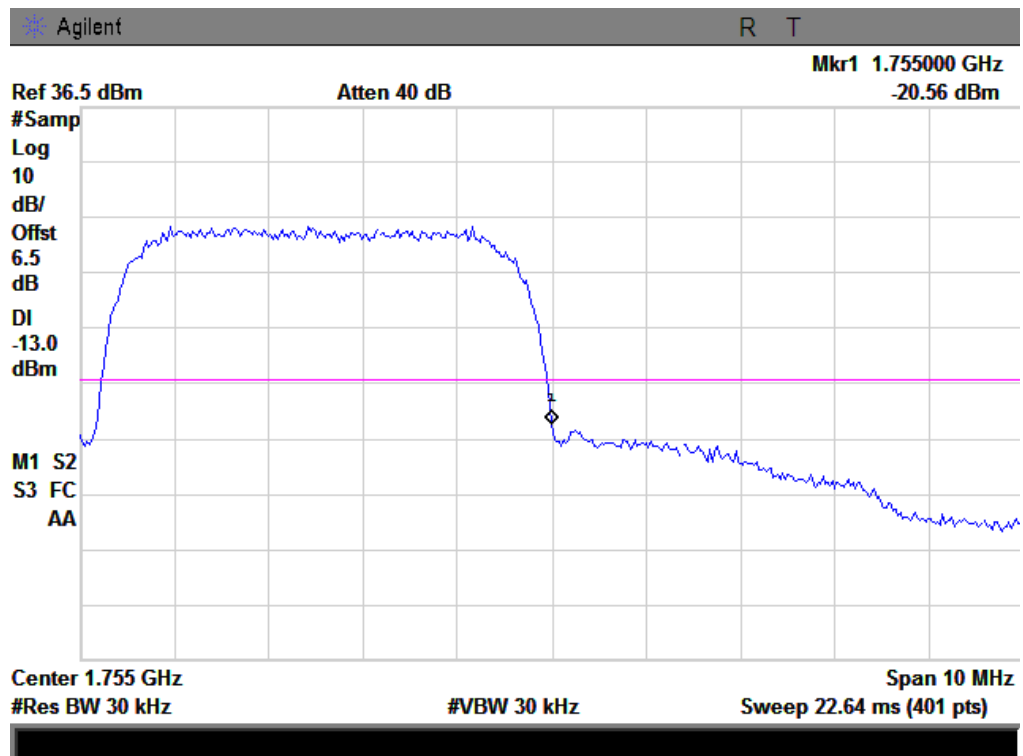

## Low Band Edge UMTS BAND V CH 4132


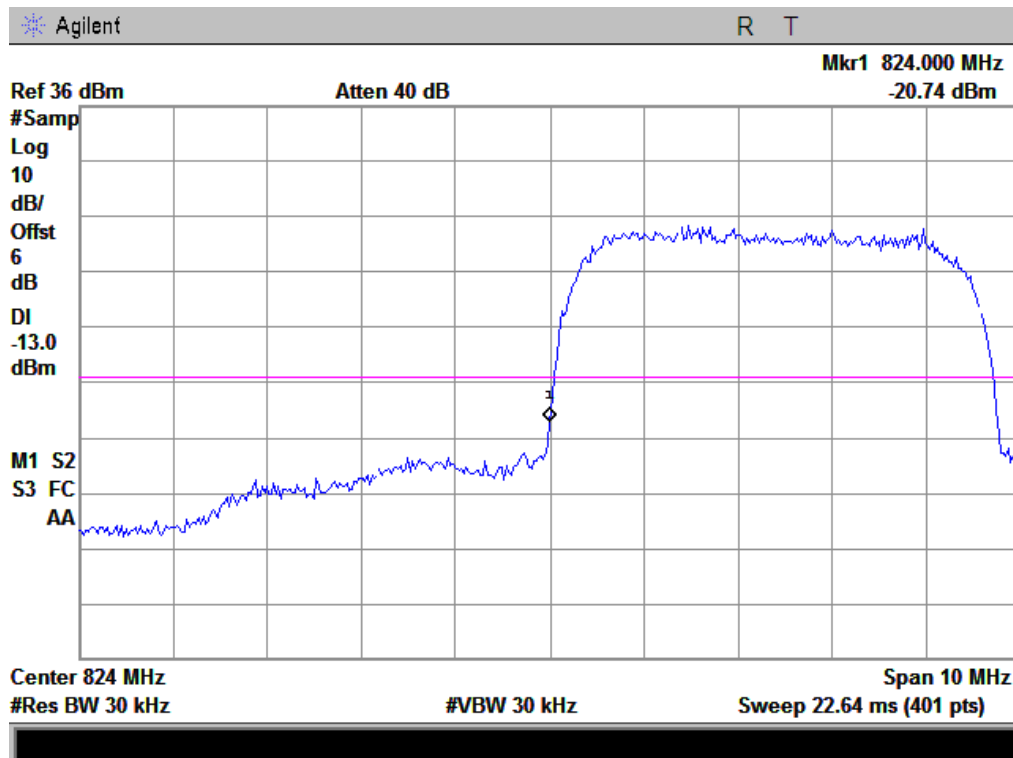


## High Band Edge UMTS BAND V CH 4233

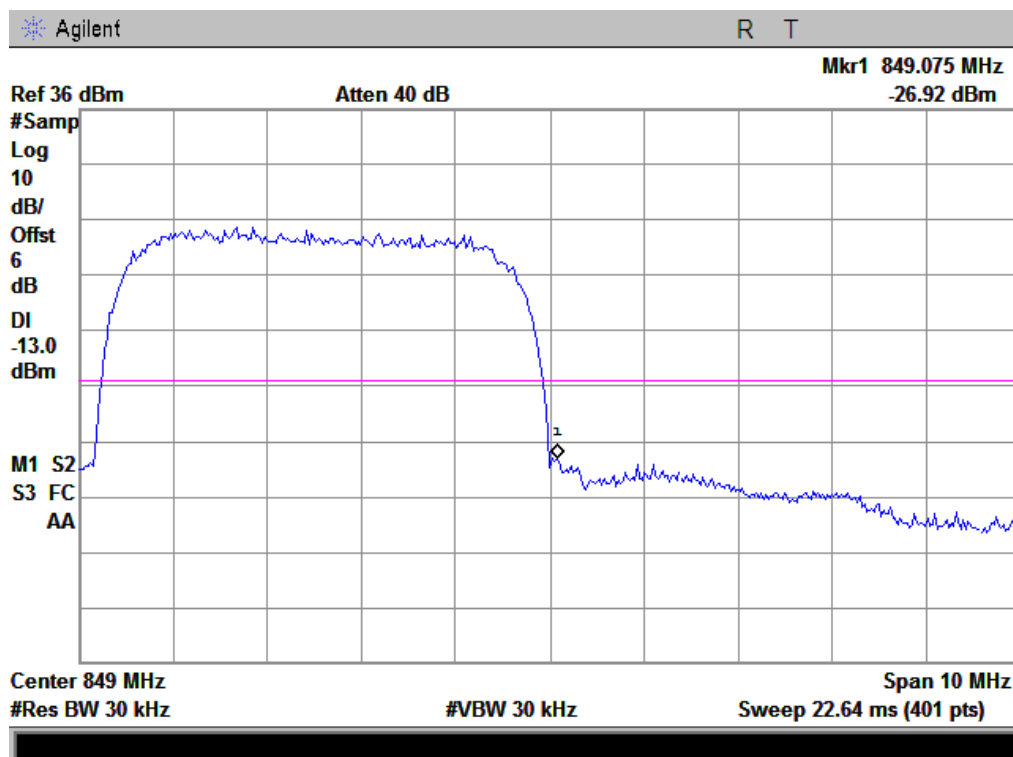



APPENDIX IV  
PHOTOGRAPHS OF TEST SETUP

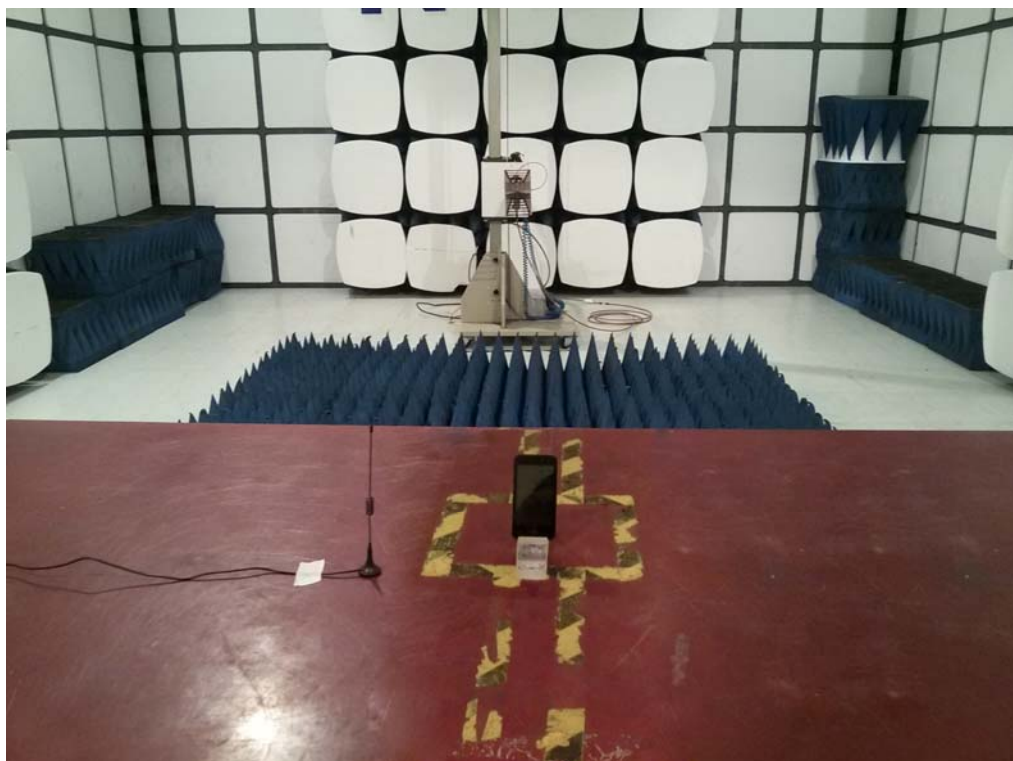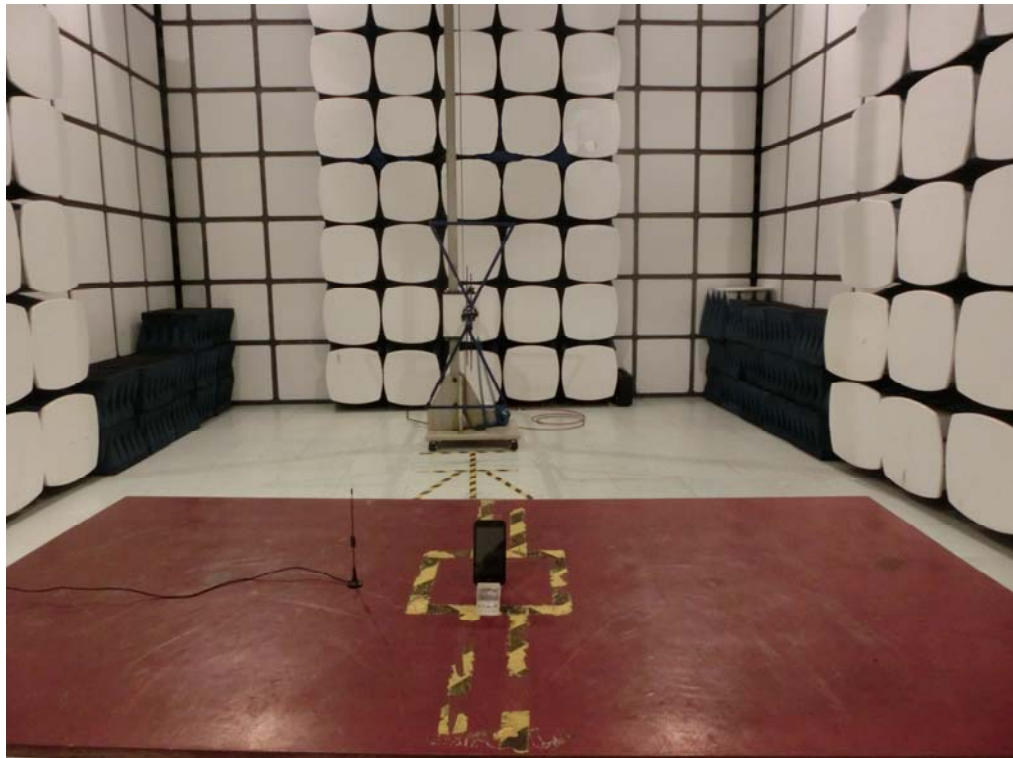

----END OF REPORT----