

FCC PART 27 FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

MOVEON TECHNOLOGY LIMITED

World Trade Plaza-A block#3201-3202 Fuhong Road, Futian, Shenzhen, China

FCC ID: 2AFD9K5SPACE

Report Type: Product Type:

Original Report Mobile phone

Report Number: RSZ160630001-00D

Report Date: 2016-10-14

Jesse Huang

Reviewed By: Manager

Bay Area Compliance Laboratories Corp. (Kunshan)

Jesse. Humf

Chenghu Road, Kunshan Development Zone

Prepared By: No.248, Kunshan, Jiangsu, China

Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
Measurement Uncertainty Test Facility	
SYSTEM TEST CONFIGURATION	
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	8
APPLICABLE STANDARD	
TEST RESULT	
FCC §2.1047 - MODULATION CHARACTERISTIC	9
§2.1046; § 22.913 (A); § 24.232 (C); §27.50 (D) (H) - RF OUTPUT POWER	
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	30
APPLICABLE STANDARDS.	30
TEST PROCEDURE	
TEST DATA	30
§ 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H)(M) SPURIOUS EMISSIONS AT	72
ANTENNA TERMINALS	72
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST DATA	72
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS	100
APPLICABLE STANDARDS.	100
TEST PROCEDURE	
TEST DATA	100
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	103
APPLICABLE STANDARDS.	103
TEST PROCEDURE	
TEST DATA	103
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	146
APPLICABLE STANDARDS	146
TEST PROCEDURE	
Test Data	147

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The MOVEON TECHNOLOGY LIMITED's product, model number: K5 SPACE (FCC ID: 2AFD9K5SPACE) or the "EUT" in this report was a mobilephone, which was measured approximately: 14.2 cm (L) \times 7.2 cm (W) \times 0.9 cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Input: AC 100-240V, 50/60Hz, 0.15A

Output: DC 5.0V, 1.0A

*All measurement and test data in this report was gathered from production sample serial number: 1602631 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-06-30.

Objective

This type approval report is prepared on behalf of *MOVEON TECHNOLOGY LIMITED* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2AFD9K5SPACE.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

	Item	Uncertainty	
AC Power Line	s Conducted Emissions	±3.26 dB	
RF conducte	d test with spectrum	±0.9dB	
RF Output Pov	wer with Power meter	±0.5dB	
Radiated emission	30MHz~1GHz	±5.91dB	
Radiated emission	Above 1G	±4.92dB	
Occupi	ed Bandwidth	±0.5kHz	
Те	mperature	±1.0℃	
H	Iumidity	±6%	

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.0002K50- 116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

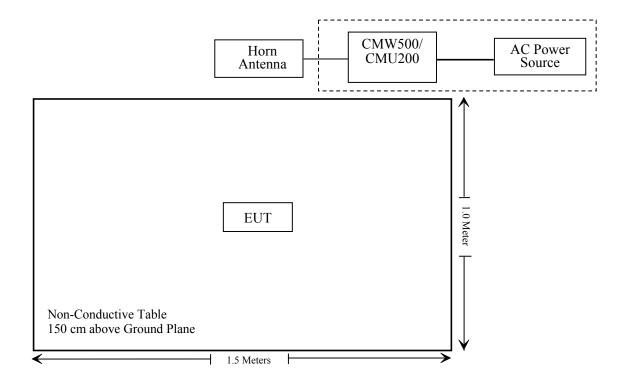

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
\$ 2.1049; \$ 22.905; \$ 22.917; \$ 24.238; \$27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ160630001-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	F	Radiated Emission	n Test		
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2015-11-07	2016-11-06
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-16
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	9311-4159	2015-11-07	2016-11-06
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15
НР	Signal Generator	E4421B	3426A01336	2015-11-04	2016-11-03
		RF Conducted	test		
BACL	TS 8997 Cable-01	T-KS- EMC086	T-KS- EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHEL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131	2016-09-21	2017-09-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2015-11-12	2016-11-11
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 116218-UY	2016-09-08	2017-09-07
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12
WEINSCHEL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ160630001-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h) - RF OUTPUT POWER

Applicable Standards

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25℃
Relative Humidity:	54 %
ATM Pressure:	101.0kPa

The testing was performed by Ada Yu on 2016-09-29.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	32.81	38.45
GSM	190	836.6	32.78	38.45
	251	848.8	32.75	38.45

Mode	Channel Frequency		Average Output Power (dBm)				Limit
1,10uc Chumici	(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)	
	128	824.2	32.84	32.11	30.38	29.31	38.45
GPRS	190	836.6	32.83	32.10	30.43	29.28	38.45
	251	848.8	32.80	32.11	30.46	29.29	38.45

Mode Channel		Frequency	Average Output Power (dBm)				Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	27.35	26.33	24.34	23.25	38.45
EGPRS	190	836.6	27.29	26.26	24.28	23.15	38.45
	251	848.8	27.24	26.24	24.21	23.07	38.45

	Test	Test	3GPP Sub	Average Output Power (dBm)			
Mode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.24	22.49	22.26	
			21.20	21.44	21.21	21.45	
		Rel 6	21.16	21.33	21.13	21.35	
		HSDPA	21.25	21.49	21.28	21.55	
			21.10	21.40	21.16	21.38	
WCDMA (Band V)	Normal	Rel 6 HSUPA	21.19	21.43	21.17	21.49	
(Bunu 1)			21.14	21.32	21.09	21.41	
			21.27	21.55	21.29	21.59	
			21.15	21.34	21.12	21.38	
			21.30	21.52	21.22	21.58	
		HSPA+	21.25	21.42	21.20	21.50	

810

Report No.: RSZ160630001-00D

33

Mode	Mode Channel Frequence (MHz)		Average Output Power (dBm)	Limit (dBm)	
	512	1850.2	29.08	33	
GSM	661	1880.0	29.02	33	

1909.8

28.99

Mode	Channel	Channel Frequency		Average Output Power (dBm)			
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	29.09	28.37	26.42	25.31	33
GPRS	661	1880.0	29.08	28.30	26.46	25.35	33
	810	1909.8	29.01	28.23	26.47	25.32	33

Mode	Channel	Frequency		Limit			
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	26.14	25.17	23.13	21.97	33
EGPRS	661	1880.0	26.22	25.23	23.24	22.05	33
	810	1909.8	26.17	25.24	23.26	22.06	33

Mode	Test	Test	3GPP Sub	Average Output Power (dBm)			
Wiode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.58	22.81	22.89	
		Rel 6 HSDPA	1	21.29	21.67	21.79	
			2	21.26	21.62	21.68	
			3	21.34	21.78	21.87	
			4	21.23	21.55	21.71	
WCDMA (Band II)	Normal		1	21.37	21.71	21.78	
(Build II)			2	21.26	21.59	21.72	
		Rel 6 HSUPA	3	21.47	21.75	21.85	
		1100171	4	21.28	21.61	21.70	
			5	21.50	21.76	21.83	
		HSPA+	1	21.29	21.63	21.84	

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.29	13
GSM	Middle	0.22	13
	High	0.24	13

Mode	Channel	PAR (dB)	Limit (dB)	
	Low	0.59	13	
EGPRS	Middle	0.32	13	
	High	0.48	13	

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.45	13
RMC (BPSK)	Middle	3.35	13
(BI SIK)	High	3.49	13
	Low	3.41	13
HSDPA (16QAM)	Middle	3.32	13
(10(21111)	High	3.46	13
	Low	3.43	13
HSUPA (BPSK)	Middle	3.37	13
	High	3.43	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.28	13
GSM	Middle	0.21	13
	High	0.25	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.39	13
EGPRS	Middle	0.24	13
	High	0.37	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.27	13
RMC (BPSK)	Middle	3.14	13
(Br Sik)	High	3.25	13
	Low	3.24	13
HSDPA (16QAM)	Middle	3.12	13
(10(21111)	High	3.29	13
	Low	3.22	13
HSUPA (BPSK)	Middle	3.12	13
(Br 5R)	High	3.27	13

Radiated Power

GSM Mode:

Frequency (MHz) Receiver Reading (dBµV) Turntable Angle Degree		Turntable	Rx Antenna		Substituted			Absolute		
		Angle	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
		E	RP, Cellu	ılar Banc	l (Part 22H	H), Low	Channel			
824.20	97.72	121	1.7	Н	26.7	0.46	4.75	30.99	38.45	7.46
824.20	94.38	178	1.5	V	23.3	0.46	4.75	27.59	38.45	10.86
			EIRP, PC	S Band	(Part 24E)	, Low C	hannel			
1850.20	80.04	160	1.8	Н	19.2	0.31	10.4	29.29	33	3.71
1850.20	82.07	186	1.7	V	17.8	0.31	10.4	27.89	33	5.11

EDGE Mode:

Receiver T		Turntable	Turntable Rx Anten		nna Substituted			Absolute		
Frequency (MHz)	requency Reading		Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
		E	RP, Cellu	ılar Band	d (Part 22H	I), Low	Channel			
824.20	92.24	125	1.6	Н	21.2	0.46	4.75	25.49	38.45	12.96
824.20	92.13	23	1.8	V	21.1	0.46	4.75	25.39	38.45	13.06
		Е	IRP, PCS	Band (Part 24E),	Middle (Channel			
1880.00	75.24	32	1.6	Н	14.4	0.31	10.4	24.49	33	8.51
1880.00	76.97	123	1.4	V	12.7	0.31	10.4	22.79	33	10.21

WCDMA Mode:

Receiver		Turntable	Rx An	tenna	\$	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP, WCDMA Band V (Part 22H), Middle Channel									
836.60	88.14	185	1.5	Н	17.1	0.46	4.75	21.39	38.45	17.06
836.60	87.93	213	1.7	V	16.9	0.46	4.75	21.19	38.45	17.26
		EIR	RP, WCDN	MA Band	II (Part 2	4E), High	Channel			
1907.60	72.74	337	2.0	Н	12.6	0.31	10.4	22.69	33	10.31
1907.60	74.63	73	2.4	V	11.1	0.31	10.4	21.19	33	11.81

Note:

All above data were tested with no amplifier. Absolute Level = SG Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	23.24	23.57	23.29
		RB Size=1, RB Offset=2	23.42	23.76	23.53
		RB Size=1, RB Offset=5	23.24	23.52	23.31
	QPSK	RB Size=3, RB Offset=0	22.46	22.70	22.50
		RB Size=3, RB Offset=1	22.35	22.64	22.39
		RB Size=3, RB Offset=2	22.48	22.84	22.61
1.4		RB Size=6, RB Offset=0	21.31	21.63	21.38
1.4		RB Size=1, RB Offset=0	23.26	23.54	23.32
		RB Size=1, RB Offset=2	23.41	23.69	23.52
		RB Size=1, RB Offset=5	23.29	23.53	23.33
	16QAM	RB Size=3, RB Offset=0	22.44	22.72	22.53
		RB Size=3, RB Offset=1	22.36	22.61	22.42
		RB Size=3, RB Offset=2	22.44	22.74	22.59
		RB Size=6, RB Offset=0	21.35	21.57	21.41
		RB Size=1, RB Offset=0	22.27	22.59	22.28
		RB Size=1, RB Offset=7	22.46	22.69	22.47
		RB Size=1, RB Offset=14	22.26	22.60	22.35
	QPSK	RB Size=8, RB Offset=0	22.45	22.69	22.44
		RB Size=8, RB Offset=4	22.37	22.69	22.33
		RB Size=8, RB Offset=7	22.55	22.72	22.58
3.0		RB Size=15, RB Offset=0	21.34	21.66	21.40
3.0		RB Size=1, RB Offset=0	22.28	22.59	22.33
		RB Size=1, RB Offset=7	22.47	22.75	22.50
		RB Size=1, RB Offset=14	22.29	22.58	22.35
	16QAM	RB Size=8, RB Offset=0	21.45	21.73	21.54
		RB Size=8, RB Offset=4	21.32	21.70	21.38
		RB Size=8, RB Offset=7	21.51	21.82	21.55
		RB Size=15, RB Offset=0	21.39	21.68	21.46

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.24	22.57	22.35
		RB Size=1, RB Offset=12	22.43	22.74	22.49
		RB Size=1, RB Offset=24	22.26	22.58	22.37
	QPSK	RB Size=12, RB Offset=0	21.43	21.70	21.46
		RB Size=12, RB Offset=6	21.34	21.63	21.43
		RB Size=12, RB Offset=11	21.50	21.82	21.61
5.0		RB Size=25, RB Offset=0	21.38	21.68	21.47
3.0		RB Size=1, RB Offset=0	22.24	22.59	22.33
		RB Size=1, RB Offset=12	22.44	22.75	22.49
		RB Size=1, RB Offset=24	22.25	22.52	22.37
	16QAM	RB Size=12, RB Offset=0	21.44	21.71	21.46
		RB Size=12, RB Offset=6	21.29	21.70	21.42
		RB Size=12, RB Offset=11	21.48	21.85	21.59
		RB Size=25, RB Offset=0	21.29	21.60	21.46
		RB Size=1, RB Offset=0	22.23	22.56	22.35
		RB Size=1, RB Offset=24	22.45	22.69	22.46
		RB Size=1, RB Offset=49	22.30	22.59	22.35
	QPSK	RB Size=25, RB Offset=0	21.45	21.69	21.45
		RB Size=25, RB Offset=12	21.29	21.66	21.46
		RB Size=25, RB Offset=24	21.51	21.79	21.52
10.0		RB Size=50, RB Offset=0	21.37	21.68	21.44
10.0		RB Size=1, RB Offset=0	22.22	22.60	22.31
		RB Size=1, RB Offset=24	22.41	22.74	22.54
		RB Size=1, RB Offset=49	22.23	22.52	22.36
	16QAM	RB Size=25, RB Offset=0	21.38	21.71	21.53
		RB Size=25, RB Offset=12	21.28	21.70	21.37
		RB Size=25, RB Offset=24	21.47	21.80	21.57
		RB Size=50, RB Offset=0	21.28	21.59	21.42

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.25	22.59	22.35
		RB Size=1, RB Offset=37	22.41	22.71	22.50
		RB Size=1, RB Offset=74	22.25	22.59	22.30
	QPSK	RB Size=36, RB Offset=0	21.45	21.72	21.45
		RB Size=36, RB Offset=18	21.32	21.71	21.39
		RB Size=36, RB Offset=37	21.54	21.77	21.58
15.0		RB Size=75, RB Offset=0	21.34	21.63	21.40
13.0		RB Size=1, RB Offset=0	22.28	22.55	22.34
		RB Size=1, RB Offset=37	22.47	22.76	22.52
		RB Size=1, RB Offset=74	22.31	22.53	22.36
	16QAM	RB Size=36, RB Offset=0	21.39	21.77	21.51
		RB Size=36, RB Offset=18	21.40	21.60	21.42
		RB Size=36, RB Offset=37	21.59	21.82	21.55
		RB Size=75, RB Offset=0	21.40	21.59	21.48
		RB Size=1, RB Offset=0	22.82	22.90	22.79
		RB Size=1, RB Offset=49	22.47	22.75	22.44
		RB Size=1, RB Offset=99	22.29	22.61	22.28
	QPSK	RB Size=50, RB Offset=0	21.47	21.69	21.49
		RB Size=50, RB Offset=24	21.34	21.71	21.34
		RB Size=50, RB Offset=49	21.51	21.87	21.49
20.0		RB Size=100, RB Offset=0	21.33	21.70	21.37
20.0		RB Size=1, RB Offset=0	22.30	22.60	22.33
		RB Size=1, RB Offset=49	22.40	22.75	22.46
		RB Size=1, RB Offset=99	22.28	22.52	22.37
	16QAM	RB Size=50, RB Offset=0	21.42	21.77	21.52
		RB Size=50, RB Offset=24	21.40	21.64	21.36
		RB Size=50, RB Offset=49	21.51	21.87	21.57
		RB Size=100, RB Offset=0	21.38	21.65	21.47

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.12	13	Pass
QPSK (100%RB Size)	5.63	13	Pass
16QAM (1RB Size)	3.95	13	Pass
16QAM (100%RB Size)	5.72	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz 1	Bandwidth					
1880.00	73.74	249	1.2	Н	12.9	0.31	10.4	22.99	33	
1880.00	75.47	1	1.8	V	11.2	0.31	10.4	21.29	33	
				3 MHz B	andwidth					
1880.00	73.34	264	1.1	Н	12.5	0.31	10.4	22.59	33	
1880.00	75.57	127	2.1	V	11.3	0.31	10.4	21.39	33	
			_	5 MHz B	andwidth					
1880.00	72.74	173	2.2	Н	11.9	0.31	10.4	21.99	33	
1880.00	75.07	210	1.4	V	10.8	0.31	10.4	20.89	33	
				10MHz E	Bandwidth					
1880.00	72.44	159	1.8	Н	11.6	0.31	10.4	21.69	33	
1880.00	75.37	86	1.5	V	11.1	0.31	10.4	21.19	33	
			1	15 MHz I	Bandwidth					
1880.00	72.24	169	1.7	Н	11.4	0.31	10.4	21.49	33	
1880.00	74.37	255	2.4	V	10.1	0.31	10.4	20.19	33	
			2	20 MHz I	Bandwidth					
1880.00	71.84	215	2.3	Н	11.0	0.31	10.4	21.09	33	
1880.00	74.17	334	1.9	V	9.9	0.31	10.4	19.99	33	

16QAM:

	D:	Turn	Rx An	Turn Rx Antenna		Substitut	ed	Absolute	
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz	Bandwidth	_			
1880.00	73.94	60	1.5	Н	13.1	0.31	10.4	23.19	33
1880.00	75.37	210	1.6	V	11.1	0.31	10.4	21.19	33
			_	3 MHz B	Bandwidth	_			
1880.00	73.54	286	1.7	Н	12.7	0.31	10.4	22.79	33
1880.00	75.17	189	1.3	V	10.9	0.31	10.4	20.99	33
				5 MHz B	Bandwidth				
1880.00	73.14	63	1.5	Н	12.3	0.31	10.4	22.39	33
1880.00	74.47	271	2.1	V	10.2	0.31	10.4	20.29	33
				10 MHz I	Bandwidth				
1880.00	72.64	176	1.3	Н	11.8	0.31	10.4	21.89	33
1880.00	74.27	2	2.1	V	10.0	0.31	10.4	20.09	33
				15 MHz I	Bandwidth				
1880.00	72.54	84	1.6	Н	11.7	0.31	10.4	21.79	33
1880.00	73.87	264	1.2	V	9.6	0.31	10.4	19.69	33
	20 MHz Bandwidth								
1880.00	71.94	178	2.3	Н	11.1	0.31	10.4	21.19	33
1880.00	73.77	110	2.2	V	9.5	0.31	10.4	19.59	33

LTE Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.30	22.61	22.28
		RB Size=1, RB Offset=2	22.48	22.73	22.47
		RB Size=1, RB Offset=5	22.29	22.54	22.32
	QPSK	RB Size=3, RB Offset=0	21.45	21.73	21.52
		RB Size=3, RB Offset=1	21.39	21.71	21.34
		RB Size=3, RB Offset=2	21.60	21.86	21.53
1.4		RB Size=6, RB Offset=0	21.34	21.60	21.41
1.4		RB Size=1, RB Offset=0	22.27	22.52	22.35
		RB Size=1, RB Offset=2	22.39	22.76	22.48
		RB Size=1, RB Offset=5	22.28	22.52	22.35
	16QAM	RB Size=3, RB Offset=0	21.42	21.69	21.52
		RB Size=3, RB Offset=1	21.37	21.65	21.40
		RB Size=3, RB Offset=2	21.44	21.87	21.57
		RB Size=6, RB Offset=0	21.01	21.11	21.27
		RB Size=1, RB Offset=0	22.26	22.56	22.29
		RB Size=1, RB Offset=7	22.40	22.70	22.48
		RB Size=1, RB Offset=14	22.24	22.55	22.35
	QPSK	RB Size=8, RB Offset=0	21.42	21.72	21.45
		RB Size=8, RB Offset=4	21.38	21.68	21.40
		RB Size=8, RB Offset=7	21.47	21.73	21.52
3.0		RB Size=15, RB Offset=0	21.06	21.66	21.45
3.0		RB Size=1, RB Offset=0	22.25	22.56	22.31
		RB Size=1, RB Offset=7	22.42	22.70	22.49
		RB Size=1, RB Offset=14	22.29	22.60	22.32
	16QAM	RB Size=8, RB Offset=0	21.43	21.74	21.54
		RB Size=8, RB Offset=4	21.34	21.64	21.43
		RB Size=8, RB Offset=7	21.45	21.78	21.57
		RB Size=15, RB Offset=0	21.41	21.70	21.38

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.28	22.58	22.29
		RB Size=1, RB Offset=12	22.39	22.77	22.52
		RB Size=1, RB Offset=24	22.25	22.59	22.34
	QPSK	RB Size=12, RB Offset=0	21.42	21.68	21.50
		RB Size=12, RB Offset=6	21.37	21.66	21.34
		RB Size=12, RB Offset=11	21.52	21.89	21.55
5.0		RB Size=25, RB Offset=0	21.37	21.65	21.38
3.0		RB Size=1, RB Offset=0	22.26	21.55	21.34
		RB Size=1, RB Offset=12	22.42	22.73	22.48
		RB Size=1, RB Offset=24	22.24	22.59	22.30
	16QAM	RB Size=12, RB Offset=0	21.45	21.70	21.53
		RB Size=12, RB Offset=6	21.31	21.61	21.47
		RB Size=12, RB Offset=11	21.48	21.79	21.59
		RB Size=25, RB Offset=0	21.36	21.46	21.36
		RB Size=1, RB Offset=0	22.25	22.55	22.36
		RB Size=1, RB Offset=24	22.44	22.76	22.51
		RB Size=1, RB Offset=49	22.28	22.56	22.33
	QPSK	RB Size=25, RB Offset=0	21.43	21.72	21.48
		RB Size=25, RB Offset=12	21.37	21.63	21.39
		RB Size=25, RB Offset=24	21.53	21.83	21.54
10.0		RB Size=50, RB Offset=0	21.33	21.60	21.39
10.0		RB Size=1, RB Offset=0	22.30	22.59	22.33
		RB Size=1, RB Offset=24	22.41	22.76	22.52
		RB Size=1, RB Offset=49	22.28	22.58	22.38
	16QAM	RB Size=25, RB Offset=0	21.44	21.70	21.46
		RB Size=25, RB Offset=12	21.40	21.63	21.37
		RB Size=25, RB Offset=24	21.47	21.88	21.64
		RB Size=50, RB Offset=0	21.32	21.67	21.47

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.25	22.62	22.35
		RB Size=1, RB Offset=37	22.40	22.72	22.53
		RB Size=1, RB Offset=74	22.31	22.54	22.36
	QPSK	RB Size=36, RB Offset=0	21.45	21.78	21.51
		RB Size=36, RB Offset=18	21.38	21.69	21.45
		RB Size=36, RB Offset=37	21.50	21.76	21.64
15.0		RB Size=75, RB Offset=0	21.41	21.66	21.45
13.0		RB Size=1, RB Offset=0	22.31	22.57	22.31
		RB Size=1, RB Offset=37	22.45	22.72	22.51
		RB Size=1, RB Offset=74	22.23	22.53	22.35
	16QAM	RB Size=36, RB Offset=0	21.44	21.70	21.49
		RB Size=36, RB Offset=18	21.41	21.64	21.37
		RB Size=36, RB Offset=37	21.53	21.79	21.55
		RB Size=75, RB Offset=0	21.27	21.61	21.42
		RB Size=1, RB Offset=0	22.87	22.90	22.82
		RB Size=1, RB Offset=49	22.47	22.69	22.45
		RB Size=1, RB Offset=99	22.26	22.57	22.33
	QPSK	RB Size=50, RB Offset=0	21.40	21.76	21.54
		RB Size=50, RB Offset=24	21.36	21.73	21.40
		RB Size=50, RB Offset=49	21.51	21.72	21.48
20.0		RB Size=100, RB Offset=0	21.35	21.68	21.42
20.0		RB Size=1, RB Offset=0	22.24	22.55	22.29
		RB Size=1, RB Offset=49	22.43	22.71	22.50
		RB Size=1, RB Offset=99	22.30	22.57	22.30
	16QAM	RB Size=50, RB Offset=0	21.45	21.69	21.47
		RB Size=50, RB Offset=24	21.30	21.64	21.33
		RB Size=50, RB Offset=49	21.54	21.77	21.55
		RB Size=100, RB Offset=0	21.41	21.64	21.39

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.57	13	Pass
QPSK (100%RB Size)	5.62	13	Pass
16QAM (1RB Size)	4.71	13	Pass
16QAM (100%RB Size)	5.50	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz l	Bandwidth					
1732.50	74.98	229	2.2	Н	12.6	0.30	9.90	22.20	30	
1732.50	75.94	236	2.3	V	11.1	0.30	9.90	20.70	30	
				3 MHz B	andwidth					
1732.50	74.98	3	2.0	Н	12.6	0.30	9.90	22.20	30	
1732.50	75.84	281	2.4	V	11.0	0.30	9.90	20.60	30	
				5 MHz B	andwidth					
1732.50	74.48	98	1.7	Н	12.1	0.30	9.90	21.70	30	
1732.50	75.24	112	1.9	V	10.4	0.30	9.90	20.00	30	
				10MHz E	Bandwidth					
1732.50	74.08	219	1.6	Н	11.7	0.30	9.90	21.30	30	
1732.50	74.74	252	2.3	V	9.9	0.30	9.90	19.50	30	
			1	5 MHz I	Bandwidth					
1732.50	73.98	356	2.1	Н	11.6	0.30	9.90	21.20	30	
1732.50	74.34	199	1.1	V	9.5	0.30	9.90	19.10	30	
			2	20 MHz I	Bandwidth					
1732.50	73.08	55	2.2	Н	10.7	0.30	9.90	20.30	30	
1732.50	74.44	137	1.4	V	9.6	0.30	9.90	19.20	30	

16QAM:

	D	Turn	Rx An	tenna		Substitut	ed	Absolute	
Frequency (MHz)	Receiver Reading (dBµV)	Reading table	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz	Bandwidth				
1732.50	75.48	132	1.2	Н	13.1	0.30	9.90	22.70	30
1732.50	76.74	38	1.2	V	11.9	0.30	9.90	21.50	30
			-	3 MHz B	andwidth	-			
1732.50	74.78	319	1.8	Н	12.4	0.30	9.90	22.00	30
1732.50	75.94	274	2.0	V	11.1	0.30	9.90	20.70	30
				5 MHz B	andwidth				
1732.50	74.88	24	1.6	Н	12.5	0.30	9.90	22.10	30
1732.50	76.14	306	1.3	V	11.3	0.30	9.90	20.90	30
				10 MHz I	Bandwidth				
1732.50	74.58	240	1.1	Н	12.2	0.30	9.90	21.80	30
1732.50	75.64	116	1.9	V	10.8	0.30	9.90	20.40	30
				15 MHz I	Bandwidth				
1732.50	73.98	84	1.5	Н	11.6	0.30	9.90	21.20	30
1732.50	74.84	265	1.7	V	10.0	0.30	9.90	19.60	30
			2	20 MHz I	Bandwidth			·	
1732.50	72.88	19	2.3	Н	10.5	0.30	9.90	20.10	30
1732.50	74.54	158	1.1	V	9.7	0.30	9.90	19.30	30

LTE Band 5:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.08	22.40	22.21
		RB Size=1, RB Offset=2	22.16	22.57	22.38
		RB Size=1, RB Offset=5	22.05	22.41	22.22
	QPSK	RB Size=3, RB Offset=0	21.21	21.59	21.35
		RB Size=3, RB Offset=1	21.19	21.53	21.30
		RB Size=3, RB Offset=2	21.23	21.62	21.48
1.4		RB Size=6, RB Offset=0	21.14	21.52	21.34
1.4		RB Size=1, RB Offset=0	22.01	22.44	22.25
		RB Size=1, RB Offset=2	22.23	22.63	22.39
		RB Size=1, RB Offset=5	22.06	22.41	22.27
	16QAM	RB Size=3, RB Offset=0	21.20	21.58	21.44
		RB Size=3, RB Offset=1	21.13	21.54	21.30
		RB Size=3, RB Offset=2	21.34	21.69	21.43
		RB Size=6, RB Offset=0	21.15	21.51	21.39
		RB Size=1, RB Offset=0	22.08	22.44	22.27
		RB Size=1, RB Offset=7	22.24	22.60	22.45
		RB Size=1, RB Offset=14	22.08	22.47	22.21
	QPSK	RB Size=8, RB Offset=0	21.25	21.61	21.35
		RB Size=8, RB Offset=4	21.15	21.51	21.37
		RB Size=8, RB Offset=7	21.28	21.65	21.58
3.0		RB Size=15, RB Offset=0	21.20	21.52	21.31
3.0		RB Size=1, RB Offset=0	22.09	22.39	22.21
		RB Size=1, RB Offset=7	22.19	22.61	22.43
		RB Size=1, RB Offset=14	22.05	22.45	22.28
	16QAM	RB Size=8, RB Offset=0	21.25	21.60	21.37
		RB Size=8, RB Offset=4	21.21	21.50	21.33
		RB Size=8, RB Offset=7	21.27	21.65	21.52
		RB Size=15, RB Offset=0	21.11	21.49	21.35

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.08	22.48	22.29
		RB Size=1, RB Offset=12	22.25	22.59	22.44
		RB Size=1, RB Offset=24	22.00	22.47	22.22
	QPSK	RB Size=12, RB Offset=0	21.17	21.60	21.37
		RB Size=12, RB Offset=6	21.13	21.54	21.40
		RB Size=12, RB Offset=11	21.31	21.62	21.55
5.0		RB Size=25, RB Offset=0	21.11	21.54	21.30
3.0		RB Size=1, RB Offset=0	22.03	22.45	22.21
		RB Size=1, RB Offset=12	22.25	22.62	22.38
		RB Size=1, RB Offset=24	22.07	22.47	22.22
	16QAM	RB Size=12, RB Offset=0	21.23	21.64	21.36
		RB Size=12, RB Offset=6	21.15	21.57	21.27
		RB Size=12, RB Offset=11	21.32	21.75	21.48
		RB Size=25, RB Offset=0	21.15	21.56	21.32
		RB Size=1, RB Offset=0	22.66	22.86	22.78
	QPSK	RB Size=1, RB Offset=24	22.17	22.65	22.41
		RB Size=1, RB Offset=49	22.04	22.42	22.26
		RB Size=25, RB Offset=0	21.26	21.59	21.42
		RB Size=25, RB Offset=12	21.14	21.56	21.35
		RB Size=25, RB Offset=24	21.23	21.70	21.46
10.0		RB Size=50, RB Offset=0	21.17	21.45	21.34
10.0		RB Size=1, RB Offset=0	22.08	22.41	22.24
		RB Size=1, RB Offset=24	22.19	22.61	22.41
		RB Size=1, RB Offset=49	22.07	22.39	22.23
	16QAM	RB Size=25, RB Offset=0	21.26	21.65	21.41
		RB Size=25, RB Offset=12	21.13	21.50	21.35
		RB Size=25, RB Offset=24	21.28	21.66	21.46
		RB Size=50, RB Offset=0	21.17	21.48	21.26

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.49	13	Pass
QPSK (100%RB Size)	6.67	13	Pass
16QAM (1RB Size)	4.53	13	Pass
16QAM (100%RB Size)	6.75	13	Pass

EIRP:

QPSK:

	Receiver		Rx An	tenna	\$	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
]	Middle C	hannel				
			1.4	MHz B	andwidth				
836.50	88.96	112	2.2	Н	17.9	0.46	4.75	22.19	38.45
836.50	87.22	25	1.8	V	16.2	0.46	4.75	20.49	38.45
			3	MHz Baı	ndwidth				
836.50	88.82	118	1.6	Н	17.8	0.46	4.75	22.09	38.45
836.50	86.98	59	1.8	V	15.9	0.46	4.75	20.19	38.45
			5	MHz Ba	ndwidth				
836.50	88.17	52	1.5	Н	17.2	0.46	4.75	21.49	38.45
836.50	86.85	72	1.7	V	15.8	0.46	4.75	20.09	38.45
	10 MHz Bandwidth								
836.50	87.84	251	1.7	Н	16.8	0.46	4.75	21.09	38.45
836.50	85.93	126	1.5	V	14.9	0.46	4.75	19.19	38.45

16QAM:

	Receiver	Turn	Rx An	tenna	5	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dRuV) ta	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth	1			
836.50	88.85	112	1.5	Н	17.8	0.46	4.75	22.09	38.45
836.50	87.08	158	1.7	V	16.1	0.46	4.75	20.39	38.45
			_	3 MHz E	Bandwidth				
836.50	88.58	158	1.7	Н	17.6	0.46	4.75	21.89	38.45
836.50	86.45	75	2.3	V	15.5	0.46	4.75	19.79	38.45
	5 MHz Bandwidth								
836.50	87.72	48	1.7	Н	16.7	0.46	4.75	20.99	38.45
836.50	85.82	78	1.5	V	14.8	0.46	4.75	19.09	38.45
	10 MHz Bandwidth								
836.50	87.27	185	1.8	Н	16.3	0.46	4.75	20.59	38.45
836.50	85.31	72	1.5	V	14.2	0.46	4.75	18.49	38.45

Note:

All above data were tested with no amplifier
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.



Test Data

Environmental Conditions

Temperature:	24~25℃	
Relative Humidity:	50~54 %	
ATM Pressure:	100.0~101.0kPa	

The testing was performed by Ada Yu from 2016-10-13 to 2016-10-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.50	320.64
EGPRS(8PSK)	836.6	252.51	312.63


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.208	4.910
HSUPA (BPSK)	836.6	4.208	4.950
HSDPA (16QAM)	836.6	4.228	4.890

PCS Band (Part 24E)


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	244.49	312.63
EGPRS(8PSK)	1880.0	248.50	316.63

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.208	4.850
HSUPA (BPSK)	1880.0	4.228	4.890
HSDPA (16QAM)	1880.0	4.228	4.890


Cellular Band (Part 22H) 99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

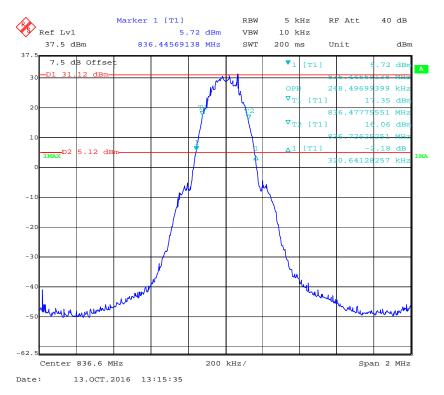


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

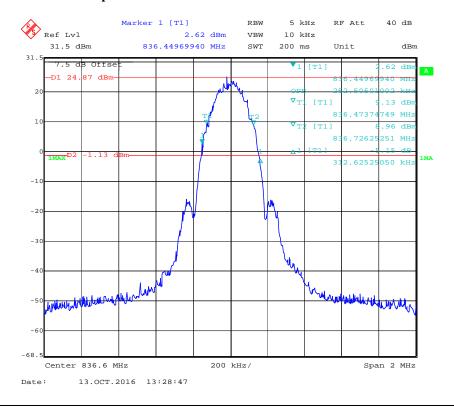


99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

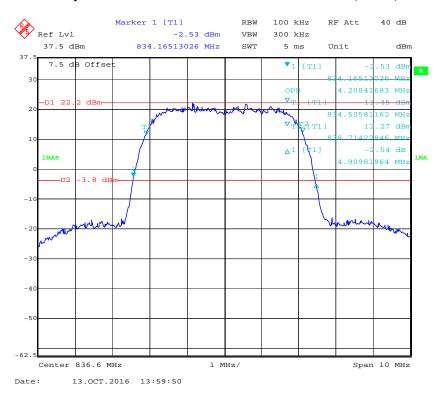


99% Occupied&26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

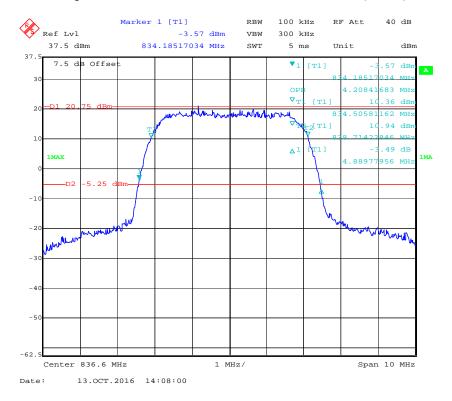


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

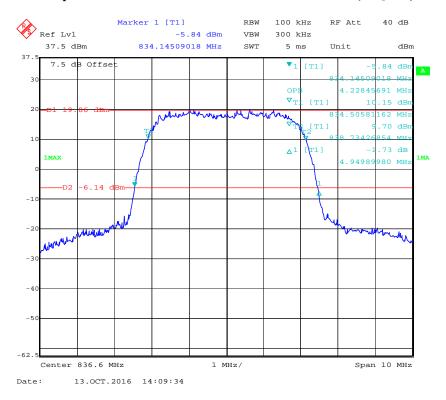


PCS Band (Part 24E) 99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

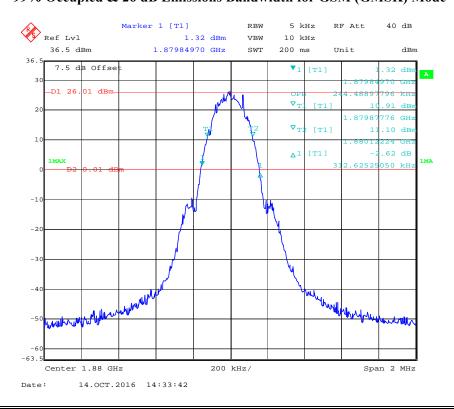


99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode

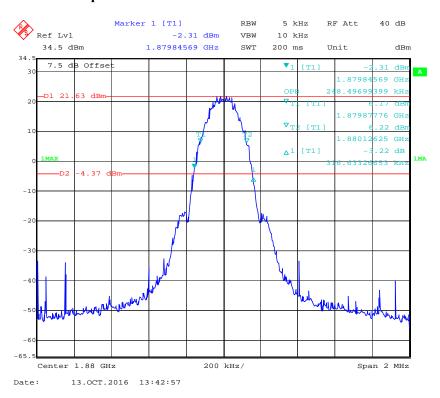


99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

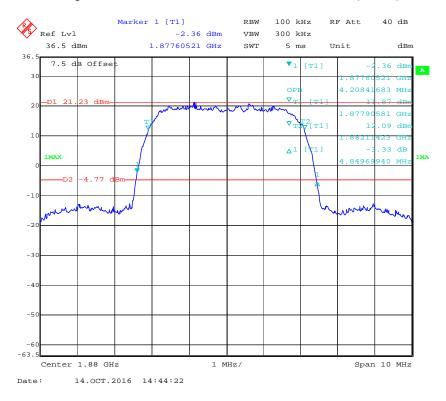

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

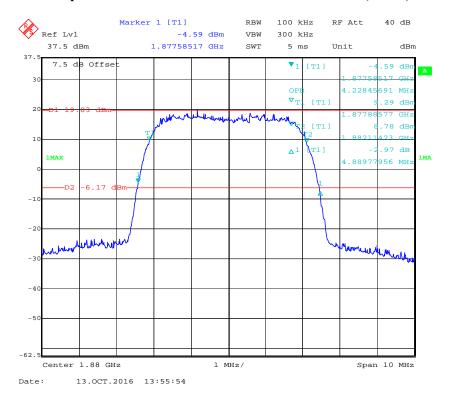


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

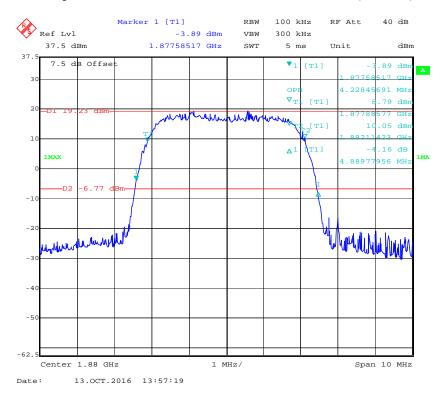


LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.094	1.257
	16QAM	1.111	1.268
3.0	QPSK	2.705	2.922
	16QAM	2.693	2.898
5.0	QPSK	4.529	5.090
	16QAM	4.549	5.050
10.0	QPSK	9.018	9.659
	16QAM	8.978	9.780
15.0	QPSK	13.587	14.970
	16QAM	13.587	15.030
20.0	QPSK	17.956	19.319
	16QAM	17.956	19.479


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

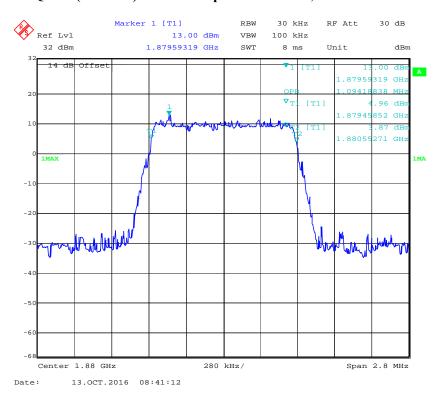


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

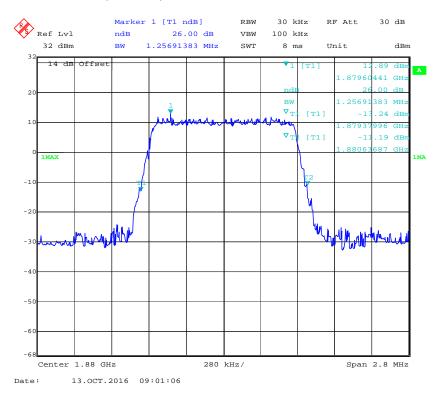


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

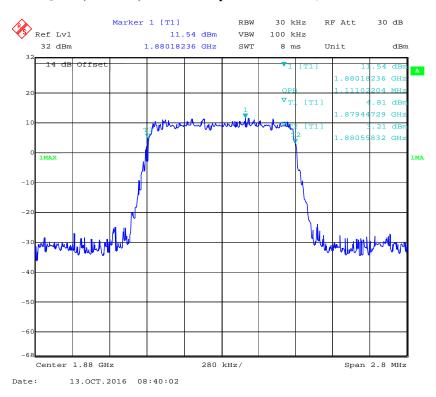


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

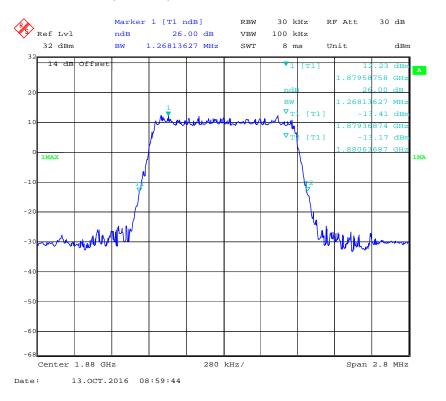


QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

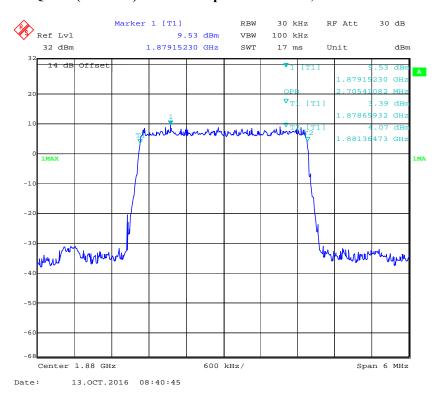


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

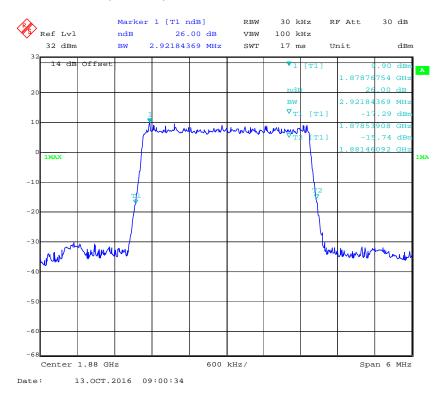


16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

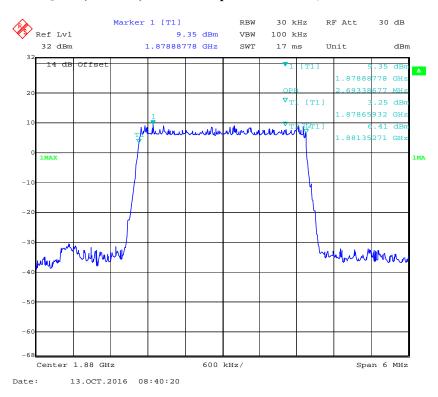


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

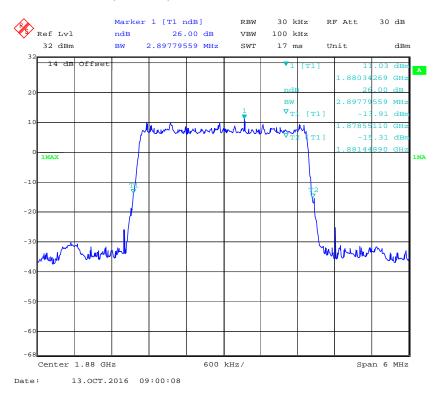


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

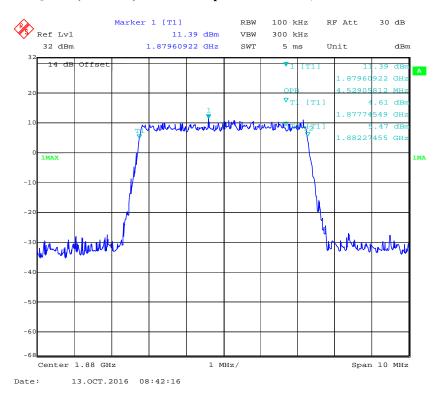


QPSK (5.0 MHz) -26 dB Bandwidth, Middle channel

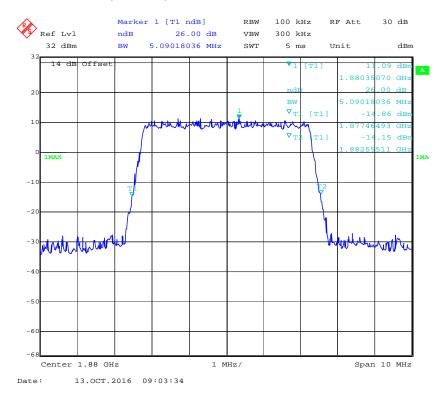


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

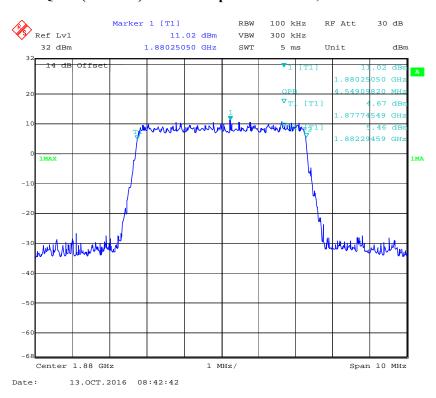


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

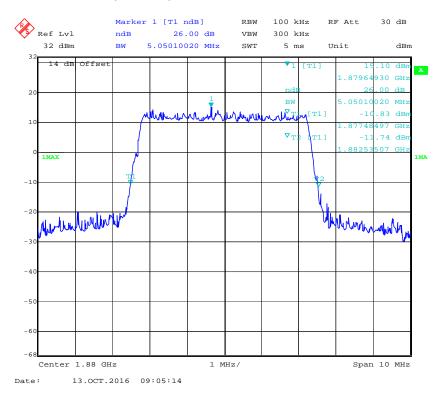


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

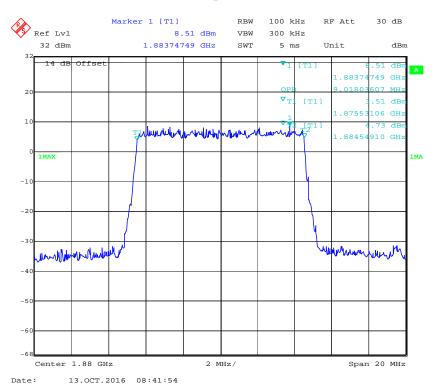


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

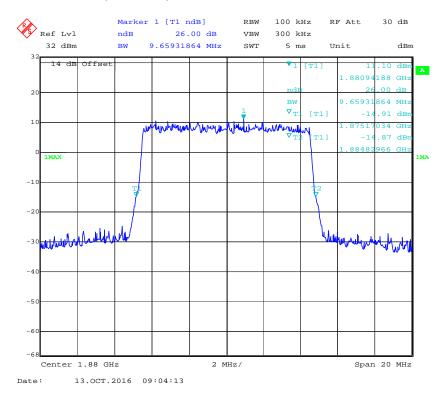


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

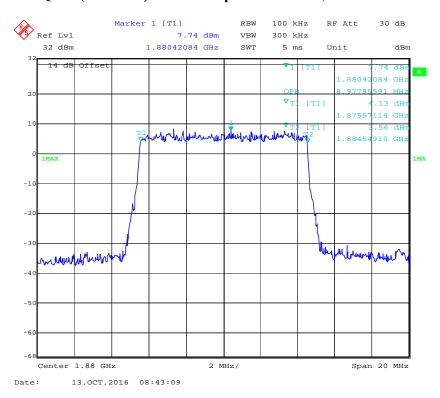


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

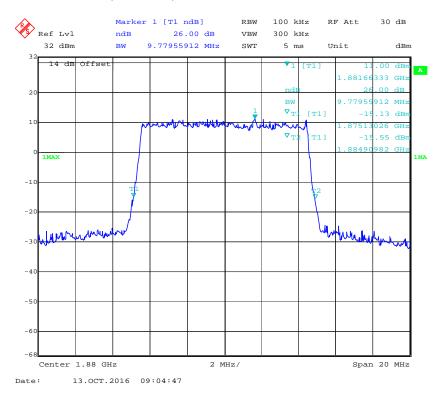


QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

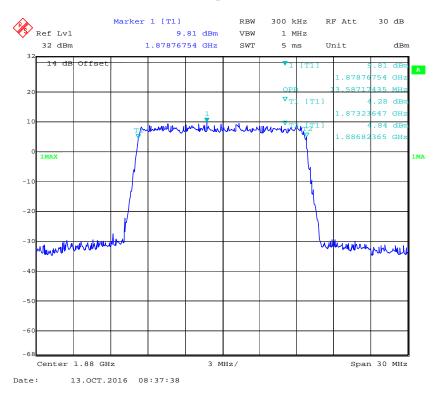


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

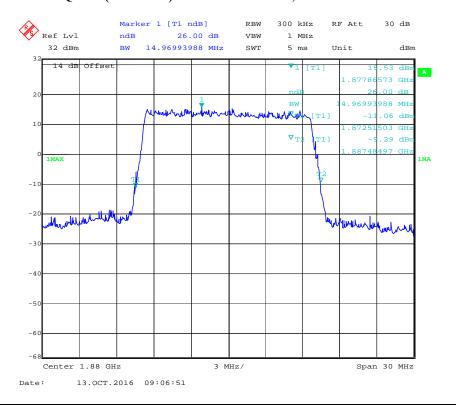


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

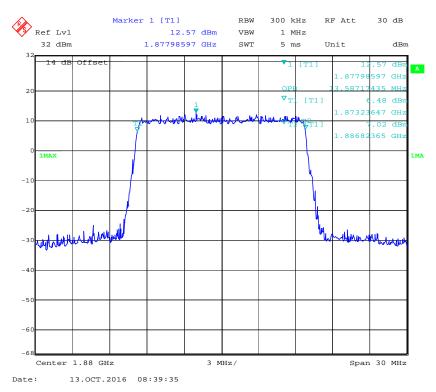


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

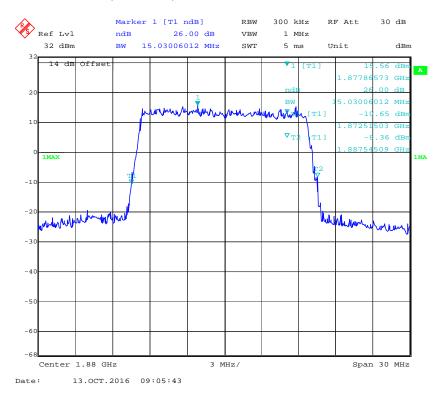


QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

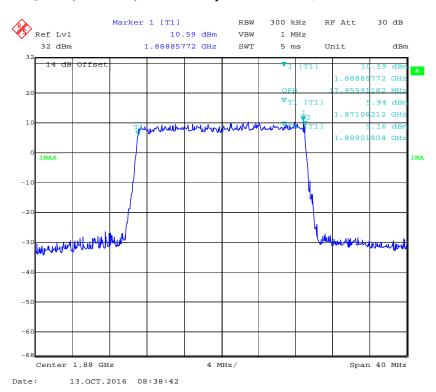


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

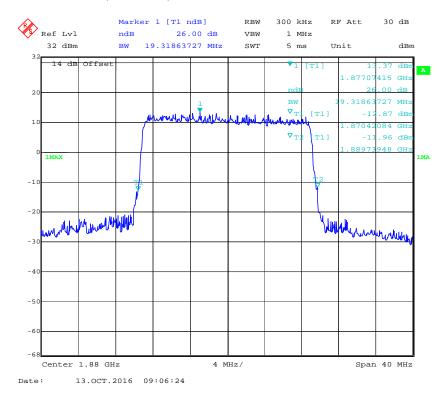

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

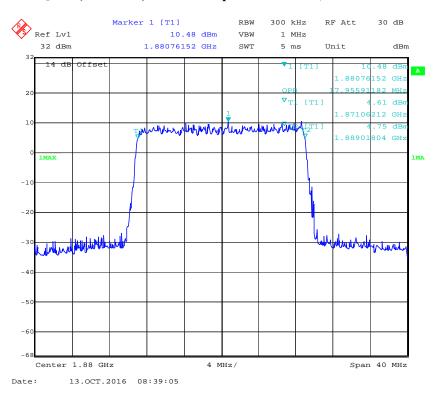


16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

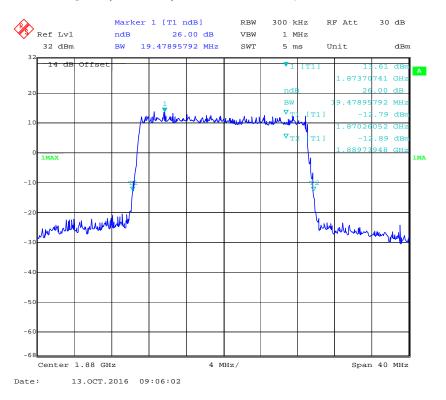


LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.111	1.257
	16QAM	1.105	1.246
3.0	QPSK	2.693	2.898
	16QAM	2.693	2.886
5.0	QPSK	4.549	5.110
	16QAM	4.529	5.090
10.0	QPSK	8.978	9.739
	16QAM	8.978	9.619
15.0	QPSK	13.527	14.910
	16QAM	13.527	14.850
20.0	QPSK	17.956	19.479
	16QAM	17.956	19.559


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

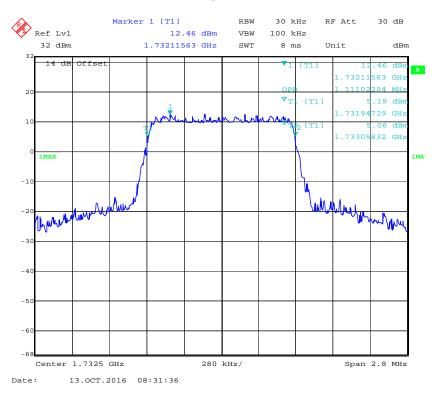


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

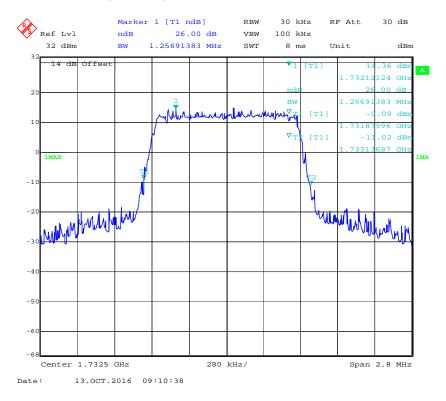


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

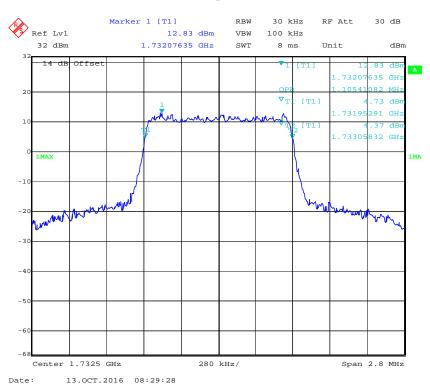


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

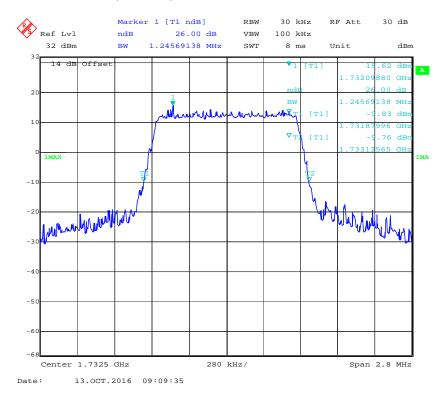


QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

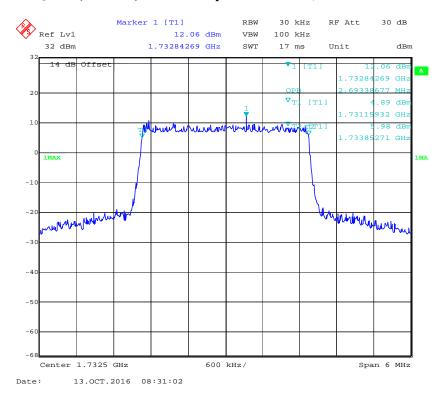


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

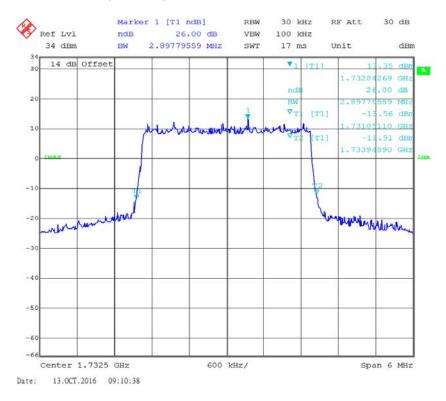


16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

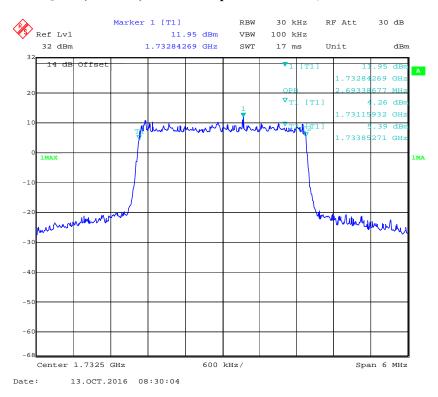


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

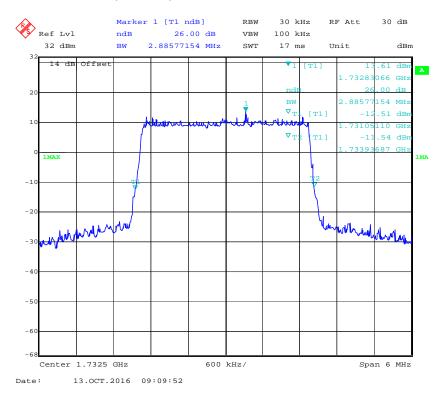


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

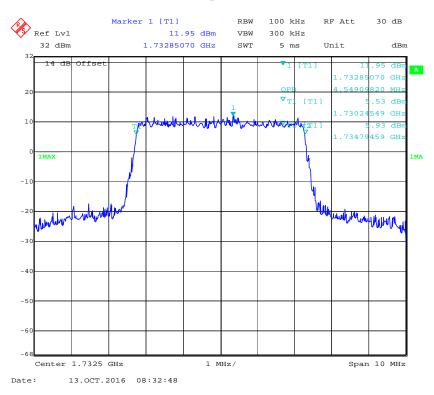


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

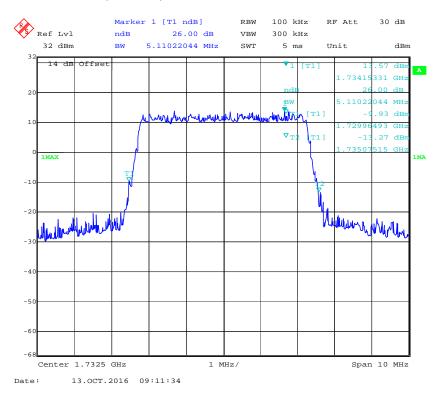


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

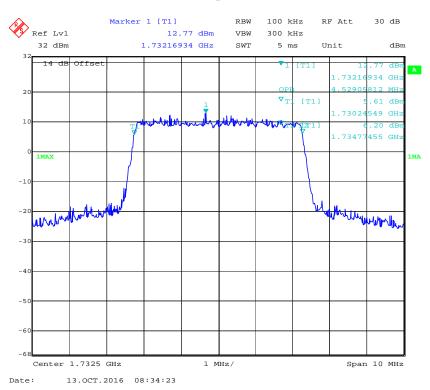


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

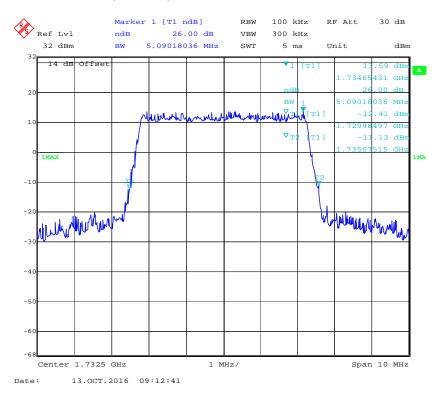


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

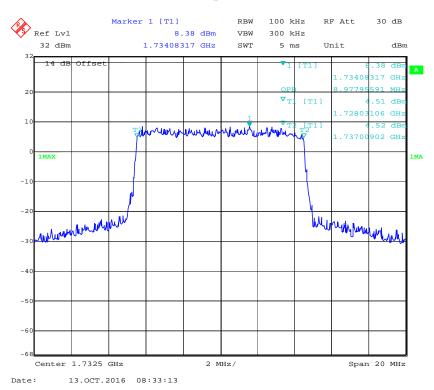


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

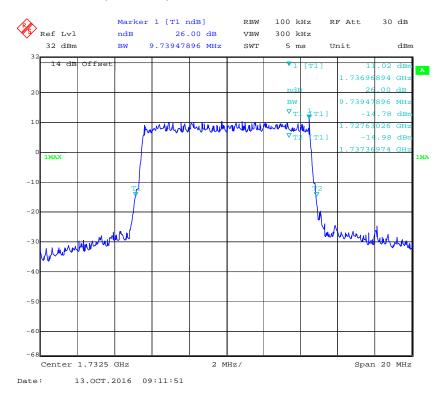


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

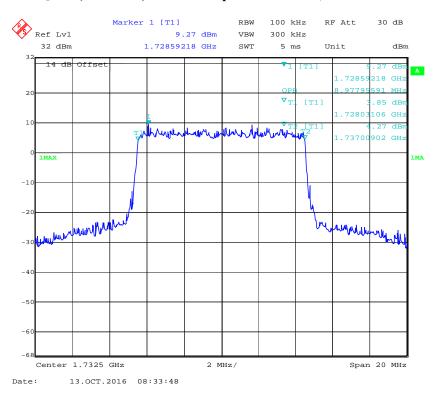

16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

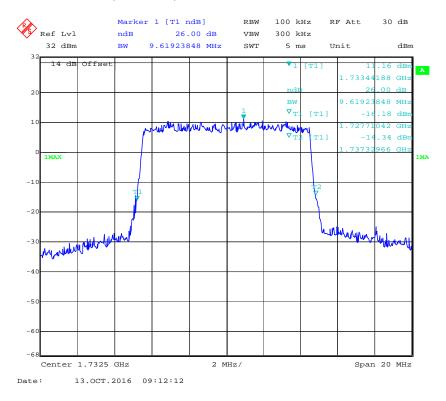


QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

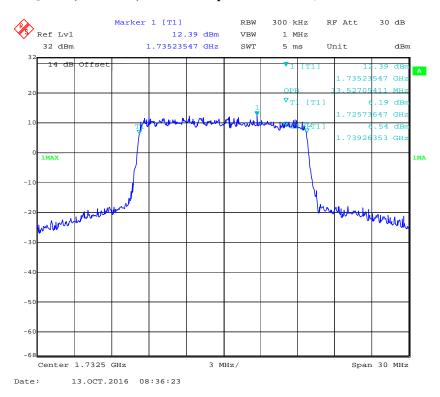


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel




16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

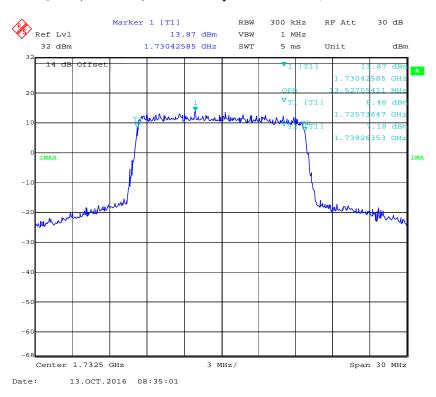


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

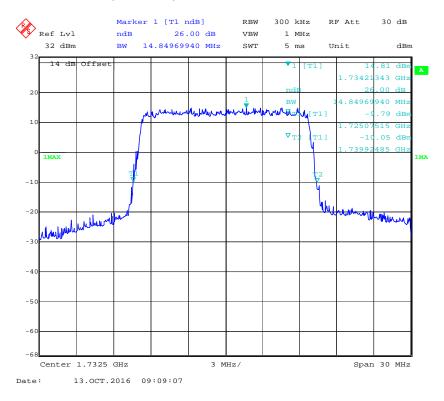


QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

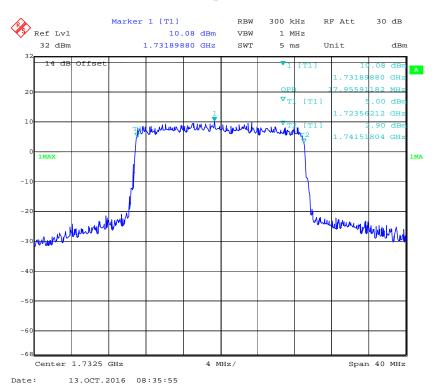


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

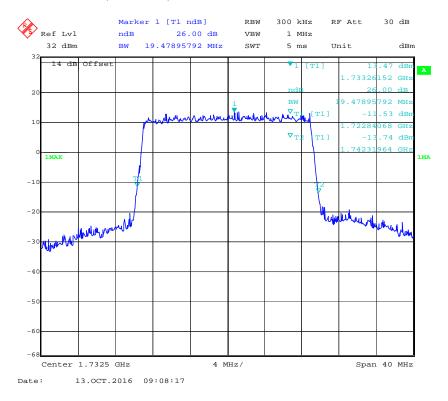

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

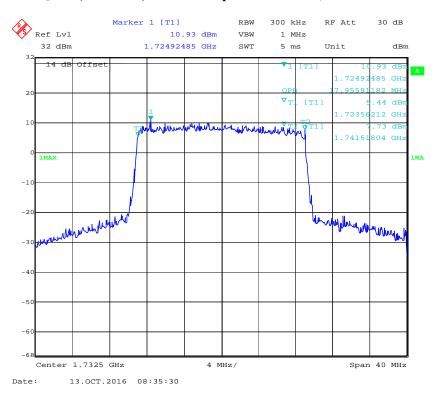


16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

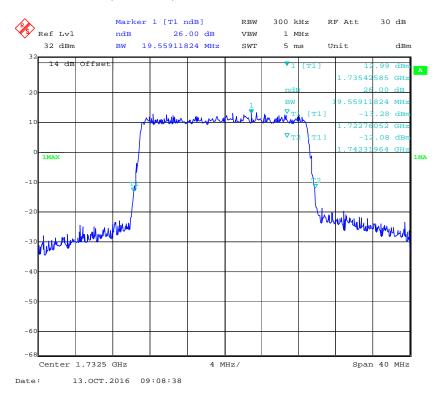


LTE Band 5: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.100	1.274
	16QAM	1.105	1.296
3.0	QPSK	2.693	2.922
	16QAM	2.681	2.922
5.0	QPSK	4.529	5.050
	16QAM	4.509	5.150
10.0	QPSK	8.978	9.699
	16QAM	8.978	9.780


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

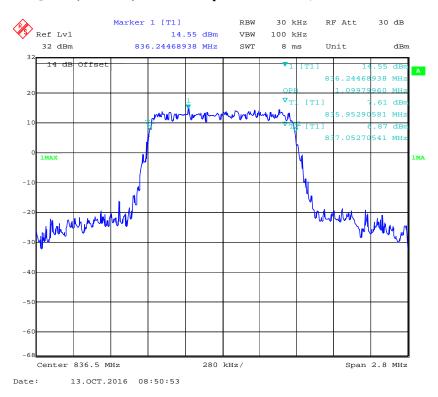


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

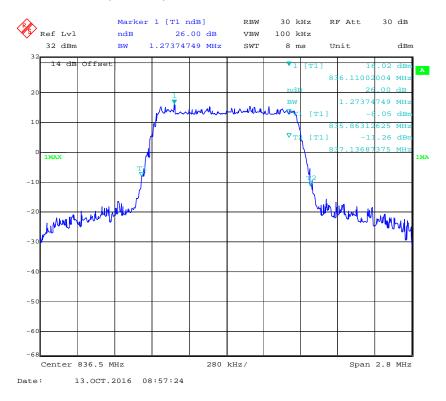


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

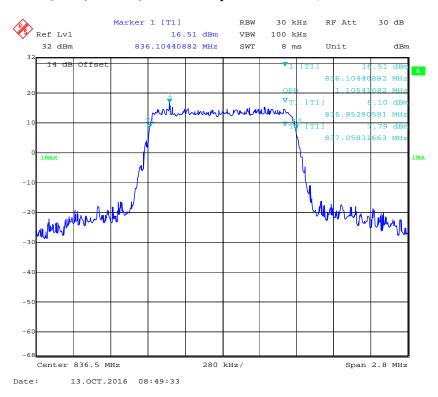


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

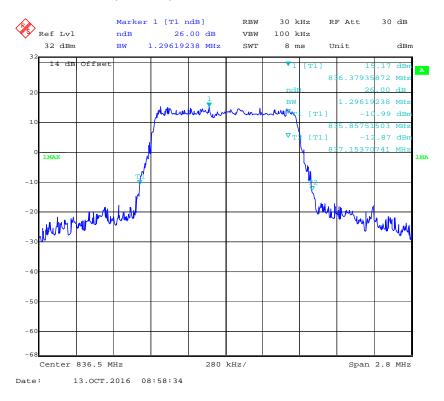


QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

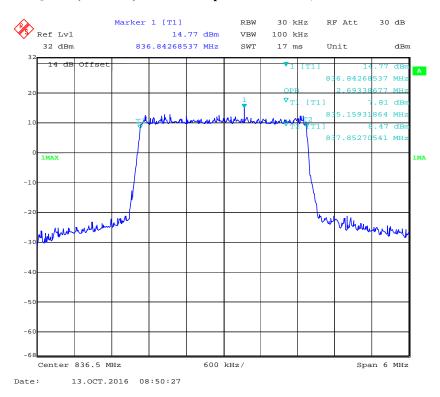


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

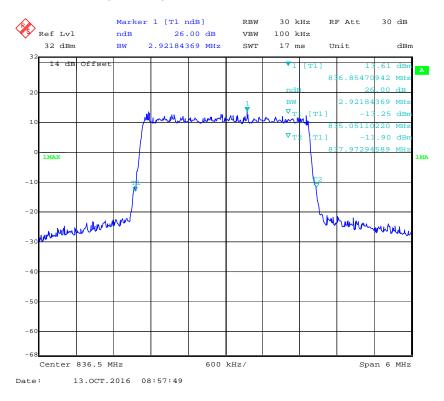


16-QAM (3.0MHz) - 99% Occupied Bandwidth, Middle channel

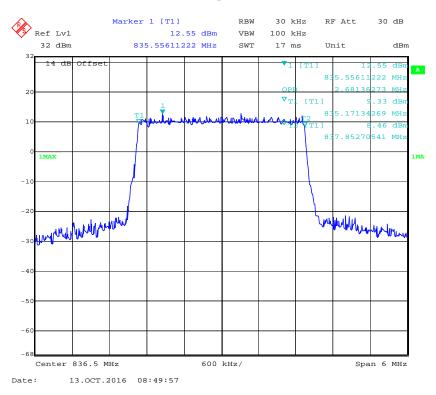


16-QAM (3.0MHz) - 26 dB Bandwidth, Middle channel

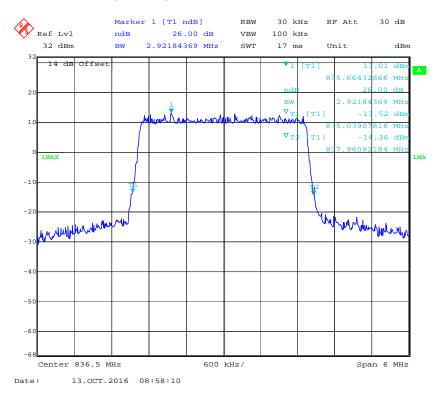


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

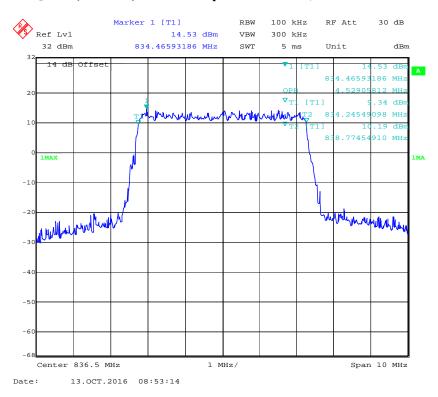


QPSK (5.0 MHz) -26 dB Bandwidth, Middle channel

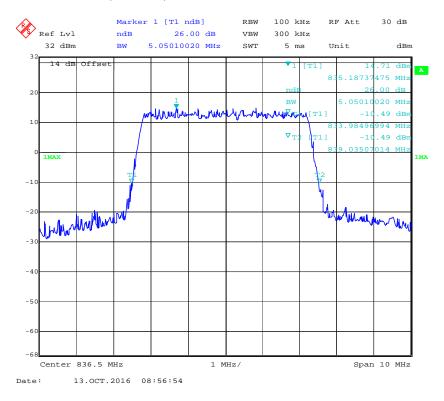


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

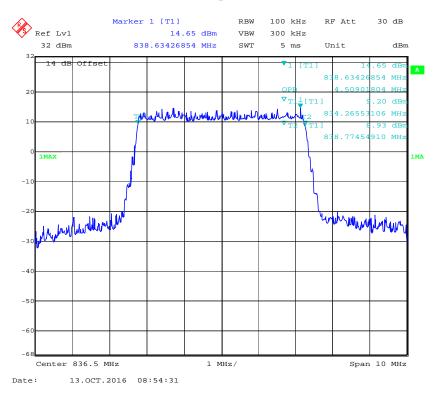


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

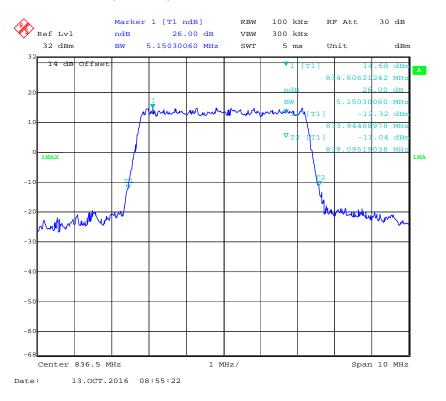


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

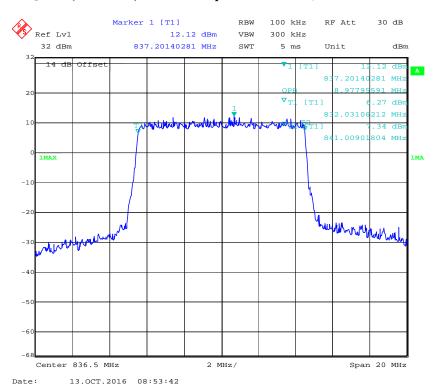


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

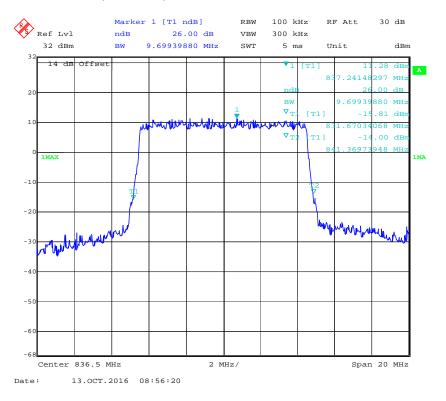

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

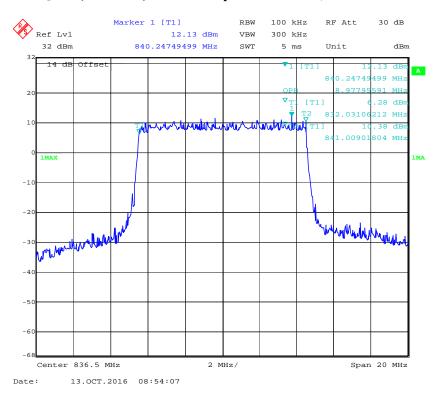

16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

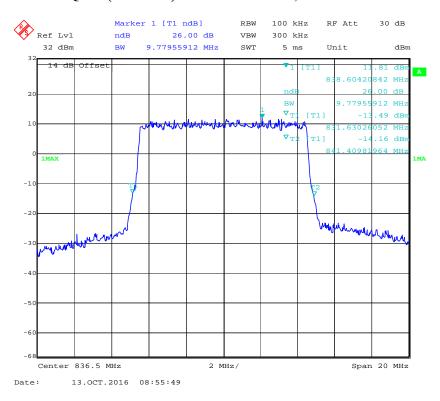

Report No.: RSZ160630001-00D

§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h)(m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. Sufficient scans were taken to show any out of band emissions up to 10^{th} harmonic.



Test Data


Environmental Conditions

Temperature:	24~25°C
Relative Humidity:	50~54 %
ATM Pressure:	100.0~101.0kPa


The testing was performed by Ada Yu from 2016-10-13 to 2016-10-14.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

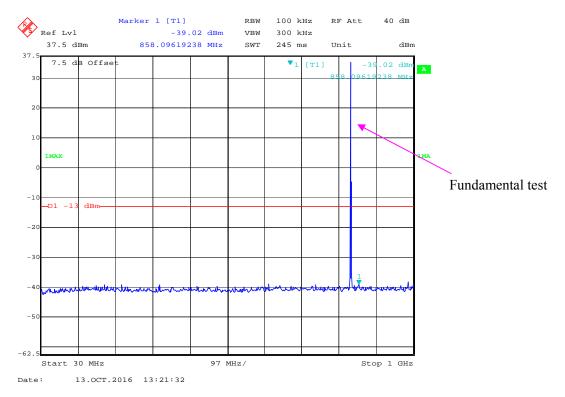


1 GHz – 10 GHz (GSM Mode)

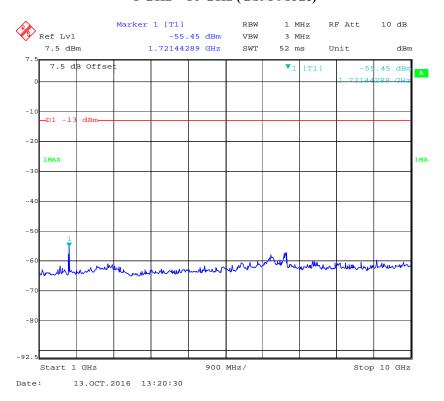

30 MHz - 1 GHz (WCDMA Mode)

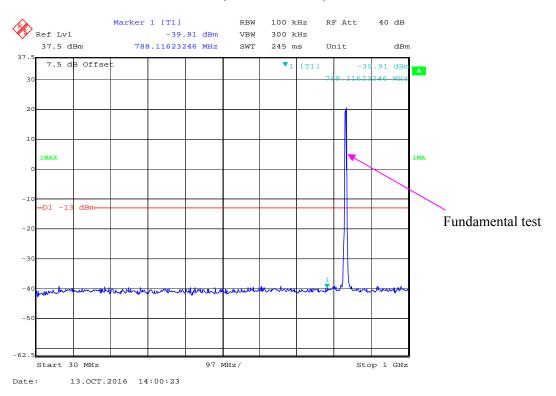


1 GHz – 10 GHz (WCDMA Mode)

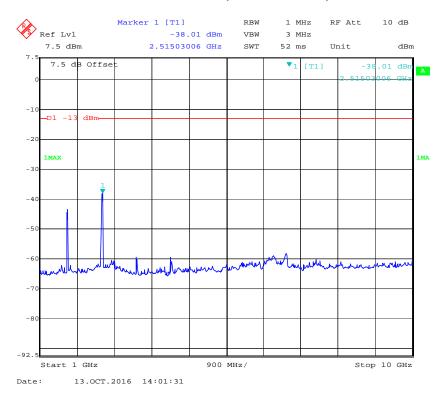


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

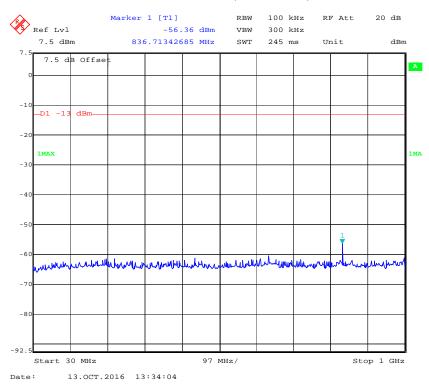


1 GHz – 2 GHz (GSM Mode)

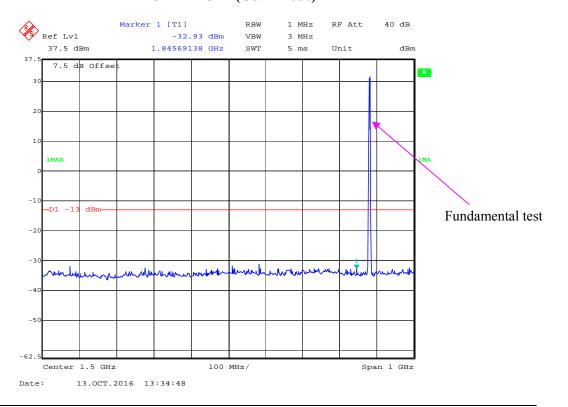


2 GHz - 20 GHz (GSM Mode)

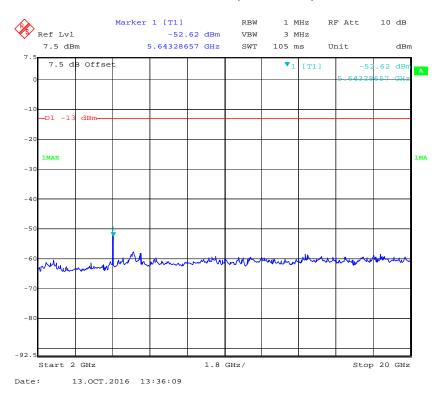


30 MHz - 1 GHz (WCDMA Mode)

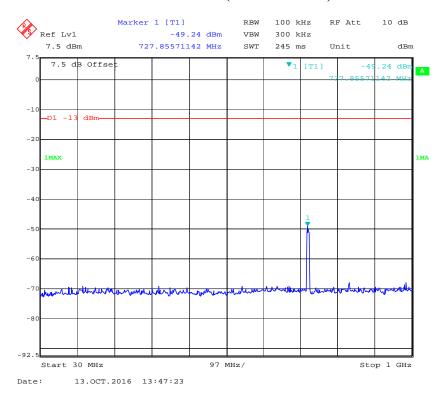

1 GHz – 2 GHz (WCDMA Mode)

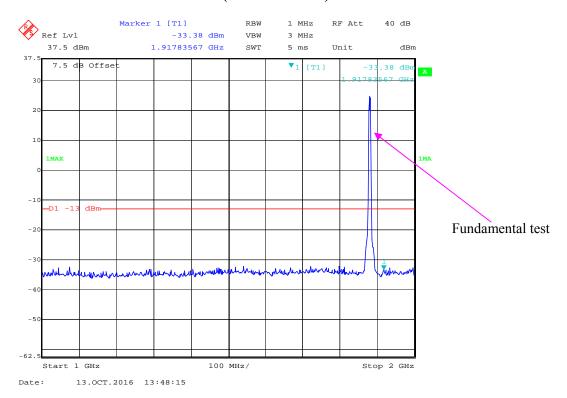


2 GHz - 20 GHz (WCDMA Mode)

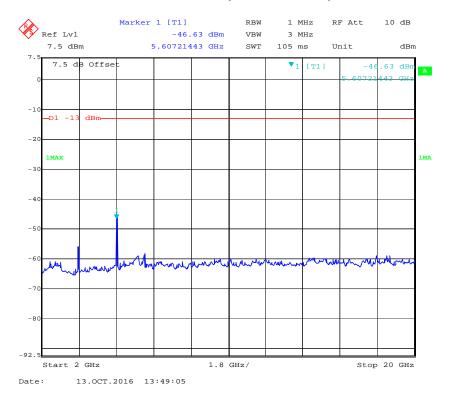


LTE Band 2:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

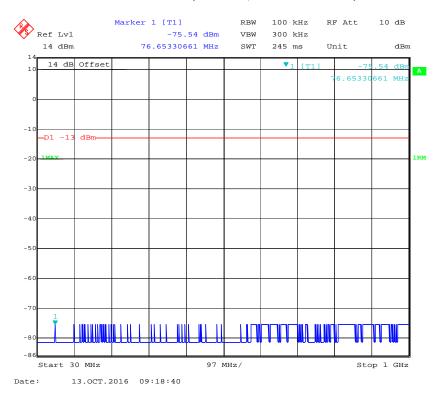


1 GHz – 2 GHz (1.4 MHz, Middle Channel)

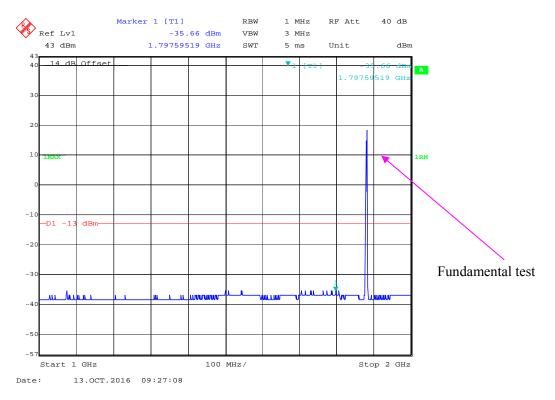


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

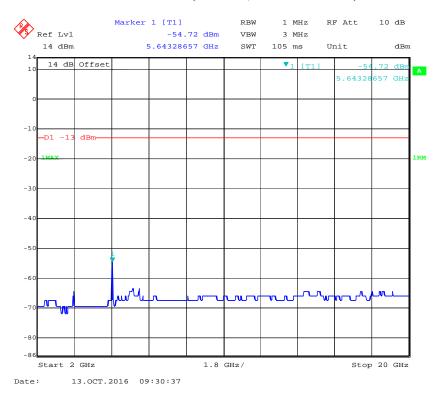


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

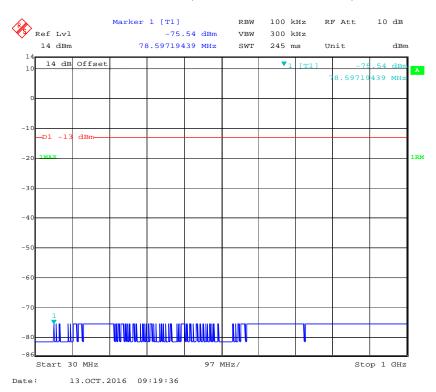


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

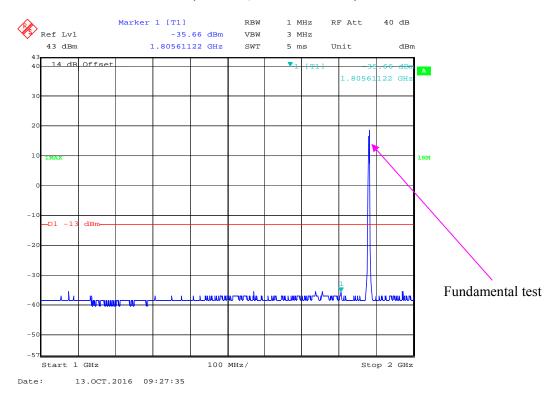


2 GHz - 20 GHz (3.0 MHz, Middle Channel)

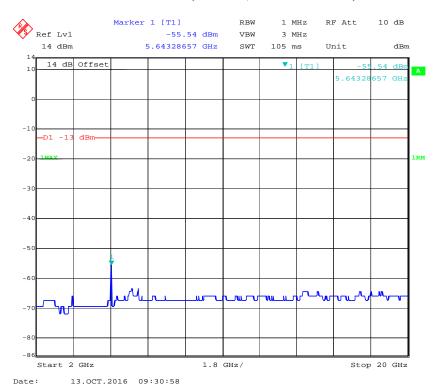


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

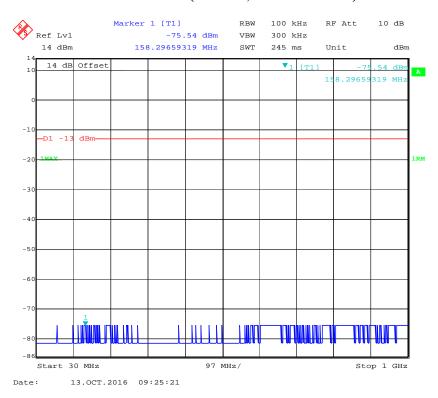


1 GHz – 2 GHz (5.0 MHz, Middle Channel)

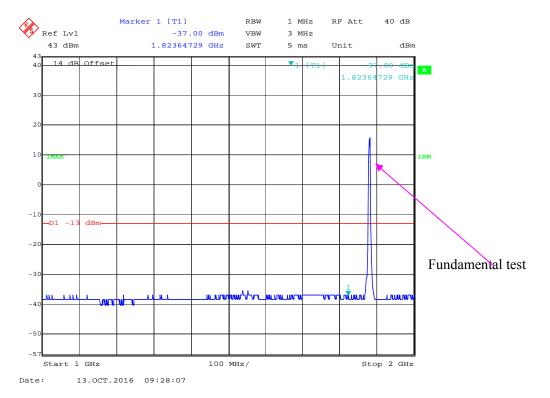


2 GHz - 20 GHz (5.0 MHz, Middle Channel)

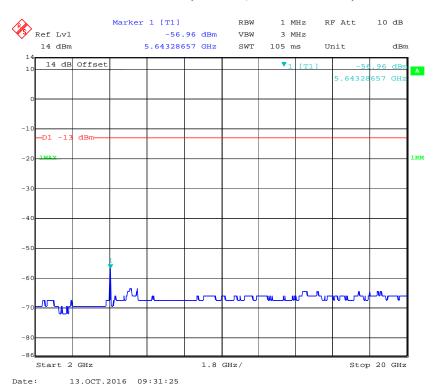


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

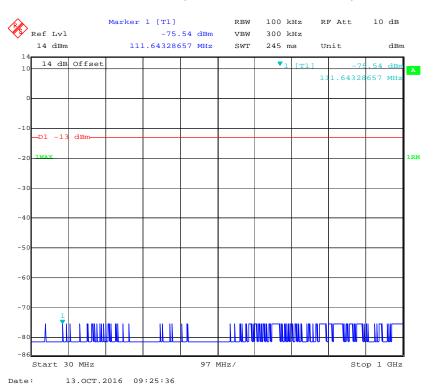


1 GHz - 2 GHz (10.0 MHz, Middle Channel)

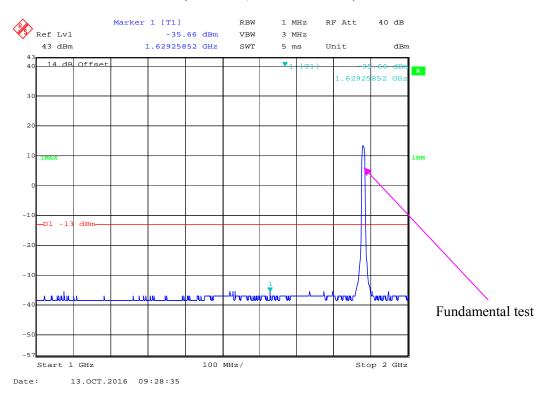


2 GHz - 20 GHz (10.0 MHz, Middle Channel)

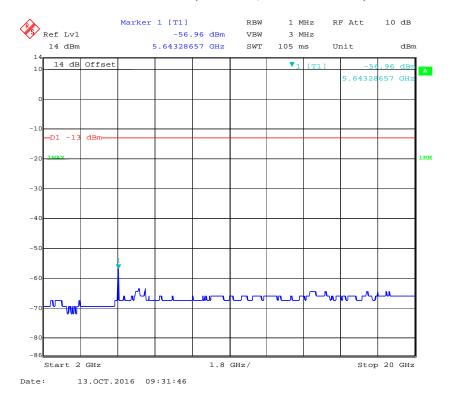


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

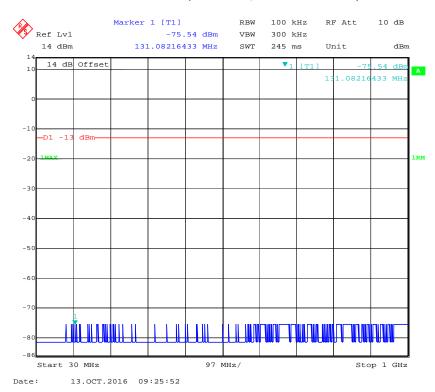


1 GHz -2 GHz (15.0 MHz, Middle Channel)

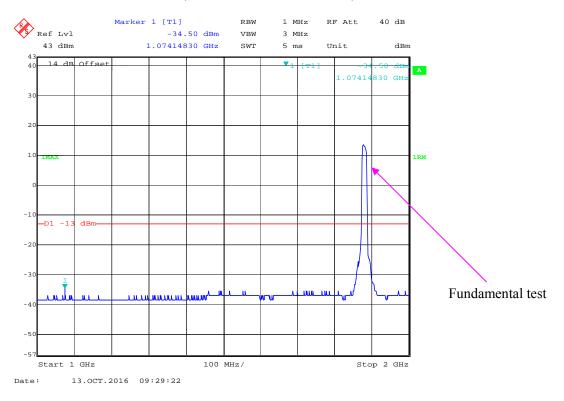


2 GHz -20 GHz (15.0 MHz, Middle Channel)

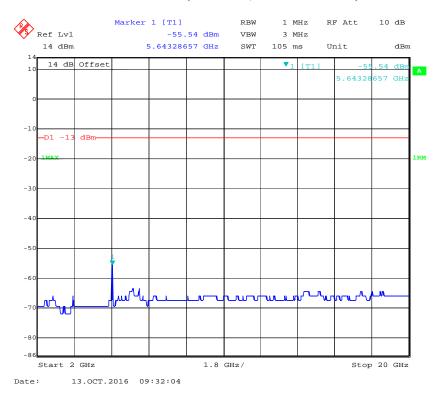


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

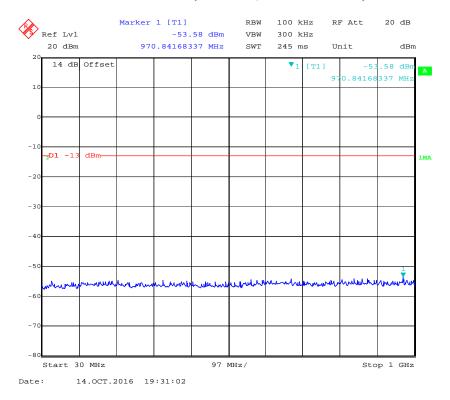

1 GHz -2 GHz (20.0 MHz, Middle Channel)

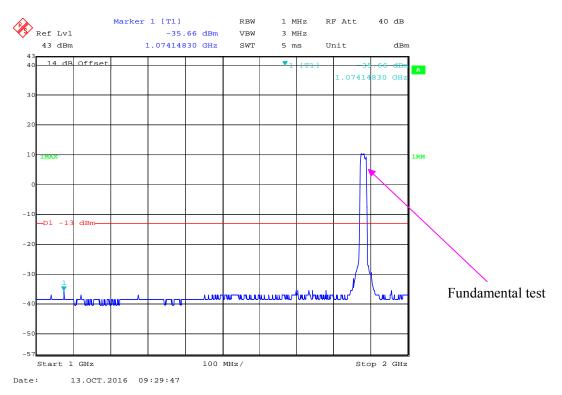


2 GHz -20 GHz (20.0 MHz, Middle Channel)

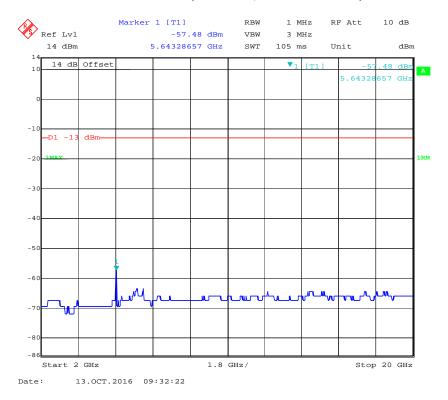


LTE Band 4:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

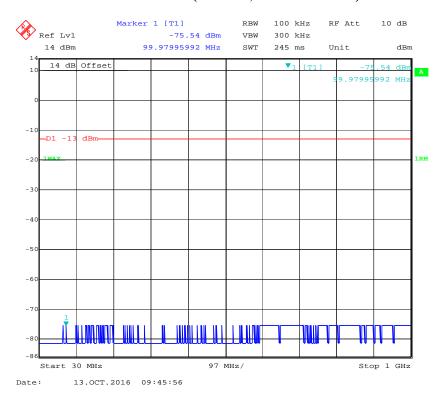


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

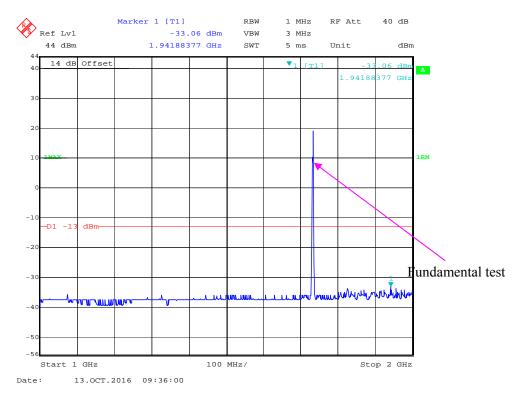


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

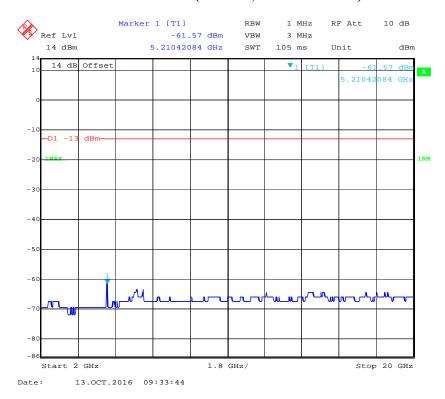


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

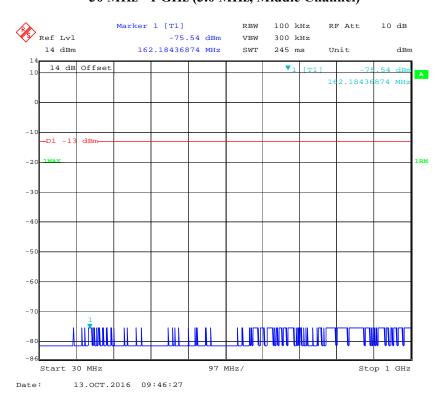


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

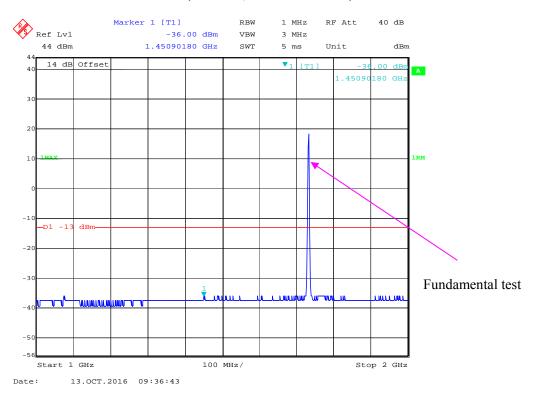


2 GHz - 20 GHz (3.0 MHz, Middle Channel)

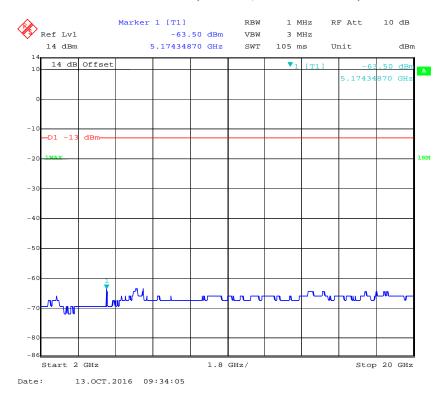


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

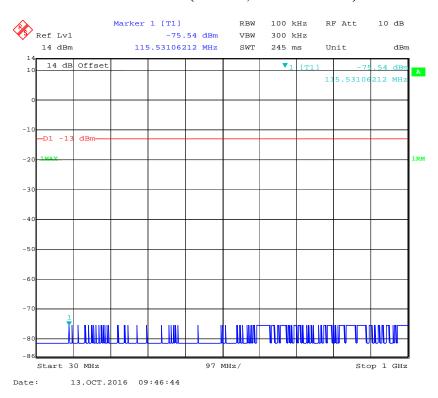


1 GHz – 2 GHz (5.0 MHz, Middle Channel)

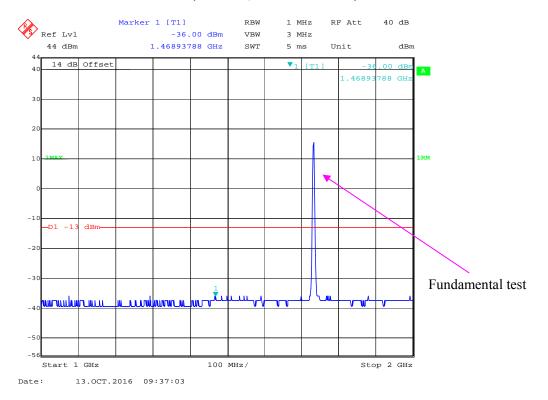


2 GHz - 20 GHz (5.0 MHz, Middle Channel)

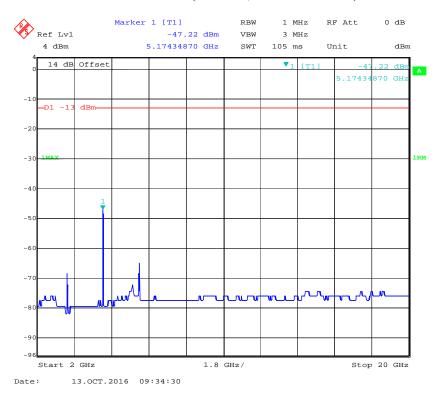


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

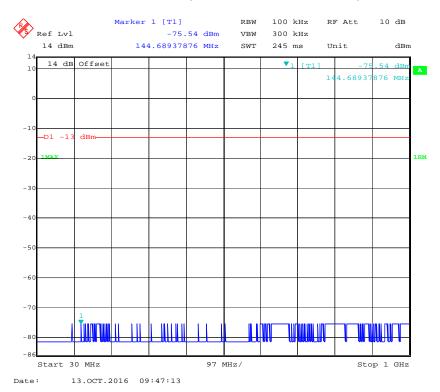


1 GHz - 2 GHz (10.0 MHz, Middle Channel)

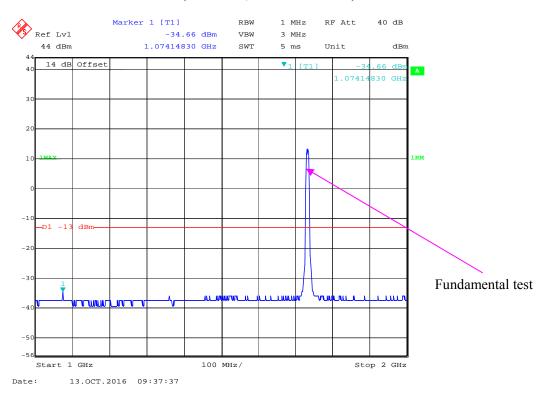


2 GHz - 20 GHz (10.0 MHz, Middle Channel)

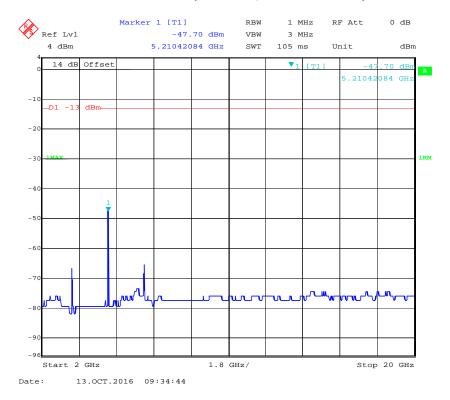


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

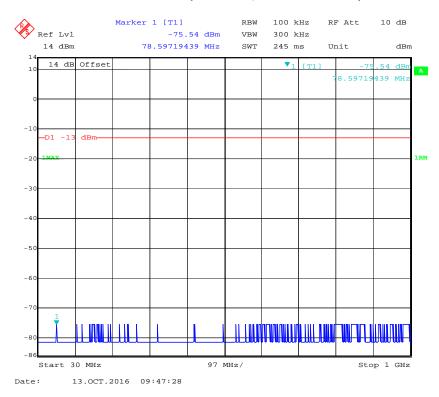


1 GHz -2 GHz (15.0 MHz, Middle Channel)

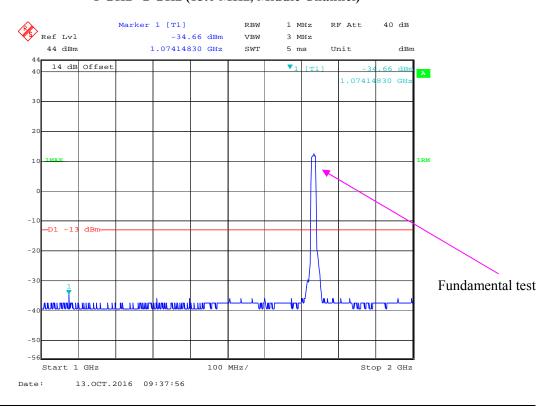


2 GHz -20 GHz (15.0 MHz, Middle Channel)

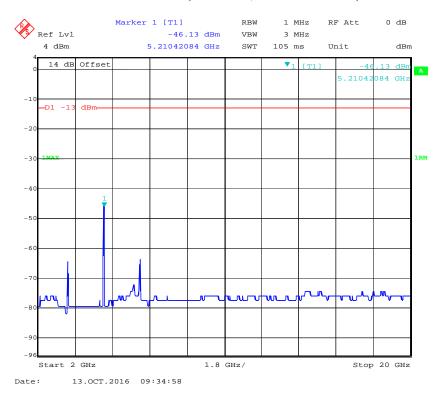


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

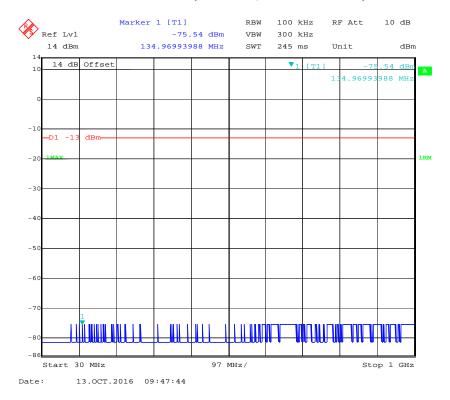

1 GHz -2 GHz (20.0 MHz, Middle Channel)

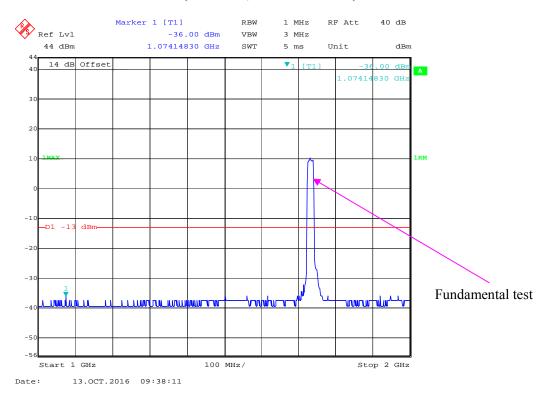

2 GHz -20 GHz (20.0 MHz, Middle Channel)

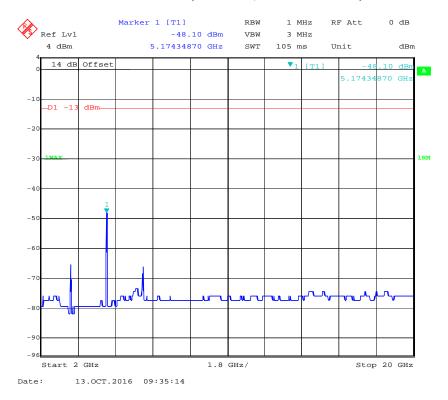


LTE Band 5:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)




1 GHz – 10 GHz (1.4 MHz, Middle Channel)

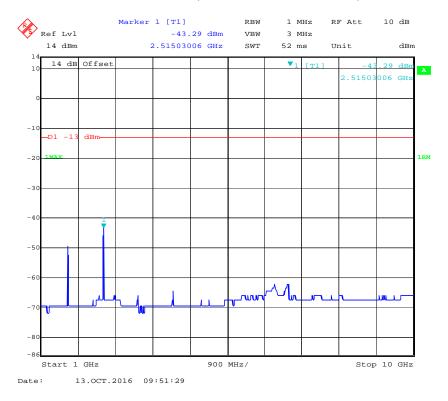


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

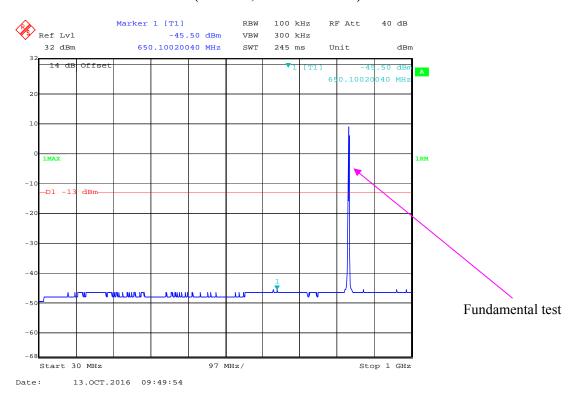


1 GHz – 10 GHz (3.0 MHz, Middle Channel)

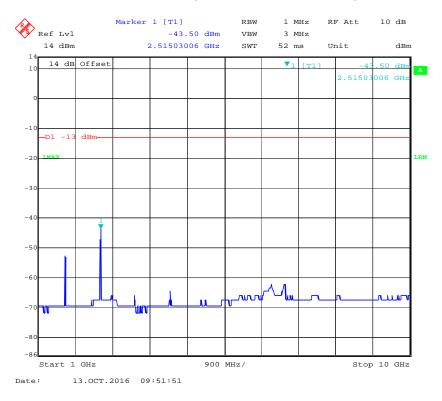


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

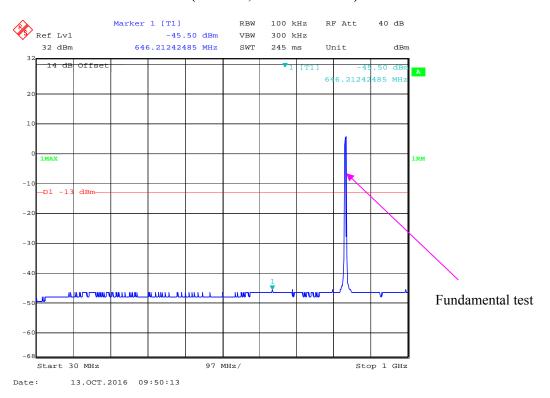


1 GHz – 10 GHz (5.0 MHz, Middle Channel)

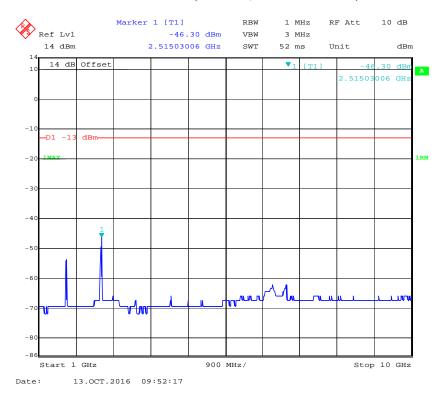

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

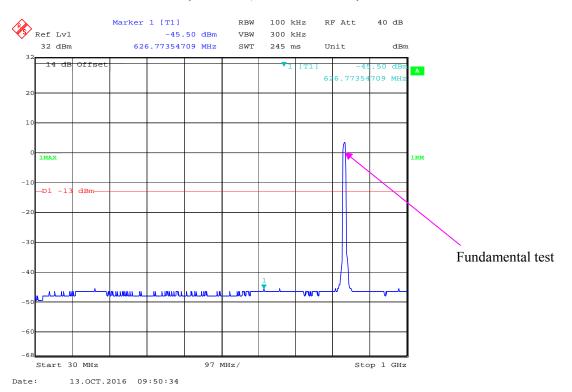

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

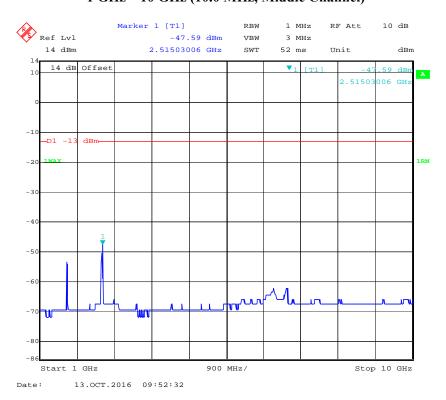

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) dB$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) dB$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) dB$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P) dB$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) dB$ at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TX \text{ pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Data

Environmental Conditions

Temperature:	25℃
Relative Humidity:	54 %
ATM Pressure:	101.0kPa

The testing was performed by Ada Yu on 2016-09-30.

Test mode: Transmitting

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

	Receiver	Turntable	Rx Antenna		,	Substitut	ed	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz) Reading A	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)				
	GSM Mode									
239.35	38.54	275	1.5	Н	-58.5	0.31	3.75	-55.06	-13	42.06
239.35	37.22	15	1.1	V	-59.8	0.31	3.75	-56.36	-13	43.36
1648.40	50.63	270	1.2	Н	-53.3	0.30	9.40	-43.70	-13	30.70
1648.40	55.12	57	1.3	V	-50.3	0.30	9.40	-40.70	-13	27.70
	WCDMA Mode									
234.25	37.12	147	1.9	Н	-59.9	0.31	3.75	-56.46	-13	43.46
234.25	36.32	190	2.5	V	-60.7	0.31	3.75	-57.26	-13	44.26
1673.20	62.33	179	2.0	Н	-41.6	0.30	9.40	-32.00	-13	19.00
1673.20	61.62	289	2.1	V	-43.8	0.30	9.40	-34.20	-13	21.20

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

	Receiver	Turntable Angle Degree	Rx Antenna		;	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)		Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	GSM Mode									
239.35	38.21	143	2.4	Н	-58.8	0.31	3.75	-55.36	-13	42.36
239.35	37.17	116	1.0	V	-59.8	0.31	3.75	-56.36	-13	43.36
3700.40	42.93	355	2.3	Н	-50.8	2.42	12.60	-40.62	-13	27.62
3700.40	42.33	182	2.0	V	-50.4	2.42	12.60	-40.22	-13	27.22
WCDMA Mode										
234.25	37.18	303	1.0	Н	-59.8	0.31	3.75	-56.36	-13	43.36
234.25	36.16	129	1.4	V	-60.8	0.31	3.75	-57.36	-13	44.36
3815.20	42.43	22	2.3	Н	-51.3	2.42	12.60	-41.12	-13	28.12
3815.20	42.93	1	1.9	V	-49.8	2.42	12.60	-39.62	-13	26.62

LTE Band:

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx An	tenna	Substituted			Absolute		
(MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
					Band 2					
	Test frequency range:30 MHz ~ 20 GHz									
176.63	37.54	271	1.7	Н	-59.5	0.28	0.45	-59.33	-13	46.33
176.63	36.43	92	2.1	V	-60.6	0.28	0.45	-60.43	-13	47.43
3760.00	42.53	163	1.9	Н	-51.2	2.42	12.6	-41.02	-13	28.02
3760.00	43.23	129	1.6	V	-49.5	2.42	12.6	-39.32	-13	26.32
	Band 4									
	Test frequency range:30 MHz ~ 18 GHz									
176.63	37.67	211	1.1	Н	-59.3	0.28	0.45	-59.13	-13	46.13
176.63	36.21	186	1.5	V	-60.8	0.28	0.45	-60.63	-13	47.63
3465.00	47.57	221	1.9	Н	-47.0	2.34	12.40	-36.94	-13	23.94
3465.00	46.11	236	1.9	V	-46.4	2.34	12.40	-36.34	-13	23.34
	Band 5									
Test frequency range: 30 MHz ~ 10 GHz										
176.63	37.42	41	2.3	Н	-59.6	0.28	0.45	-59.43	-13	46.43
176.63	36.18	288	2.1	V	-60.8	0.28	0.45	-60.63	-13	47.63
1673.00	44.03	117	2.4	Н	-59.9	0.30	9.40	-50.80	-13	37.80
1673.00	46.12	285	2.2	V	-59.3	0.30	9.40	-50.20	-13	37.20

Note:

¹⁾ Absolute Level = SG Level - Cable loss + Antenna Gain

²⁾ Margin = Limit- Absolute Level

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to $\S24.238(a)$, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) dB$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) dB$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) dB$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P) dB$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) dB$ at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



Test Data

Environmental Conditions


Temperature:	25℃
Relative Humidity:	54 %
ATM Pressure:	101.0kPa

The testing was performed by Ada Yu on 2016-10-13.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

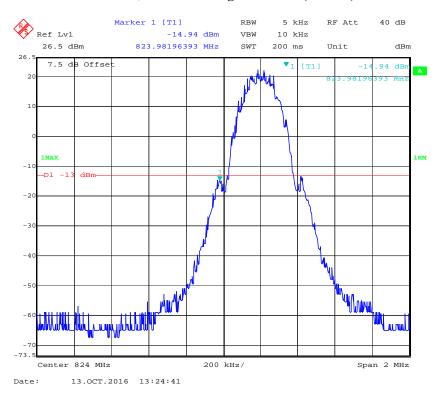


Cellular Band, Right Band Edge for GSM (GMSK) Mode

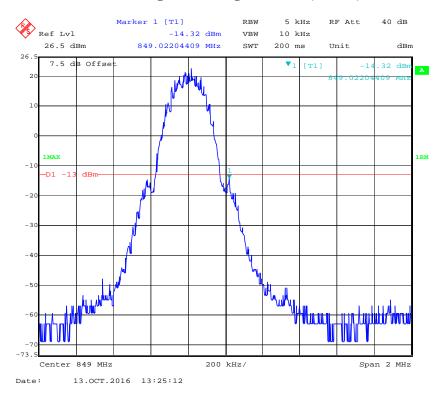


Cellular Band, Left Band Edge for EGPRS Mode

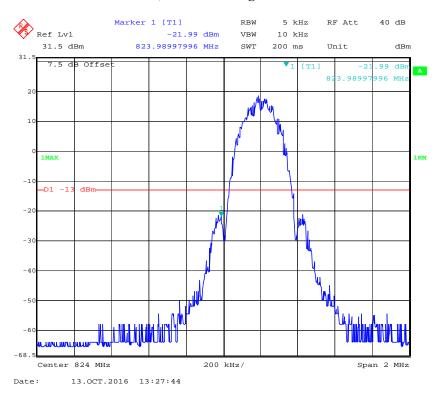


Cellular Band, Right Band Edge for EGPRS Mode

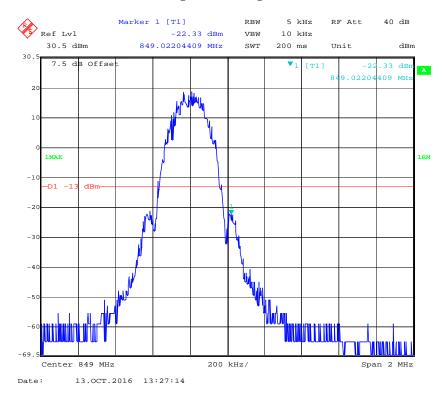


Cellular Band, Left Band Edge for RMC (BPSK) Mode

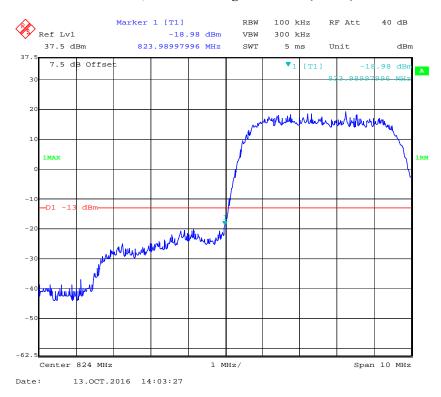


Cellular Band, Right Band Edge for RMC (BPSK) Mode

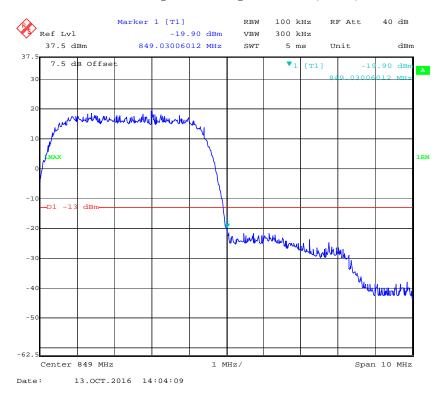


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

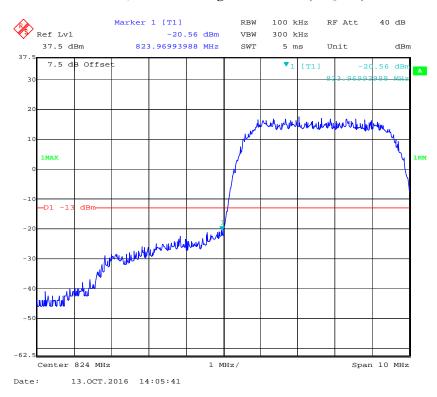


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

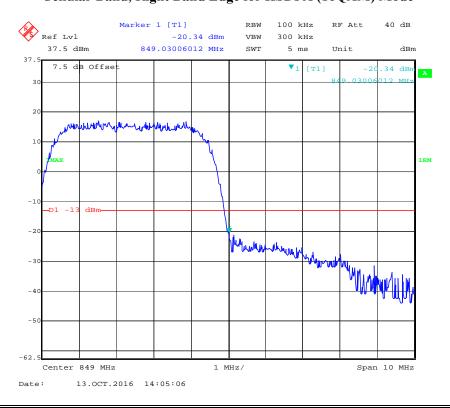


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

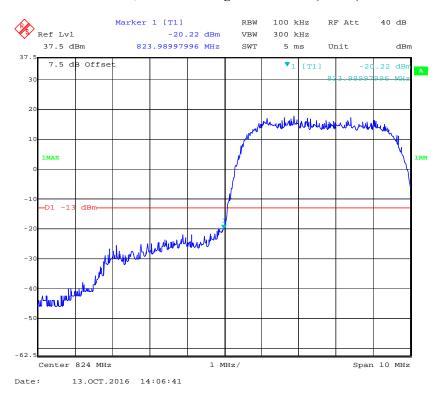


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

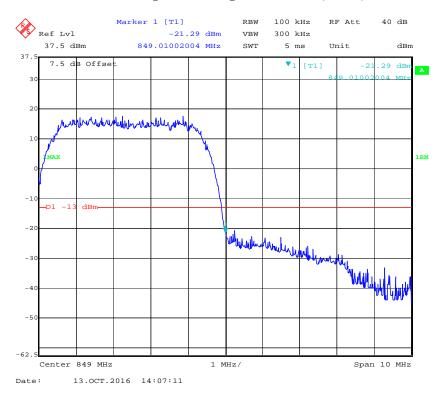


PCS Band, Left Band Edge for GSM (GMSK) Mode

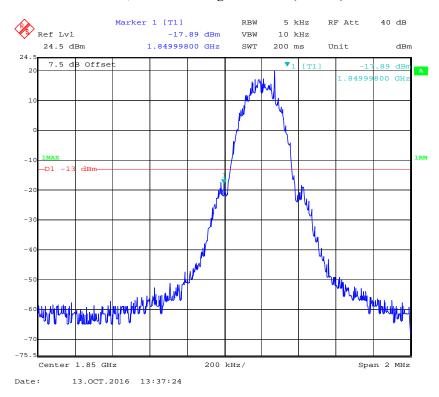


PCS Band, Right Band Edge for GSM (GMSK) Mode

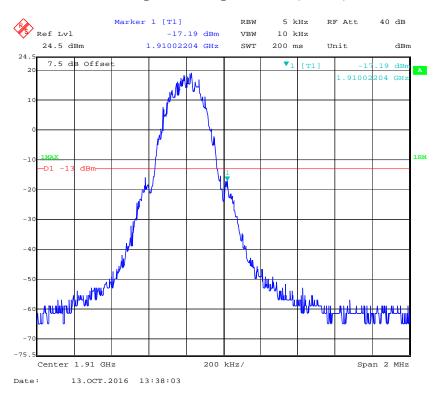


PCS Band, Left Band Edge for EGPRS Mode

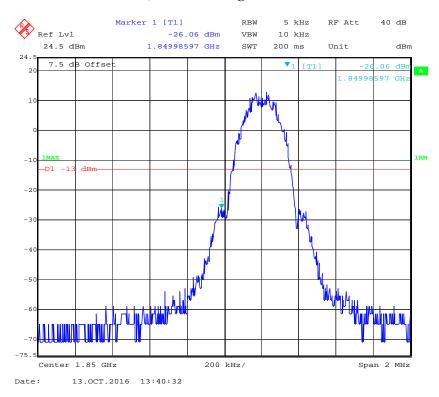


PCS Band, Right Band Edge for EGPRS Mode

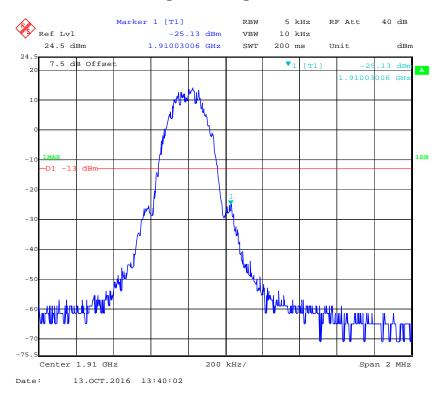


PCS Band, Left Band Edge for RMC (BPSK) Mode

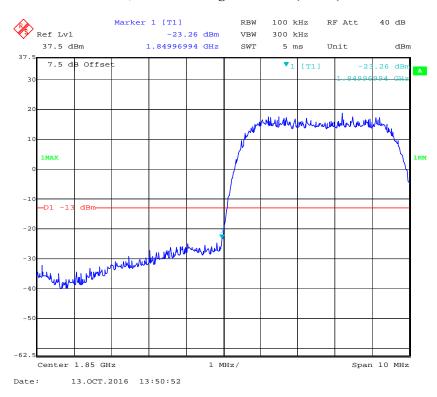


PCS Band, Right Band Edge for RMC (BPSK) Mode

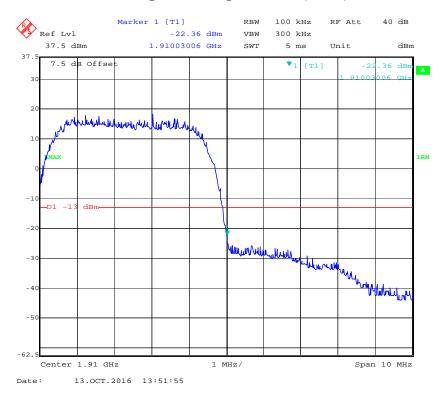


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

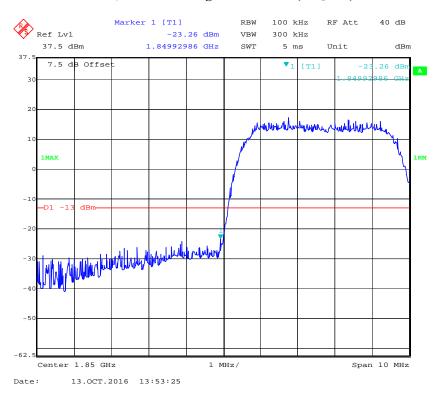


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

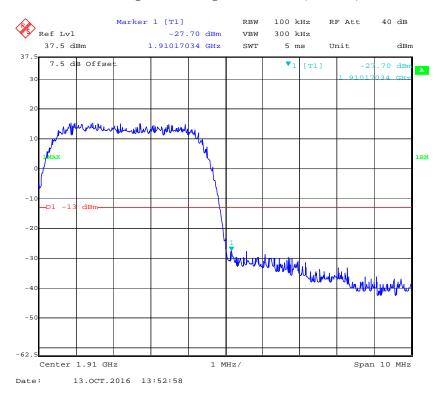

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

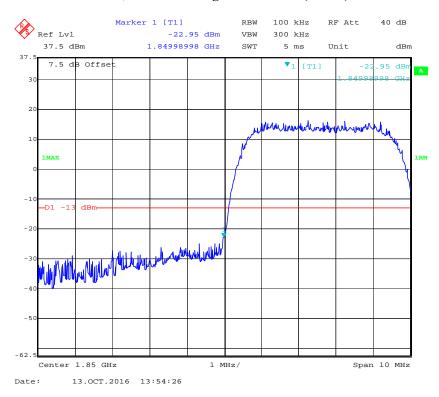


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

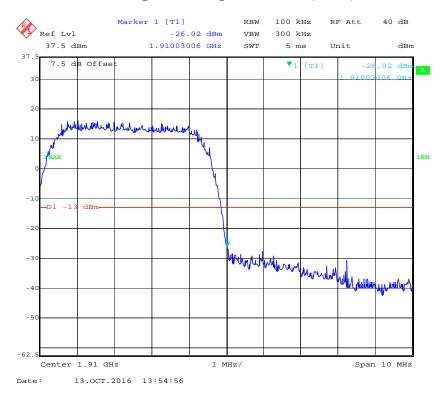


Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

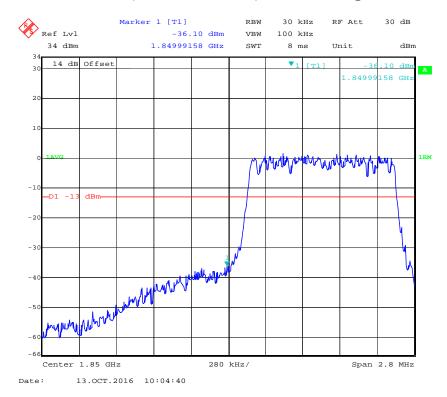


QPSK (1.4 MHz, FULL RB) - Right Band Edge

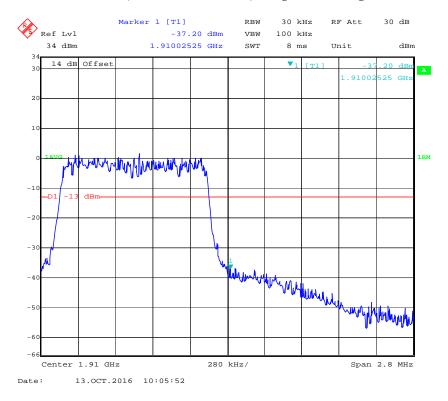


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

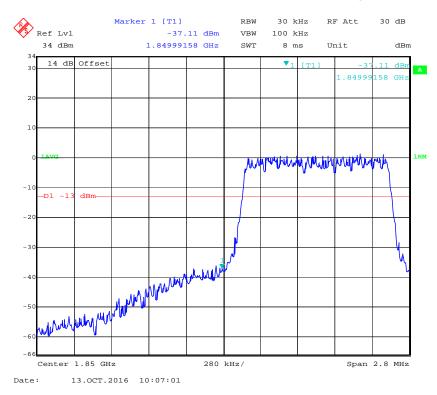


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

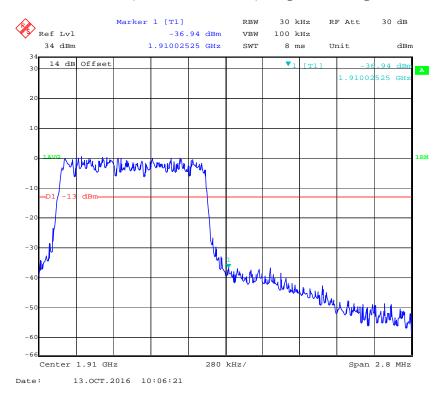


QPSK (3.0 MHz, FULL RB) - Left Band Edge

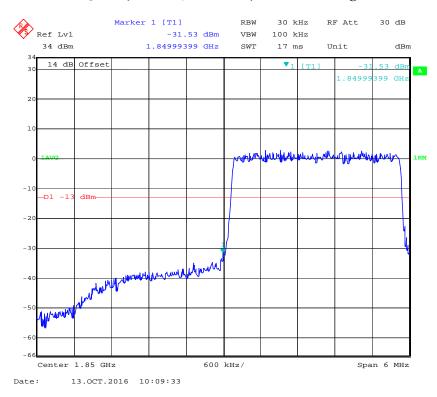


QPSK (3.0 MHz, FULL RB) - Right Band Edge

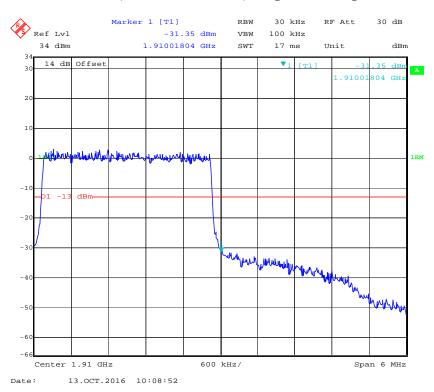


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

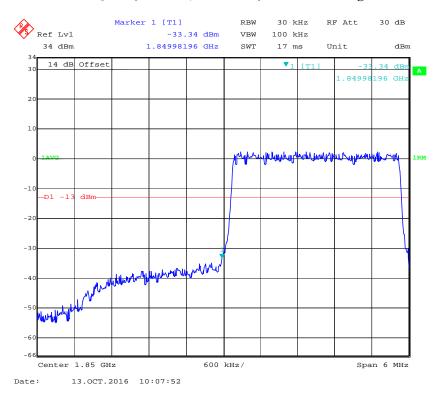


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

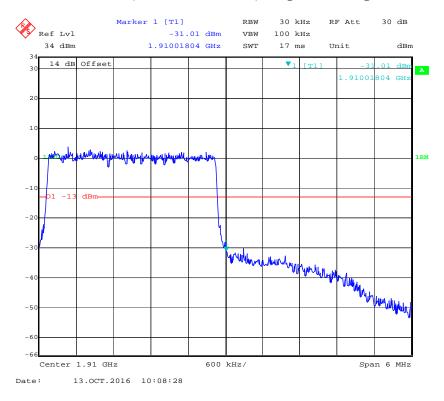


QPSK (5.0 MHz, FULL RB) - Left Band Edge

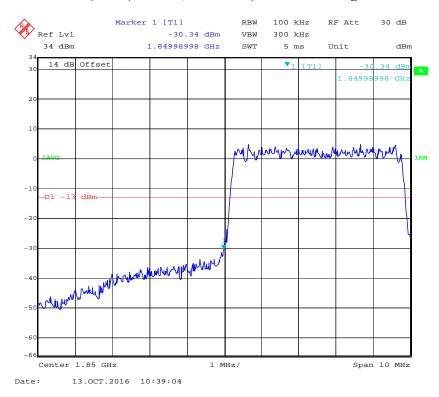


QPSK (5.0 MHz, FULL RB) - Right Band Edge

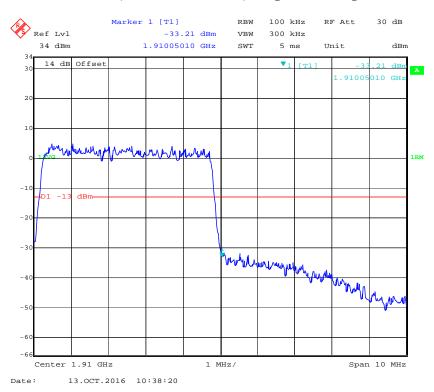


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

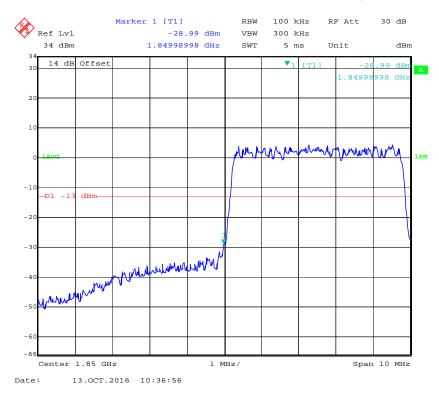


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

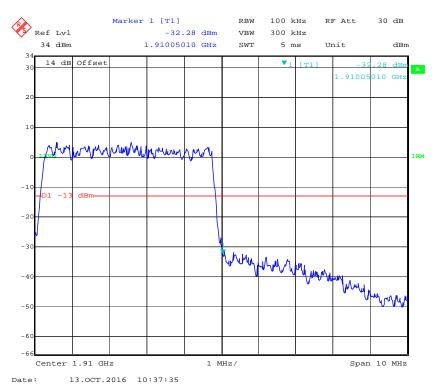


QPSK (10.0 MHz, FULL RB) - Left Band Edge

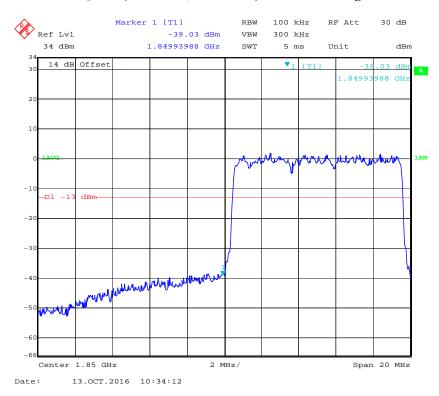


QPSK (10.0 MHz, FULL RB) - Right Band Edge

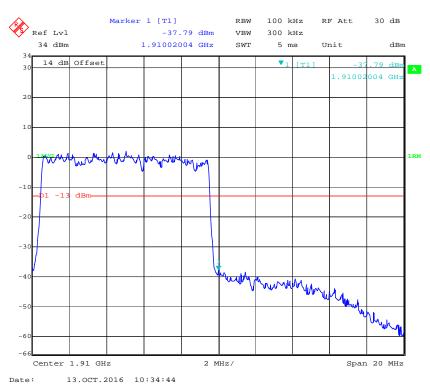


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

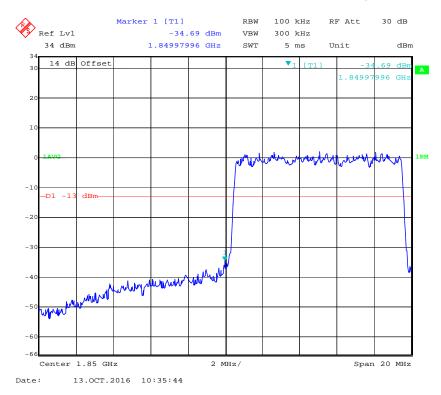


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

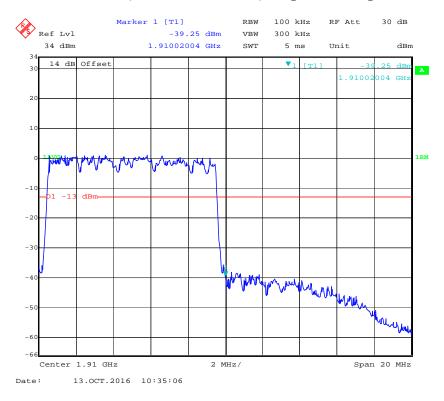


QPSK (15.0 MHz, FULL RB) - Left Band Edge

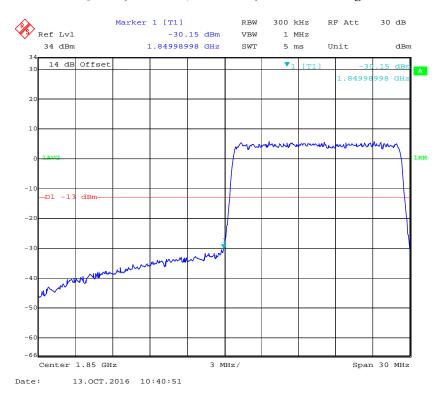


QPSK (15.0 MHz, FULL RB) - Right Band Edge

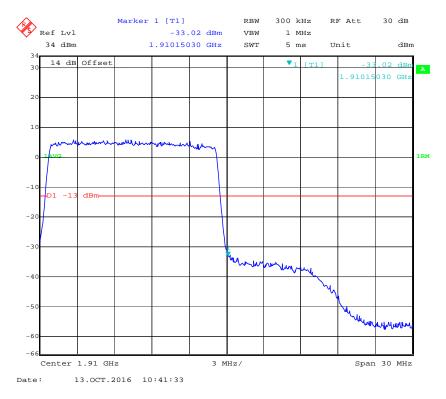


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

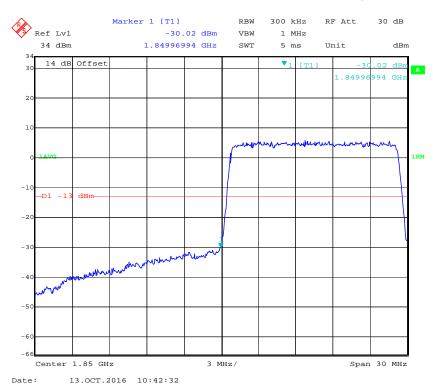


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

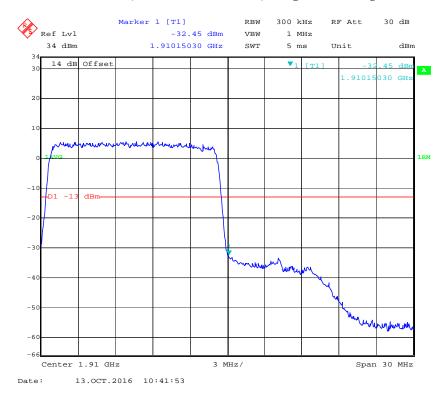


QPSK (20.0 MHz, FULL RB) - Left Band Edge

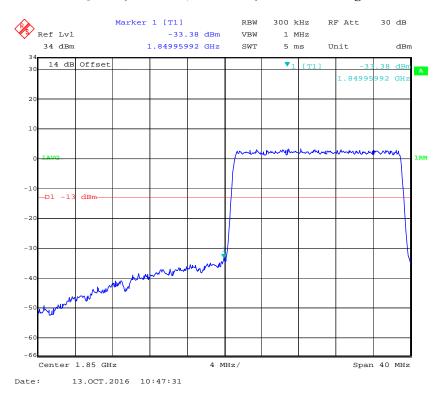


QPSK (20.0 MHz, FULL RB) - Right Band Edge

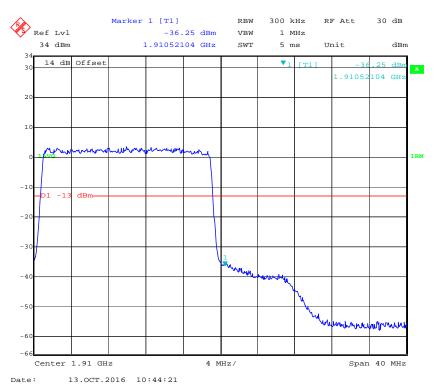

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

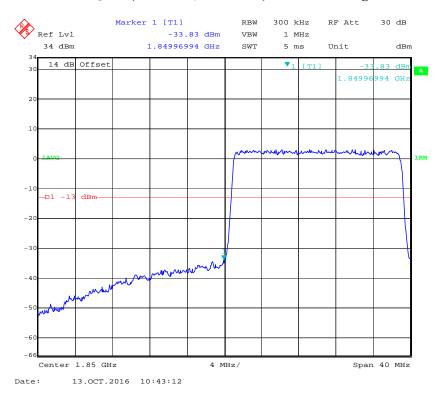


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

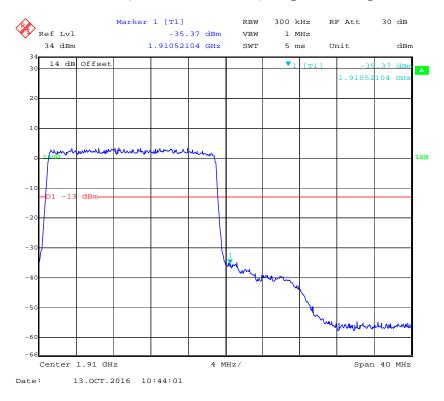


Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

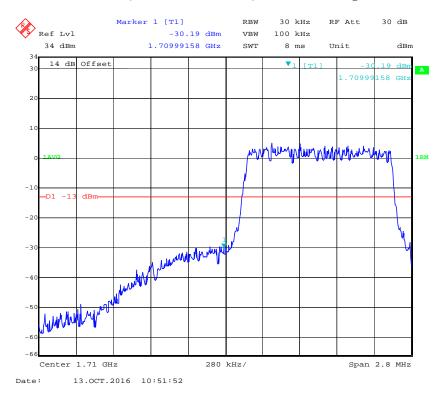


QPSK (1.4 MHz, FULL RB) - Right Band Edge

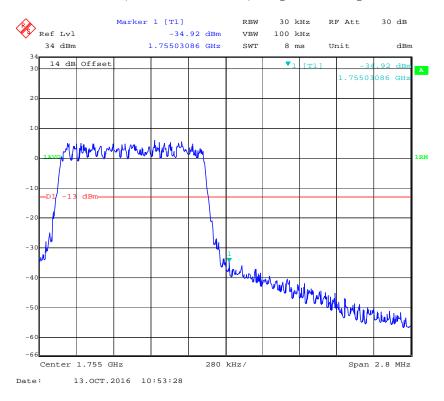


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

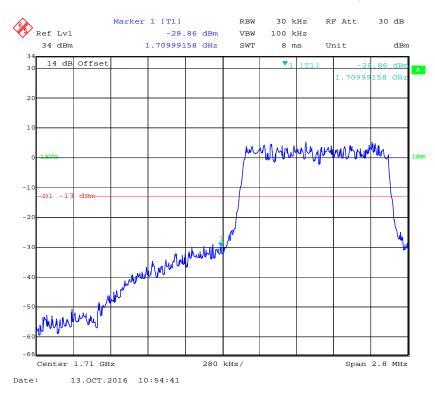


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

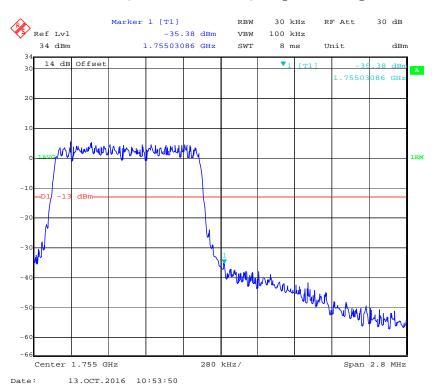


QPSK (3.0 MHz, FULL RB) - Left Band Edge

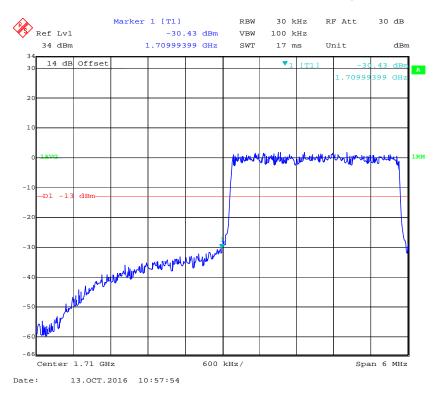


QPSK (3.0 MHz, FULL RB) - Right Band Edge

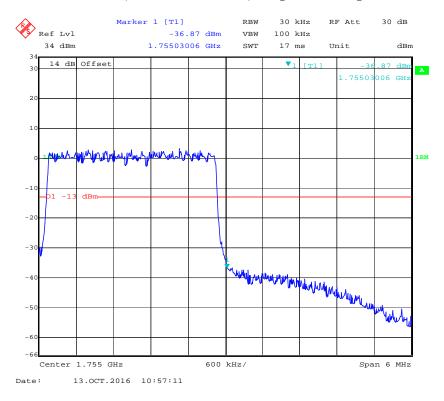


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

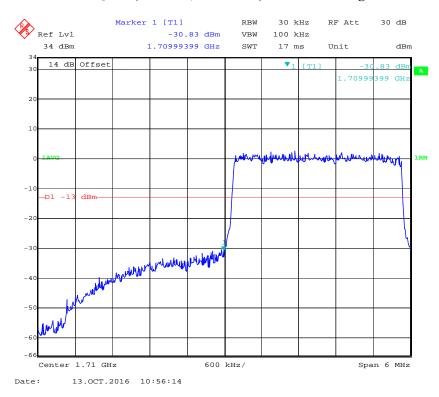


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

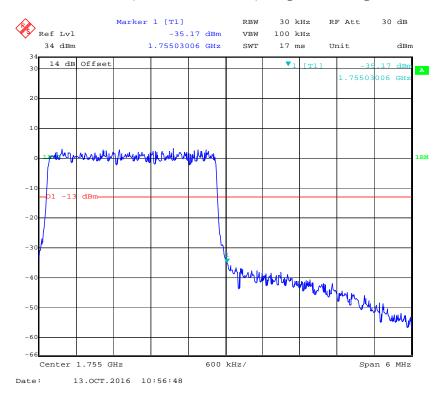


QPSK (5.0 MHz, FULL RB) - Left Band Edge

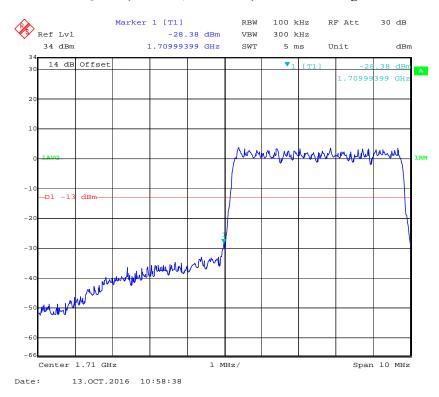


QPSK (5.0 MHz, FULL RB) - Right Band Edge

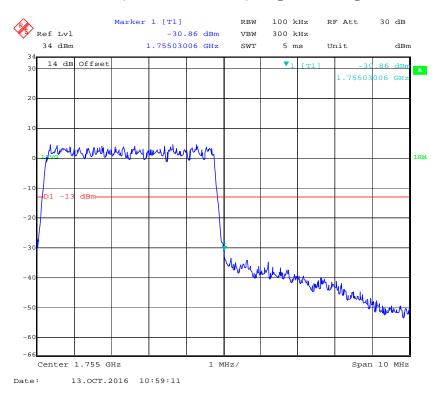


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

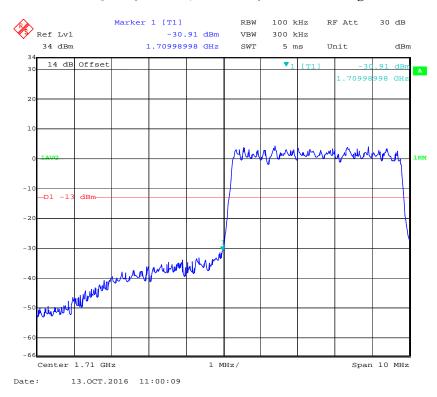


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

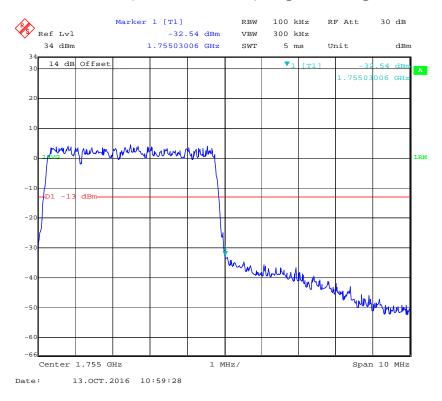


QPSK (10.0 MHz, FULL RB) - Left Band Edge

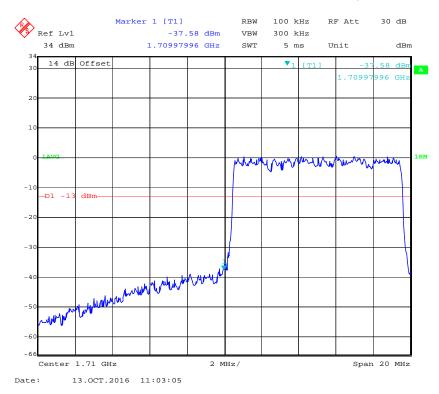


QPSK (10.0 MHz, FULL RB) - Right Band Edge

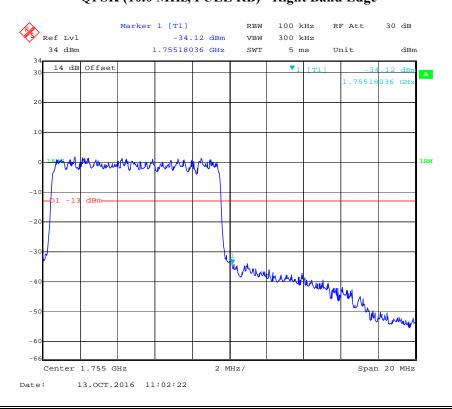


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

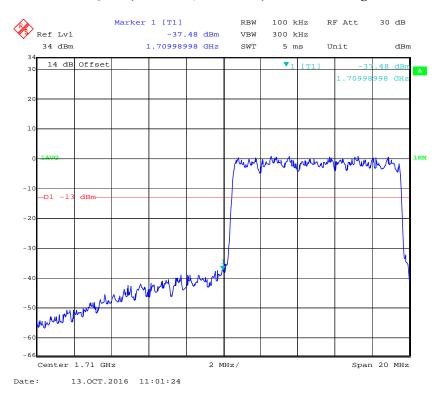


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

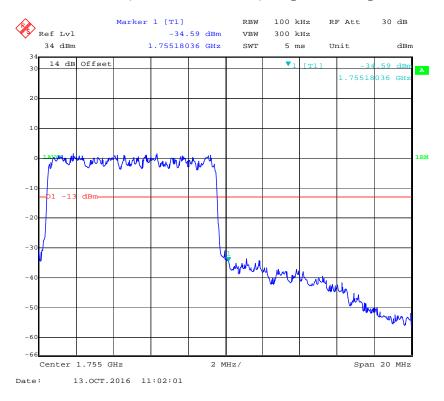


QPSK (15.0 MHz, FULL RB) - Left Band Edge

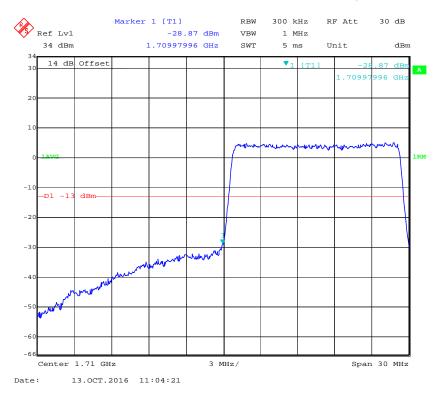


QPSK (15.0 MHz, FULL RB) - Right Band Edge

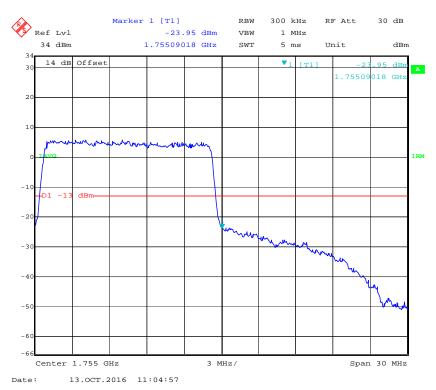


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

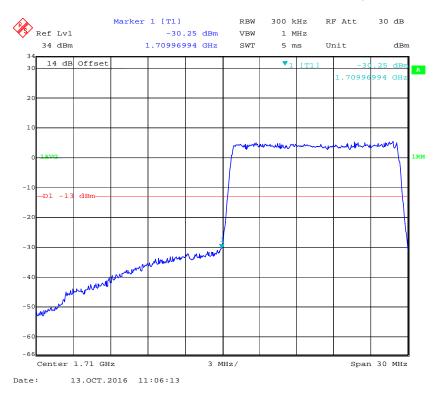


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

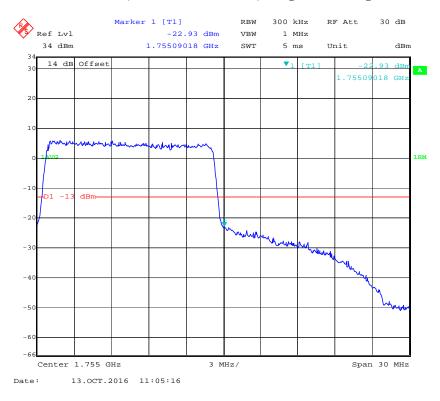


QPSK (20.0 MHz, FULL RB) - Left Band Edge

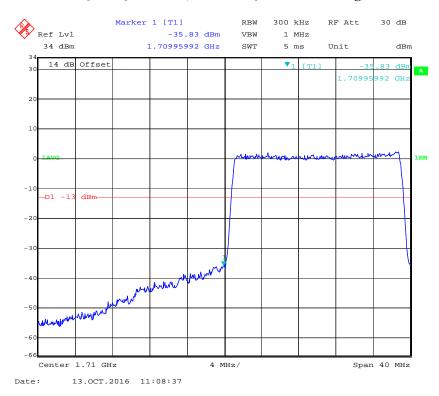


QPSK (20.0 MHz, FULL RB) - Right Band Edge

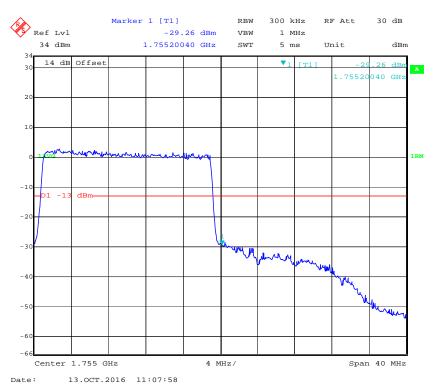

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

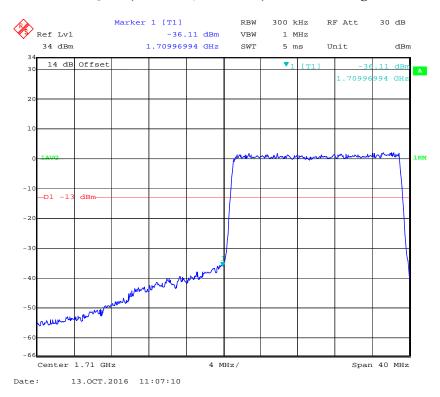


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

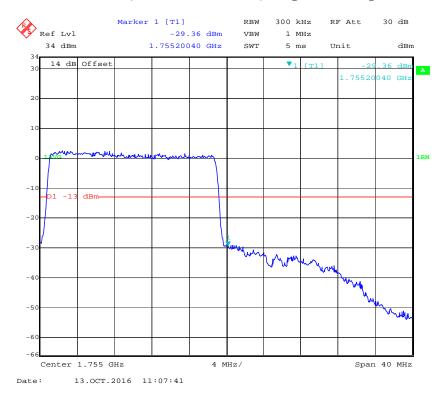


Band 5:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

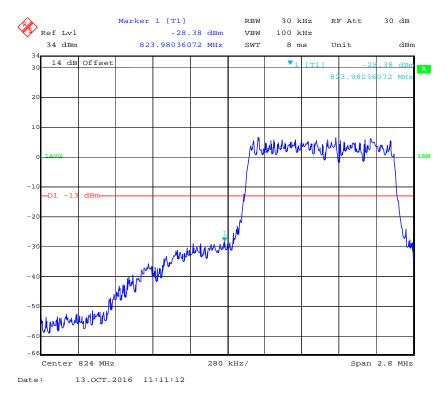


QPSK (1.4 MHz, FULL RB) - Right Band Edge

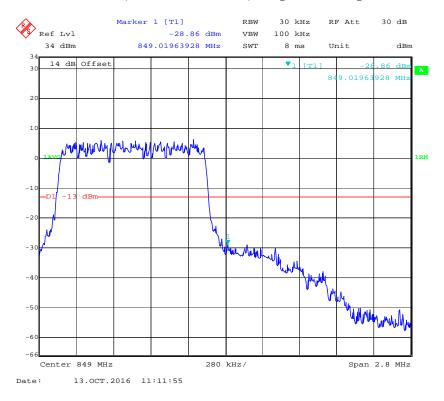


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

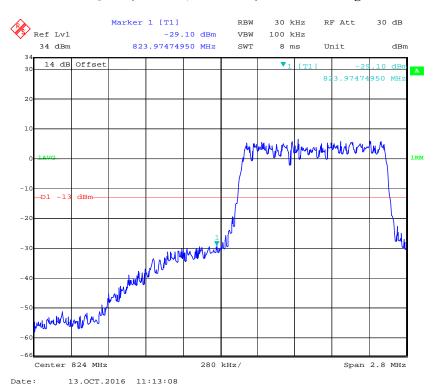


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

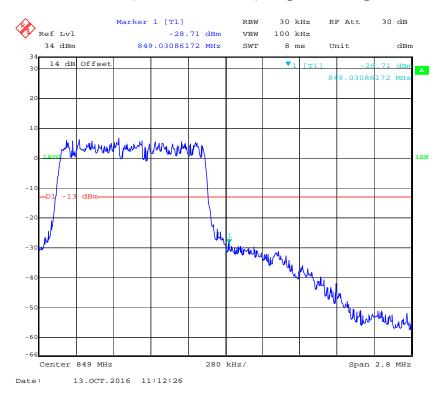


QPSK (3.0 MHz, FULL RB) - Left Band Edge

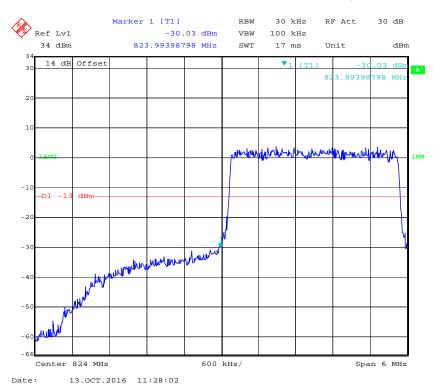


QPSK (3.0 MHz, FULL RB) - Right Band Edge

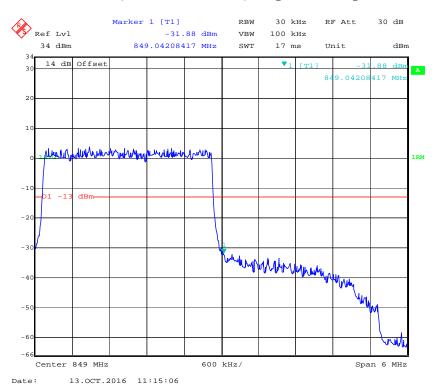


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

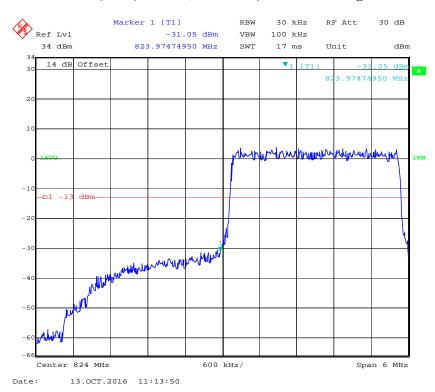


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

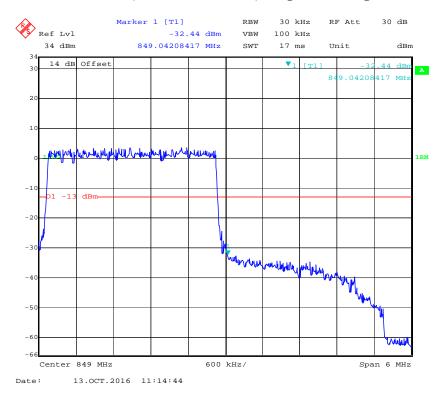


QPSK (5.0 MHz, FULL RB) - Left Band Edge

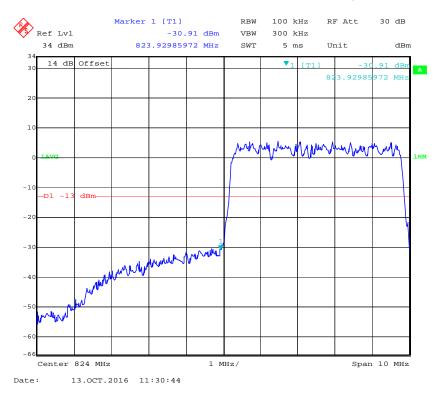


QPSK (5.0 MHz, FULL RB) - Right Band Edge

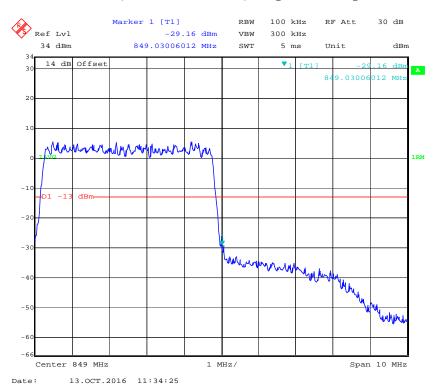


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

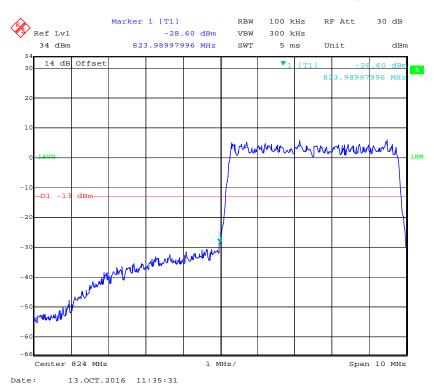


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

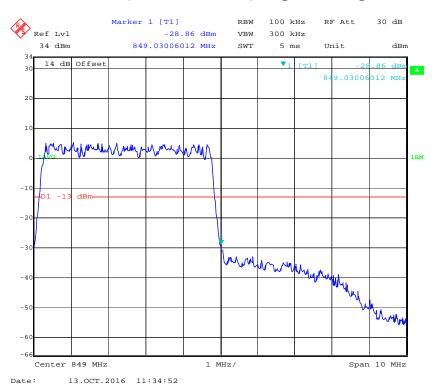


QPSK (10.0 MHz, FULL RB) - Left Band Edge

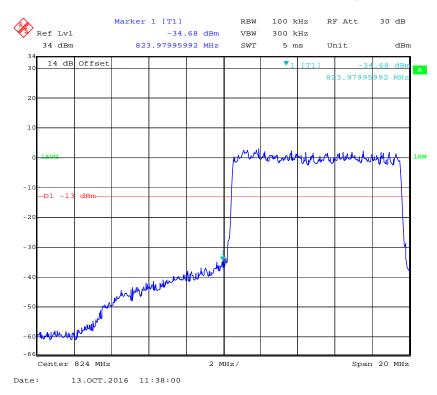


QPSK (10.0 MHz, FULL RB) - Right Band Edge

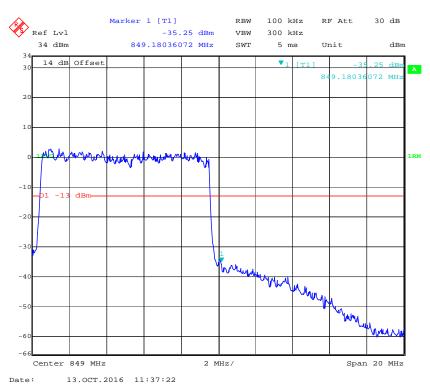

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

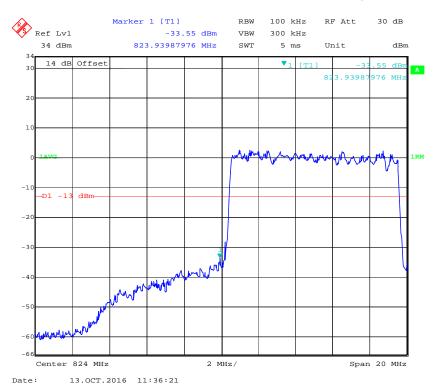

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

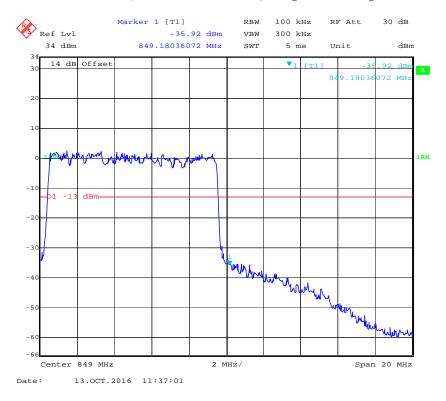

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Data

Environmental Conditions

Temperature:	25℃
Relative Humidity:	54 %
ATM Pressure:	101.0kPa

The testing was performed by Ada Yu on 2016-09-29.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Report No.: RSZ160630001-00D

Cellular Band (Part 22H)

GSM Mode

	Middle Channel, f _o =836.6 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		25	0.02988	2.5		
-20		23	0.02749	2.5		
-10		27	0.03227	2.5		
0		11	0.01315	2.5		
10	3.7	27	0.03227	2.5		
20		15	0.01793	2.5		
30		10	0.01195	2.5		
40		23	0.02749	2.5		
50		27	0.03227	2.5		
25	V min.= 3.5	15	0.01793	2.5		
25	V max.= 4.2	11	0.01315	2.5		

EDGE Mode

	Middle Channel, f _o =836.6 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		22	0.02630	2.5		
-20		11	0.01315	2.5		
-10		7	0.00837	2.5		
0		15	0.01793	2.5		
10	3.7	11	0.01315	2.5		
20		15	0.01793	2.5		
30		18	0.02152	2.5		
40		11	0.01315	2.5		
50		25	0.02988	2.5		
25	V min.= 3.5	21	0.02510	2.5		
25	V max.= 4.2	11	0.01315	2.5		

Middle Channel, f ₀ =836.6 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		15	0.01793	2.5	
-20		3	0.00359	2.5	
-10		15	0.01793	2.5	
0		7	0.00837	2.5	
10	3.7	11	0.01315	2.5	
20		14	0.01673	2.5	
30		8	0.00956	2.5	
40		11	0.01315	2.5	
50		15	0.01793	2.5	
25	V min.= 3.5	15	0.01793	2.5	
25	V max.= 4.2	18	0.02152	2.5	

PCS Band (Part 24E)

GSM Mode

	Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		16	0.00851	pass		
-20		16	0.00851	pass		
-10		11	0.00585	pass		
0		26	0.01383	pass		
10	3.7	17	0.00904	pass		
20		21	0.01117	pass		
30		27	0.01436	pass		
40		15	0.00798	pass		
50		21	0.01117	pass		
25	V min.= 3.5	16	0.00851	pass		
25	V max.= 4.2	18	0.00957	pass		

EDGE Mode

	Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		8	0.00426	pass		
-20		10	0.00532	pass		
-10		7	0.00372	pass		
0		11	0.00585	pass		
10	3.7	25	0.01330	pass		
20		10	0.00532	pass		
30		17	0.00904	pass		
40		15	0.00798	pass		
50		10	0.00532	pass		
25	V min.= 3.5	16	0.00851	pass		
25	V max.= 4.2	10	0.00532	pass		

WCDMA Mode

	Middle Channel, f _o =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		18	0.00957	pass	
-20		15	0.00798	pass	
-10		10	0.00532	pass	
0		18	0.00957	pass	
10	3.7	18	0.00957	pass	
20		9	0.00479	pass	
30		12	0.00638	pass	
40		23	0.01223	pass	
50		12	0.00638	pass	
25	V min.= 3.5	18	0.00957	pass	
25	V max.= 4.2	25	0.01330	pass	

Band 2:

	20.0 MHz Middle Channel, f _o =1880MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		16	0.00851	pass	
-20		18	0.00957	pass	
-10		18	0.00957	pass	
0		21	0.01117	pass	
10	3.7	15	0.00798	pass	
20		24	0.01277	pass	
30		28	0.01489	pass	
40		9	0.00479	pass	
50		18	0.00957	pass	
25	V min.= 3.5	32	0.01702	pass	
25	V max.= 4.2	18	0.00957	pass	

Band 4:

	20.0 MHz Middle Channel, f _o =1732.5 MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		16	0.00924	pass	
-20		32	0.01847	pass	
-10		10	0.00577	pass	
0		15	0.00866	pass	
10	3.7	20	0.01154	pass	
20		13	0.00750	pass	
30		20	0.01154	pass	
40		17	0.00981	pass	
50]	30	0.01732	pass	
25	V min.= 3.5	19	0.01097	pass	
25	V max.= 4.2	33	0.01905	pass	

Band 5:

	10.0 MHz Middle Channel, f ₀ =836.5 MHz (QPSK)					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		15	0.01793	2.5		
-20		11	0.01315	2.5		
-10		15	0.01793	2.5		
0		10	0.01195	2.5		
10	3.7	22	0.02630	2.5		
20		21	0.02510	2.5		
30		24	0.02869	2.5		
40		17	0.02032	2.5		
50		25	0.02989	2.5		
25	V min.= 3.5	29	0.03467	2.5		
25	V max.= 4.2	15	0.01793	2.5		

***** END OF REPORT *****

Report No.: RSZ160630001-00D