

# **FCC Test Report**

FCC ID : 2AFEDDL200S2015

Equipment : DARTSLIVE-200S

Model No. : DARTSLIVE-200S

Brand Name : DARTSLIVE

Applicant : DARTSLIVE Co.,Ltd.

Address : Ebisu Business Tower 18th Floor, 1-19-19

Ebisu, Shibuya-ku, Tokyo, Japan

Manufacturer : Solid Year Co., Ltd.

Address : 8F.-1, No.36, Hengyang Rd., Zhongzheng Dist.,

Taipei City 10045, Taiwan R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Feb. 05, 2015

Tested Date : Aug. 10 ~ Aug. 12, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

lac-MRA



Report No.: FR520501 Page: 1 of 37



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	g
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Unwanted Emissions into Restricted Frequency Bands	14
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	24
3.4	Conducted Output Power	27
3.5	Number of Hopping Frequency	29
3.6	20dB and Occupied Bandwidth	31
3.7	Channel Separation	33
3.8	Number of Dwell Time	35
4	TEST LABORATORY INFORMATION	37

Page: 2 of 37



## **Release Record**

Report No.	Version	Description	Issued Date
FR520501	Rev. 01	Initial issue	Aug. 26, 2015

Report No.: FR520501 Page: 3 of 37



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.751MHz 23.34 (Margin -32.66dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 797.27MHz	Pass
15.209	Radiated Effissions	41.17 (Margin -4.83dB) - PK	F d 5 5
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 2.53	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR520501 Page: 4 of 37



## 1 General Description

### 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	· · · · · · · · · · · · · · · · · · ·							
2400-2483.5 BR V3.0 2402-2480 0-78 [79] 1 Mbps								

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK. Note 3: EDR mode is not supported.

#### 1.1.2 Antenna Details

Ant.	No.	Туре	Brand	Model	Gain (dBi)	Connector	Remark
1		PCB			2.78	N/A	

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

I POWAR SIINNIV I VNA	5Vdc from AC adapter. 4.5Vdc from battery (1.5V AA battery*3)
	, , , , , , , , , , , , , , , , , , ,

#### 1.1.4 Accessories

	Accessories					
No.	No. Equipment Description					
1	micro USB cable	1.75m shielded w/o core (for charging only.)				

Report No.: FR520501 Page: 5 of 37



### 1.1.5 Channel List

	Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
0	2402	20	2422	40	2442	60	2462	
1	2403	21	2423	41	2443	61	2463	
2	2404	22	2424	42	2444	62	2464	
3	2405	23	2425	43	2445	63	2465	
4	2406	24	2426	44	2446	64	2466	
5	2407	25	2427	45	2447	65	2467	
6	2408	26	2428	46	2448	66	2468	
7	2409	27	2429	47	2449	67	2469	
8	2410	28	2430	48	2450	68	2470	
9	2411	29	2431	49	2451	69	2471	
10	2412	30	2432	50	2452	70	2472	
11	2413	31	2433	51	2453	71	2473	
12	2414	32	2434	52	2454	72	2474	
13	2415	33	2435	53	2455	73	2475	
14	2416	34	2436	54	2456	74	2476	
15	2417	35	2437	55	2457	75	2477	
16	2418	36	2438	56	2458	76	2478	
17	2419	37	2439	57	2459	77	2479	
18	2420	38	2440	58	2460	78	2480	
19	2421	39	2441	59	2461			

## 1.1.6 Test Tool and Duty Cycle

Test Tool	Broadcom Blue Tool, Version: 1.4.5.4
-----------	--------------------------------------

### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)				
Wodulation Wode	2402 2441 2480				
GFSK/1Mbps	Specify Power Table index 0	Specify Power Table index 0	Specify Power Table index 0		


Report No.: FR520501 Page: 6 of 37



## 1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Signal cable / Length (m)						
1	AC adapter	Apple Inc.	A1385				

## 1.3 Test Setup Chart

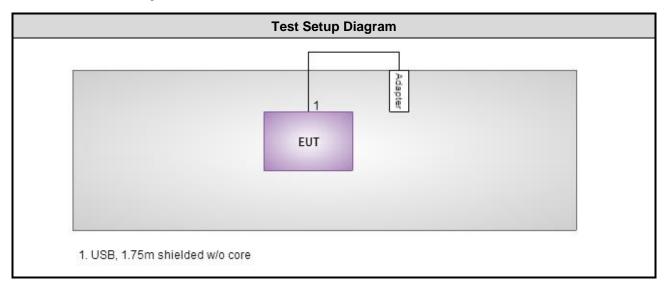

Report No.: FR520501 Page: 7 of 37



## 1.4 The Equipment List

Conducted Emission							
Conduction room 1 / (CO01-WS)							
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015			
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015			
SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015			
Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015			
NA	50	04	Apr. 15, 2015	Apr. 14, 2016			
AUDIX	e3	6.120210k	NA	NA			
	Conduction room 1 / (  Manufacturer  R&S  SCHWARZBECK  SCHWARZBECK  Woken  NA	Conduction room 1 / (CO01-WS)  Manufacturer Model No.  R&S ESCS 30  SCHWARZBECK Schwarzbeck 8127  SCHWARZBECK Schwarzbeck 8127  Woken CFD200-NL  NA 50	Conduction room 1 / (CO01-WS)           Manufacturer         Model No.         Serial No.           R&S         ESCS 30         100169           SCHWARZBECK         Schwarzbeck 8127         8127-667           SCHWARZBECK         Schwarzbeck 8127         8127-666           Woken         CFD200-NL         CFD200-NL-001           NA         50         04	Conduction room 1 / (CO01-WS)           Manufacturer         Model No.         Serial No.         Calibration Date           R&S         ESCS 30         100169         Oct. 17, 2014           SCHWARZBECK         Schwarzbeck 8127         8127-667         Nov. 17, 2014           SCHWARZBECK         Schwarzbeck 8127         8127-666         Nov. 26, 2014           Woken         CFD200-NL         CFD200-NL-001         Dec. 31, 2014           NA         50         04         Apr. 15, 2015			

Test Item	Radiated Emission									
Test Site	966 chamber 2 / (03C)	966 chamber 2 / (03CH02-WS)								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015					
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016					
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015					
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015					
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015					
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015					
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015					
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015					
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015					
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015					
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015					
Measurement Software	ΔΙΠΝΥ		e3 6.120210g		NA					
Note: Calibration Inter	rval of instruments listed	d above is one year.								

Test Item	RF Conducted						
Test Site	(TH01-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016		
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015		
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015		
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA		
Note: Calibration Interval of instruments listed above is one year.							

Report No.: FR520501 Page: 8 of 37



### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 FCC Public notice DA 00-705 ANSI C63.10-2013

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty								
Parameters	Uncertainty							
Bandwidth	±34.134 Hz							
Conducted power	±0.808 dB							
Power density	±0.463 dB							
Conducted emission	±2.670 dB							
AC conducted emission	±2.92 dB							
Radiated emission ≤ 1GHz	±3.62 dB							
Radiated emission > 1GHz	±5.60 dB							

Report No.: FR520501 Page: 9 of 37



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 56%	Kevin Ma
Radiated Emissions	03CH02-WS	21°C / 61%	Anderson Hung
RF Conducted	TH01-WS	22°C / 61%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2480	1Mbps	
Radiated Emissions ≤ 1GHz	GFSK	2480	1Mbps	
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2480	1Mbps	
Conducted Output Power	GFSK	2402, 2441, 2480	1Mbps	
Number of Hopping Channels	GFSK	2402~2480	1Mbps	
Hopping Channel Separation	GFSK	2402, 2441, 2480	1Mbps	
Dwell Time	GFSK	2480	1Mbps	

Report No.: FR520501 Page: 10 of 37



### 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz)	Quasi-Peak	Average					
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarith	m of the frequency.	,					

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

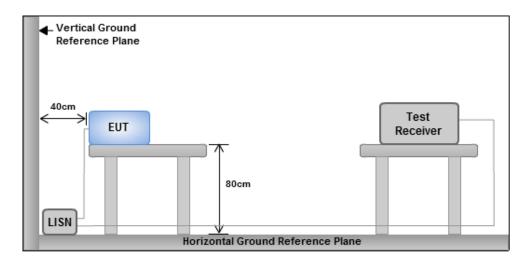


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR520501 Page: 11 of 37




#### **Test Result of Conducted Emissions** 3.1.4

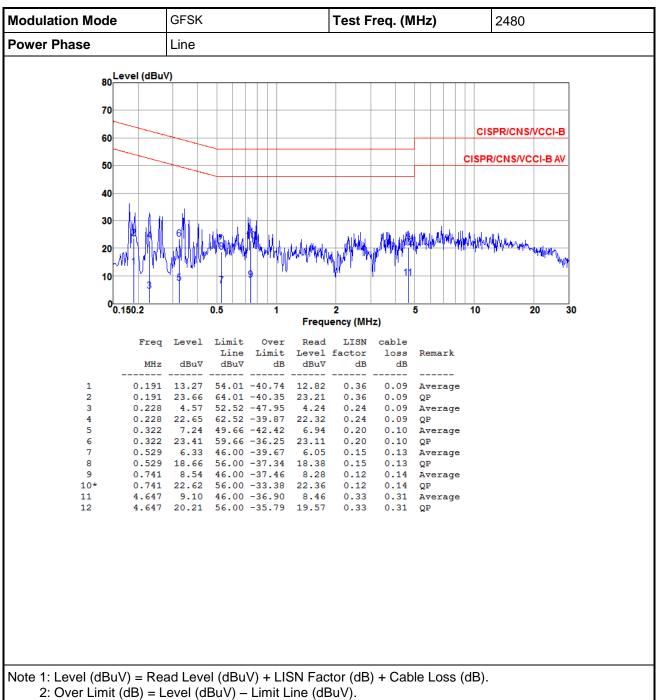

Report No.: FR520501 Page: 12 of 37



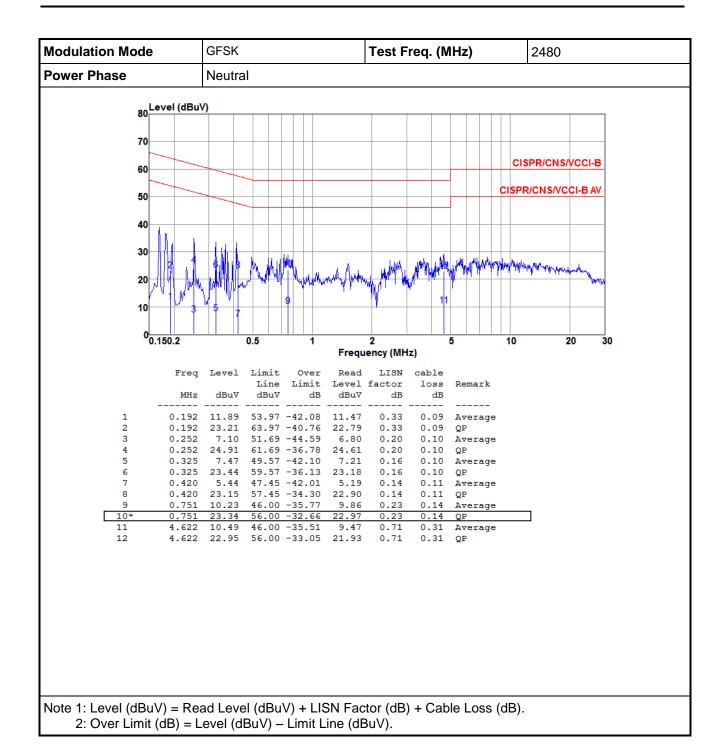

Report No.: FR520501 Page: 13 of 37



## 3.2 Unwanted Emissions into Restricted Frequency Bands

#### 3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics

The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:


3. 
$$20\log \text{ (Duty cycle)} = 20\log \frac{1\text{s}/1600 * 5}{100 \text{ ms}} = -30.1 \text{dB}$$

4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector

Report No.: FR520501 Page: 14 of 37




### 3.2.3 Test Setup

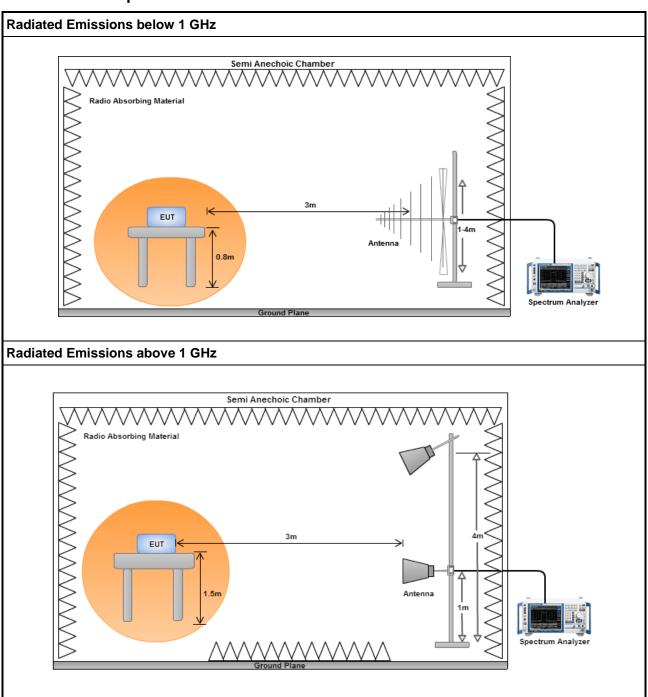

Report No.: FR520501 Page: 15 of 37



#### 3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

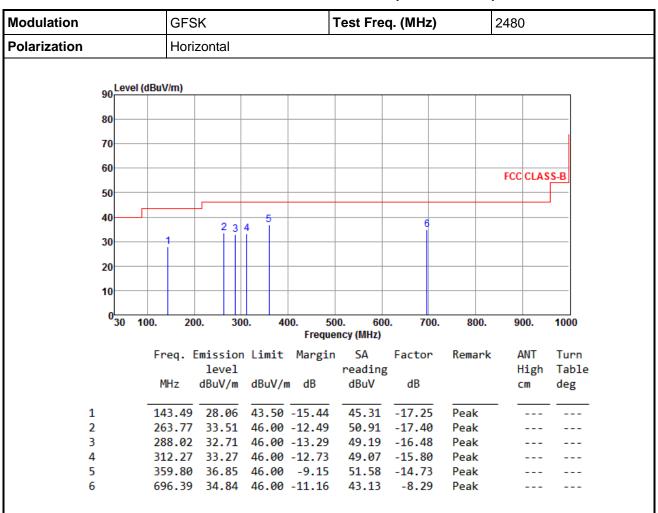

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR520501 Page: 16 of 37




Modulation		GFSK Test Freq. (MHz) 2480									
Polarization		Vertical									
	90 Lev	el (dBu\	//m)			1					
	80										
	70										
	60									FCC CLAS	S . R
	50									TOUCEA	55-5
			<del></del>						6		_
	40		1	3	4			5			
	30										
	20										
	10										
	030	100.	200.	30	0. 4		00. 600	0. 700.	800.	900.	1000
		_					ency (MHz)	_			_
		Fr		ssion evel	Limit	Margin	· SA reading	Factor	Remark	ANT High	Turn Table
		М			dBuV/	m dB	dBuV	dB		cm	deg
1						-12.30		-17.25	Peak		
2						-17.99 -11.78	46.13 50.70		Peak Peak		
- 4				3.75		-12.25	48.48		Peak		
			7.36 34 7.27 4			-11.19 -4.83	43.09 48.11	-8.28 -6.94	Peak Peak		

\*Factor includes antenna factor, cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR520501 Page: 17 of 37



### 3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

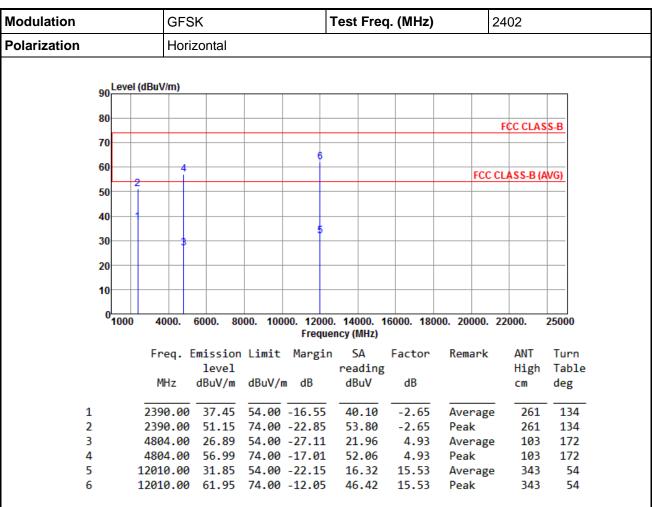

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 18 of 37



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

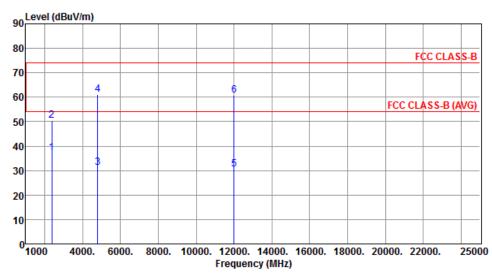


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.31	54.00	-16.69	39.96	-2.65	Average	348	183
2	2390.00	50.58	74.00	-23.42	53.23	-2.65	Peak	348	183
3	4804.00	31.10	54.00	-22.90	26.17	4.93	Average	100	188
4	4804.00	61.20	74.00	-12.80	56.27	4.93	Peak	100	188
5	12010.00	30.53	54.00	-23.47	15.00	15.53	Average	214	319
6	12010.00	60.63	74.00	-13.37	45.10	15.53	Peak	214	319

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 19 of 37



Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

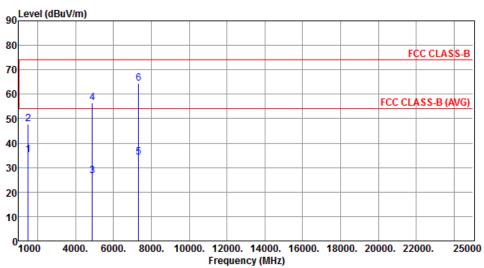


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1500.00	35.07	54.00	-18.93	40.64	-5.57	Average	188	183
2	1500.00	47.71	74.00	-26.29	53.28	-5.57	Peak	188	183
3	4882.00	26.51	54.00	-27.49	21.40	5.11	Average	111	165
4	4882.00	56.61	74.00	-17.39	51.50	5.11	Peak	111	165
5	7323.00	34.24	54.00	-19.76	24.10	10.14	Average	100	143
6	7323.00	64.34	74.00	-9.66	54.20	10.14	Peak	100	143

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 20 of 37



Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

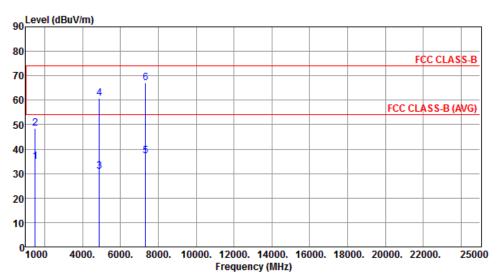

		Emission level		Ū	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1500.00	34.87	54.00	-19.13	40.44	-5.57	Average	237	105
2	1500.00		74.00		54.02	-5.57	Peak	237	105
3	4882.00	30.81	54.00	-23.19	25.70	5.11	Average	107	191
4	4882.00	60.91	74.00	-13.09	55.80	5.11	Peak	107	191
5	7323.00	37.14	54.00	-16.86	27.00	10.14	Average	107	218
6	7323.00	67.24	74.00	-6.76	57.10	10.14	Peak	107	218

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 21 of 37



3

4

5

Modulation			GFS	K			Test Fr	eq. (MHz)		2480	
Polarization			Horiz	Horizontal							
	90 <mark>1</mark>	Level (	(dBuV/m)								
	80										
										FCC CLAS	S-B
	70			6							
	60	- 1	4						FCC	CLASS D.	WC)
	50								FCC	CLASS-B (A	WG)
	50										
	40			5							
	30			$\bot$							
	20										
	10										-
	0										
	U,	1000	4000.	6000. 80	00. 100		0. 14000. ency (MHz	16000. 180 )	00. 20000.	22000.	25000
			Freq. E	mission	Limit	Margi	n SA	Factor	Remark	ANT	Turn
				level		3	readin			High	Tabl
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
	1		2483.50	38.04	54.00	-15.96	40.38	-2.34	Average	261	131
	2							5 -2.34	_	261	131
	_										

21.54

51.64

24.15

5.28

5.28

10.41

10.41

Average

Average

Peak

Peak

106

106

100

100

167

167

156

156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

4960.00 26.82 54.00 -27.18

4960.00 56.92 74.00 -17.08

7440.00 34.56 54.00 -19.44


7440.00 64.66 74.00 -9.34 54.25

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 22 of 37



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

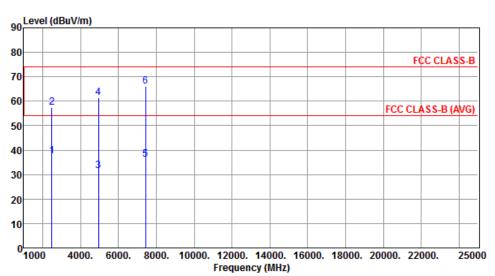

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	J	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.66	54.00	-16.34	40.00	-2.34	Average	376	176
2	2483.50	57.54	74.00	-16.46	59.88	-2.34	Peak	376	176
3	4960.00	31.39	54.00	-22.61	26.11	5.28	Average	162	269
4	4960.00	61.49	74.00	-12.51	56.21	5.28	Peak	162	269
5	7440.00	36.08	54.00	-17.92	25.67	10.41	Average	228	212
6	7440.00	66.18	74.00	-7.82	55.77	10.41	Peak	228	212

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520501 Page: 23 of 37



## 3.3 Unwanted Emissions into Non-Restricted Frequency Bands

#### 3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.3.2 Test Procedures


#### **Reference Level Measurement**

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

#### **Unwanted Emissions Level Measurement**

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


#### 3.3.3 Test Setup



Report No.: FR520501 Page: 24 of 37




### 3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

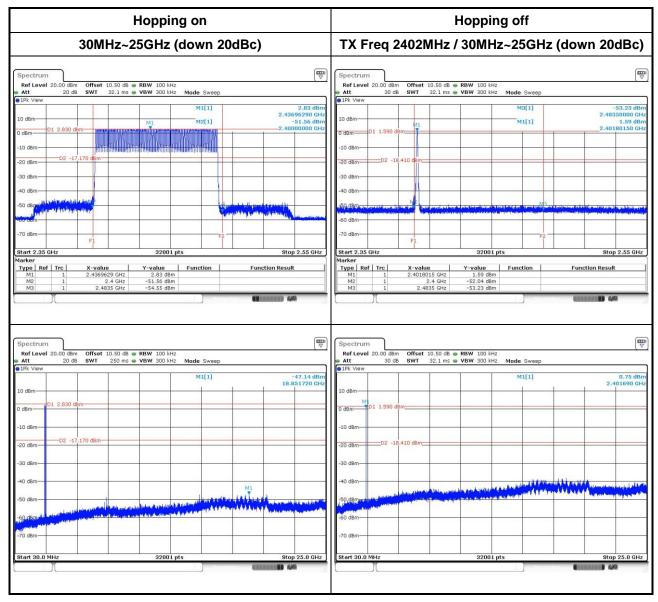

Report No.: FR520501 Page: 25 of 37



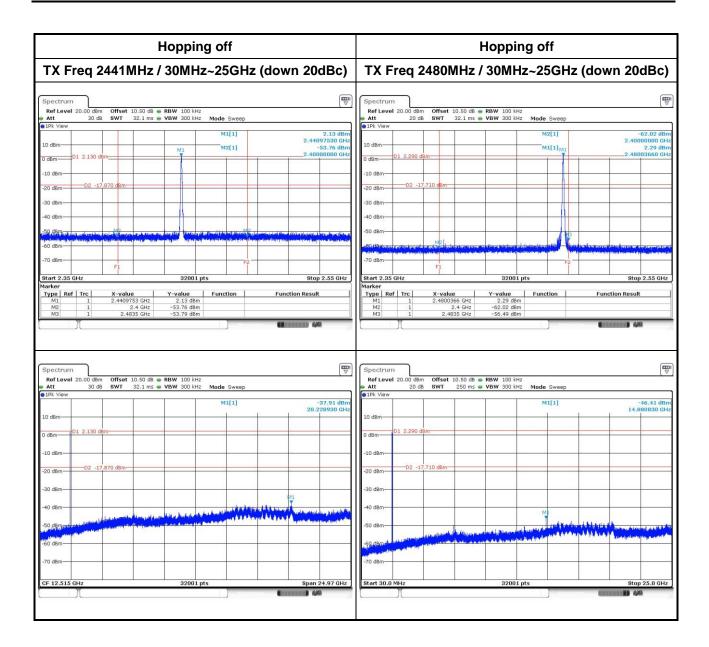

Report No.: FR520501 Page: 26 of 37



## 3.4 Conducted Output Power

## 3.4.1 Limit of Conducted Output Power

1 Watt For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
0.125 Watt For all other frequency hopping systems in the 2400–2483.5 MHz band.
0.125 Watt For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

#### 3.4.2 Test Procedures

- A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

### 3.4.3 Test Setup



Report No.: FR520501 Page: 27 of 37



## 3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (dBm)
GFSK	2402	1.37	1.38	20.96
GFSK	2441	1.59	2.02	20.96
GFSK	2480	1.79	2.53	20.96

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	1.36	1.34
GFSK	2441	1.58	1.98
GFSK	2480	1.77	2.49

Note: Average power is for reference only.

Report No.: FR520501 Page: 28 of 37



## 3.5 Number of Hopping Frequency


## 3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### 3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.


### 3.5.3 Test Setup



Report No.: FR520501 Page: 29 of 37



### 3.5.4 Test Result of Number of Hopping Frequency

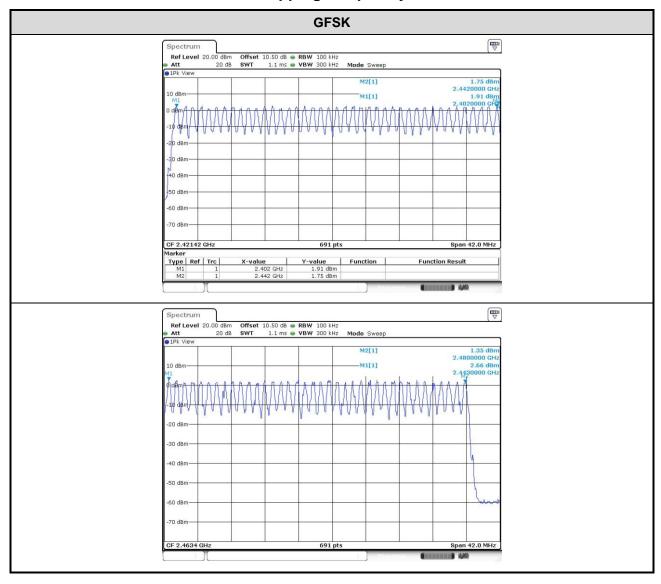

Report No.: FR520501 Page: 30 of 37



## 3.6 20dB and Occupied Bandwidth

#### 3.6.1 Test Procedures


#### 20dB Bandwidth

- Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
- 2 Allow trace to stabilize
- 3 Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

- Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
- 2 Allow trace to stabilize
- 3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

#### 3.6.2 Test Setup




Report No.: FR520501 Page: 31 of 37



## 3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	1.030	0.932
GFSK	2441	1.030	0.945
GFSK	2480	1.030	0.922

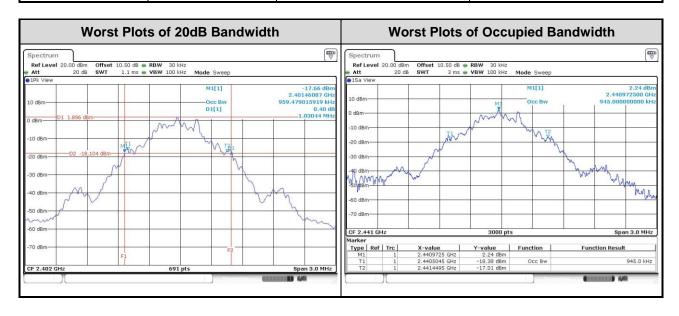

Report No.: FR520501 Page: 32 of 37



## 3.7 Channel Separation


#### 3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 3.7.2 Test Procedures

- 1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

#### 3.7.3 Test Setup




Report No.: FR520501 Page: 33 of 37



### 3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	1.030	0.687
GFSK	2441	1.003	1.030	0.687
GFSK	2480	1.003	1.030	0.687

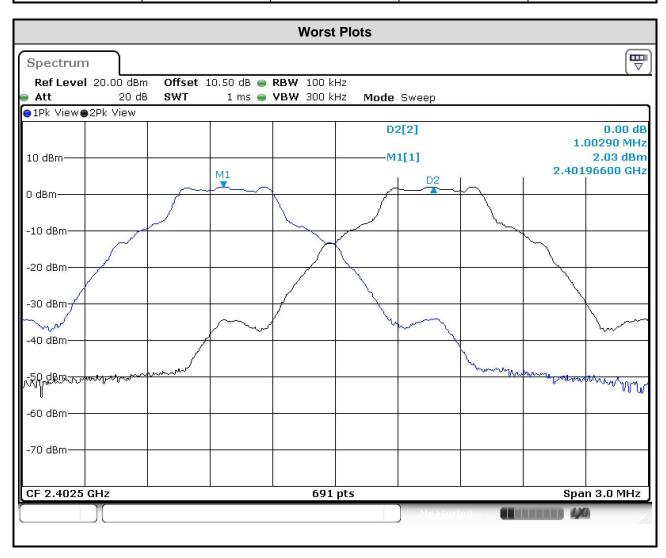

Report No.: FR520501 Page: 34 of 37



#### 3.8 Number of Dwell Time


#### 3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.8.2 Test Procedures

- Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- 3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.
- 4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds

#### 3.8.3 Test Setup




Report No.: FR520501 Page: 35 of 37



#### 3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2480	0.46087	320	0.147	0.4
GFSK-DH3	2480	1.71957	160	0.275	0.4
GFSK-DH5	2480	2.97971	106.6	0.318	0.4

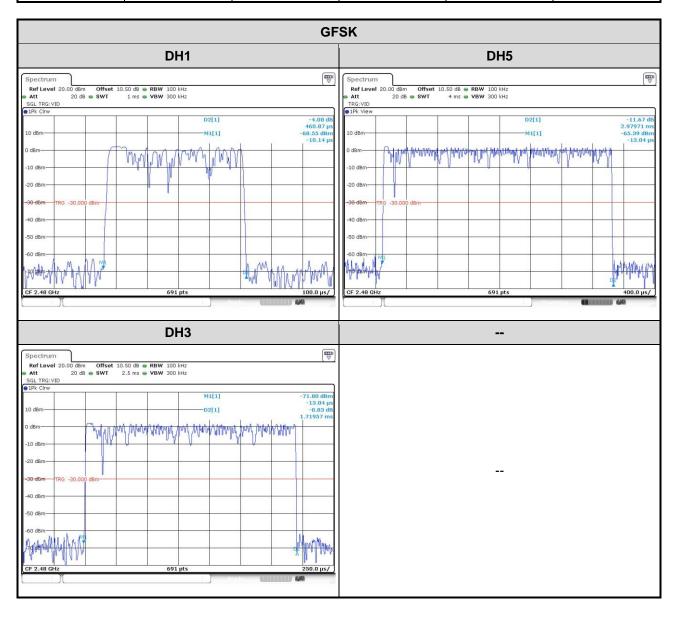

Report No.: FR520501 Page: 36 of 37



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR520501 Page: 37 of 37