
### A2. WCDMA

## Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.20	3.16	3.32	
Middle CH	3.16	3.36	3.28	PASS
Highest CH	3.32	3.16	3.40	

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FG22/24/27 Version 1.1

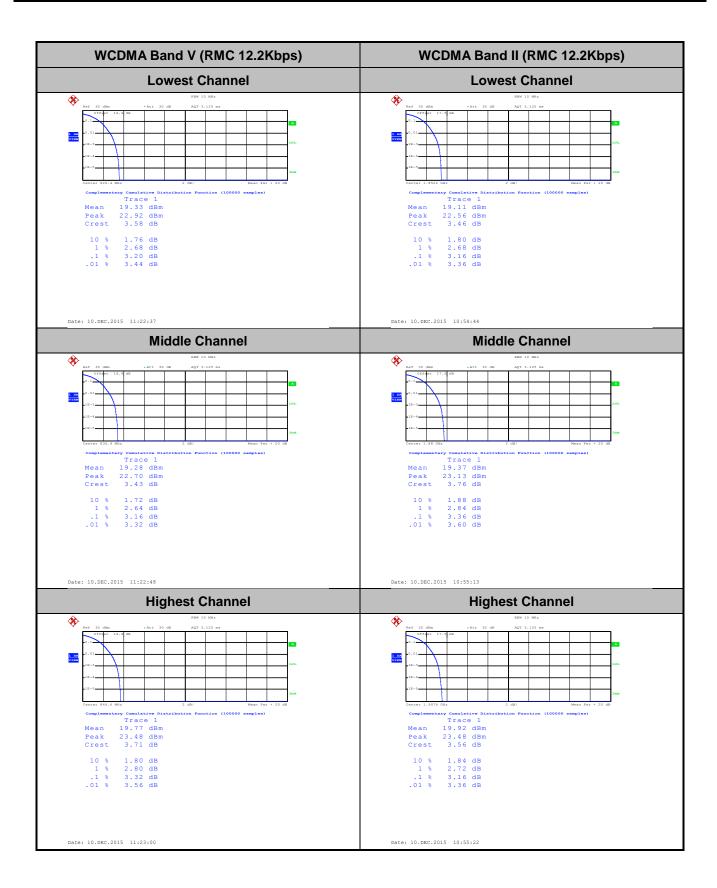

: A2-2 of 17

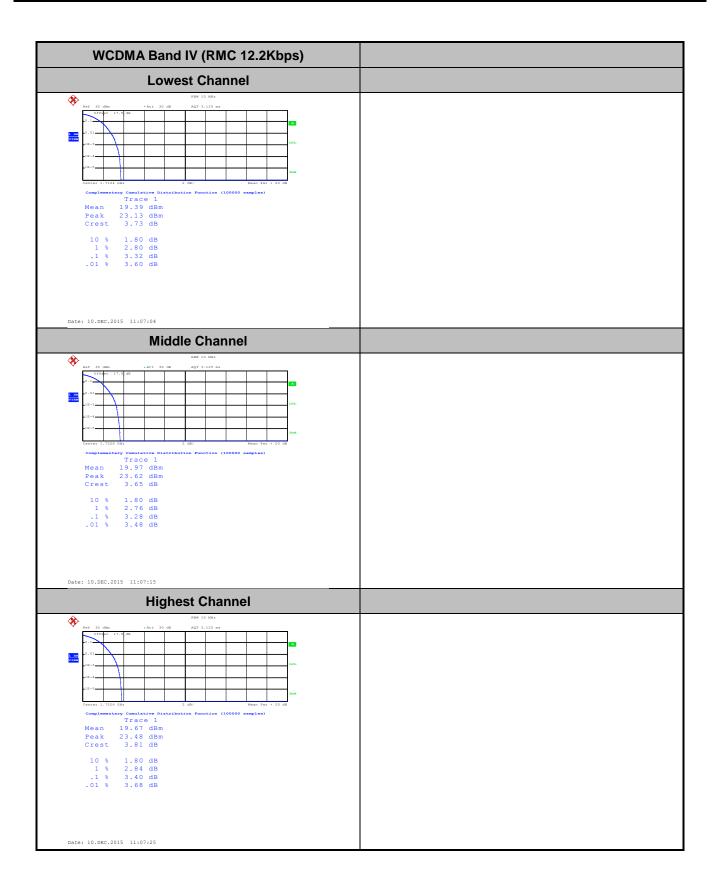

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978


## 26dB Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.73	4.71	4.70
Middle CH	4.70	4.72	4.68
Highest CH	4.70	4.71	4.69

SPORTON INTERNATIONAL INC. Page Number : A2-4 of 17

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FG22/24/27 Version 1.1

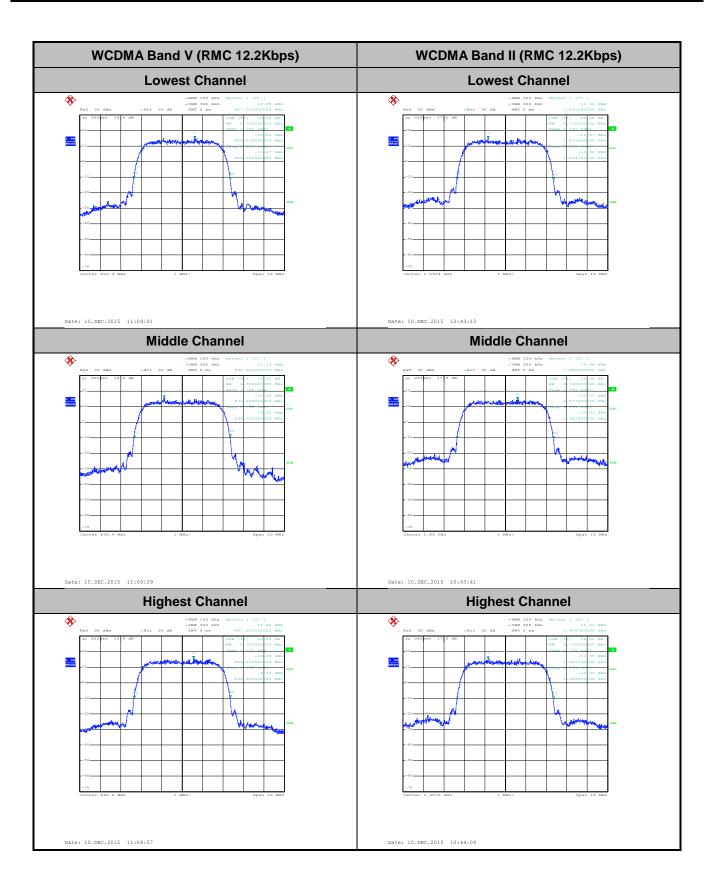

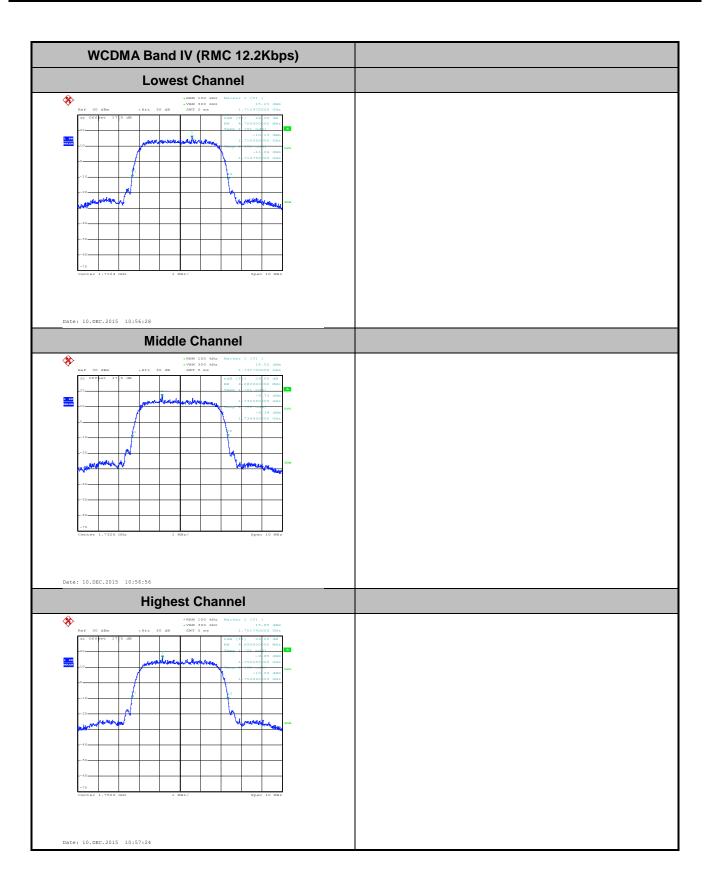


# Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14	4.14
Middle CH	4.13	4.16	4.13
Highest CH	4.12	4.15	4.14

SPORTON INTERNATIONAL INC. Page Number : A2-7 of 17


TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FG22/24/27 Version 1.1

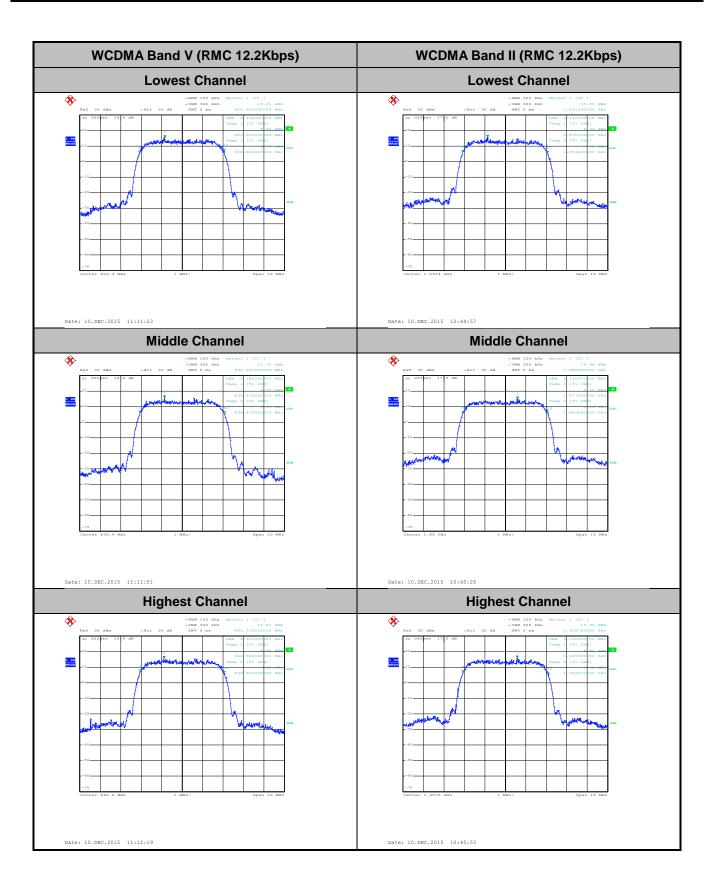

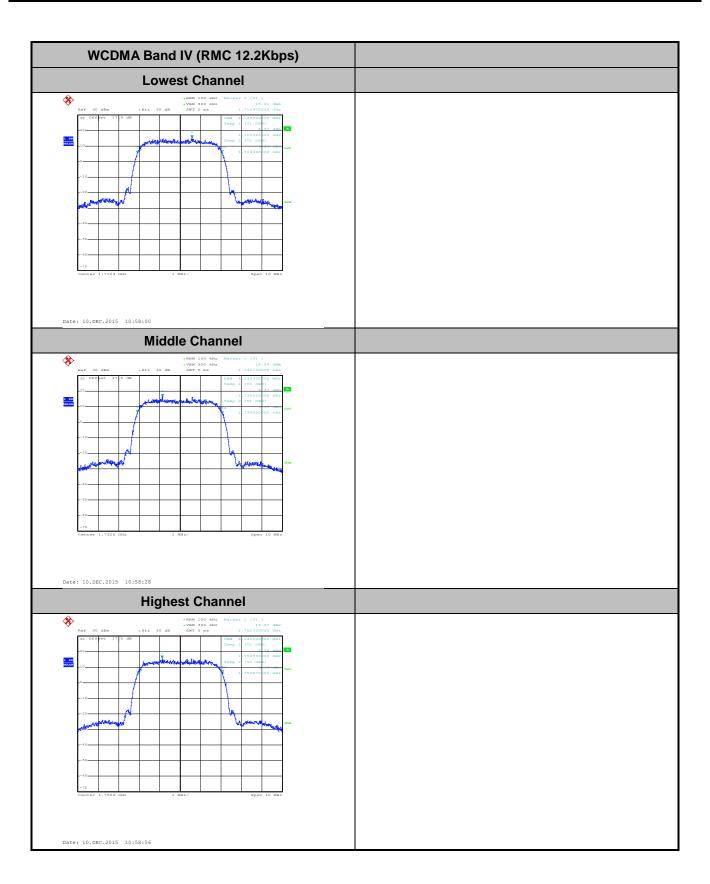



# **Conducted Band Edge**

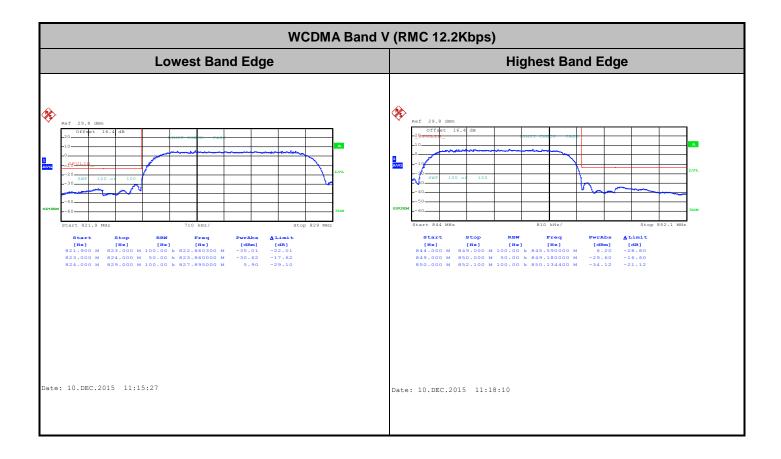

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No.: FG5N2627A

Report Template No.: BU5-FG22/24/27 Version 1.1

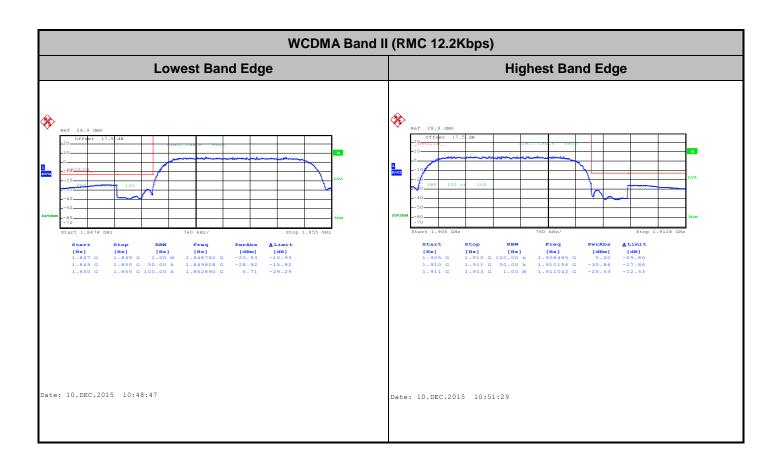


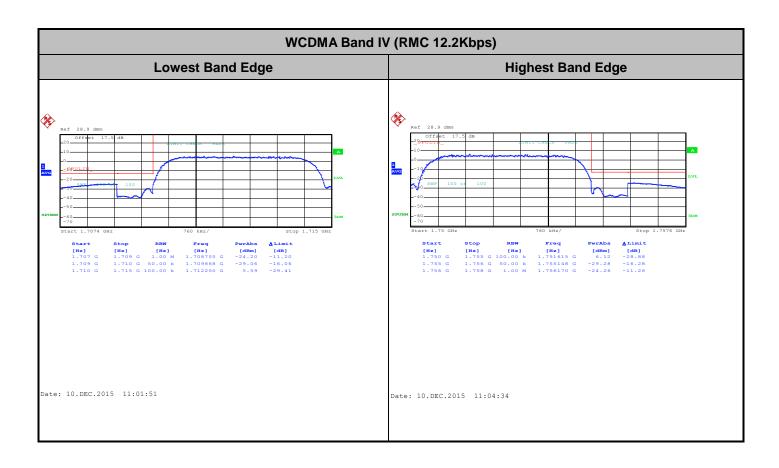

: A2-12 of 17

Page Number


# **Conducted Spurious Emission**

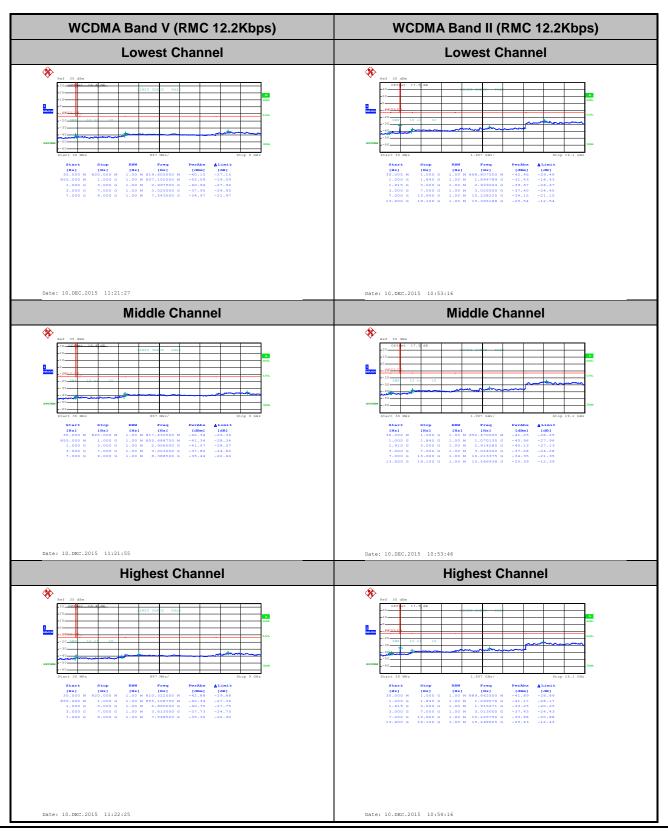

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: A2-13 of 17

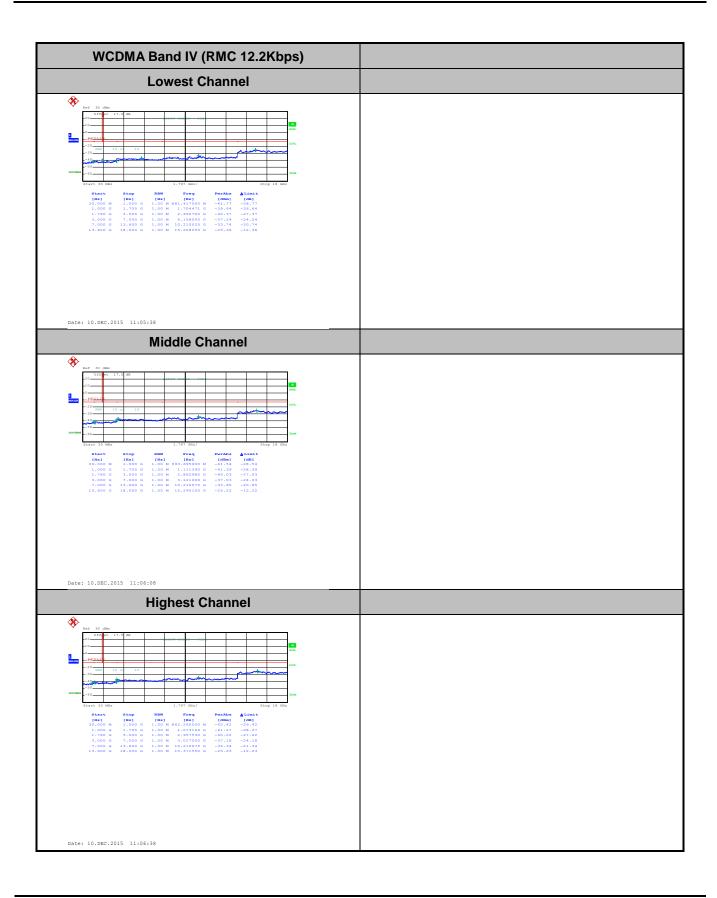

### Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0060	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0084	PASS
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0072	
20	Maximum Voltage	0.0072	
20	Normal Voltage	0.0132	
20	Battery End Point	0.0060	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**SPORTON INTERNATIONAL INC.** Page Number : A2-15 of 17

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FG22/24/27 Version 1.1

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0069	
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0101	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0005	
-10	Normal Voltage	0.0021	PASS
-20	Normal Voltage	0.0016	
-30	Normal Voltage	0.0005	
20	Maximum Voltage	0.0016	
20	Normal Voltage	0.0074	
20	Battery End Point	0.0059	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**SPORTON INTERNATIONAL INC.** Page Number : A2-16 of 17

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0081	
40	Normal Voltage	0.0017	
30	Normal Voltage	0.0029	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0006	
-10	Normal Voltage	0.0017	PASS
-20	Normal Voltage	0.0104	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0023	
20	Normal Voltage	0.0069	
20	Battery End Point	0.0075	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**SPORTON INTERNATIONAL INC.** Page Number : A2-17 of 17

TEL: 886-3-327-3456 FAX: 886-3-328-4978