
Let's get started.

GL·ÎNet

GL-E750C4 / Mudi Portable 4G LTE Router

SETTING UP

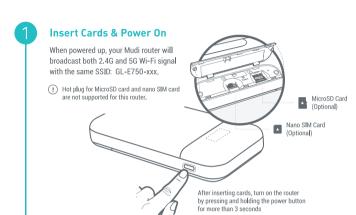

or

Connect via Wi-Fi

Connect to the Wi-Fi called GL-E750-xxx, and then input the default Wi-Fi password goodlife, which is also printed on the bottom of the router.



Default password is goodlife

Connect via LAN



Plug the Ethernet cable connecting to your computer into the LAN port of the USB-C port replicator


Set Up Router

Visit http://192.168.8.1 in your browser to set up your router; start by choosing your preferred language.



四个角做5mm圆角

SUPPORT

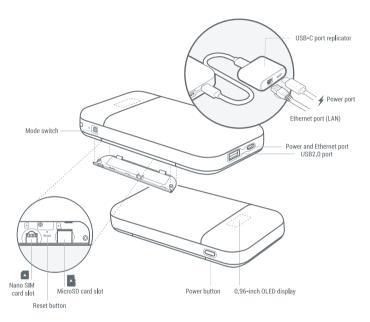

Repair / Reset

If you cannot access the web-based setup page or cannot connect to the router, you can press the Reset button by using a pin:

- Press and hold for 3 seconds, and then release to repair your network.
- Press and hold for 10 seconds, and then release to reset the router to factory settings. All user data will be cleared.



https://docs.gl-inet.com/en/3/

Technical Supports

- For more detailed and updated instructions, please visit our website docs.ql-inet.com
- For further questions, you can get help from the following ways:
 - Email to support@gl-inet.com
 - Message us on our Facebook: facebook.com/gl.inet.wifi/
 - Post questions in our forum: forum.gl-inet.com
 - Ask professionals in other forums e.g. OpenWrt, LEDE or other professional websites

WARRANTY

- We provide one year limited warranty for routers and 3-month limited warranty for accessories. Extra warranty may apply according to the local law in which the product purchase took place.
- Highly recommend using the included 5V/2A power adapter.
- Any damage to the router caused by not following the instructions will render this warranty null
- Any damage to the router caused by modifying the PCBA, components or case will render this warranty null and void.
- Issues caused by the use of third-party firmware may not get official support from us.
- Any damage to the router caused by inappropriate use, e.g. inappropriate voltage input, high temperature, dropping in the water or on the ground will render this warranty null and void.
- Pictures on the instructions are only for reference. We reserve the right to change or modify these materials without further notice.

FCC ID: 2AFIW-E750C4

- 1. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
- (1) this device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.
- 2. Changes or multi-actions and uncertainty of the party responsible for compliance could viole the uncertainty to operate the equipment.

 3. Ones of the could viole the uncertainty of the party responsible for compliance could viol the uncertainty to operate the equipment.

 3. Note: This equipment is absent tested and noted to comply with the limits for a Significal device, unsurant to part 15 of the PCD Rules. The action of the party responsible provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can and as a designed by provide reasonable procedura grands in amount and the restrictions are designed under the restrictions and a read of the restrictions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the
- interference by one or more of the following measures

 Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and re
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 Consult the dealer or an experienced radio/TV technician for help important announcement.

This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed no assure the safety of all persons regardless of ago or healty.

The SAR limit of USA (FCD) is 1,6 W/kg averaged over one gram of lissue, Device types:F500C4 has also been tested against this SAR limit, use accessories that rimination a 50mm separation distance between the user's body and the back of the handset.

The Equipment named above is confirmed to comply with the requirements setout in the European Council Directive on the Approximation of the Laws of the Member States relating to RED (2014/53/EU). The equipment passed the test which was performed according to the following European standards: EN300 328 V2.1.1: EN301 893 V2.1.1

EN301 489-1 V2.1.1; EN301 489/17 V3.1.1 IEC/EN 62368-1:2014

EN62209-2:2010

EN50566:2017

Operating Frequencies: 2412MHz~2462MHz;2422MHz~2452MHz;5150MHz~5250 MHz;5725MHz~5850MHz

The Product comply with Directive 2011/65/EU and its amendment directive 2015/863/EU (Rohs2.0)

Hong Kong Office

GL Technologies (Hong Kong) Limited 103B Enterprise Place, 5W Science Park,

Hong Kong

Shenzhen Office

Shenzhen Guanglianzhitong Tech Co., Ltd.

Room 305 - 306, Skyworth Digital Building, Shiyan Street, Baoan District, Shenzhen, China, 518000

(+86-0755-86606126)

