FCC RF Test Report

APPLICANT : Solnik S.A. EQUIPMENT : mobile phone

BRAND NAME : HYUNDAI MODEL NAME : HY1-1618

FCC ID : 2AFRUHY1-1618

STANDARD : FCC Part 15 Subpart C §15.247

CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 21, 2017 and testing was completed on Jul. 03, 2017. We, SPORTON International (ShenZhen) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON International (ShenZhen) INC., the test report shall not be reproduced except in full.

Prepared by: Eric Shih / Manager

True Shih

Approved by: Jones Tsai / Manager

SPORTON International (ShenZhen) INC.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 1 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Testing Laboratory 2353

Report No.: FR762102B

TABLE OF CONTENTS

SU	MMAF	RY OF TEST RESULT	4
1	GEN	5	
	1.1.	Applicant	5
	1.2.	Manufacturer	5
	1.3.	Product Feature of Equipment Under Test	5
	1.4.	Product Specification of Equipment Under Test	5
	1.5.	Modification of EUT	5
	1.6.	Testing Location	6
	1.7.	Applicable Standards	6
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1.	Descriptions of Test Mode	7
	2.2.	Test Mode	8
	2.3.	Connection Diagram of Test System	9
	2.4.	Support Unit used in test configuration and system	10
	2.5.	EUT Operation Test Setup	10
	2.6.	Measurement Results Explanation Example	11
3	TEST	T RESULT	12
	3.1.	6dB Bandwidth Measurement	12
	3.2.	Peak Output Power Measurement	15
	3.3.	Power Spectral Density Measurement	16
	3.4.	Conducted Band Edges and Spurious Emission Measurement	21
	3.5.	Radiated Band Edges and Spurious Emission Measurement	26
	3.6.	AC Conducted Emission Measurement	30
	3.7.	Antenna Requirements	34
4	LIST	OF MEASURING EQUIPMENT	35
5	UNC	ERTAINTY OF EVALUATION	36
ΑP	PEND	DIX A. CONDUCTED TEST RESULTS	
ΑP	PEND	DIX B. RADIATED SPURIOUS EMISSION	
ΑP	PEND	DIX C. DUTY CYCLE PLOTS	

SPORTON International (ShenZhen) INC.

APPENDIX D. SETUP PHOTOGRAPHS

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 2 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR762102B	Rev. 01	Initial issue of report	Aug. 01, 2017

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 3 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.43 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.90 dB at 0.550 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 4 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

1 General Description

1.1. Applicant

Solnik S.A.

Dr. Emilio Ravignani 1724 Ciudad Autonoma de Buenos Aires Zip Code 1414 Argentina

Report No.: FR762102B

1.2. Manufacturer

Gionee Communication Equipment Co.,Ltd.

21/F, Times Technology Building, No. 7028, Shennan Avenue, Futian District, Shenzhen, China

1.3. Product Feature of Equipment Under Test

Product Feature				
Equipment	mobile phone			
Brand Name	HYUNDAI			
Model Name	HY1-1618			
FCC ID	2AFRUHY1-1618			
EUT supports Radios application	GSM/GPRS/EGPRS/HSPA/DC-HSDPA/HSPA+/LTE/ WLAN2.4G 802.11b/g/n HT20/HT40/ Bluetooth v2.1 + EDR/Bluetooth v3.0 + EDR/Bluetooth v4.0 LE			
IMEI Code	Conducted: 354147042105800/754147043105809 Conduction: 354147042105776/354147043105775 Radiation: 354147042105768/354147043105767			
HW Version	Ultra Active_Mainboard_P4			
SW Version	Ultra Active_0402_V5748			
EUT Stage	Pre-Production			

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz			
Number of Channels	40			
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)			
Maximum Output Power to Antenna	7.41 dBm (0.0055 W)			
Antenna Type / Gain	IFA Antenna with gain -2.0 dBi			
Type of Modulation	Bluetooth LE : GFSK			

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON International (ShenZhen) INC.
 Page Number
 : 5 of 36

 TEL: 86-755-8637-9589
 Report Issued Date
 : Aug. 01, 2017

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: 2AFRUHY1-1618 Report Template No.: BU5-FR15CBT4.0 Version 2.0

1.6. Testing Location

Test Site	SPORTON International (ShenZhen) INC.		
	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District,		
	Shenzhen City, Guangdong Province, China		
Test Site Location	TEL: +86-755-8637-9589		
	FAX: +86-755-8637-9595		
Test O'te Ne	Sportor	n Site No.	
Test Site No.	TH01-SZ	CO01-SZ	

Test Site	SPORTON International (ShenZhen) INC.		
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398		
Took Site No	Sporton Site No. FCC Registration No.		
Test Site No.	03CH03-SZ	565805	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON International (ShenZhen) INC.
TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 6 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

2 Test Configuration of Equipment Under Test

2.1. Descriptions of Test Mode

The RF output power was recorded in the following table:

		Bluetooth – LE RF Output Power	
Channal		Data Rate / Modulation	
Channel	Frequency	GFSK	
		1Mbps	
Ch00	2402MHz	6.63 dBm	
Ch19	2440MHz	7.41 dBm	
Ch39	2480MHz	5.25 dBm	

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

SPORTON International (ShenZhen) INC.

FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618

TEL: 86-755-8637-9589

Page Number : 7 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

2.2. Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


	Summary table of Test Cases					
Toot Itom	Data Rate / Modulation					
Test Item	Bluetooth – LE / GFSK					
Conducted	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps					
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps					
TCs	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps					
Radiated	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps					
TCs	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps					
ICS	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps					
AC	Made 1: CSM1000 Idle + Plusteeth Link + WLAN Link/2 4C) + Fernhane + LISP Cable					
Conducted	Mode 1: GSM1900 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable					
Emission	(Charging from Adapter)					
Remark: For	Remark: For Radiated TCs, The tests were performed with Adapter, Earphone and USB Cable.					

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 8 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

2.3. Connection Diagram of Test System

<Bluetooth - LE Tx Mode>

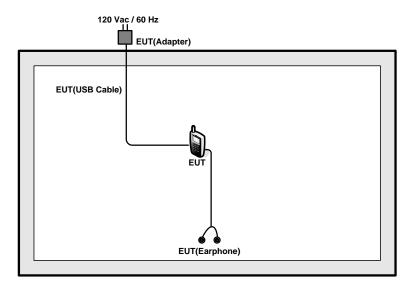

<AC Conducted Emission Mode>

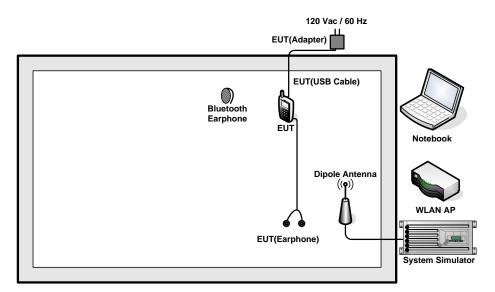

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 9 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

2.4. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded,1.8m
	Notebook	ebook Lenovo	E540	FCC DoC	N/A	AC I/P:
١						Unshielded, 1.2m
3.						DC O/P:
						Shielded, 1.8m
4.	Bluetooth	Nokia	DH 400	DVALIC 107W	NI/A	NI/A
	Earphone	INUKIA	BH-108	PYAHS-107W	N/A	N/A

2.5. EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 10 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

2.6. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$$

= 5.0 + 10 = 15.0 (dB)

Report No.: FR762102B

3 Test Result

3.1. 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. Measure and record the results in the test report.

3.1.4 Test Setup




TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 12 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

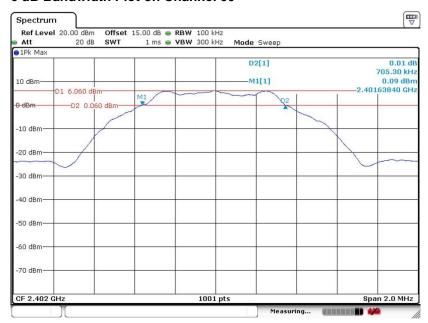


Date: 26.JUN.2017 22:08:00

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 13 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

6 dB Bandwidth Plot on Channel 19

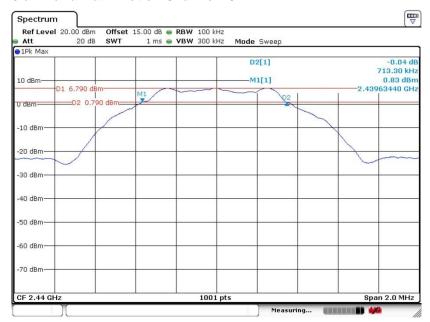

Date: 26.JUN.2017 22:16:27

6 dB Bandwidth Plot on Channel 39

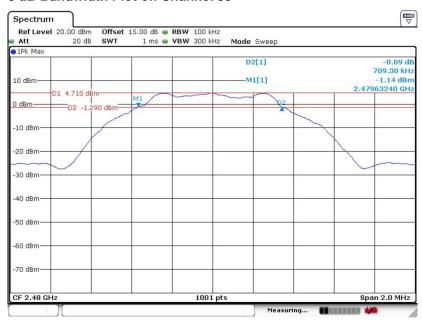

Date: 26.JUN.2017 22:25:17

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 14 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.2. Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas.
 Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

Page Number : 15 of 36
Report Issued Date : Aug. 01, 2017

Report No.: FR762102B

Report Version : Rev. 01

3.3. Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

- The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 16 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

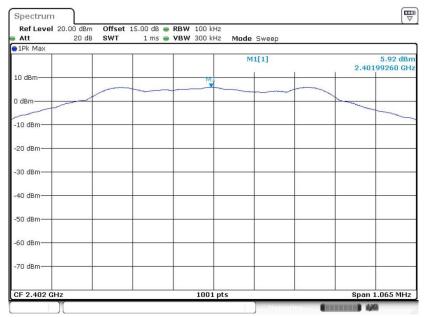

Date: 26.JUN.2017 22:08:17

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 17 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

PSD 100kHz Plot on Channel 19



Date: 26.JUN.2017 22:16:45

PSD 100kHz Plot on Channel 39

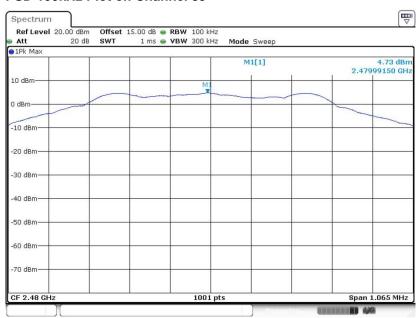


Date: 26.JUN.2017 22:26:00

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 18 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

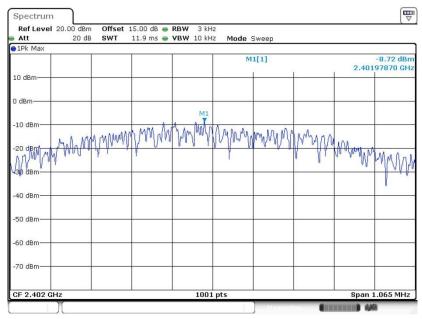


Date: 26.JUN.2017 22:08:10

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 19 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

PSD 3kHz Plot on Channel 19

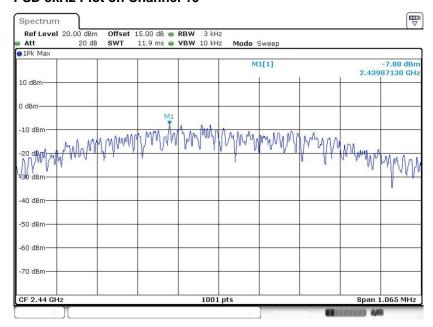

Date: 26.JUN.2017 22:16:39

PSD 3kHz Plot on Channel 39

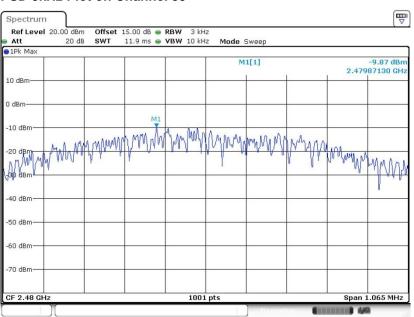

Date: 26.JUN.2017 22:25:52

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 20 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.4. Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup




TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 21 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

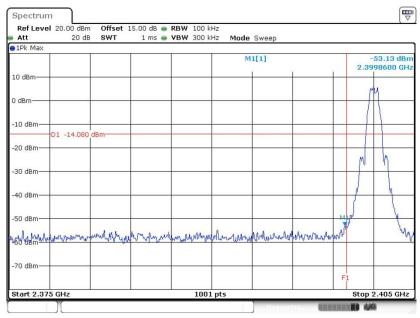

Date: 26.JUN.2017 22:08:38

High Band Edge Plot on Channel 39

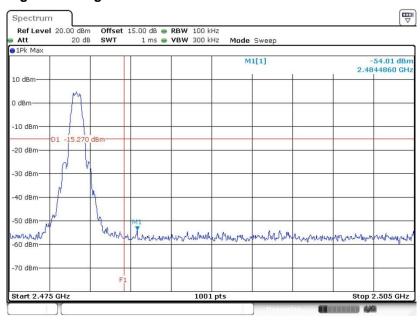


Date: 26.JUN.2017 22:26:06

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 22 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B


3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

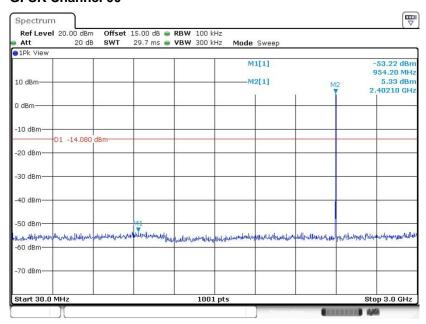

Date: 26.JUN.2017 22:08:48

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

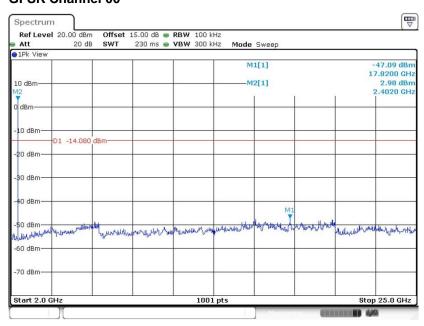


Date: 26.JUN.2017 22:08:56

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 23 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

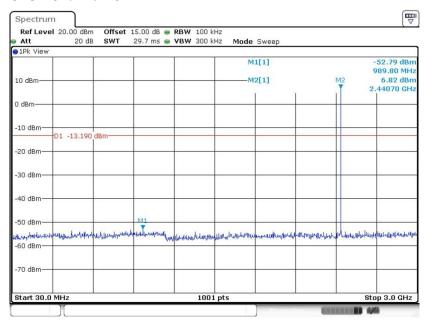

Date: 26.JUN.2017 22:19:51

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

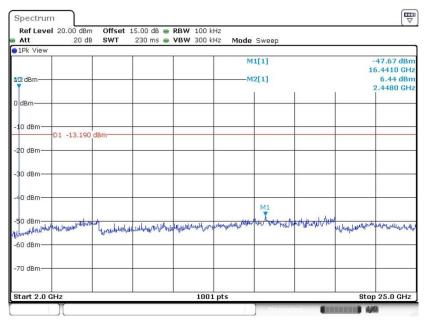


Date: 26.JUN.2017 22:19:59

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 24 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01


Report No.: FR762102B

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

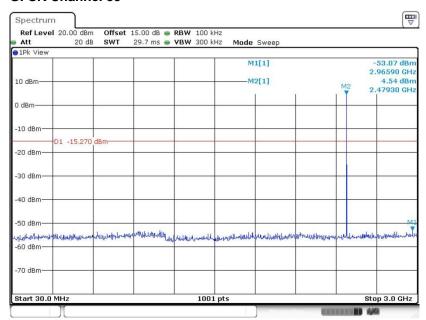

Date: 26.JUN.2017 22:26:33

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

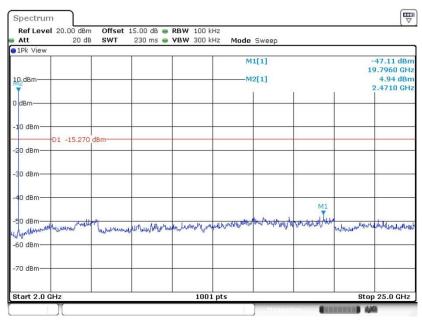

Date: 26.JUN.2017 22:26:41

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 25 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.5. Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 26 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.5.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 27 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.5.4 Test Setup

For radiated emissions below 30MHz




For radiated emissions from 30MHz to 1GHz



TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 28 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

For radiated emissions above 1GHz

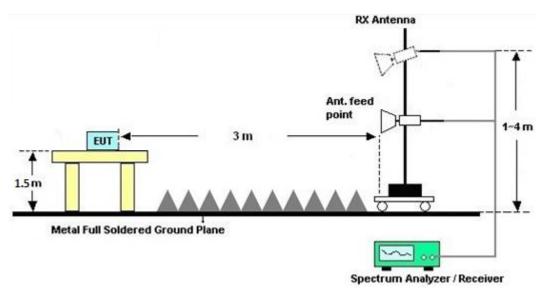

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 29 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.6. AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Eroquency of emission (MUz)	Conducted limit (dBµV)		
Frequency of emission (MHz)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*}Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


3.6.3 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Report No.: FR762102B



3.6.4 Test Setup

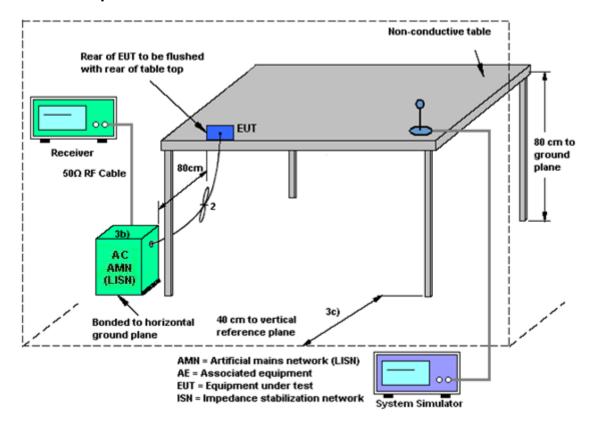


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 31 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.6.5 Test Result of AC Conducted Emission

Test Mode:	Mode 1	Temperature :	24~25 ℃
Test Engineer :	HaoHai YE	Relative Humidity :	60~65%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth	Link + WLAN Link(2.	4G) + Earphone + USB Cable

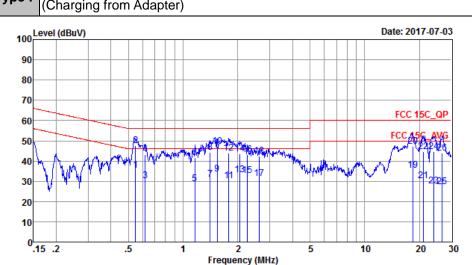

Site : CO01-SZ

Condition: FCC 15C_QP LISN_20170301_L LINE

IMEI	:	354147042105776/354147043105	775
------	---	------------------------------	-----

	: 354147042105776/354147043105775										
			Over	Limit	Read	LISN	Cable				
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark			
_	MHz	dBu₹	dB	dBu∇	dBuV	dB	dB				
1	0.55	35.30	-10.70	46.00	25.10	0.02	10.18	Average			
2 *	0.55	47.50	-8.50	56.00	37.30	0.02	10.18	QP			
3	0.62	30.19	-15.81	46.00	20.00	0.02	10.17	Average			
4	0.62	42.99	-13.01	56.00	32.80	0.02	10.17	QP			
5	1.16	28.73	-17.27	46.00	18.50	0.08	10.15	Average			
6	1.16	41.83	-14.17	56.00	31.60	0.08	10.15	QP			
7	1.41	31.04	-14.96	46.00	20.80	0.09	10.15	Average			
8	1.41	44.44	-11.56	56.00	34.20	0.09	10.15	QP			
9	1.54	33.45	-12.55	46.00	23.20	0.09	10.16	Average			
10	1.54	47.05	-8.95	56.00	36.80	0.09	10.16	QP			
11	1.78	30.26	-15.74	46.00	20.00	0.10	10.16	Average			
12	1.78	43.96	-12.04	56.00	33.70	0.10	10.16	QP			
13	2.05	33.08	-12.92	46.00	22.81	0.11	10.16	Average			
14	2.05	43.68	-12.32	56.00	33.41	0.11	10.16	QP			
15	2.26	32.90	-13.10	46.00	22.60	0.12	10.18	Average			
16	2.26	43.20	-12.80	56.00	32.90	0.12	10.18	QP			
17	2.62	31.24	-14.76	46.00	20.90	0.14	10.20	Average			
18	2.62	42.54	-13.46	56.00	32.20	0.14	10.20	QP			
19	18.43	35.54	-14.46	50.00	23.90	1.08	10.56	Average			
20	18.43	47.14	-12.86	60.00	35.50	1.08					
21	21.15	30.15	-19.85	50.00	18.21	1.32	10.62	Average			
22	21.15	44.65	-15.35	60.00	32.71	1.32	10.62	QP			
23	24.01	27.82	-22.18	50.00	15.89	1.36	10.57	Average			
24	24.01	44.62	-15.38	60.00	32.69	1.36	10.57	QP			
25	26.70	27.14	-22.86	50.00	15.30	1.38	10.46	Average			
26	26.70	44 04	-15.96	60.00	32.20	1.38	10.46	-			

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 32 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B




 Test Mode :
 Mode 1
 Temperature :
 24~25°C

 Test Engineer :
 HaoHai YE
 Relative Humidity :
 60~65%

 Test Voltage :
 120Vac / 60Hz
 Phase :
 Neutral

 GSM1900 Idle + Bluetooth Link + WLAN Link(2.4G) + Farnhone + USB Cable

Function Type : GSM1900 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter)

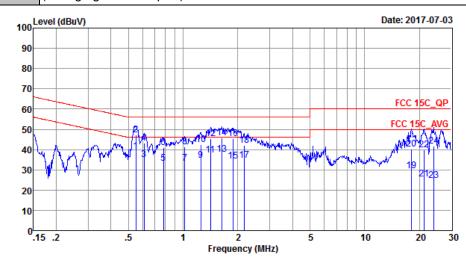

Site : CO01-SZ

Condition: FCC 15C_QP LISN_20170301_N NEUTRAL

IMEI	:	354147042105776/	/354147043105775
------	---	------------------	------------------

			Over	Limit	Read	LISN	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
_								
	MHz	dBuV	dB	dBu∀	dBu∀	dB	dB	
1 *	0.55		-6.90		28.90			Average
2	0.55	47.10	-8.90	56.00	36.90	0.02		
3	0.61	34.99	-11.01	46.00	24.80	0.02	10.17	Average
4	0.61	43.19	-12.81	56.00	33.00	0.02	10.17	QP
5	0.78	33.19	-12.81	46.00	23.00	0.03	10.16	Average
6	0.78	41.09	-14.91	56.00	30.90	0.03	10.16	QP
7	1.02	33.10	-12.90	46.00	22.90	0.05	10.15	Average
8	1.02	41.30	-14.70	56.00	31.10	0.05	10.15	QP
9	1.25	34.50	-11.50	46.00	24.30	0.05	10.15	Average
10	1.25	42.30	-13.70	56.00	32.10	0.05	10.15	QP
11	1.42	37.11	-8.89	46.00	26.90	0.05	10.16	Average
12	1.42	45.41	-10.59	56.00	35.20	0.05	10.16	QP
13	1.63	37.81	-8.19	46.00	27.60	0.05	10.16	Average
14	1.63	45.61	-10.39	56.00	35.40	0.05	10.16	QP
15	1.88	34.31	-11.69	46.00	24.10	0.05	10.16	Average
16	1.88	45.41	-10.59	56.00	35.20	0.05	10.16	QP
17	2.17	34.82	-11.18	46.00	24.60	0.05	10.17	Average
18	2.17	42.12	-13.88	56.00	31.90	0.05	10.17	QP
19	18.04	29.62	-20.38	50.00	18.60	0.49	10.53	Average
20	18.04	40.12	-19.88	60.00	29.10	0.49	10.53	QP
21	21.26	25.42	-24.58	50.00	14.10	0.70	10.62	Average
22	21.26	40.02	-19.98	60.00	28.70	0.70	10.62	QP
23	24.01	24.79	-25.21	50.00	13.29	0.93	10.57	Average
24	24.01	41.59	-18.41	60.00	30.09	0.93	10.57	QP

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 33 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

3.7. Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 34 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 20, 2017	Jun. 26, 2017	Apr. 19, 2018	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 06, 2017	Jun. 26, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 06, 2017	Jun. 26, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY544500 83	20Hz~8.4GHz	Apr. 20, 2017	Jun. 27, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Anaiyzer	KEYSIGHT	N9010A	MY551502 46	10Hz~44GHz;	Apr. 20, 2017	Jun. 27, 2017	Apr. 19, 2018	Radiation (03CH03-SZ
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2017	Jun. 27, 2017	May 13, 2018	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	May 14, 2017	Jun. 27, 2017	May 13, 2018	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-128 5	1GHz~18GHz	Jan. 12, 2017	Jun. 27, 2017	Jan. 11, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug. 10, 2016	Jun. 27, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Jun. 27, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5G Hz	Jan. 06, 2017	Jun. 27, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 16, 2016	Jun. 27, 2017	Jul. 15, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Jun. 27, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 27, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 27, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	Jul. 03, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	Jul. 03, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	Jul. 03, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 16, 2016	Jul. 03, 2017	Jul. 15, 2017	Conduction (CO01-SZ)

NCR: No Calibration Required

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 35 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

0.540
2.5dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5.1dB
of 95% (U = 2Uc(y))	

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	5.0dB
of 95% (U = 2Uc(y))	3.00B

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	5.0dB
of 95% (U = 2Uc(y))	3.0GB

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : 36 of 36
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

Appendix A. Conducted Test Results

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : A1 of A1
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 2.0

Report No.: FR762102B

Report Number : FR762102B

Bluetooth Low Energy

Test Engineer:	Bruce Huang	Temperature:	24~26	°C
Test Date:	2017/6/26	Relative Humidity:	50~53	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	0.71	0.50	Pass
BLE	1Mbps	1	19	2440	1.02	0.71	0.50	Pass
BLE	1Mbps	1	39	2480	1.02	0.71	0.50	Pass

TEST RESULTS DATA

Peak Power Table

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.63	30.00	-2.00	4.63	36.00	Pass
BLE	1Mbps	1	19	2440	7.41	30.00	-2.00	5.41	36.00	Pass
BLE	1Mbps	1	39	2480	5.25	30.00	-2.00	3.25	36.00	Pass

TEST RESULTS DATA Average Power Table (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.21	6.45
BLE	1Mbps	1	19	2440	2.21	7.26
BLE	1Mbps	1	39	2480	2.21	5.05

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.92	-8.72	-2.00	8.00	Pass
BLE	1Mbps	1	19	2440	6.81	-7.88	-2.00	8.00	Pass
BLE	1Mbps	1	39	2480	4.73	-9.87	-2.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2389.905	47.92	-26.08	74	48.17	5.64	27.43	33.32	100	117	Р	Н
		2389.065	33.35	-20.65	54	33.61	5.64	27.43	33.33	100	117	Α	Н
DI E		2402	97.13	1	-	97.38	5.64	27.43	33.32	100	117	Р	Н
BLE CH 00		2402	96.81	-	-	97.06	5.64	27.43	33.32	100	117	Α	Н
2402MHz		2390	45.47	-28.53	74	45.72	5.64	27.43	33.32	339	204	Р	V
240211112		2389.59	32.44	-21.56	54	32.7	5.64	27.43	33.33	339	204	Α	V
		2402	94.45		-	94.7	5.64	27.43	33.32	339	204	Р	V
		2402	94.21		-	94.46	5.64	27.43	33.32	339	204	Α	V
		2317.7	42.34	-31.66	74	42.96	5.53	27.18	33.33	100	114	Р	Н
		2387.42	32.13	-21.87	54	32.39	5.64	27.43	33.33	100	114	Α	Н
		2440	97.61	-	-	97.63	5.68	27.61	33.31	100	114	Р	Н
		2440	97.06	-	-	97.08	5.68	27.61	33.31	100	114	Α	Н
		2487.33	42.04	-31.96	74	41.89	5.72	27.74	33.31	100	114	Р	Н
BLE		2493.42	32.97	-21.03	54	32.75	5.72	27.8	33.3	100	114	Α	Н
CH 19 2440MHz		2360.82	42.46	-31.54	74	42.9	5.59	27.3	33.33	332	249	Р	V
2440181712		2328.62	31.98	-22.02	54	32.6	5.53	27.18	33.33	332	249	Α	V
		2440	92.57	-	-	92.59	5.68	27.61	33.31	332	249	Р	V
		2440	91.84	-	-	91.86	5.68	27.61	33.31	332	249	Α	V
		2496.01	41.33	-32.67	74	41.11	5.72	27.8	33.3	332	249	Р	V
		2492.72	32.5	-21.5	54	32.28	5.72	27.8	33.3	332	249	Α	V

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : B1 of B6
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01
Report Template No.: BU5-FR15CBT4.0 Version 2.0

Report No.: FR762102B



2480 95.31 5.72 27.74 33.31 100 Ρ 95.46 126 Н 5.72 100 2480 94.96 94.81 27.74 33.31 126 Α Н 2483.6 Р 58.1 -15.9 74 57.95 5.72 27.74 33.31 100 126 Н BLE 2483.52 40.57 -13.43 54 40.42 5.72 27.74 33.31 100 126 Н Α **CH 39** 2480 84.91 84.76 5.72 27.74 33.31 100 266 Ρ ٧ 2480MHz 2480 84.09 5.72 33.31 100 266 ٧ 84.24 --27.74 2483.52 49.54 -24.46 74 5.72 33.31 100 266 ٧ 49.39 27.74 34.01 -19.99 54 27.74 33.31 100 266 Α ٧ 2483.76 33.86 5.72 No other spurious found. Remark All results are PASS against Peak and Average limit line.

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : B2 of B6
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)		
BLE		4804	40.82	-33.18	74	58.2	7.82	31.44	56.64	150	148	Р	Н
CH 00 2402MHz		4804	41.1	-32.9	74	58.48	7.82	31.44	56.64	150	148	Р	V
		4880	42.45	-31.55	74	59.93	7.82	31.61	56.91	150	245	Р	Н
BLE		7320	41.28	-32.72	74	53.78	9.17	36.19	57.86	147	360	Р	Н
CH 19		4880	42.58	-31.42	74	60.06	7.82	31.61	56.91	150	245	Р	V
2440MHz		7320	41.75	-32.25	74	54.25	9.17	36.19	57.86	147	360	Р	V
		4960	44.27	-29.73	74	60.88	7.82	31.82	56.25	150	135	Р	Н
BLE		7440	42.9	-31.1	74	55.15	9.19	36.34	57.78	147	360	Р	Н
CH 39		4960	43.27	-30.73	74	59.88	7.82	31.82	56.25	150	135	Р	٧
2480MHz		7440	42.47	-31.53	74	54.72	9.19	36.34	57.78	147	360	Р	V
Pomark	1. No	o other spurious	s found.	1	1	ı	,		ı	1		1	ı

Remark

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : B3 of B6
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No. : FR762102B

^{2.} All results are PASS against Peak and Average limit line.

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30.97	24.98	-15.02	40	31.97	24.52	0.27	31.78	100	214	Р	Н
		107.6	21.03	-22.47	43.5	34.76	16.73	1.09	31.55	-	-	Р	Н
		232.73	21.3	-24.7	46	34.03	16.87	1.68	31.28	-	-	Р	Н
		476.2	24.48	-21.52	46	30.95	22.33	2.37	31.17	-	-	Р	Н
0.4011		676.02	27.5	-18.5	46	30.38	25.46	2.88	31.22	-	-	Р	Н
2.4GHz		866.14	29.09	-16.91	46	29.06	28	3.3	31.27	-	-	Р	Н
BLE LF		30	23.77	-16.23	40	30.45	25.1	0.25	31.78	-	-	Р	V
LF		121.18	22.1	-21.4	43.5	36.48	17.13	1.14	31.51	-	-	Р	V
		172.59	22.8	-20.7	43.5	37.45	16.69	1.37	31.34	-	-	Р	V
		465.53	25.21	-20.79	46	34.4	21.99	2.34	31.18	-	-	Р	V
		591.63	27.45	-18.55	46	33.8	24.88	2.68	31.23	-	-	Р	V
		881.66	32.31	-13.69	46	35.4	28.18	3.34	31.27	100	235	Р	V
Remark		o other spurious		mit line.									

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : B4 of B6
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No. : FR762102B

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any							
	unwanted emissions shall not exceed the level of the fundamental frequency.							
!	Test result is over limit line.							
P/A	Peak or Average							
H/V	Horizontal or Vertical							

SPORTON International (ShenZhen) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : B5 of B6
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 2.0

Report No. : FR762102B

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

1. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

SPORTON International (ShenZhen) INC.
TEL: 86-755-8637-9589

FAX: 86-755-8637-9589 FCC ID: 2AFRUHY1-1618 Report Issued Date : Aug. 01, 2017 Report Version : Rev. 01

Page Number

: B6 of B6


Report No.: FR762102B



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	60.18	0.377	2.654	3kHz

Bluetooth v4.0 LE

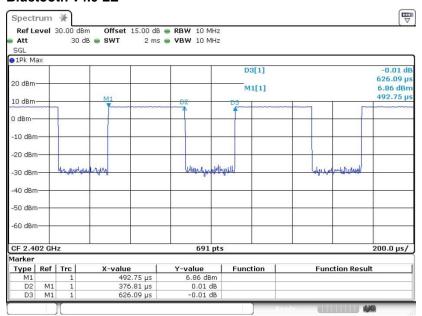

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2AFRUHY1-1618 Page Number : C1 of C1
Report Issued Date : Aug. 01, 2017
Report Version : Rev. 01

Report No.: FR762102B