



# FCC Test Report

**APPLICANT** : Solnik S.A.  
**EQUIPMENT** : mobile phone  
**BRAND NAME** : HYUNDAI  
**MODEL NAME** : HY1-1716  
**FCC ID** : 2AFRUHY1-1716  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Nov. 16, 2017 and testing was completed on Dec. 13, 2017. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



---

Approved by: Eric Shih / Manager

***Sporton International (Shenzhen) Inc.***

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City  
Guangdong Province 518055 China***



## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1. GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Product Feature of Equipment Under Test .....	5
1.4. Product Specification of Equipment Under Test .....	6
1.5. Modification of EUT .....	6
1.6. Test Location .....	7
1.7. Applicable Standards .....	7
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1. Test Mode .....	8
2.2. Connection Diagram of Test System .....	10
2.3. Support Unit used in test configuration and system.....	12
2.4. EUT Operation Test Setup .....	12
<b>3. TEST RESULT .....</b>	<b>13</b>
3.1. Test of AC Conducted Emission Measurement .....	13
3.2. Test of Radiated Emission Measurement .....	19
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>23</b>
<b>5. UNCERTAINTY OF EVALUATION .....</b>	<b>24</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC7N1621	Rev. 01	Initial issue of report	Dec. 28, 2017



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 2.20 dB at 0.53 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.71 dB at 749.74 MHz

## 1. General Description

### 1.1. Applicant

**Solnik S.A.**

Dr. Emilio Ravignani 1724 Ciudad Autonoma de Buenos Aires Zip Code 1414 Argentina

### 1.2. Manufacturer

**ShenZhen Chenyee Technology Co., Ltd.**

32F, Tower A, East Pacific International Center, No.7888, Shennan Avenue, Futian District, Shenzhen-518040, China

### 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	mobile phone
Brand Name	HYUNDAI
Model Name	HY1-1716
FCC ID	2AFRUHY1-1716
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0+EDR/ Bluetooth v4.0 LE Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conduction:354147042347519/354147042347514 Radiation:354147042340936/354147042390931
HW Version	Ultra Vision_Mainboard_P3
SW Version	Ultra Vision_2302_V0525
EUT Stage	Pre-Production

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS: 1.57542 GHz FM : 88 MHz ~ 108 MHz
<b>Antenna Type</b>	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GPS : PIFA Antenna FM : External Headset Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSPA : QPSK (Uplink) HSPA+ : 16QAM uplink is not supported DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS : BPSK FM : FM

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019

<b>Test Site</b>	Sporton International (Shenzhen) Inc.	
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	251365

<b>Test Site</b>	Sporton International (Shenzhen) Inc.	
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	577730

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

### Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + SIM1 <Fig.1>
	Mode 2: GSM 1900 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Front) + SIM1 <Fig.1>
	Mode 3: WCDMA Band V Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + MPEG4(From SD Card) + SIM1 <Fig.1>
	Mode 4: LTE Band 4 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Play Music(From SD Card) + SIM1 <Fig.1>
	Mode 5: FM 98MHz + Earphone + Battery + USB Cable (Charging from Adapter) <Fig.2>
	Mode 6: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)<Fig.3>
Radiated Emissions < 1GHz	Mode 1: GSM 850 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + SIM1<Fig.1>
	Mode 2: GSM 1900 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Front) + SIM1<Fig.1>
	Mode 3: WCDMA Band V Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + MPEG4(From SD Card) + SIM1<Fig.1>
	Mode 4: LTE Band 4 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Play Music(From SD Card) + SIM1<Fig.1>
	Mode 5: FM 98MHz + Earphone + Battery + USB Cable (Charging from Adapter)<Fig.2>
	Mode 6: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)<Fig.3>






Radiated Emissions $\geq$ 1GHz	Mode 1 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)<Fig.3>
<b>Remark:</b> <ol style="list-style-type: none"><li>1. The worst case of AC is mode 2; and the data link mode is mode 6, the test data of these modes are reported.</li><li>2. The worst case of RE is mode 6; only the test data of this mode is reported.</li><li>3. Data Link with Notebook means data application transferred mode between EUT and Notebook.</li></ol>	


## 2.2. Connection Diagram of Test System

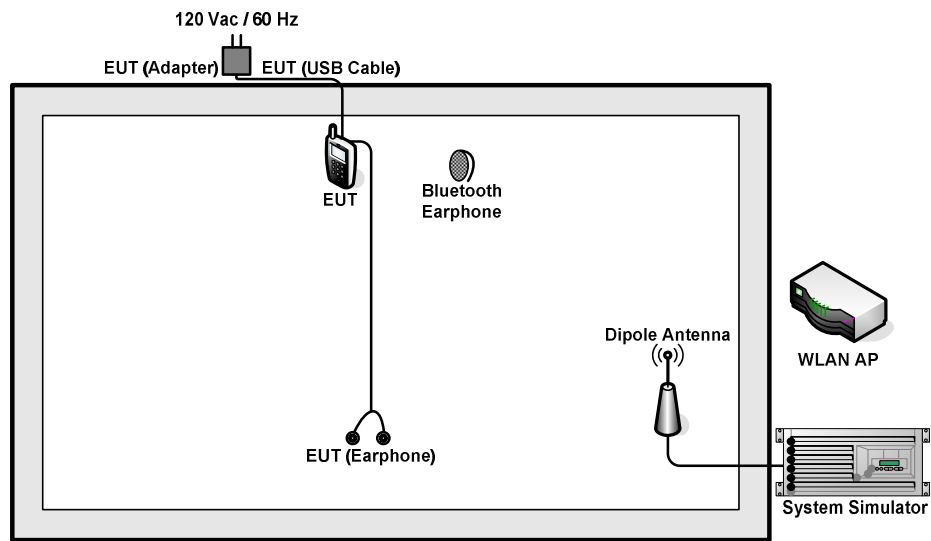

**<Fig. 1>**

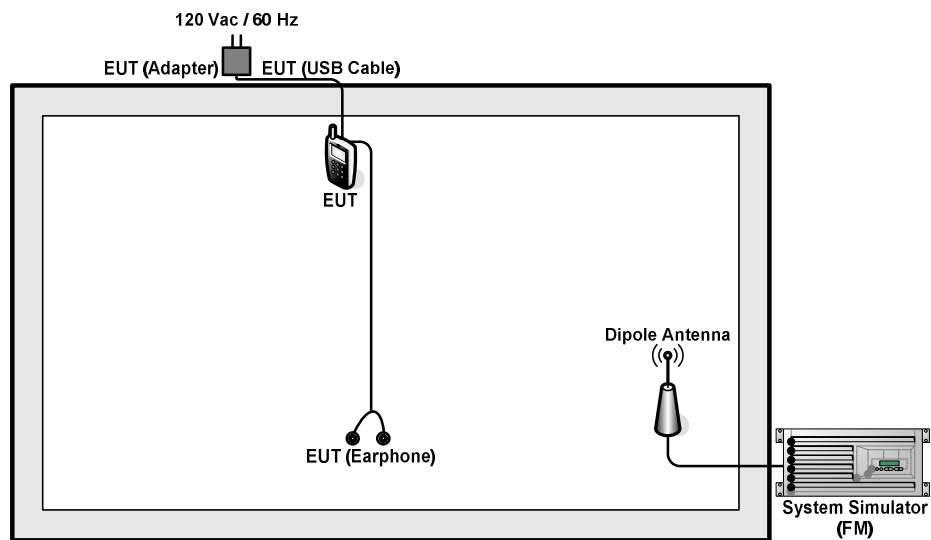

**<Fig. 2>**

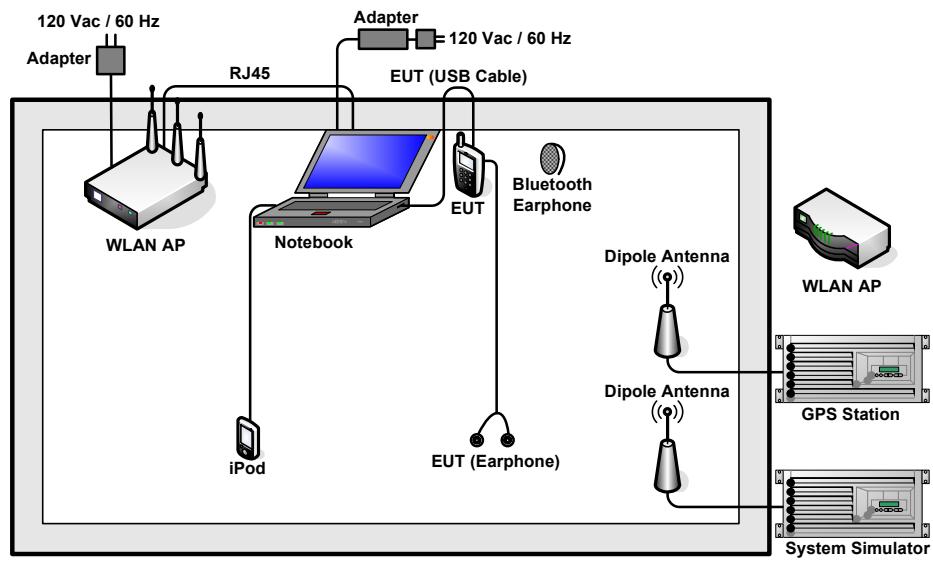

**<Fig. 3>**

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	System Simulator(FM)	R&S	SMB100A	N/A	N/A	Unshielded, 1.8m
3.	GPS Station	ADIVIE	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
5.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
6.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
7.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
8.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
9.	SD Card	Kingston	MicroSD HC	FCC DoC	N/A	N/A
10.	iPod nano 8GB	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2m	N/A
11.	iPod	Apple	MC525 ZP/A	DoC	Shielded, 1.0m	N/A

## 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Execute "GPS Test" to make the EUT receive continuous signals from GNSS station.
3. Execute "Video player" to play MPEG4 files.
4. Turn on camera to capture images.
5. Turn on FM function.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup






## 3.1.5 Test Result of AC Conducted Emission

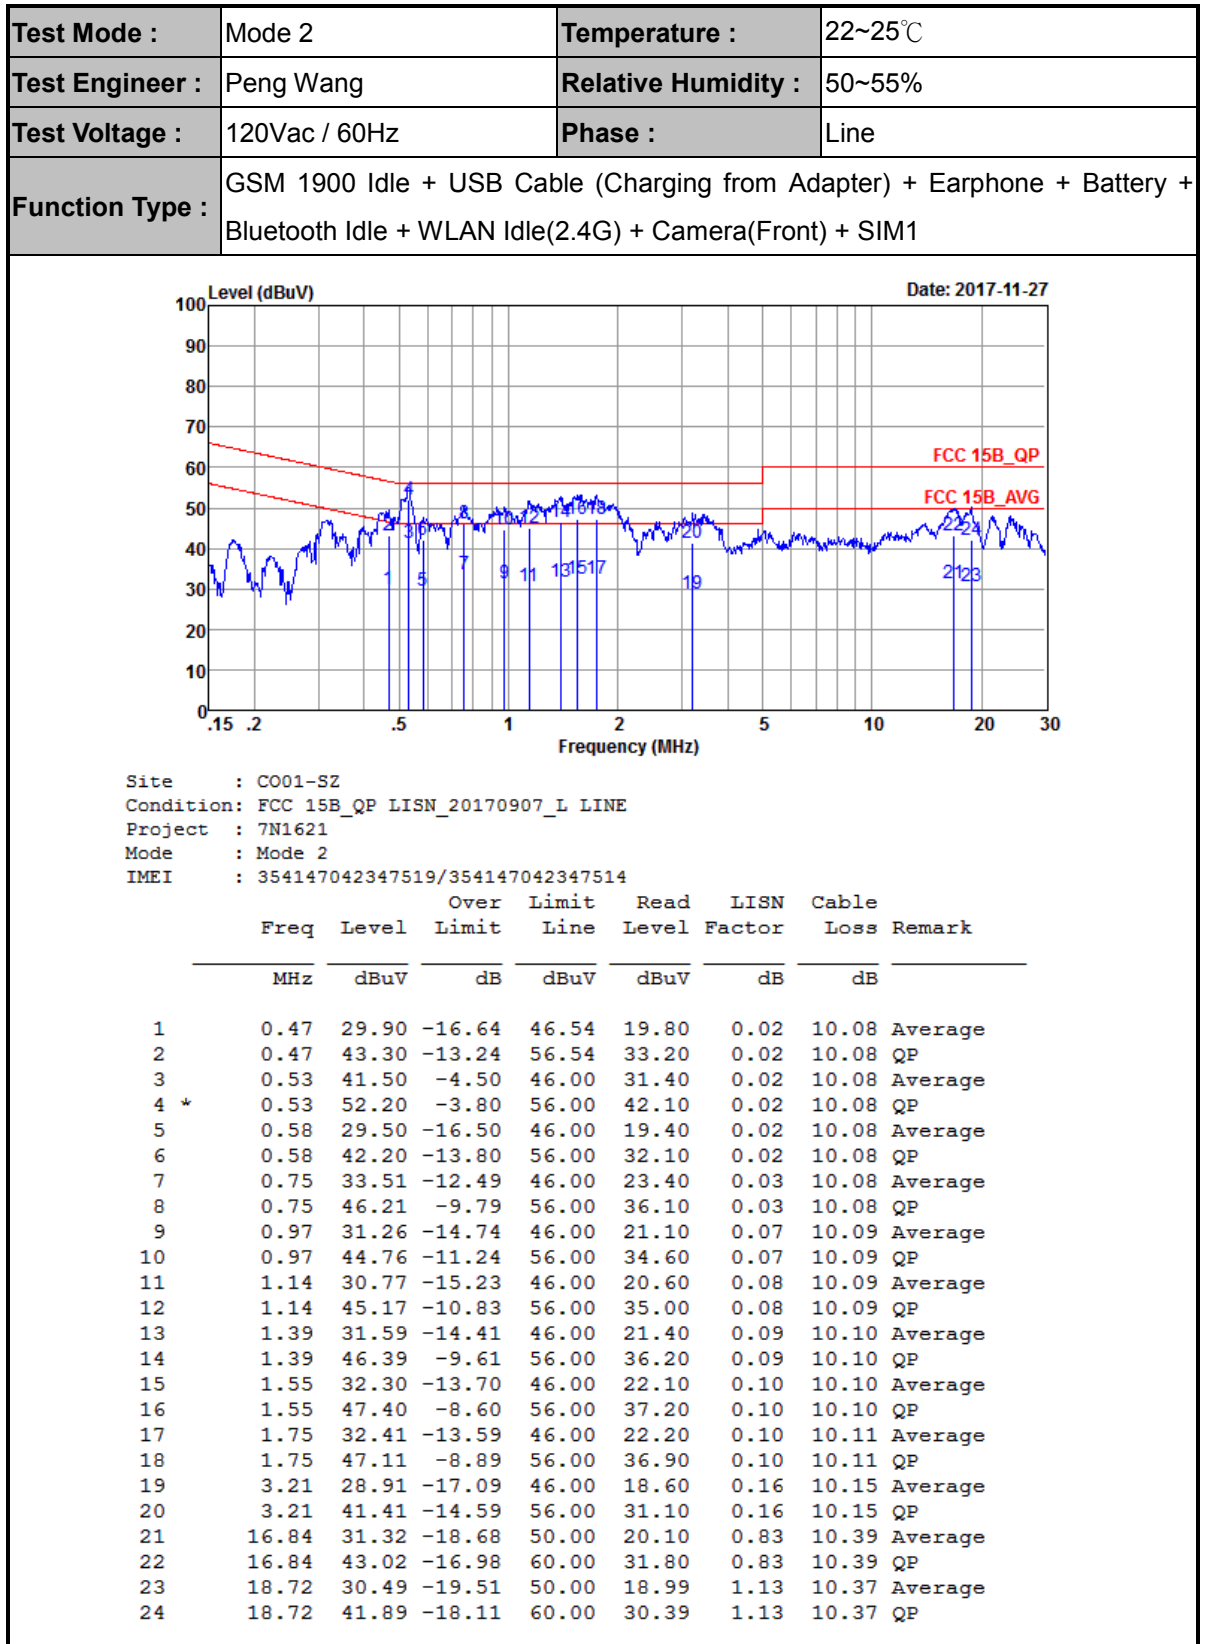



Test Mode :	Mode 2	Temperature :	22~25°C
Test Engineer :	Peng Wang	Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 1900 Idle + USB Cable (Charging from Adapter) + Earphone + Battery + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Front) + SIM1		

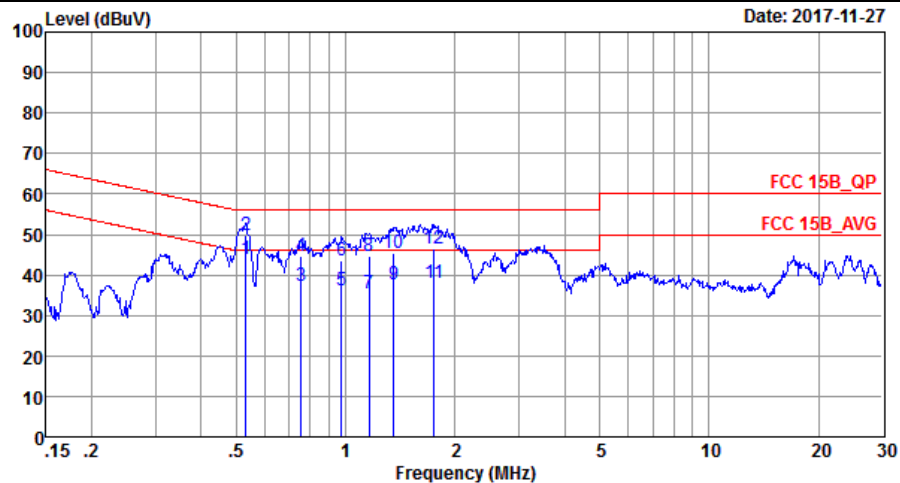


Site : C001-SZ  
Condition: FCC 15B\_QP LISN\_20170907\_N NEUTRAL  
Project : 7N1621  
Mode : Mode 2  
IMEI : 354147042347519/354147042347514

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.53	43.80	-2.20	46.00	33.70	0.02	10.08	Average
2	0.53	49.90	-6.10	56.00	39.80	0.02	10.08	QP
3	0.75	37.21	-8.79	46.00	27.10	0.03	10.08	Average
4	0.75	44.61	-11.39	56.00	34.50	0.03	10.08	QP
5	0.97	36.14	-9.86	46.00	26.00	0.05	10.09	Average
6	0.97	43.54	-12.46	56.00	33.40	0.05	10.09	QP
7	1.16	35.24	-10.76	46.00	25.10	0.05	10.09	Average
8	1.16	44.54	-11.46	56.00	34.40	0.05	10.09	QP
9	1.36	37.55	-8.45	46.00	27.40	0.05	10.10	Average
10	1.36	45.55	-10.45	56.00	35.40	0.05	10.10	QP
11	1.75	38.06	-7.94	46.00	27.90	0.05	10.11	Average
12	1.75	46.46	-9.54	56.00	36.30	0.05	10.11	QP





Test Mode :	Mode 6	Temperature :	22~25°C
Test Engineer :	Peng Wang	Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMABand II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)		

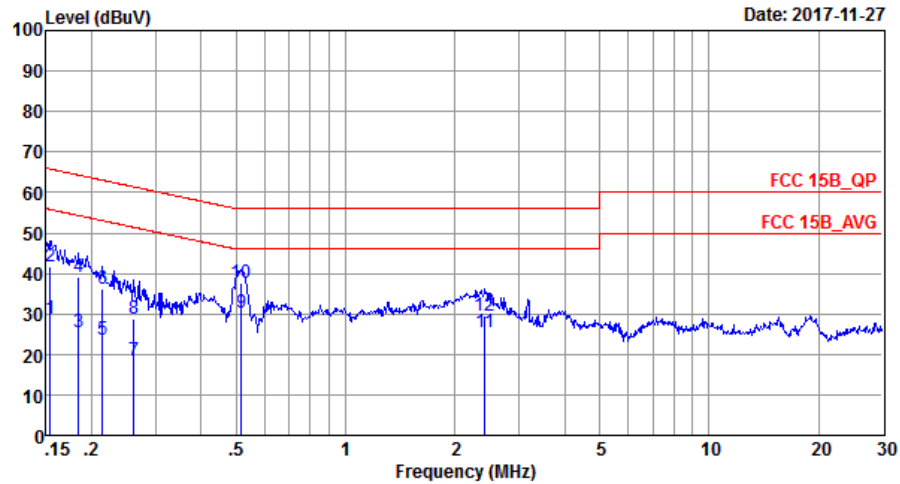


Site : CO01-SZ  
Condition: FCC 15B\_QP LISN\_20170907\_L LINE  
Project : 7N1621  
Mode : Mode 6  
IMEI : 354147042347519/354147042347514

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	28.79	-26.99	55.78	18.70	0.03	10.06	Average
2	0.15	41.69	-24.09	65.78	31.60	0.03	10.06	QP
3	0.18	25.50	-28.78	54.28	15.40	0.03	10.07	Average
4	0.18	39.19	-25.09	64.28	29.09	0.03	10.07	QP
5	0.21	23.60	-29.45	53.05	13.50	0.03	10.07	Average
6	0.21	36.00	-27.05	63.05	25.90	0.03	10.07	QP
7	0.26	18.31	-33.07	51.38	8.20	0.03	10.08	Average
8	0.26	28.81	-32.57	61.38	18.70	0.03	10.08	QP
9 *	0.52	30.20	-15.80	46.00	20.10	0.02	10.08	Average
10	0.52	37.50	-18.50	56.00	27.40	0.02	10.08	QP
11	2.42	25.46	-20.54	46.00	15.21	0.13	10.12	Average
12	2.42	29.56	-26.44	56.00	19.31	0.13	10.12	QP



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	22~25°C
<b>Test Engineer :</b>	Peng Wang	<b>Relative Humidity :</b>	50~55%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	WCDMABand II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)		

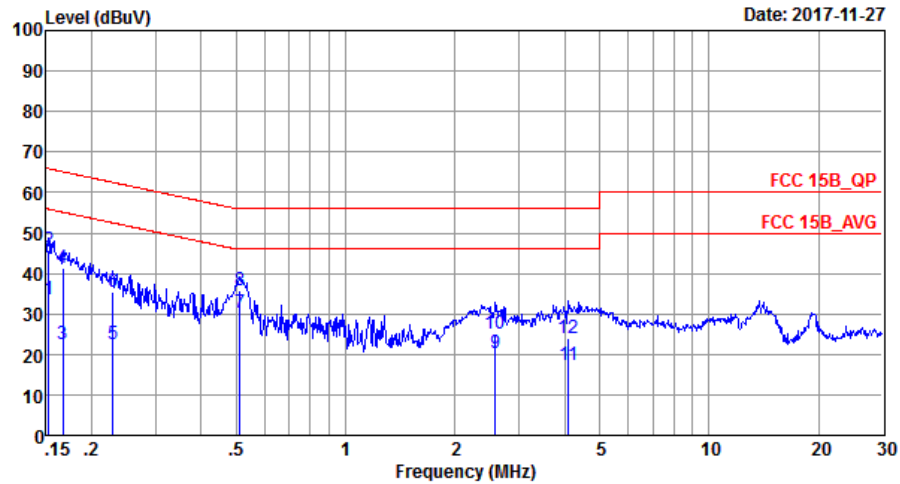

Site : C001-SZ  
Condition: FCC 15B\_QP LISN\_20170907\_N NEUTRAL  
Project : 7N1621  
Mode : Mode 6  
IMEI : 354147042347519/354147042347514

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Remark
1	0.15	33.69	-22.18	55.87	23.60	0.03	10.06	Average
2	0.15	45.89	-19.98	65.87	35.80	0.03	10.06	QP
3	0.17	22.60	-32.52	55.12	12.50	0.03	10.07	Average
4	0.17	41.49	-23.63	65.12	31.39	0.03	10.07	QP
5	0.23	22.60	-29.88	52.48	12.50	0.03	10.07	Average
6	0.23	35.30	-27.18	62.48	25.20	0.03	10.07	QP
7 *	0.51	30.20	-15.80	46.00	20.10	0.02	10.08	Average
8	0.51	35.80	-20.20	56.00	25.70	0.02	10.08	QP
9	2.58	20.26	-25.74	46.00	10.09	0.04	10.13	Average
10	2.58	25.16	-30.84	56.00	14.99	0.04	10.13	QP
11	4.11	17.32	-28.68	46.00	7.10	0.05	10.17	Average
12	4.11	23.92	-32.08	56.00	13.70	0.05	10.17	QP

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

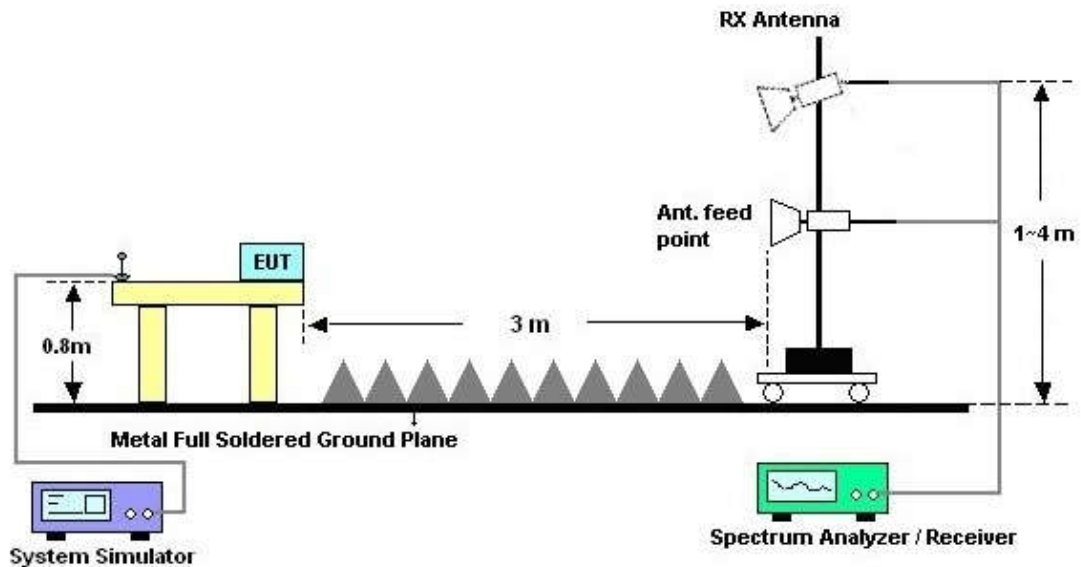



## 3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 6	Temperature :	24 ~ 25°C
Test Engineer :	Peng Chang	Relative Humidity :	48 ~ 49%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)		
Remark :	#7 is system simulator signal which can be ignored.		

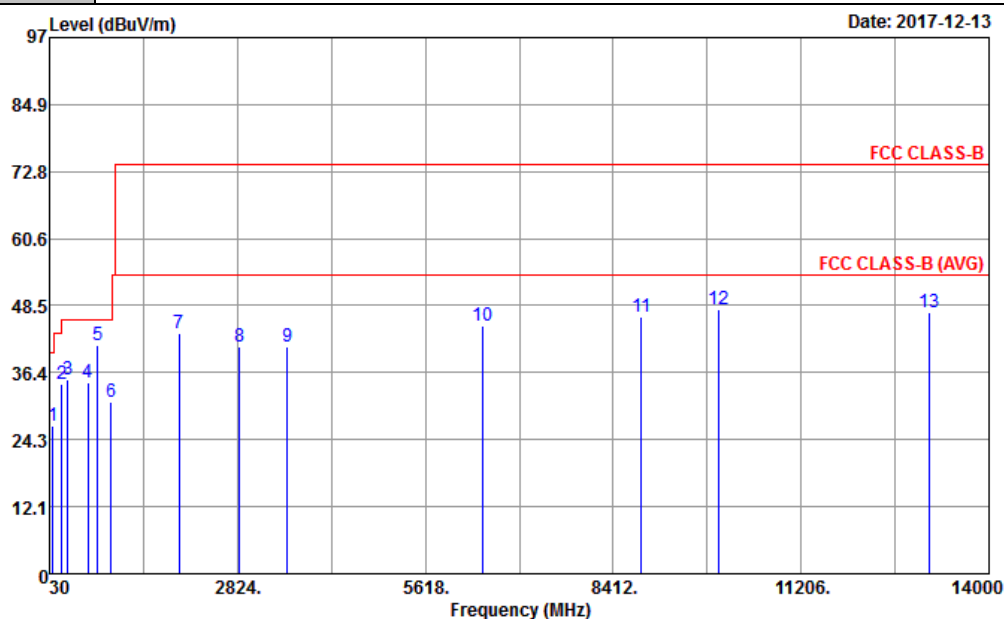


Site : 03CH04-SZ  
Condition : FCC CLASS-B 3m HF\_ANT\_9120D-1474 HORIZONTAL  
Project : 7N1621  
Mode : Mode 6  
IMEI : 354147042340936/354147042390931  
Plane : X

Plane	A		Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	Freq	Level			Level	Factor					
	MHz	dBuV/m			dB	dBuV/m					
1	84.32	26.69	-13.31	40.00	43.45	14.16	0.91	31.83	---	---	Peak
2	209.45	34.44	-9.06	43.50	48.82	15.30	1.63	31.31	---	---	Peak
3	299.66	35.09	-10.91	46.00	45.06	19.40	1.85	31.22	---	---	Peak
4	600.36	34.49	-11.51	46.00	37.26	25.80	2.70	31.27	---	---	Peak
5	749.74	41.29	-4.71	46.00	41.88	27.59	3.03	31.21	200	78	Peak
6	942.77	31.12	-14.88	46.00	29.16	29.81	3.46	31.31	---	---	Peak
7	1960.00	43.56			71.68	25.91	4.31	58.34	---	---	Peak
8	2852.00	40.97	-33.03	74.00	65.10	28.29	5.03	57.45	---	---	Peak
9	3564.00	41.04	-32.96	74.00	65.93	28.87	4.85	58.61	---	---	Peak
10	6460.00	44.98	-29.02	74.00	62.60	33.82	6.54	57.98	---	---	Peak
11	8836.00	46.60	-27.40	74.00	56.03	37.47	8.05	54.95	---	---	Peak
12	9974.00	47.89	-26.11	74.00	56.08	38.39	9.10	55.68	200	254	Peak
13	13109.00	47.38	-26.62	74.00	56.09	39.59	9.91	58.21	---	---	Peak



Test Mode :	Mode 6	Temperature :	24 ~ 25°C
Test Engineer :	Peng Chang	Relative Humidity :	48 ~ 49%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle (2.4G) + Earphone + Battery + GPS RX + USB Cable (Data Link with Notebook)		
Remark :	#7 is system simulator signal which can be ignored.		

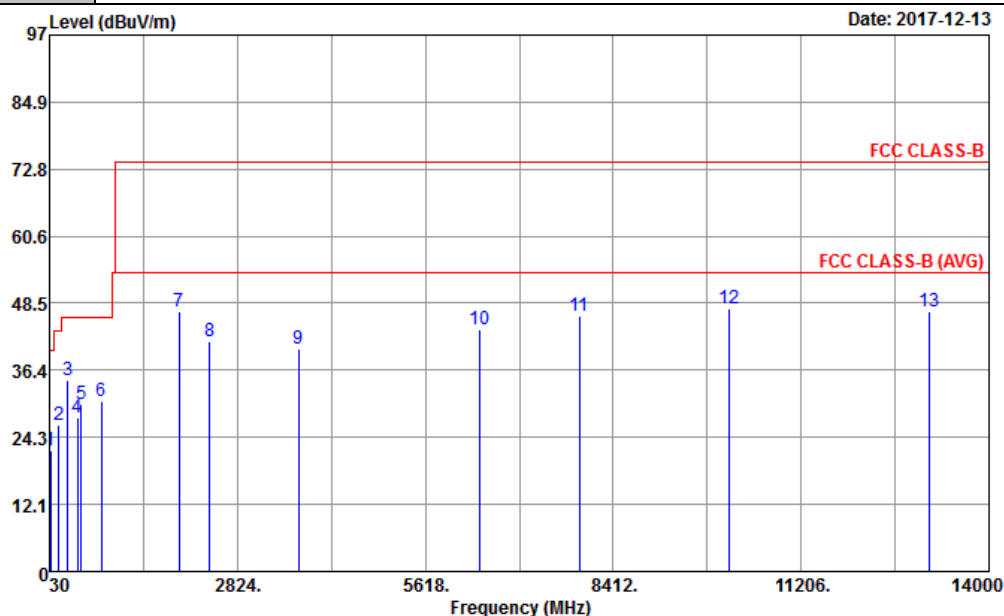

Site : 03CH04-SZ  
Condition : FCC CLASS-B 3m HF\_ANT\_9120D-1474 VERTICAL  
Project : 7N1621  
Mode : Mode 6  
IMEI : 354147042340936/354147042390931  
Plane : X

Line	F		Over	Limit	ReadAntenna		Cable	Preamp	A/Pos	T/Pos	Remark
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	42.61	22.00	-18.00	40.00	34.86	18.65	0.46	31.97	---	---	Peak
2	165.80	26.36	-17.14	43.50	40.50	16.00	1.33	31.47	---	---	Peak
3	298.69	34.64	-11.36	46.00	44.63	19.38	1.85	31.22	100	120	Peak
4	446.13	27.87	-18.13	46.00	33.99	22.87	2.29	31.28	---	---	Peak
5	499.48	30.17	-15.83	46.00	34.99	23.98	2.43	31.23	---	---	Peak
6	797.27	30.85	-15.15	46.00	30.41	28.45	3.15	31.16	---	---	Peak
7	1960.00	46.99			75.11	25.91	4.31	58.34	---	---	Peak
8	2414.00	41.58	-32.42	74.00	67.20	27.49	4.78	57.89	---	---	Peak
9	3734.00	40.17	-33.83	74.00	64.92	29.28	4.98	59.01	---	---	Peak
10	6422.00	43.81	-30.19	74.00	61.45	33.77	6.51	57.92	---	---	Peak
11	7906.00	46.31	-27.69	74.00	57.79	37.12	7.43	56.03	---	---	Peak
12	10126.00	47.43	-26.57	74.00	55.49	38.51	9.18	55.75	100	150	Peak
13	13106.00	47.07	-26.93	74.00	55.78	39.59	9.91	58.21	---	---	Peak



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	Nov. 27, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	Nov. 27, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	Nov. 27, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Nov. 27, 2017	NCR	Conduction (CO01-SZ)
EMI Test Receiver&SA	R&S	ESR7	101404	9kHz~7GHz	Apr. 20, 2017	Dec. 13, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 20, 2017	Dec. 13, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 16, 2017	Dec. 13, 2017	May 15, 2018	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jan. 12, 2017	Dec. 13, 2017	Jan. 11, 2018	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 20, 2017	Dec. 13, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1989346	1GHz~18GHz	Jul. 27, 2017	Dec. 13, 2017	Jul. 26, 2018	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Dec. 13, 2017	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 13, 2017	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 13, 2017	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------