

Report No.: SZEM160300124401

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 97

FCC REPORT

Application No: SZEM1603001244CR

Applicant:Shenzhen Damai Technology Co., LtdManufacturer:Shenzhen Damai Technology Co., Ltd

Product Name: Wireless Portable Disk

Model No.(EUT): A7

Trade Mark: airdisk

FCC ID: 2AFTT-A7

Standards: 47 CFR Part 15, Subpart C (2015)

Date of Receipt: 2016-03-11

Date of Test: 2016-03-17 to 2016-04-25

Date of Issue: 2016-05-05

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160300124401

Page: 2 of 97

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2016-05-05		Original			

Authorized for issue by:		
Tested By	Brir Chen	2016-04-25
	(Bill Chen) /Project Engineer	Date
Prepared By	Joyce Shi	2016-05-05
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2016-05-05
	(Eric Fu) /Reviewer	Date



Report No.: SZEM160300124401

Page: 3 of 97

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	·		PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: SZEM160300124401

Page: 4 of 97

4 Contents

			Page
1	COV	ER PAGE	1
2	VED	SION	2
_	VEN	SION	,
3	TES	T SUMMARY	3
4	CON	ITENTS	4
7	CON	ITENTO	4
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION.	7
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	Power Spectral Density	34
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	42
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	47
	6.8	RADIATED SPURIOUS EMISSIONS	66
	6.8.1	1 Radiated emission below 1GHz	69
	6.8.2	? Transmitter emission above 1GHz	71
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	78
7	PHO	TOGRAPHS - EUT TEST SETUP	96
	7.1	CONDUCTED EMISSION	96
	7.2	RADIATED EMISSION	96
	7.3	RADIATED SPURIOUS EMISSION	97
8	PHO	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	97



Report No.: SZEM160300124401

Page: 5 of 97

5 General Information

5.1 Client Information

Applicant:	Shenzhen Damai Technology Co., Ltd
Address of Applicant:	5/F. 1 Building, Financial Base, No.8, kefa Road, High-TechPark, Shenzhen, China
Manufacturer:	Shenzhen Damai Technology Co., Ltd
Address of Manufacturer:	5/F. 1 Building, Financial Base, No.8, kefa Road, High-TechPark, Shenzhen, China

5.2 General Description of EUT

Product Name:	Wireless Portable Disk
Model No.:	A7
Trade Mark:	airdisk
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
	IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,
	QPSK,BPSK)
Antenna Type	Chip
Antenna Gain:	1dBi
Test voltage	120V60Hz
Battery	Rechargeable battery: DC 3.7V 5000mAh 18.5Wh (charge by USB)





Report No.: SZEM160300124401

Page: 6 of 97

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency Char		nel	Frequency
1	24	412MHz	4	2427MHz	7	244	12MHz	10)	2457MHz
2	24	417MHz	5	2432MHz	8	244	47MHz 11			2462MHz
3	24	422MHz	6	2437MHz	9	245	2452MHz			
Operation F	requ	ency each	of channe	el(802.11n HT40))					
Channe		Frequ	ency	Channel	Frequen	су	Chan	nel	ſ	requency
3 2422MHz		6	2437MF	lz	9			2452MHz		
4	4 2427MHz 7 2442MHz		lz							
5 2432MHz		8	2447MF	lz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: SZEM160300124401

Page: 7 of 97

5.3 Test Environment and Mode

Operating Environment:						
Temperature:	25.0 °C					
Humidity:	55 % RH					
Atmospheric Pressure:	1015 mbar					
Test mode:						
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all					
	kind of data rate.					

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160300124401

Page: 8 of 97

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

· CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160300124401

Page: 9 of 97

5.10Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2015-05-13	2016-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09			
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25			
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30			
5	4 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T4- 02	EMC0121	2015-08-30	2016-08-30			
6	2 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T2- 02	EMC0122	2015-08-30	2016-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			



Report No.: SZEM160300124401

Page: 10 of 97

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS- LINDGREN	N/A	SEM001-01	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16
3	BiConiLog Antenna (26-3000MHz)	ETS- LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS- LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS- LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2015-05-13	2016-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



Report No.: SZEM160300124401

Page: 11 of 97

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
	' '	(yyyy-mm-dd)	(yyyy-mm-dd)			
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17
3	Barometer	ChangChun	DYM3	SEM002-01	2015-05-13	2016-05-13
4	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
5	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09



Report No.: SZEM160300124401

Page: 12 of 97

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

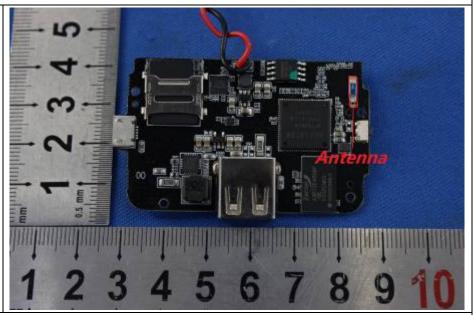

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.



Report No.: SZEM160300124401

Page: 13 of 97


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2013					
Test Frequency Range:	150kHz to 30MHz	150kHz to 30MHz				
Limit:	Fraguenov range (MUT)	Limit (d	IBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test Procedure:	0.5-5 56 46					
	 In order to find the maximum equipment and all of the ir ANSI C63.10: 2013 on cor 	nterface cables must be	•	to		



Report No.: SZEM160300124401

Page: 14 of 97

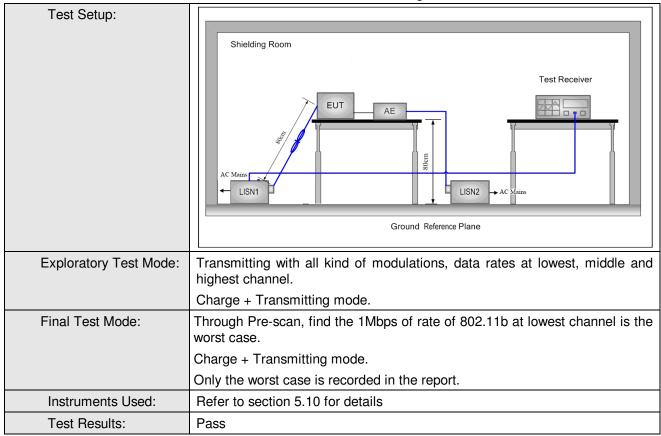



Report No.: SZEM160300124401


Page: 15 of 97

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

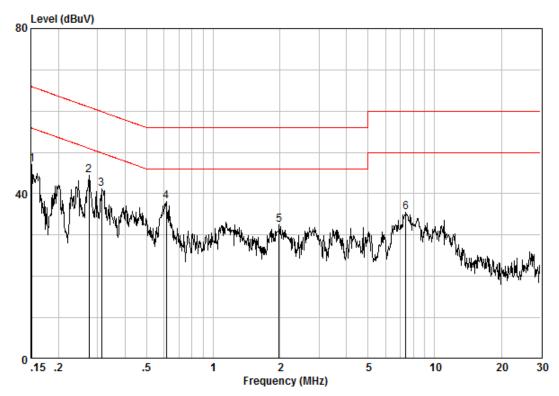

 Site
 : Shielding Room

 Condition
 : CE LINE

 Job No.
 : 1244CR

 Test Mode
 : Charge + TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15160	0.02	9.59	37.45	47.06	55.91	-8.86	Peak
2	0.27442	0.01	9.60	34.78	44.39	50.98	-6.59	Peak
3	0.31328	0.01	9.59	31.58	41.18	49.88	-8.70	Peak
4	0.61400	0.02	9.61	28.45	38.08	46.00	-7.92	Peak
5	1.980	0.02	9.64	22.80	32.46	46.00	-13.54	Peak
6	7.407	0.01	9.68	25.78	35.48	50.00	-14.52	Peak






Report No.: SZEM160300124401

Page: 16 of 97

Neutral Line:

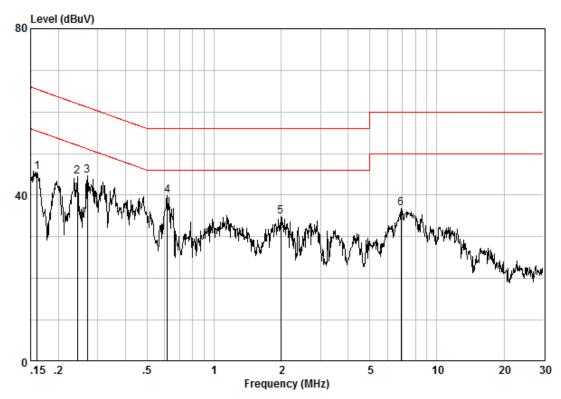

Site : Shielding Room Condition : CE NEUTRAL Job No. : 1244CR Test Mode : Charge + TX

			LISN					
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16070	0.02	9.61	35.95	45.58	55.43	-9.85	Peak
2	0.24293	0.02	9.61	34.88	44.50	52.00	-7.49	Peak
3	0.27009	0.01	9.61	35.12	44.75	51.12	-6.37	Peak
4 @	0.61726	0.02	9.63	30.15	39.79	46.00	-6.21	Peak
5	1.991	0.02	9.66	25.11	34.79	46.00	-11.21	Peak
6	6.914	0.01	9.74	27.05	36.80	50.00	-13.20	Peak

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160300124401

Page: 17 of 97

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM160300124401

Page: 18 of 97

Pre-scan under all rate at lowest channel 1								
Mode		802	.11b			_		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	5.99	5.97	5.94	5.92				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	7.56	7.52	7.51	7.50	7.48	7.45	7.43	7.42
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	7.61	7.59	7.57	7.54	7.50	7.47	7.45	7.42
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	7.87	7.85	7.81	7.79	7.75	7.73	7.70	7.69

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).



Report No.: SZEM160300124401

Page: 19 of 97

Measurement Data

802.11b mo	de				
Peak Output Power (dBm)	Limit (dBm)	Result			
5.99	30.00	Pass			
6.09	30.00	Pass			
6.20	30.00	Pass			
802.11g mo	de				
Peak Output Power (dBm)	Limit (dBm)	Result			
7.56	30.00	Pass			
7.62	30.00	Pass			
7.55	30.00	Pass			
802.11n(HT20)	mode				
Peak Output Power (dBm)	Limit (dBm)	Result			
7.61	30.00	Pass			
7.61	30.00	Pass			
7.66	30.00	Pass			
802.11n(HT40)mode					
Peak Output Power (dBm)	Limit (dBm)	Result			
7.87	30.00	Pass			
8.22	30.00	Pass			
8.10	30.00	Pass			
	Peak Output Power (dBm) 5.99 6.09 6.20 802.11g mo Peak Output Power (dBm) 7.56 7.62 7.55 802.11n(HT20) Peak Output Power (dBm) 7.61 7.61 7.66 802.11n(HT40) Peak Output Power (dBm) 7.87 8.22	5.99 30.00 6.09 30.00 802.11g mode Peak Output Power (dBm) Limit (dBm) 7.56 30.00 7.62 30.00 7.55 30.00 802.11n(HT20)mode Peak Output Power (dBm) Limit (dBm) 7.61 30.00 7.66 30.00 802.11n(HT40)mode Peak Output Power (dBm) Limit (dBm) 7.87 30.00 8.22 30.00			



Report No.: SZEM160300124401

Page: 20 of 97

Test plot as follows:

Test mode: 802.11b Test channel: Lowest



Test mode: 802.11b Test channel: Middle






Report No.: SZEM160300124401

Page: 21 of 97

Test mode: 802.11b Test channel: Highest



Test mode: 802.11g Test channel: Lowest

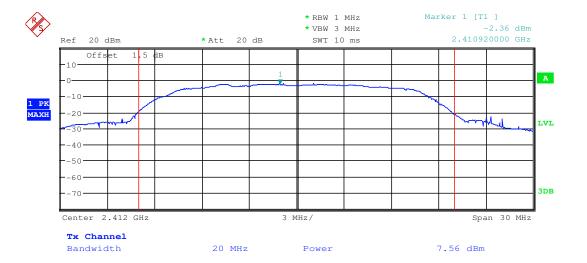





Report No.: SZEM160300124401

Page: 22 of 97

Test mode: 802.11g Test channel: Middle

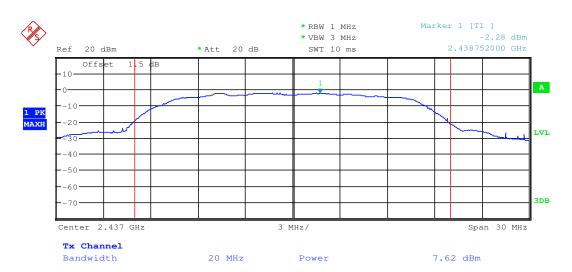

Test mode: 802.11g Test channel: Highest

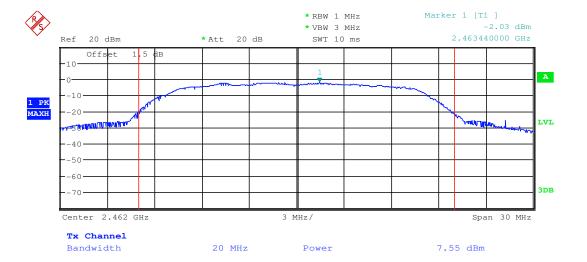





Report No.: SZEM160300124401

Page: 23 of 97

Test mode: 802.11n(HT20) Test channel: Lowest

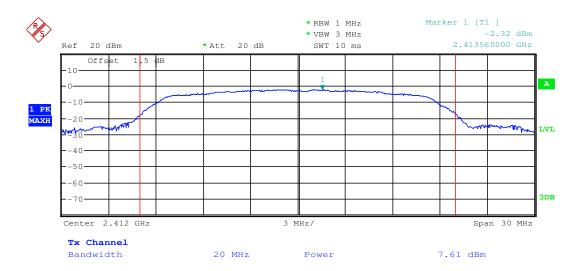



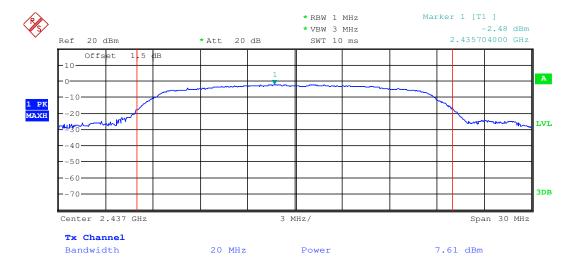





Report No.: SZEM160300124401

Page: 24 of 97

Test mode: 802.11n(HT20) Test channel: Highest

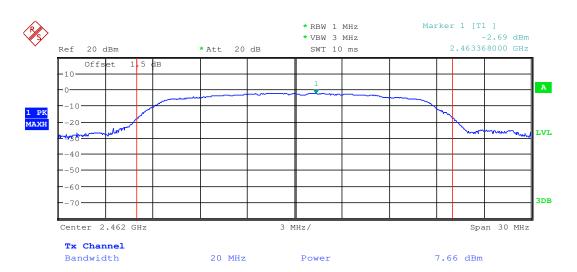



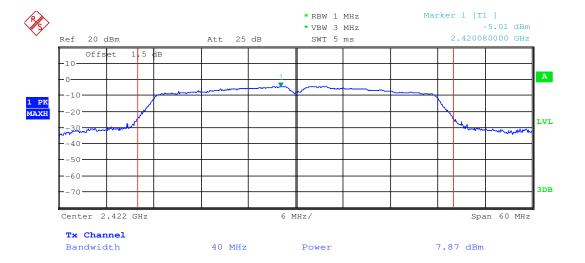





Report No.: SZEM160300124401

Page: 25 of 97

Test mode: 802.11n(HT40) Test channel: Middle

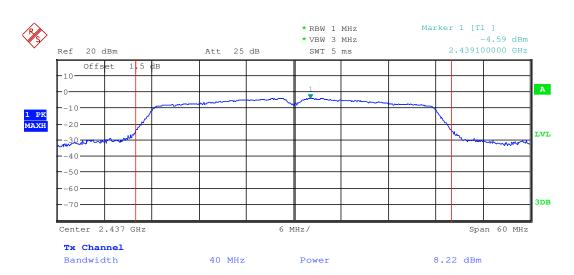

Test mode:	802.11n(HT40)	Test channel:	Highest
	00=:::(:::(:::)		g

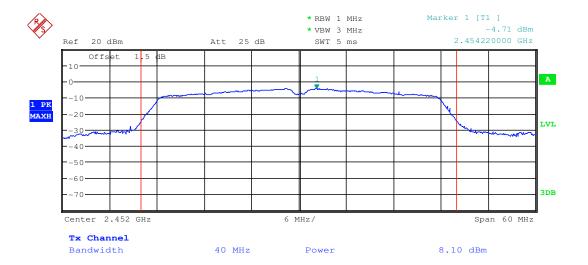






Report No.: SZEM160300124401

Page: 26 of 97

6.4 6dB Occupy Bandwidth

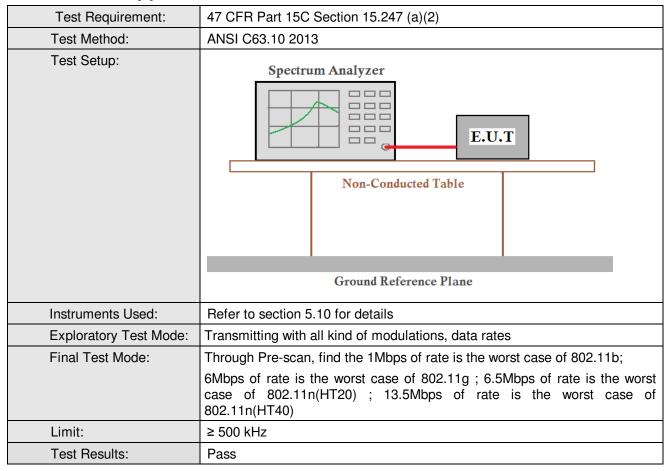



Report No.: SZEM160300124401

Page: 27 of 97

Measurement Data

	802.11b mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	10.08	≥500	Pass			
Middle	10.14	≥500	Pass			
Highest	10.14	≥500	Pass			
	802.11g mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	15.18	≥500	Pass			
Middle	15.18	≥500	Pass			
Highest	15.18	≥500	Pass			
	802.11n(HT20) mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	15.18	≥500	Pass			
Middle	15.18	≥500	Pass			
Highest	15.18	≥500	Pass			
	802.11n(HT40)mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	35.22	≥500	Pass			
Middle	35.22	≥500	Pass			
Highest	35.22	≥500	Pass			




Report No.: SZEM160300124401


Page: 28 of 97

Test plot as follows:

Test mode:	802.11b	Test channel:	Lowest

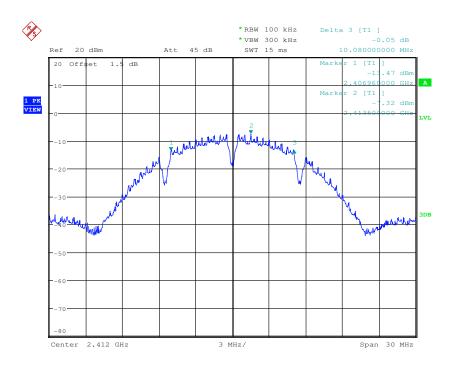



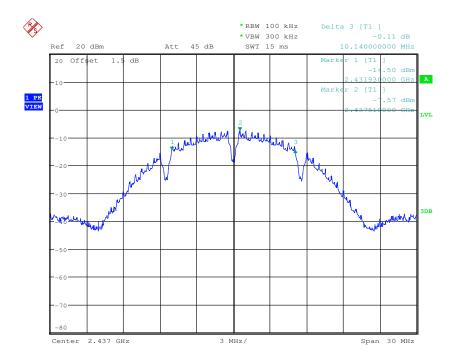





Report No.: SZEM160300124401

Page: 29 of 97

Test mode: 802.11b Test channel: Highest

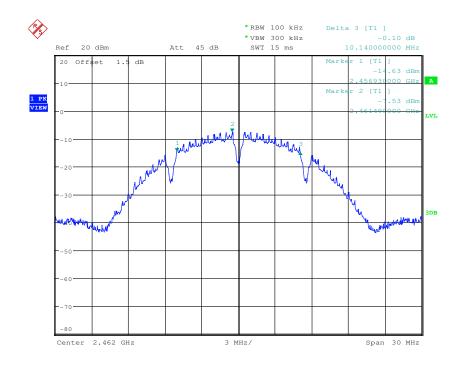



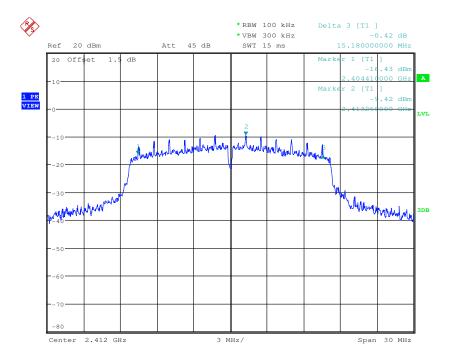





Report No.: SZEM160300124401

Page: 30 of 97

Test mode: 802.11g Test channel: Middle

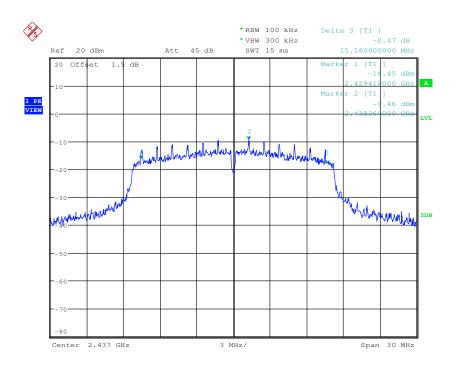



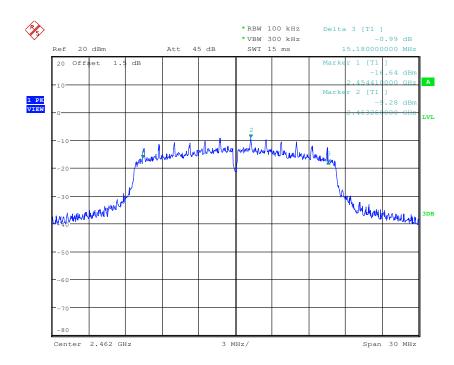





Report No.: SZEM160300124401

Page: 31 of 97

Test mode: 802.11n(HT20) Test channel: Lowest

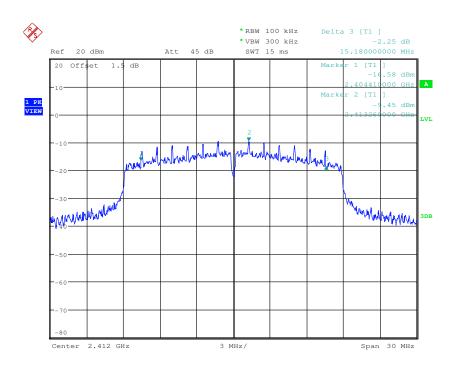



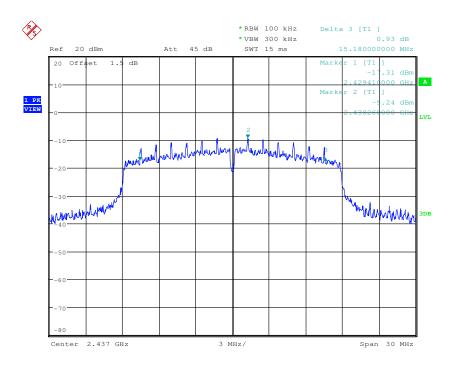





Report No.: SZEM160300124401

Page: 32 of 97

Test mode: 802.11n(HT20) Test channel: Highest

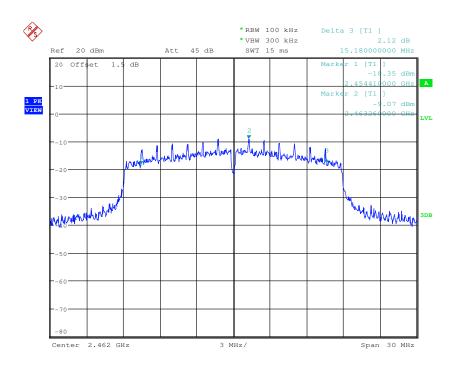



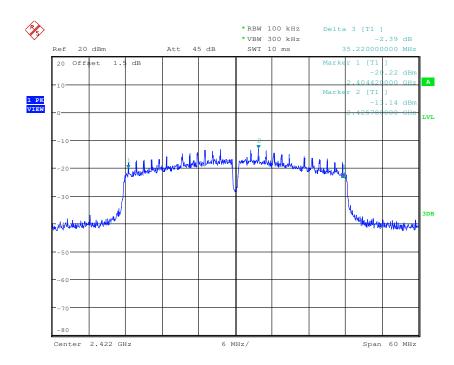





Report No.: SZEM160300124401

Page: 33 of 97

Test mode: 802.11n(HT40) Test channel: Middle

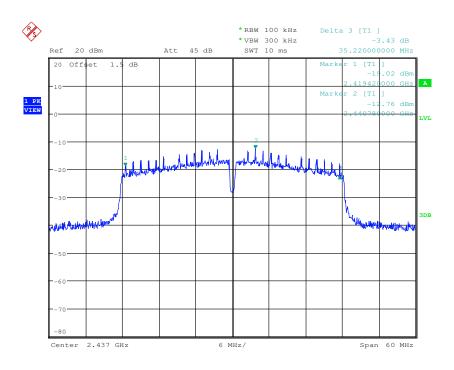



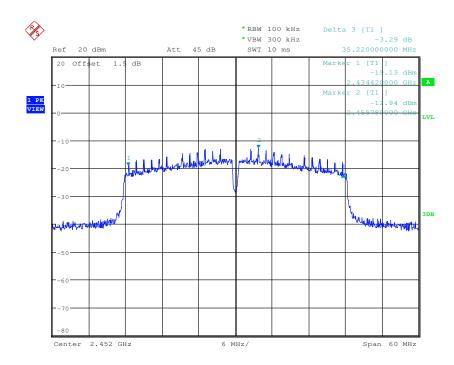



Report No.: SZEM160300124401

Page: 34 of 97

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:			
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	≤8.00dBm/3kHz		
Test Results:	Pass		



Report No.: SZEM160300124401

Page: 35 of 97

Measurement Data

Measurement Data			
802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-13.82	≤8.00	Pass
Middle	-8.59	≤8.00	Pass
Highest	-23.45	≤8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-25.79	≤8.00	Pass
Middle	-24.09	≤8.00	Pass
Highest	-25.96	≤8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-27.24	≤8.00	Pass
Middle	-26.18	≤8.00	Pass
Highest	-25.87	≤8.00	Pass
802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-28.46	≤8.00	Pass
Middle	-28.89	≤8.00	Pass
Highest	-29.24	≤8.00	Pass






Report No.: SZEM160300124401


Page: 36 of 97

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

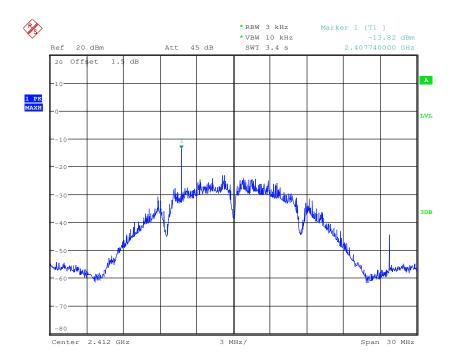



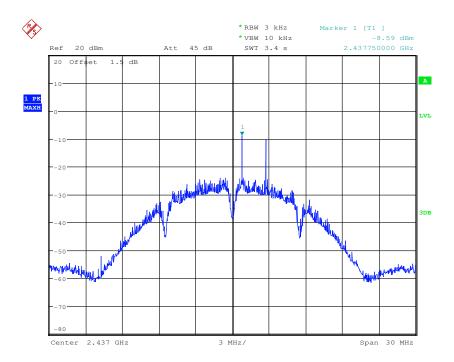





Report No.: SZEM160300124401

Page: 37 of 97

Test mode: 802.11b Test channel: Highest

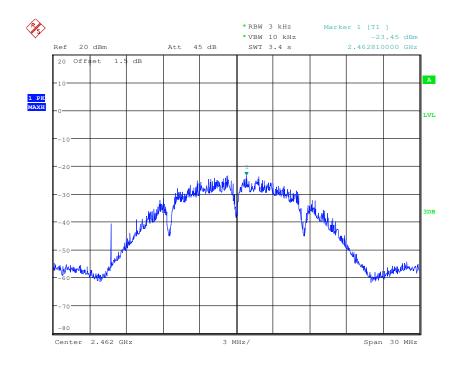



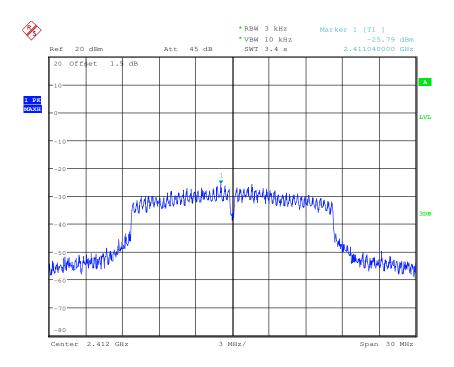




Report No.: SZEM160300124401


Page: 38 of 97

Test mode: 802.11g Test channel: Middle

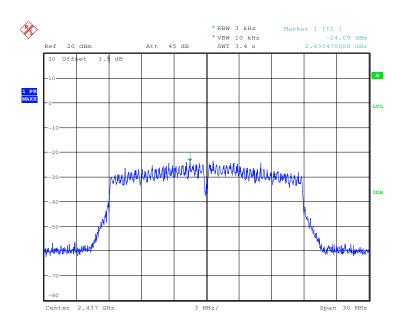

Date: 17.MAR.2016 15:31:39



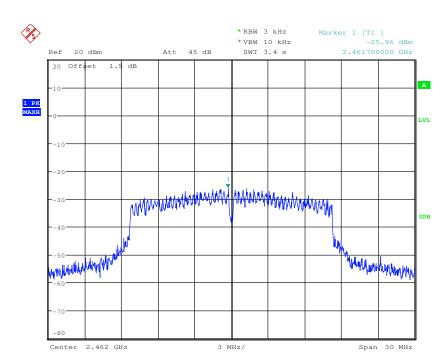





Report No.: SZEM160300124401

Page: 39 of 97

Test mode: 802.11n(HT20) Test channel: Lowest

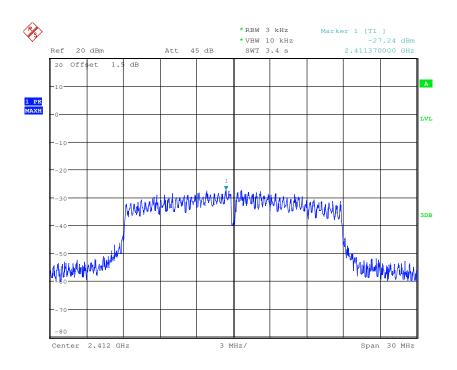



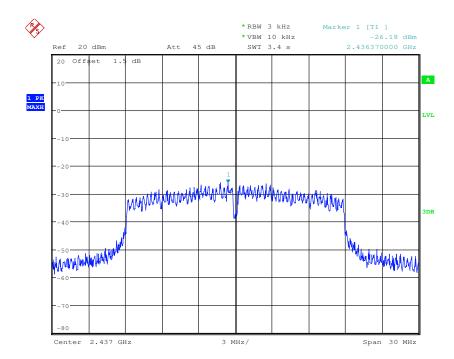





Report No.: SZEM160300124401

Page: 40 of 97

Test mode: 802.11n(HT20) Test channel: Highest

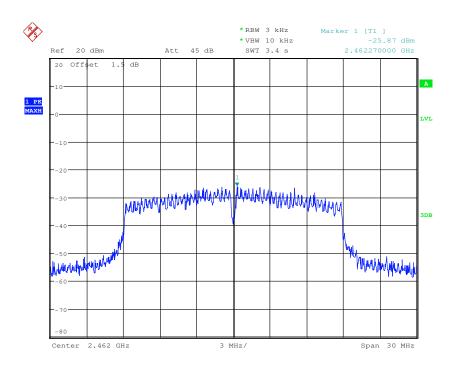



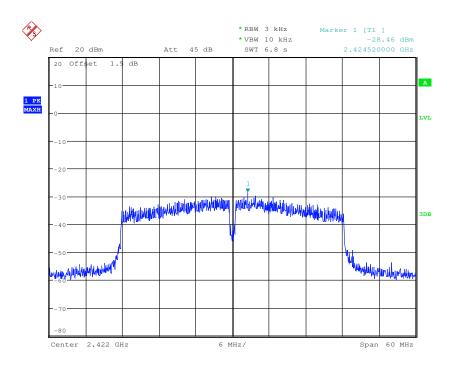






Report No.: SZEM160300124401

Page: 41 of 97

Test mode: 802.11n(HT40) Test channel: Middle

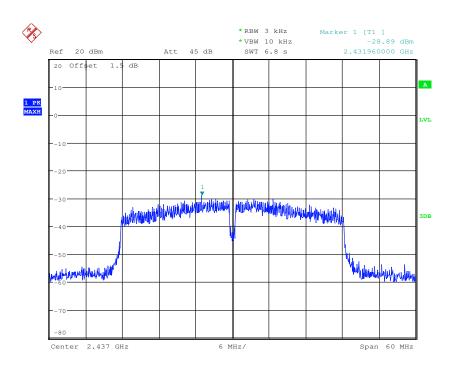



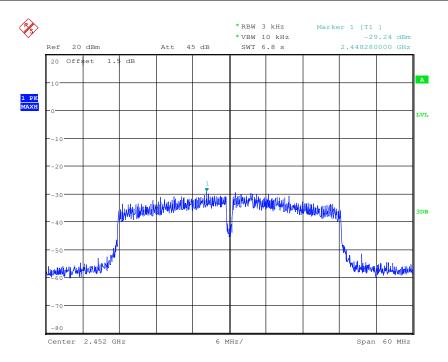



Report No.: SZEM160300124401

Page: 42 of 97

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is
	produced by the intentional radiator shall be at least 20 dB below that in the
	100 kHz bandwidth within the band that contains the highest level of the
	desired power, based on either an RF conducted or a radiated
	measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM160300124401


Page: 43 of 97

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

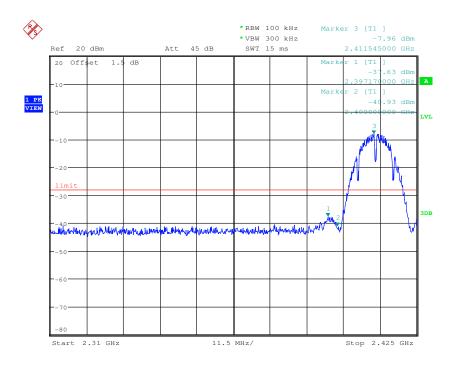



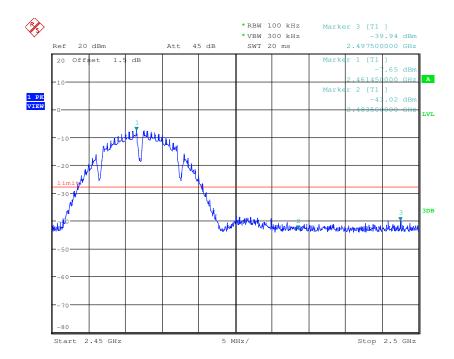





Report No.: SZEM160300124401

Page: 44 of 97

Test mode: 802.11g Test channel: Lowest

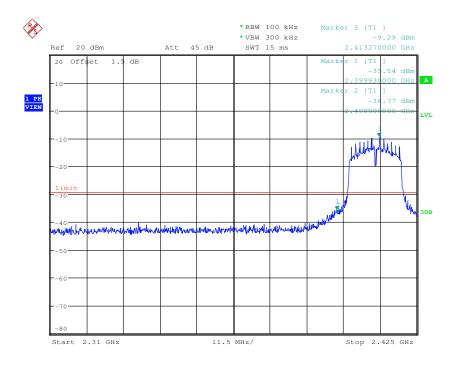



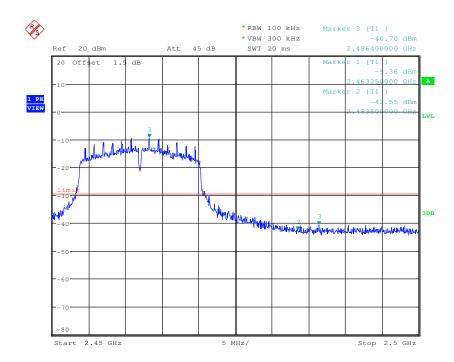





Report No.: SZEM160300124401

Page: 45 of 97

Test mode: 802.11n(HT20) Test channel: Lowest

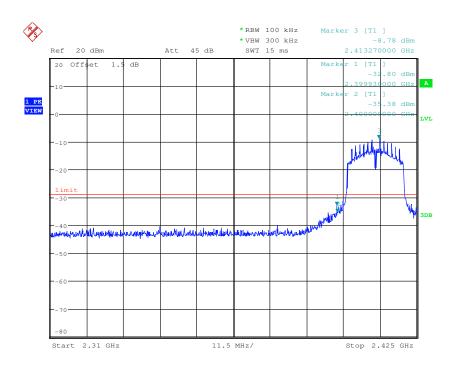



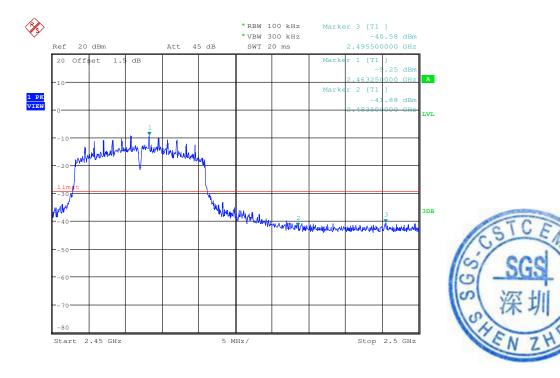





Report No.: SZEM160300124401

Page: 46 of 97

Test mode: 802.11n(HT40) Test channel: Lowest

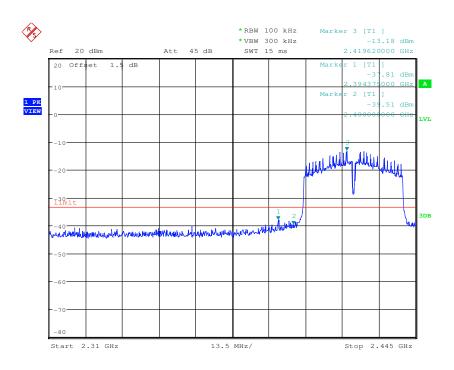



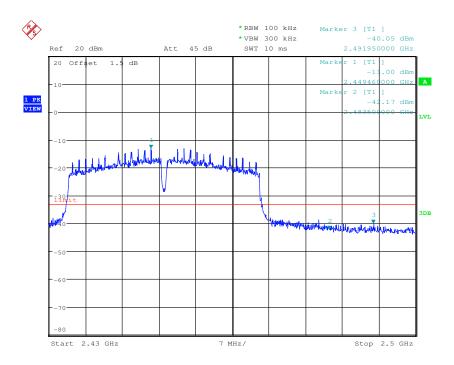



Report No.: SZEM160300124401

Page: 47 of 97

6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





Report No.: SZEM160300124401

Page: 48 of 97

Test plot as follows:


Test mode: 802.11b Test channel: Lowest

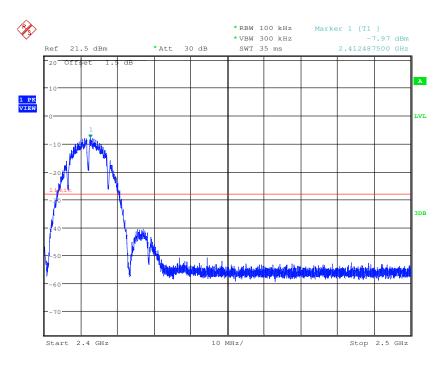

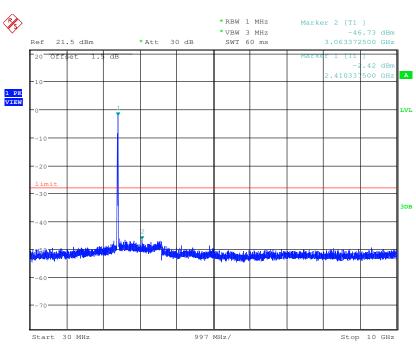




Report No.: SZEM160300124401

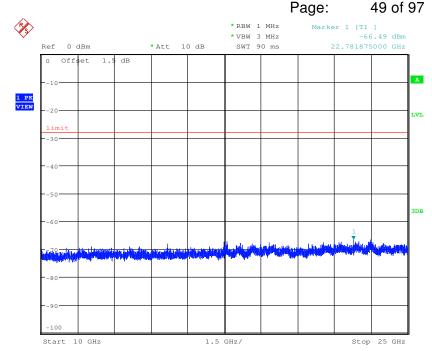





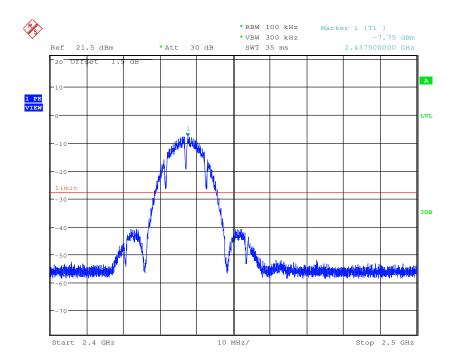



Report No.: SZEM160300124401

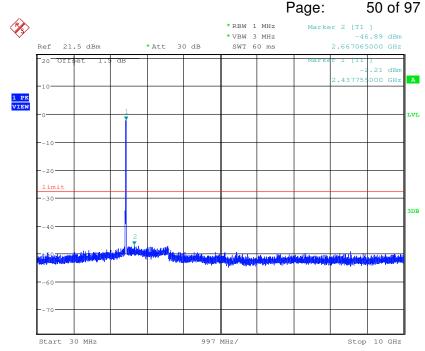

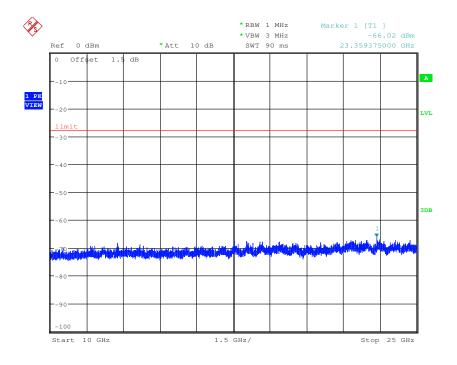





Report No.: SZEM160300124401

Page: 51 of 97


Test mode: 802.11b Test channel: Highest

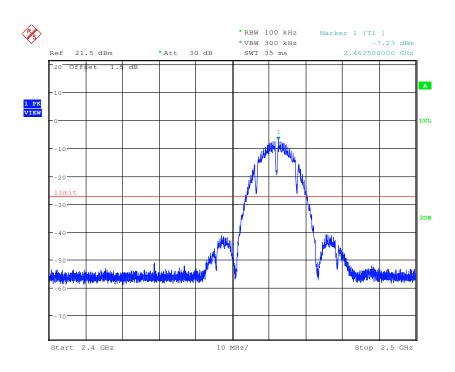

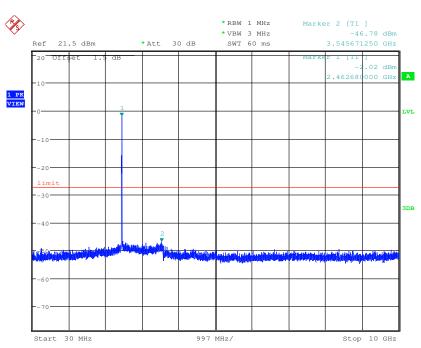




Report No.: SZEM160300124401

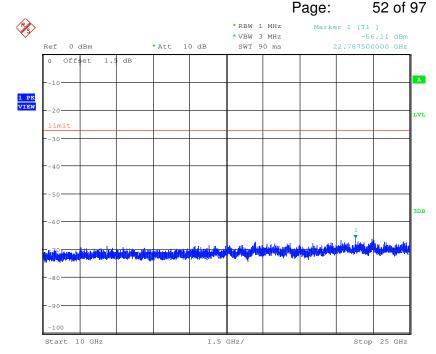





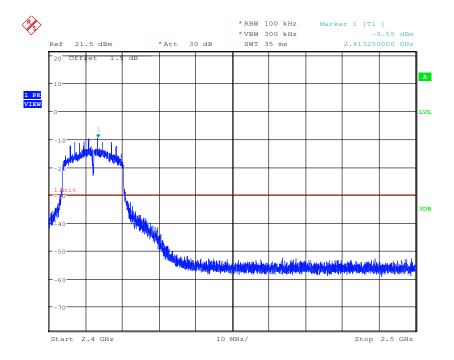



Report No.: SZEM160300124401

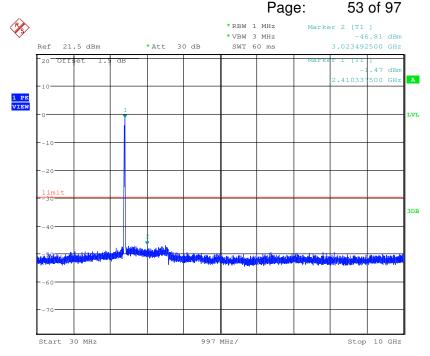

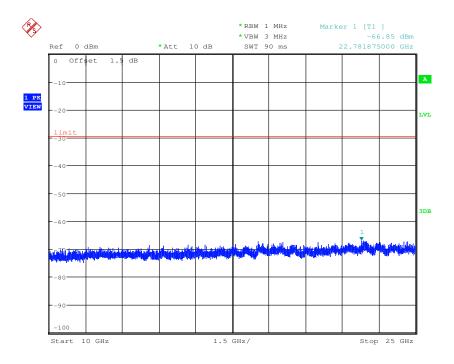





Report No.: SZEM160300124401

Page: 54 of 97

Test mode: 802.11g Test channel: Middle

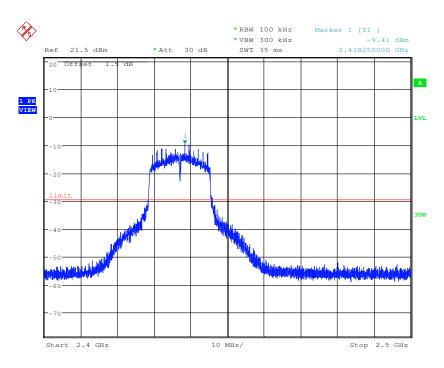


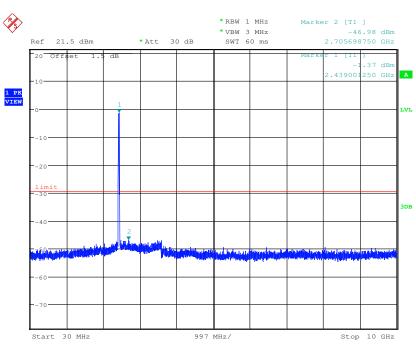




Report No.: SZEM160300124401

Page: 55 of 97

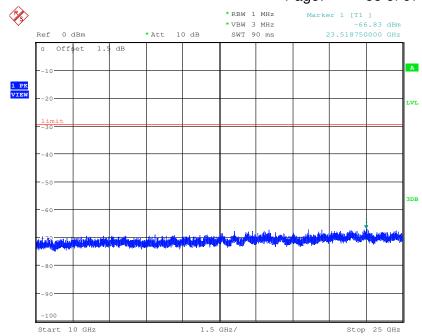


Test mode: 802.11g Test channel: Highest

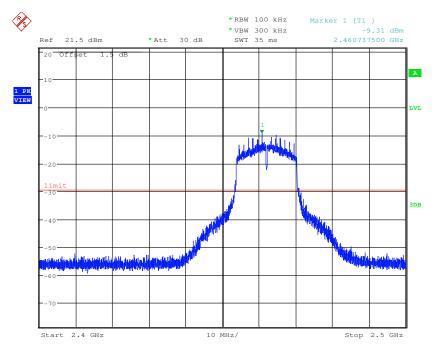






Report No.: SZEM160300124401

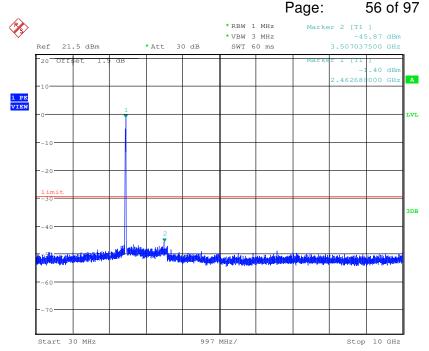

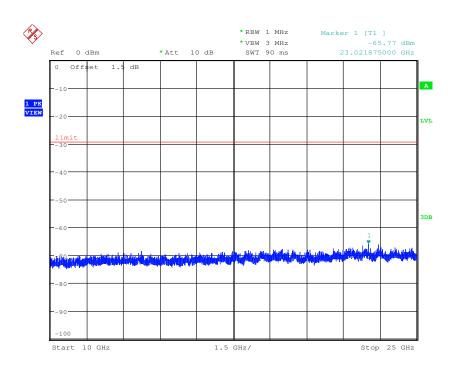





Report No.: SZEM160300124401

Page: 57 of 97

Test mode: 802.11n(HT20) Test channel: Lowest

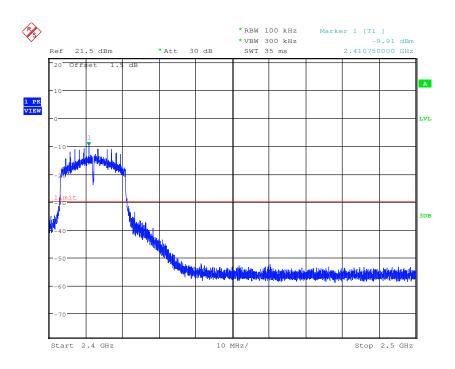


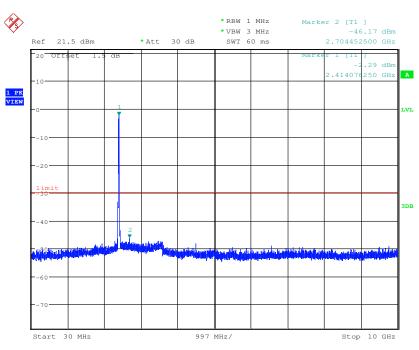




Report No.: SZEM160300124401

Page: 58 of 97

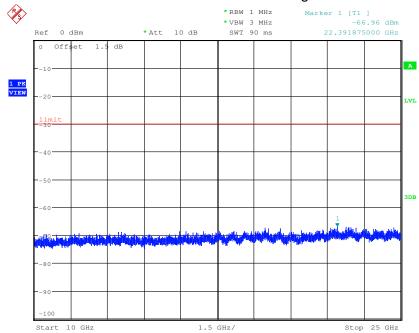




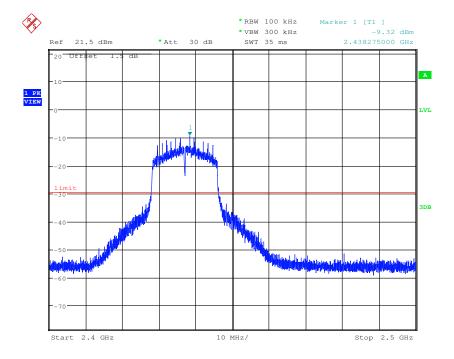




Report No.: SZEM160300124401

Page: 59 of 97

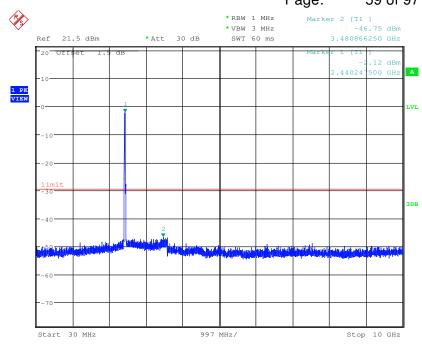

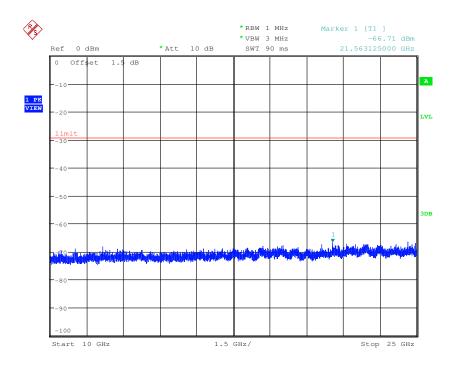





Report No.: SZEM160300124401

Page: 60 of 97


Test mode: 802.11n(HT20) Test channel: Highest

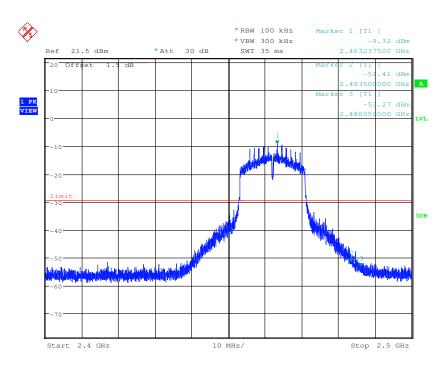

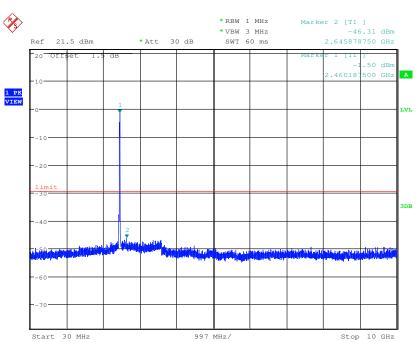




Report No.: SZEM160300124401

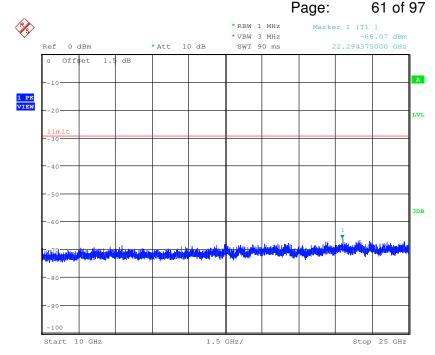





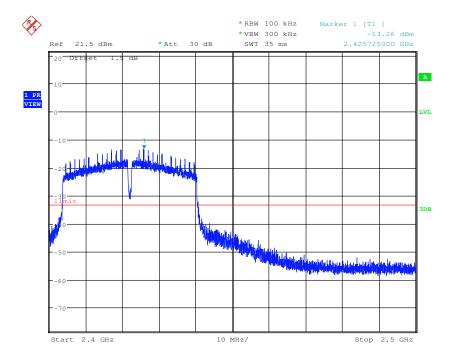



Report No.: SZEM160300124401

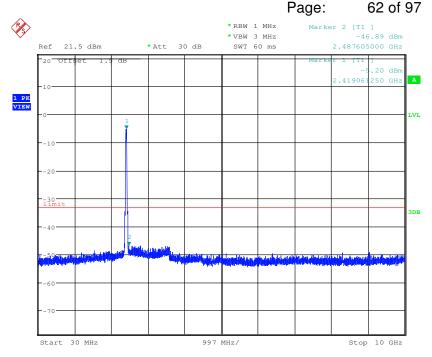

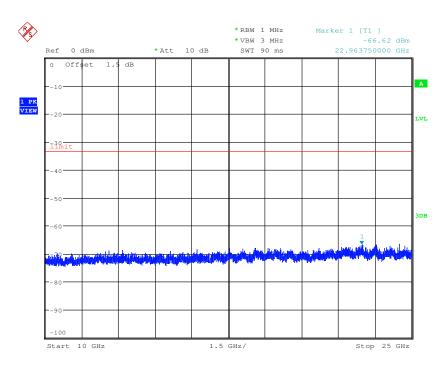





Report No.: SZEM160300124401

Page: 63 of 97

Test mode: 802.11n(HT40) Test channel: Middle

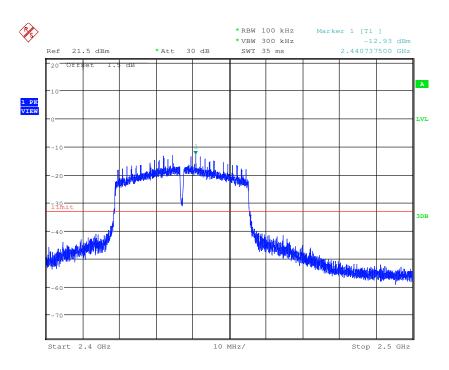


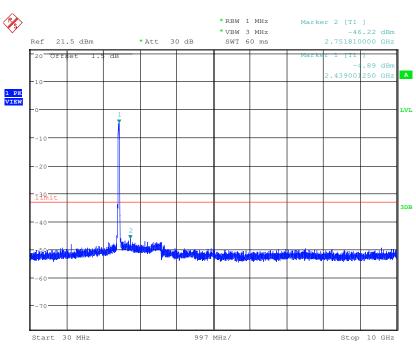




Report No.: SZEM160300124401

Page: 64 of 97

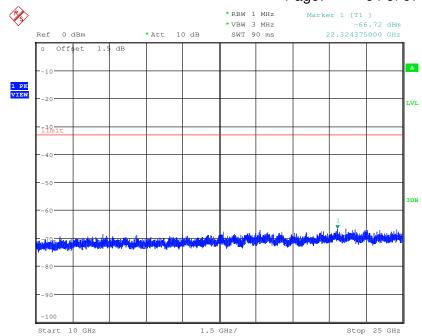




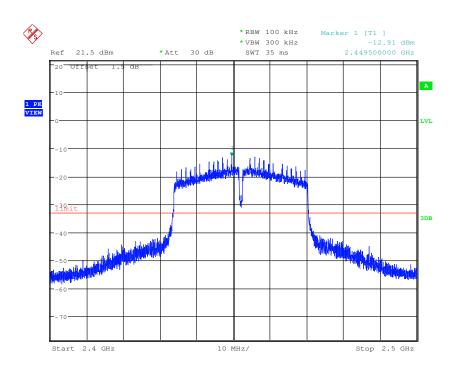




Report No.: SZEM160300124401

Page: 65 of 97

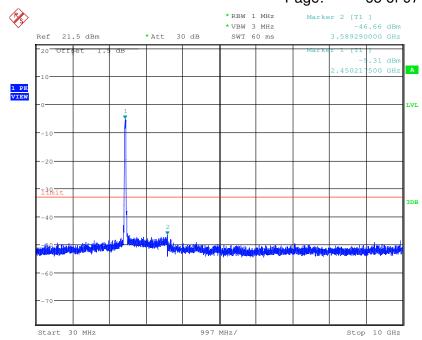

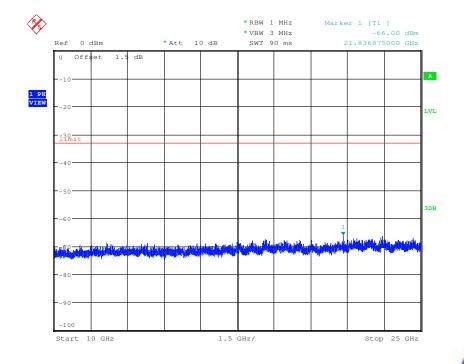

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set 30001.



Report No.: SZEM160300124401

Page: 66 of 97

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2013							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above IGHZ	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless o	•		•	•			
	emissions is 20dB		•	•				
	applicable to the peak		·	eak limit app	olies to the total			
	emission level rad	iated by the device	е.					



Report No.: SZEM160300124401

Page: 67 of 97

Test Setup:

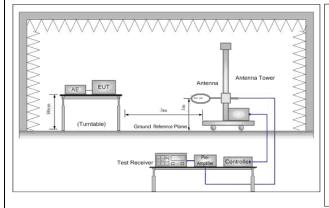

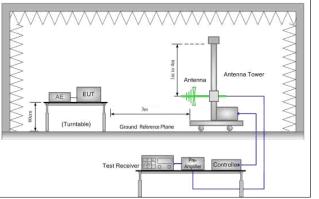


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



Report No.: SZEM160300124401

Page: 68 of 97

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11p; 6Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details Test Results: Pass		
channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Refer to section 5.10 for details		limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average
Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		<u> </u>
Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		Transmitting mode, And found the X axis positioning which it is worse
Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		j. Repeat above procedures until all frequencies measured was complete.
Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		Transmitting mode, Charge + Transmitting mode.
6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Final Test Mode:	
of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case
lowest channel is the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Instruments Used: Refer to section 5.10 for details		
		Only the worst case is recorded in the report.
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass




Report No.: SZEM160300124401

Page: 69 of 97

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge +Transmitting	Vertical

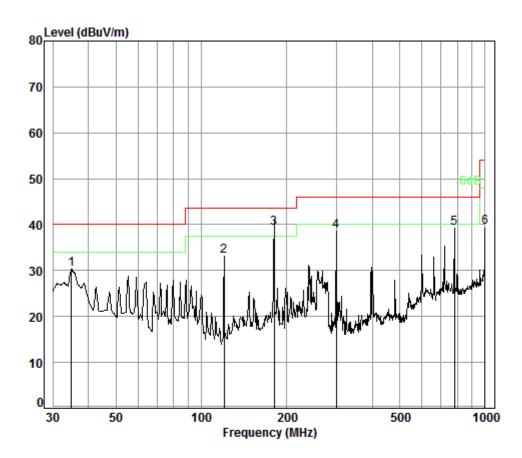

Condition: 3m Vertical

Job No. : 1244CR Test mode: Charge+TX


	Freq			Preamp Factor				Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	34.88 120.28	0.60 1.25		25.99 25.87				
3 pp 4	180.65 299.32	1.37		25.79 25.70				
5	779.61 1000.00	3.14	21.92	25.78 24.40	39.91	39.19	46.00	-6.81



Report No.: SZEM160300124401

Page: 70 of 97

Test mode: Charge +Transmitting Horizontal

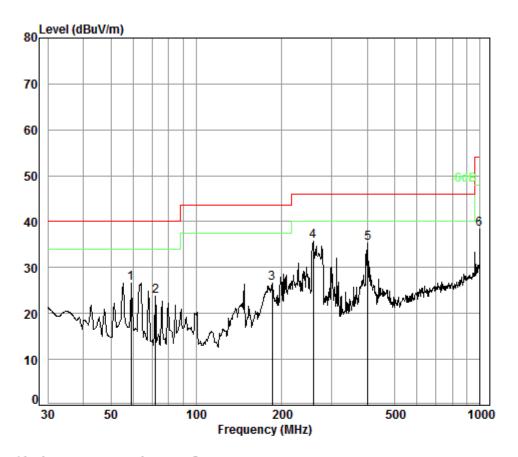

Condition: 3m Horizontal

Job No. : 1244CR Test mode: Charge+TX

	Freq			Preamp Factor				Over Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3	59.03 71.83 185.14	0.80 0.86 1.38	7.07	25.95 25.93 25.79	41.66	23.66	40.00	-16.34
4 pp 5 6	258.33 401.84 996.50	1.71 2.21 3.70	16.39	25.73 25.66 24.42	42.38	35.32	46.00	-10.68



12676.420

37.94

14.65

37.82

SGS-CSTC Standards Technical Services Co., Ltd. **Shenzhen Branch**

Report No.: SZEM160300124401

Page: 71 of 97

6.8.2 Transmitter emission above 1GHz

Test mode: 802.11b	Test channel:	Lowest	Remark:	Peak
--------------------	---------------	--------	---------	------

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3727.173	32.61	7.71	38.46	44.48	46.34	74	-27.66	Vertical
4824.000	34.12	8.90	38.75	48.80	53.07	74	-20.93	Vertical
6034.386	34.72	10.52	38.91	45.45	51.78	74	-22.22	Vertical
7236.000	35.58	10.69	37.63	42.12	50.76	74	-23.24	Vertical
9648.000	37.10	12.52	36.29	35.92	49.25	74	-24.75	Vertical
12530.530	37.83	14.24	37.68	38.36	52.75	74	-21.25	Vertical
3792.453	32.87	7.74	38.48	45.02	47.15	74	-26.85	Horizontal
4824.000	34.12	8.90	38.75	49.13	53.40	74	-20.60	Horizontal
6087.002	34.74	10.45	38.85	46.52	52.86	74	-21.14	Horizontal
7236.000	35.58	10.69	37.63	42.40	51.04	74	-22.96	Horizontal
9648.000	37.10	12.52	36.29	35.59	48.92	74	-25.08	Horizontal
12603.270	37.90	14.44	37.75	38.05	52.64	74	-21.36	Horizontal

Test mode:	802.1	1b	Test cha	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3926.464	33.03	7.78	38.53	45.47	47.75	74	-26.25	Vertical
4874.000	34.17	8.97	38.76	48.73	53.11	74	-20.89	Vertical
6157.871	34.78	10.36	38.75	45.43	51.82	74	-22.18	Vertical
7311.000	35.54	10.72	37.59	41.28	49.95	74	-24.05	Vertical
9748.000	37.10	12.58	36.16	38.67	52.19	74	-21.81	Vertical
12566.850	37.87	14.34	37.72	38.11	52.60	74	-21.40	Vertical
3836.607	32.94	7.75	38.50	44.73	46.92	74	-27.08	Horizontal
4874.000	34.17	8.97	38.76	47.96	52.34	74	-21.66	Horizontal
6016.949	34.71	10.54	38.94	44.85	51.16	74	-22.84	Horizontal
7311.000	35.54	10.72	37.59	41.45	50.12	74	-23.88	Horizontal
9748.000	37.10	12.58	36.16	38.77	52.29	74	-21.71	Horizontal

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

38.45

53.22

74

-20.78

Horizontal



Report No.: SZEM160300124401

Page: 72 of 97

Test mode:	802.11b	Test channel:	Highest	Remark:	Peak

		I						
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3803.444	32.90	7.74	38.49	45.46	47.61	74	-26.39	Vertical
4924.000	34.22	9.04	38.77	49.37	53.86	74	-20.14	Vertical
6122.333	34.76	10.40	38.80	45.53	51.89	74	-22.11	Vertical
7386.000	35.51	10.75	37.56	39.64	48.34	74	-25.66	Vertical
9848.000	37.15	12.63	36.03	39.07	52.82	74	-21.18	Vertical
12676.420	37.94	14.65	37.82	38.37	53.14	74	-20.86	Vertical
3926.464	33.03	7.78	38.53	45.16	47.44	74	-26.56	Horizontal
4924.000	34.22	9.04	38.77	48.31	52.80	74	-21.20	Horizontal
6087.002	34.74	10.45	38.85	45.25	51.59	74	-22.41	Horizontal
7386.000	35.51	10.75	37.56	39.30	48.00	74	-26.00	Horizontal
9848.000	37.15	12.63	36.03	39.66	53.41	74	-20.59	Horizontal
12639.790	37.92	14.55	37.79	38.26	52.94	74	-21.06	Horizontal

Test mode:	est mode: 802.11g		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)		Over Limit (dB)	Polarization
3803.444	32.90	7.74	38.49	45.39	47.54	74		-26.46	Vertical
4824.000	34.12	8.90	38.75	46.78	51.05	74		-22.95	Vertical
6140.076	34.77	10.38	38.78	44.98	51.35	74		-22.65	Vertical
7236.000	35.58	10.69	37.63	41.15	49.79	74		-24.21	Vertical
9648.000	37.10	12.52	36.29	36.32	49.65	74		-24.35	Vertical
12566.850	37.87	14.34	37.72	38.13	52.62	74		-21.38	Vertical
3716.403	32.57	7.71	38.45	44.94	46.77	74		-27.23	Horizontal
4824.000	34.12	8.90	38.75	45.59	49.86	74		-24.14	Horizontal
6087.002	34.74	10.45	38.85	45.09	51.43	74		-22.57	Horizontal
7236.000	35.58	10.69	37.63	42.07	50.71		74	-23.29	Horizontal
9648.000	37.10	12.52	36.29	35.06	48.39		74	-25.61	Horizontal
12603.270	37.90	14.44	37.75	37.72	52.31		74	-21.69	Horizontal



Report No.: SZEM160300124401

Page: 73 of 97

Test mode: 802.11g Test channel: Middle Remark: Peak	
--	--

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3803.444	32.90	7.74	38.49	45.39	47.54	74	-26.46	Vertical
4874.000	34.17	8.97	38.76	45.81	50.19	74	-23.81	Vertical
6087.002	34.74	10.45	38.85	45.68	52.02	74	-21.98	Vertical
7311.000	35.54	10.72	37.59	42.28	50.95	74	-23.05	Vertical
9748.000	37.10	12.58	36.16	38.21	51.73	74	-22.27	Vertical
12603.270	37.90	14.44	37.75	38.09	52.68	74	-21.32	Vertical
3803.444	32.90	7.74	38.49	44.69	46.84	74	-27.16	Horizontal
4874.000	34.17	8.97	38.76	45.70	50.08	74	-23.92	Horizontal
6087.002	34.74	10.45	38.85	45.98	52.32	74	-21.68	Horizontal
7311.000	35.54	10.72	37.59	42.62	51.29	74	-22.71	Horizontal
9748.000	37.10	12.58	36.16	39.20	52.72	74	-21.28	Horizontal
12603.270	37.90	14.44	37.75	38.52	53.11	74	-20.89	Horizontal

Test mode:	802.1	1g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	nit Line BuV/m)	Over Limit (dB)	Polarization
3759.672	32.74	7.73	38.47	45.13	47.13	74	-26.87	Vertical
4924.000	34.22	9.04	38.77	46.73	51.22	74	-22.78	Vertical
6375.465	34.80	10.08	38.48	45.19	51.59	74	-22.41	Vertical
7386.000	35.51	10.75	37.56	41.31	50.01	74	-23.99	Vertical
9848.000	37.15	12.63	36.03	38.79	52.54	74	-21.46	Vertical
12603.270	37.90	14.44	37.75	37.99	52.58	74	-21.42	Vertical
3770.567	32.78	7.73	38.47	44.36	46.40	74	-27.60	Horizontal
4924.000	34.22	9.04	38.77	45.31	49.80	74	-24.20	Horizontal
6069.413	34.74	10.47	38.87	45.53	51.87	74	-22.13	Horizontal
7386.000	35.51	10.75	37.56	41.44	50.14	74	-23.86	Horizontal
9848.000	37.15	12.63	36.03	39.37	53.12	74	-20.88	Horizontal
12603.270	37.90	14.44	37.75	39.18	53.77	74	-20.23	Horizontal



Report No.: SZEM160300124401

Page: 74 of 97

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Peak

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3792.453	32.87	7.74	38.48	45.43	47.56	74	-26.44	Vertical
4824.000	34.12	8.90	38.75	46.14	50.41	74	-23.59	Vertical
6034.386	34.72	10.52	38.91	45.13	51.46	74	-22.54	Vertical
7236.000	35.58	10.69	37.63	45.23	53.87	74	-20.13	Vertical
9648.000	37.10	12.52	36.29	35.34	48.67	74	-25.33	Vertical
12603.270	37.90	14.44	37.75	37.56	52.15	74	-21.85	Vertical
3803.444	32.90	7.74	38.49	45.34	47.49	74	-26.51	Horizontal
4824.000	34.12	8.90	38.75	45.38	49.65	74	-24.35	Horizontal
6069.413	34.74	10.47	38.87	46.35	52.69	74	-21.31	Horizontal
7236.000	35.58	10.69	37.63	41.12	49.76	74	-24.24	Horizontal
9648.000	37.10	12.52	36.29	35.08	48.41	74	-25.59	Horizontal
12603.270	37.90	14.44	37.75	37.74	52.33	74	-21.67	Horizontal

Test mode:	802.1	1n(HT20)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3870.060	32.97	7.77	38.51	45.18	47.41	74	-26.59	Vertical
4874.000	34.17	8.97	38.76	46.22	50.60	74	-23.40	Vertical
6229.564	34.80	10.26	38.66	46.30	52.70	74	-21.30	Vertical
7311.000	35.54	10.72	37.59	45.32	53.99	74	-20.01	Vertical
9748.000	37.10	12.58	36.16	38.73	52.25	74	-21.75	Vertical
12603.270	37.90	14.44	37.75	37.85	52.44	74	-21.56	Vertical
3892.524	32.99	7.77	38.52	46.10	48.34	74	-25.66	Horizontal
4874.000	34.17	8.97	38.76	45.54	49.92	74	-24.08	Horizontal
6087.002	34.74	10.45	38.85	45.86	52.20	74	-21.80	Horizontal
7311.000	35.54	10.72	37.59	44.03	52.70	74	-21.30	Horizontal
9748.000	37.10	12.58	36.16	39.76	53.28	74	-20.72	Horizontal
12676.420	37.94	14.65	37.82	38.09	52.86	74	-21.14	Horizontal



Report No.: SZEM160300124401

Page: 75 of 97

	Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak
--	------------	---------------	---------------	---------	---------	------

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	46.36	48.55	74	-25.45	Vertical
4924.000	34.22	9.04	38.77	48.33	52.82	74	-21.18	Vertical
5879.252	34.40	10.22	38.94	46.21	51.89	74	-22.11	Vertical
7386.000	35.51	10.75	37.56	44.99	53.69	74	-20.31	Vertical
9848.000	37.15	12.63	36.03	39.64	53.39	74	-20.61	Vertical
12603.270	37.90	14.44	37.75	38.23	52.82	74	-21.18	Vertical
3814.467	32.91	7.75	38.49	45.25	47.42	74	-26.58	Horizontal
4924.000	34.22	9.04	38.77	46.94	51.43	74	-22.57	Horizontal
6140.076	34.77	10.38	38.78	45.46	51.83	74	-22.17	Horizontal
7386.000	35.51	10.75	37.56	41.41	50.11	74	-23.89	Horizontal
9848.000	37.15	12.63	36.03	39.58	53.33	74	-20.67	Horizontal
12603.270	37.90	14.44	37.75	38.48	53.07	74	-20.93	Horizontal

rest mode.	002.1	111(1140)	Test ch	armer.	Lowest	nemark		reak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3836.607	32.94	7.75	38.50	44.71	46.90	74	-27.10	Vertical
4844.000	34.14	8.92	38.76	46.38	50.68	74	-23.32	Vertical
6087.002	34.74	10.45	38.85	44.93	51.27	74	-22.73	Vertical
7266.000	35.57	10.70	37.61	41.77	50.43	74	-23.57	Vertical
9688.000	37.10	12.54	36.24	35.96	49.36	74	-24.64	Vertical
12639.790	37.92	14.55	37.79	39.01	53.69	74	-20.31	Vertical
3915.118	33.02	7.78	38.53	45.58	47.85	74	-26.15	Horizontal
4844.000	34.14	8.92	38.76	45.92	50.22	74	-23.78	Horizontal
6016.949	34.71	10.54	38.94	44.99	51.30	74	-22.70	Horizontal
7266.000	35.57	10.70	37.61	41.82	50.48	74	-23.52	Horizontal
9688.000	37.10	12.54	36.24	36.76	50.16	74	-23.84	Horizontal
12639.790	37.92	14.55	37.79	38.91	53.59	74	-20.41	Horizontal

802 11n(HT40) Test channel:



Report No.: SZEM160300124401

Page: 76 of 97

Test mode:	802.11n(HT40)	Test channel:	Middle	Remark:	Peak
					_

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	45.50	47.69	74	-26.31	Vertical
4874.000	34.17	8.97	38.76	45.24	49.62	74	-24.38	Vertical
5862.263	34.36	10.18	38.94	46.88	52.48	74	-21.52	Vertical
7311.000	35.54	10.72	37.59	44.68	53.35	74	-20.65	Vertical
9748.000	37.10	12.58	36.16	39.46	52.98	74	-21.02	Vertical
12566.850	37.87	14.34	37.72	38.89	53.38	74	-20.62	Vertical
3748.808	32.70	7.72	38.47	45.10	47.05	74	-26.95	Horizontal
4874.000	34.17	8.97	38.76	44.98	49.36	74	-24.64	Horizontal
6122.333	34.76	10.40	38.80	45.37	51.73	74	-22.27	Horizontal
7311.000	35.54	10.72	37.59	42.26	50.93	74	-23.07	Horizontal
9748.000	37.10	12.58	36.16	39.17	52.69	74	-21.31	Horizontal
12639.790	37.92	14.55	37.79	38.19	52.87	74	-21.13	Horizontal

Test mode:	802.1	1n(HT40)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3903.804	33.01	7.78	38.52	44.43	46.70	74	-27.30	Vertical
4904.000	34.21	9.01	38.77	45.85	50.30	74	-23.70	Vertical
6122.333	34.76	10.40	38.80	45.93	52.29	74	-21.71	Vertical
7356.000	35.52	10.74	37.57	44.95	53.64	74	-20.36	Vertical
9808.000	37.11	12.61	36.08	39.54	53.18	74	-20.82	Vertical
12639.790	37.92	14.55	37.79	38.67	53.35	74	-20.65	Vertical
3825.521	32.93	7.75	38.49	44.70	46.89	74	-27.11	Horizontal
4904.000	34.21	9.01	38.77	45.14	49.59	74	-24.41	Horizontal
6140.076	34.77	10.38	38.78	45.49	51.86	74	-22.14	Horizontal
7356.000	35.52	10.74	37.57	42.03	50.72	74	-23.28	Horizontal
9808.000	37.11	12.61	36.08	40.29	53.93	74	-20.07	Horizontal
12639.790	37.92	14.55	37.79	38.21	52.89	74	-21.11	Horizontal



Report No.: SZEM160300124401

Page: 77 of 97

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM160300124401

Page: 78 of 97

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205							
Test Method:	ANSI C63.10 2013	ANSI C63.10 2013							
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	er)						
Limit:	Frequency	Frequency Limit (dBuV/m @3m) Remark							
	30MHz-88MHz	30MHz-88MHz 40.0 Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	Above 10115 54.0 Average Value							
	Above IGHZ	74.0	Peak Value						
Test Setup:									

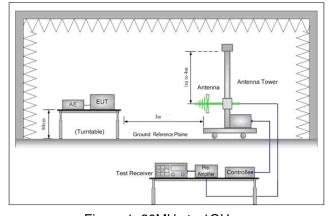




Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM160300124401

Page: 79 of 97

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel				
	h. Test the EUT in the lowest channel, the Highest channel				
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.				
	j. Repeat above procedures until all frequencies measured was complete.				
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.				
	Transmitting mode, Charge + Transmitting mode.				
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case				
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;				
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)				
	Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				




Report No.: SZEM160300124401

Page: 80 of 97

Test plot as follows:

Test mode: 802.11b Test channel: Lowest Remark: Peak Vertical

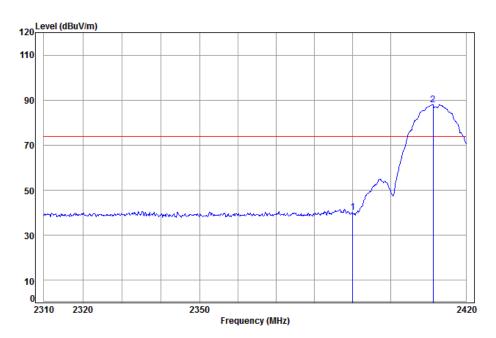

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2412 Band edge

: B

Cable Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Leve1 Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m


1 2390.00 5.34 28.57 38.11 44.26 40.06 74.00 -33.94 2 pp 2411.24 5.35 28.65 38.11 92.02 87.91 74.00 13.91



Report No.: SZEM160300124401

Page: 81 of 97

Test mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

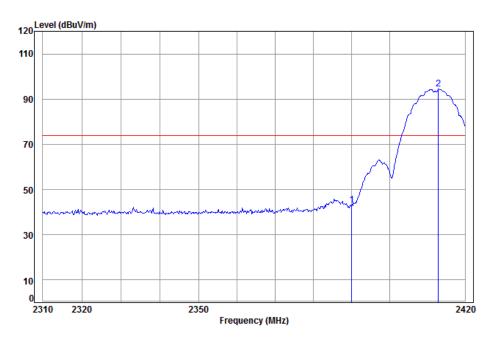

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2412 Band edge

: B


Ant Preamp Cable Read Limit 0ver Freq Loss Factor Factor Line Limit Level Level MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 47.30 43.10 74.00 -30.90 2 pp 2412.92 5.35 28.66 38.11 98.51 94.41 74.00 20.41



Report No.: SZEM160300124401

Page: 82 of 97

Test mode: 802.11b Test channel: Highest Remark: Peak Vertical

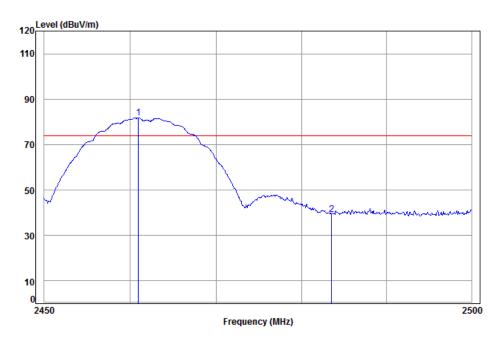

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2462 Band edge

: B


Cable Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dΒ dB/m dB dBuV dBuV/m dBuV/m dB 2460.91 5.39 28.88 38.12 85.63 81.78 74.00 2483.50 5.41 28.98 38.12 43.07 39.34 74.00 -34.66



Report No.: SZEM160300124401

Page: 83 of 97

Test mode: 802.11b Test channel: Highest Remark: Peak Horizontal

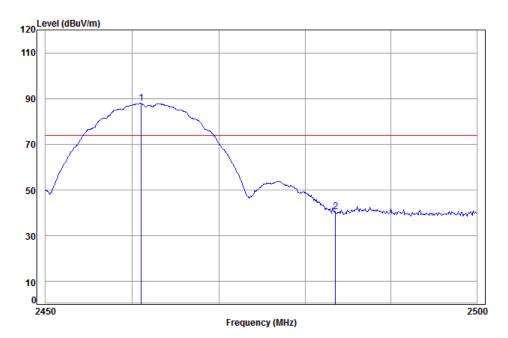

Condition: 3m Horizontal

: 1244CR

Mode: : 2462 Band edge

: B


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2461.01 5.39 28.88 38.12 91.69 87.84 74.00 13.84 1 pp 2483.50 5.41 28.98 38.12 44.35 40.62 74.00 -33.38



Report No.: SZEM160300124401

Page: 84 of 97

Test mode: 802.11g Test channel: Lowest Remark: Peak Vertical

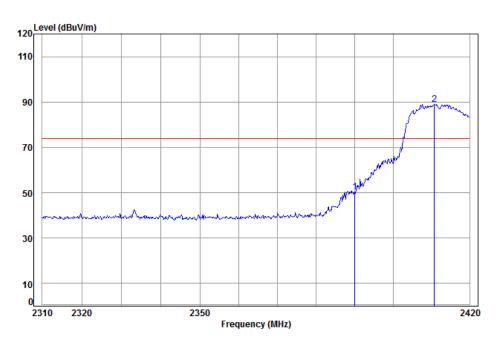

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2412 Band edge

: G


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 54.47 50.27 74.00 -23.73 5.35 28.65 38.11 93.18 89.07 74.00 15.07 2 pp 2410.79



Report No.: SZEM160300124401

Page: 85 of 97

Test mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

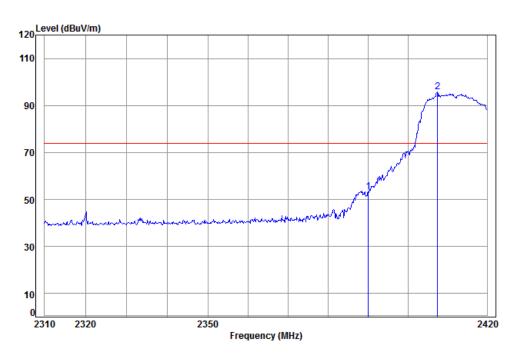

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2412 Band edge

: G

Cable Ant Preamp Read Limit 0ver Loss Factor Factor Freq Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 57.42 53.22 74.00 -20.78 2407.42 5.35 28.63 38.11 99.90 95.77 74.00 21.77






Report No.: SZEM160300124401

Page: 86 of 97

Test mode: 802.11g Test channel: Highest Remark: Peak Vertical

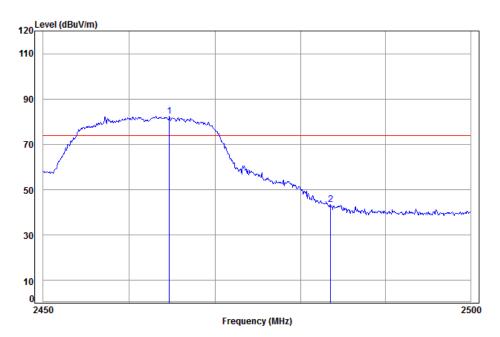

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2462 Band edge

: G

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m dB


1 pp 2464.65 5.39 28.90 38.12 86.10 82.27 74.00 8.27 2 2483.50 5.41 28.98 38.12 47.21 43.48 74.00 -30.52



Report No.: SZEM160300124401

Page: 87 of 97

Test mode: 802.11g Test channel: Highest Remark: Peak Horizontal

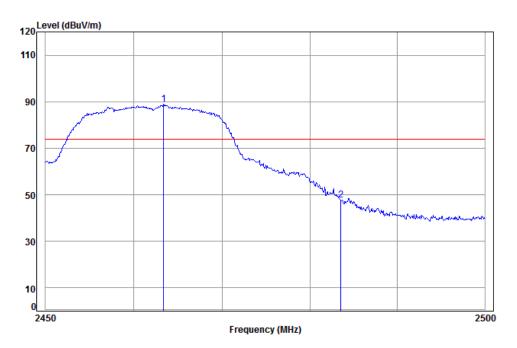

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2462 Band edge

: G


Cable Ant Preamp Limit 0ver Read Loss Factor Factor Level Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m 5.39 28.89 38.12 92.76 88.92 74.00 14.92 2463.35 1 pp 28.98 38.12 51.59 47.86 74.00 -26.14



Report No.: SZEM160300124401

Page: 88 of 97

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Vertical

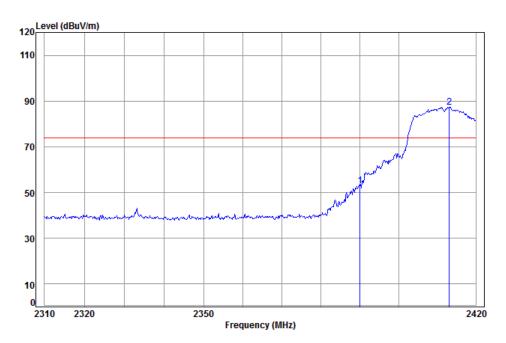

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2412 Band edge

: N20


Ant Preamp Cable Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 57.22 53.02 74.00 -20.98 5.36 28.66 38.11 91.47 87.38 74.00 13.38 2413.14



Report No.: SZEM160300124401

Page: 89 of 97

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Horizontal

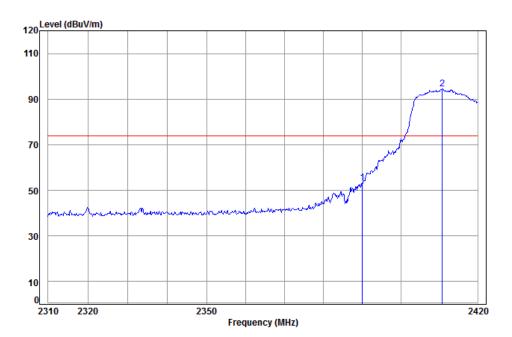

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2412 Band edge

: N20


Cable Limit Ant Preamp Read Over Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 57.65 53.45 74.00 -20.55 2410.79 5.35 28.65 38.11 98.52 94.41 74.00 20.41



Report No.: SZEM160300124401

Page: 90 of 97

Test mode: 802.11n(HT20) Test channel: Highest Remark: Peak Vertical

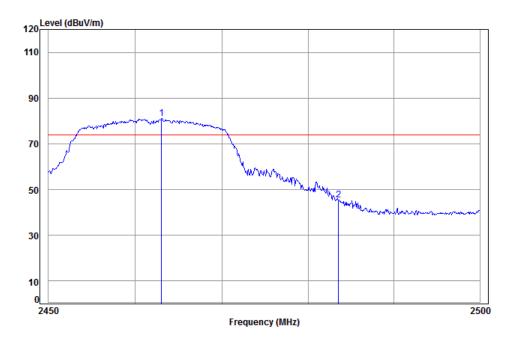

Condition: 3m Vertical

Job No: : 1244CR

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 5.39 28.89 38.12 84.87 81.03 74.00 2463.00 5.41 28.98 38.12 49.10 45.37 74.00 -28.63 2483.50



Report No.: SZEM160300124401

Page: 91 of 97

Test mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

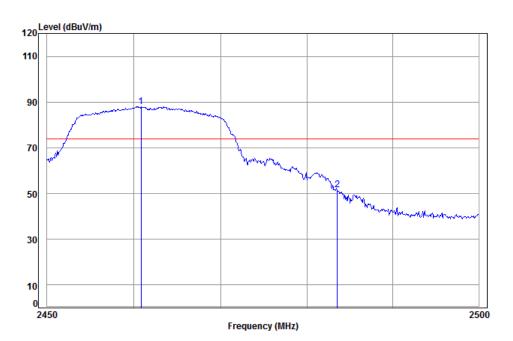

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.39 28.88 38.12 91.89 88.04 74.00 14.04 2460.81 5.41 28.98 38.12 55.28 51.55 74.00 -22.45 2483.50



Report No.: SZEM160300124401

Page: 92 of 97

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Vertical

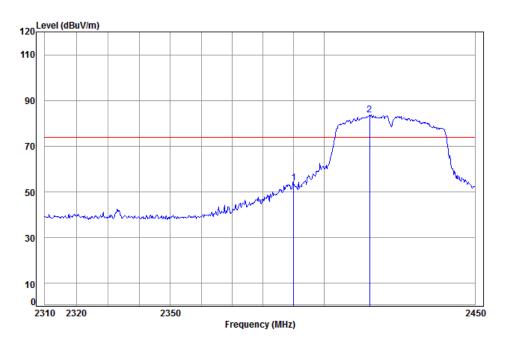

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2422 Band edge

: N40

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB


1 2390.00 5.34 28.57 38.11 58.01 53.81 74.00 -20.19 2 pp 2414.93 5.36 28.67 38.11 87.90 83.82 74.00 9.82



Report No.: SZEM160300124401

Page: 93 of 97

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Horizontal

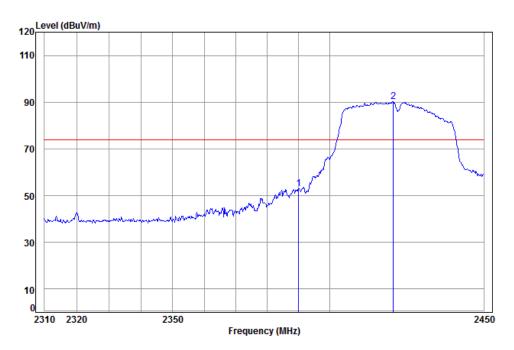

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2422 Band edge

: N40


Cable Ant Preamp Read Limit 0ver Limit Freq Loss Factor Factor Level Level Line MHz dB dBuV dBuV/m dBuV/m dB dB/m dΒ 5.34 74.00 -21.07 2390.00 28.57 38.11 57.13 52.93 28.70 38.11 94.30 90.25 74.00 16.25 2420.48 5.36



Report No.: SZEM160300124401

Page: 94 of 97

Test mode: 802.11n(HT40) Test channel: Highest Remark: Peak Vertical

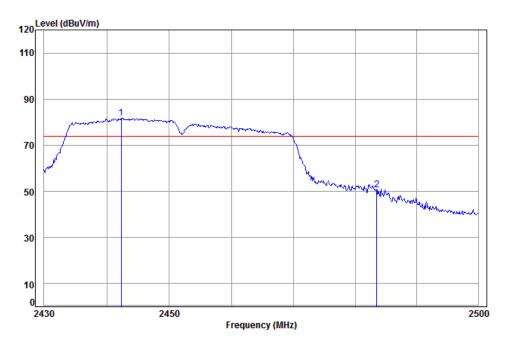

Condition: 3m Vertical Job No: : 1244CR

Mode: : 2452 Band edge

: N40


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2442.32 5.38 28.80 38.11 85.83 81.90 74.00 7.90 1 pp 2483.50 5.41 28.98 38.12 54.41 50.68 74.00 -23.32



Report No.: SZEM160300124401

Page: 95 of 97

Test mode: 802.11n(HT40) Test channel: Highest Remark: Peak Horizontal

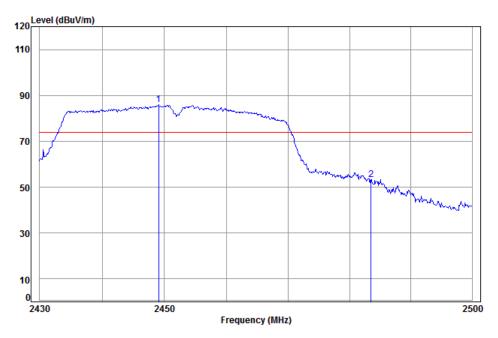

Condition: 3m Horizontal

Job No: : 1244CR

Mode: : 2452 Band edge

: N40

Freq			Preamp Factor				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
 2449.05 2483.50							

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor





Report No.: SZEM160300124401

Page: 96 of 97


7 Photographs - EUT Test Setup

Test model No.: A7

7.1 Conducted Emission



7.2 Radiated Emission

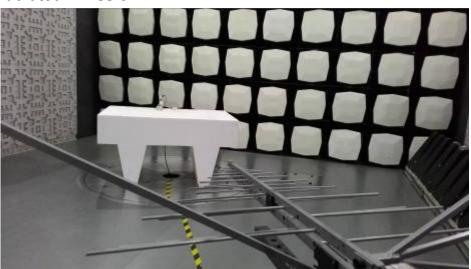




Report No.: SZEM160300124401

Page: 97 of 97

7.3 Radiated Spurious Emission

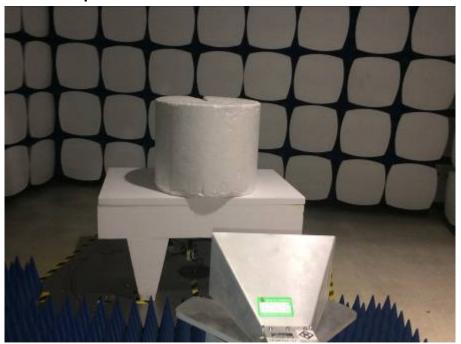

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1603001244CR.