



**Shenzhen GTI Technology Co., Ltd.**

1F,2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,  
Shenzhen, Guangdong, China.

Tel: +86-755-27559792

Fax: +86-755-86116468

Report No.: GTI20150428F-2

Page 1 of 62

# TEST REPORT

**Product Name** .....: SeeSwitch, SmartPanel

**Trademark** .....: /

**Model/Type reference** .....: SeeSwitch 4S, SmartPanel 42, SeeSwitch 5S,  
SmartPanel 52

**FCC ID**.....: **2AFTZSS525S424S**

**Test Standards** .....: **FCC Part 15.247: Operation within the bands 902-928  
MHz, 2400-2483.5 MHz and 5725-5850 MHz**

**Applicant** .....: SHENZHEN KINGFEI Technologies Co.,Ltd

**Address of applicant** .....: 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE,  
NANSHAN,SHENZHEN, GUANGDONG, CHINA

**Date of Receipt** .....: Aug. 25, 2015

**Date of Test Date**.....: Aug. 27, 2015 - Oct. 15, 2015


**Data of issue.** .....: Oct. 15, 2015

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above


GENERAL DESCRIPTION OF EUT	
Equipment:	SeeSwitch, SmartPanel
Model Name:	SeeSwitch 4S, SmartPanel 42, SeeSwitch 5S, SmartPanel 52
Manufacturer:	SHENZHEN KINGFEI Technologies Co.,Ltd
Manufacturer Address:	2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN, SHENZHEN, GUANGDONG, CHINA
Power Rating:	AC 100-240V, 50/60Hz

Compiled By:




(Sevin Li)

Reviewed By:

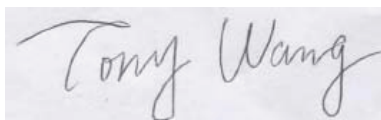

(Tony Wang)

Approved By:

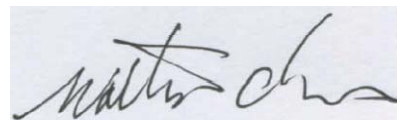

(Walter Chen)

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of compiler, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Table of Contents

## Page

<b>1. SUMMARY.....</b>	<b>4</b>
1.1. TEST STANDARDS.....	4
1.2. TEST DESCRIPTION.....	4
1.3. TEST FACILITY .....	5
1.4. MEASUREMENT UNCERTAINTY .....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. ENVIRONMENTAL CONDITIONS .....	6
2.2. GENERAL DESCRIPTION OF EUT .....	6
2.3. DESCRIPTION OF TEST MODES .....	7
2.4. MEASUREMENT INSTRUMENTS LIST .....	7
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>9</b>
3.1. CONDUCTED EMISSION (AC MAIN) .....	9
3.2. RADIATED EMISSION .....	14
3.3. MAXIMUM PEAK OUTPUT POWER .....	26
3.4. 20dB BANDWIDTH.....	30
3.5. BAND EDGE .....	34
3.6. FREQUENCY SEPARATION .....	41
3.7. NUMBER OF HOPPING FREQUENCY.....	43
3.8. TIME OF OCCUPANCY (DWEIL TIME).....	45
3.9. SPURIOUS RF CONDUCTED EMISSION.....	49
3.10. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	59
3.11. ANTENNA REQUIREMENT.....	60
<b>4. EUT TEST PHOTO .....</b>	<b>61</b>
<b>5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL .....</b>	<b>62</b>

## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10:2009](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2009](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment

### 1.2. Test Description

FCC PART 15 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

#### Shenzhen General Testing & Inspection Technology Co., Ltd.

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

#### FCC-Registration No.: 214666

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

## 1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements and is documented in the Shenzhen General Testing & Inspection Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for General Testing & Inspection laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 2.2. General Description of EUT

Product Name:	SeeSwitch, SmartPanel
Model/Type reference:	SeeSwitch 4S, SmartPanel 42, SeeSwitch 5S, SmartPanel 52
Model difference:	SeeSwitch 4S, SmartPanel 42 are electrically identical, and SeeSwitch 5S, SmartPanel 52 are electrically identical. SeeSwitch 4S/SmartPanel 42 and SeeSwitch 5S/SmartPanel 52 have same circuit ,same key components ,same RF module;but PCB layout and display size ,enclosure are different .
Power supply:	AC 100-240V, 50/60Hz
Hardware version:	3.x/4.x
Software version:	v4.x/v5.x
<b>Bluetooth 3.0</b>	
Version:	Supported BT3.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	2.3dBi

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.3. Description of Test Modes

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT. Channel 00/39/78 was selected to test.

### Operation Frequency :

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
2	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

## 2.4. Measurement Instruments List

Maximum Peak Output Power / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission /Hoping Require/ 20dB bandwidth					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Jan 07,2016

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrate until
1	LISN	R&S	ENV216	101112	Jan. 07, 2016
2	LISN	R&S	ENV216	101113	Jan. 07, 2016
3	EMI Test Receiver	R&S	ESCI	100920	Jan. 07, 2016
4	Cable	Schwarzbeck	AK9515E	33156	Jan. 07, 2016

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100967	Jan 07,2016
2	High pass filter	micro-tranics	HPM50111	142	Jan 07,2016
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Jan. 10,2016
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Jan. 10,2016
5	Loop Antenna	LAPLAC	RF300	9138	Jan. 10,2016
6	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Jan 07,2016
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Jan. 13,2016
8	Pre-Amplifier	HP	8447D	1937A03050	Jan. 07,2016

9	Pre-Amplifier	EMCI	EMC05183 5	980075	Jan. 07,2016
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Jan. 07,2016
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX1 02	DA1580	Jan. 07,2016

Note: 1. The Cal.Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.



### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emission (AC Main)


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

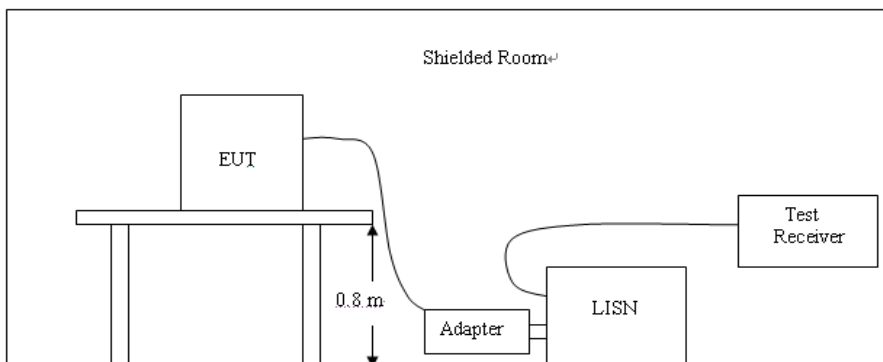

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4:2009.
2. Support equipment, if needed, was placed as per ANSI C63.4:2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4:2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

## TEST RESULTS

**Note:** We tested all modes, recorded the worst case at GFSK Low Channel mode


SeeSwitch 5S/SmartPanel 52

LINE

L

### SCAN TABLE: "Vo1 (9K-30M) FIN-N"

Short Description: 150K-30M Voltage

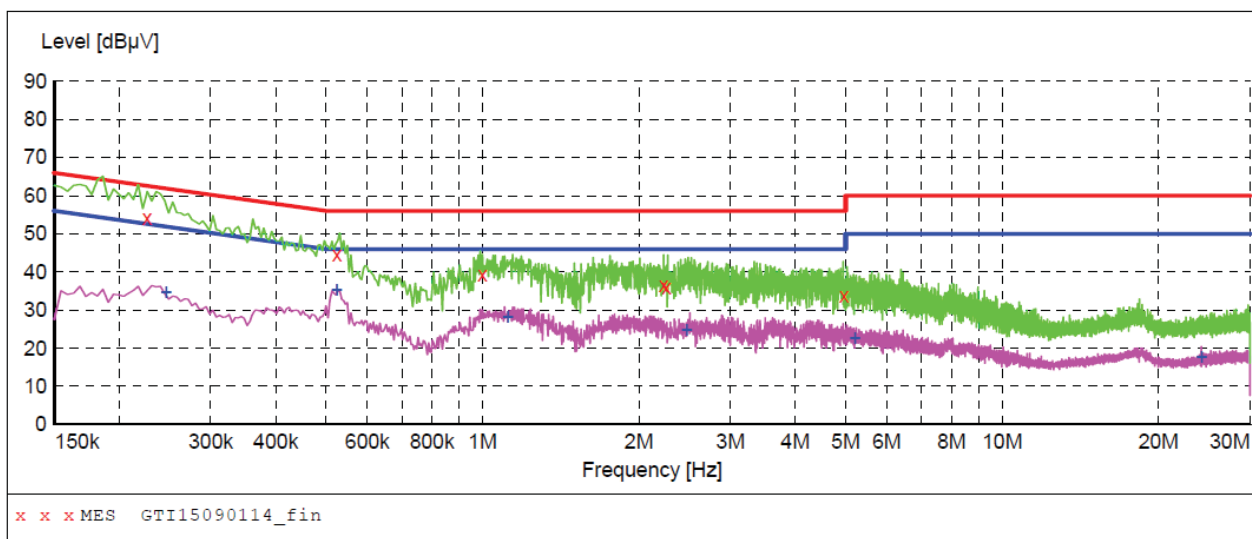

### MEASUREMENT RESULT: "GTI15090114\_fin"

9/1/2015 1:25PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226000	54.00	9.7	63	8.6	QP	L1	GND
0.524000	44.70	9.8	56	11.3	QP	L1	GND
0.998000	39.20	10.0	56	16.8	QP	L1	GND
2.228000	36.40	10.3	56	19.6	QP	L1	GND
2.258000	36.00	10.3	56	20.0	QP	L1	GND
4.964000	33.80	10.4	56	22.2	QP	L1	GND

### MEASUREMENT RESULT: "GTI15090114\_fin2"

9/1/2015 1:25PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.246000	34.50	9.7	52	17.4	AV	L1	GND
0.524000	35.30	9.8	46	10.7	AV	L1	GND
1.118000	28.30	10.0	46	17.7	AV	L1	GND
2.468000	24.80	10.3	46	21.2	AV	L1	GND
5.204000	22.50	10.4	50	27.5	AV	L1	GND
24.194000	17.80	11.1	50	32.2	AV	L1	GND

LINE

N

**SCAN TABLE: "Vol (9K-30M) FIN-N"**

Short Description: 150K-30M Voltage

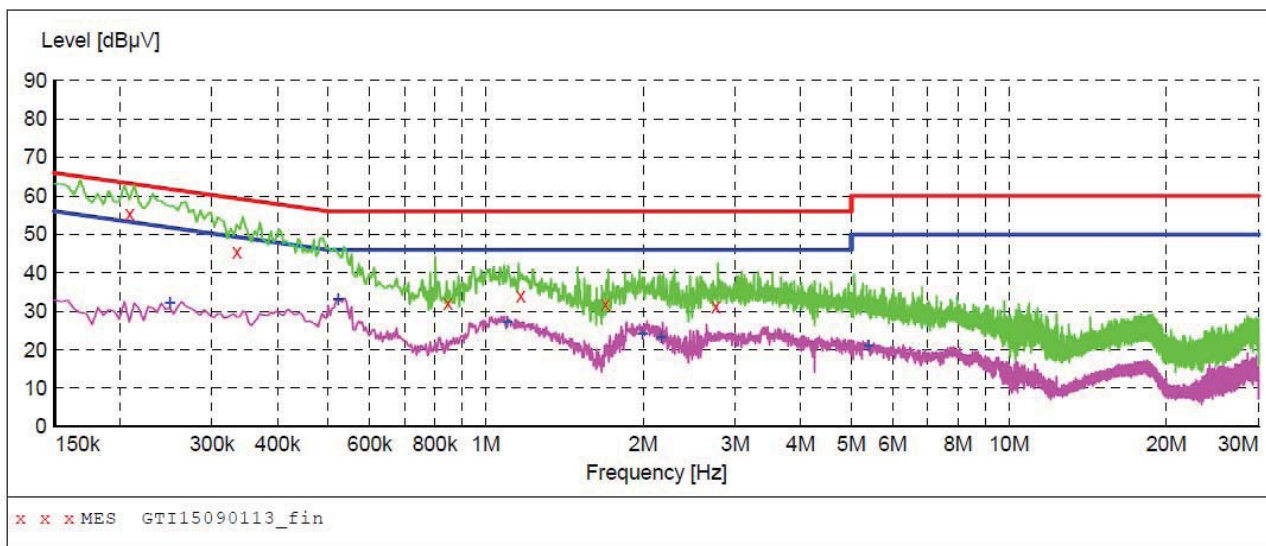
**MEASUREMENT RESULT: "GTI15090113\_fin"**

9/1/2015 1:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.208500	55.40	9.5	63	7.9	QP	N	GND
0.334500	45.50	9.5	59	13.8	QP	N	GND
0.846500	32.30	9.7	56	23.7	QP	N	GND
1.166000	34.00	9.8	56	22.0	QP	N	GND
1.692500	32.00	9.9	56	24.0	QP	N	GND
2.754500	31.20	10.1	56	24.8	QP	N	GND

**MEASUREMENT RESULT: "GTI15090113\_fin2"**

9/1/2015 1:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.249000	32.10	9.5	52	19.7	AV	N	GND
0.522500	33.20	9.6	46	12.8	AV	N	GND
1.098500	27.10	9.8	46	18.9	AV	N	GND
1.994000	24.20	10.0	46	21.8	AV	N	GND
2.165000	23.10	10.0	46	22.9	AV	N	GND
5.391500	21.00	10.2	50	29.0	AV	N	GND


SeeSwitch 4S/SmartPanel 42

LINE

L

**SCAN TABLE: "Vo1 (9K-30M) FIN-N"**

Short Description: 150K-30M Voltage

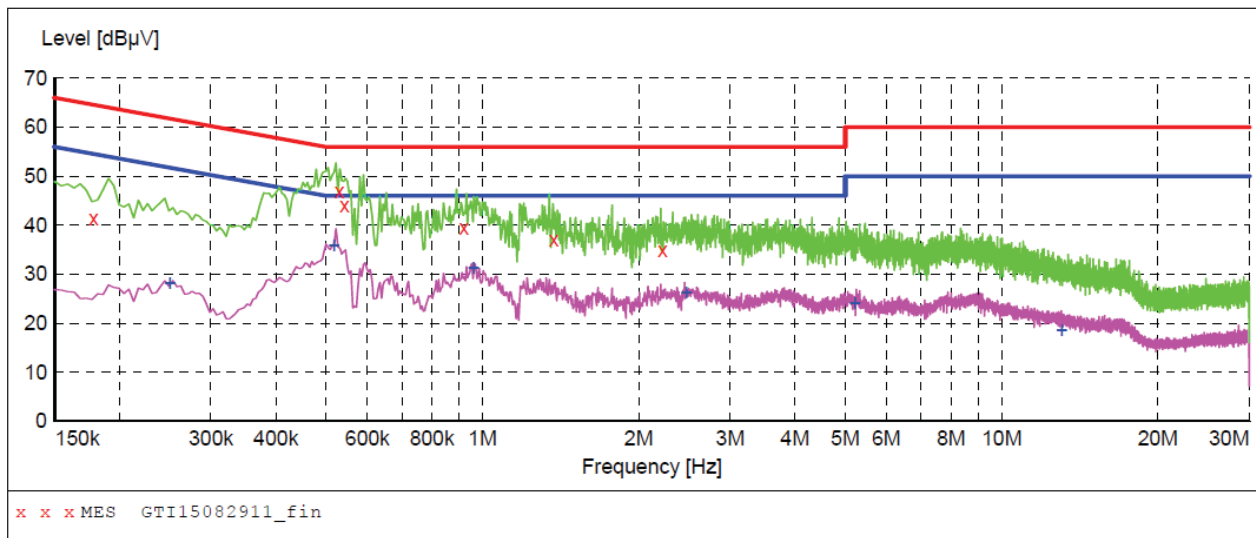
**MEASUREMENT RESULT: "GTI15082911\_fin"**

8/29/2015 3:00PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.178000	41.40	9.7	65	23.2	QP	L1	GND
0.530000	46.80	9.8	56	9.2	QP	L1	GND
0.542000	44.00	9.8	56	12.0	QP	L1	GND
0.920000	39.50	10.0	56	16.5	QP	L1	GND
1.370000	37.00	10.1	56	19.0	QP	L1	GND
2.222000	35.00	10.3	56	21.0	QP	L1	GND

**MEASUREMENT RESULT: "GTI15082911\_fin2"**

8/29/2015 3:00PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.250000	28.20	9.7	52	23.6	AV	L1	GND
0.518000	35.80	9.8	46	10.2	AV	L1	GND
0.962000	31.40	10.0	46	14.6	AV	L1	GND
2.468000	26.30	10.3	46	19.7	AV	L1	GND
5.210000	24.00	10.4	50	26.0	AV	L1	GND
13.058000	18.60	10.6	50	31.4	AV	L1	GND

LINE

N

**SCAN TABLE: "Vo1 (9K-30M) FIN-N"**

Short Description: 150K-30M Voltage

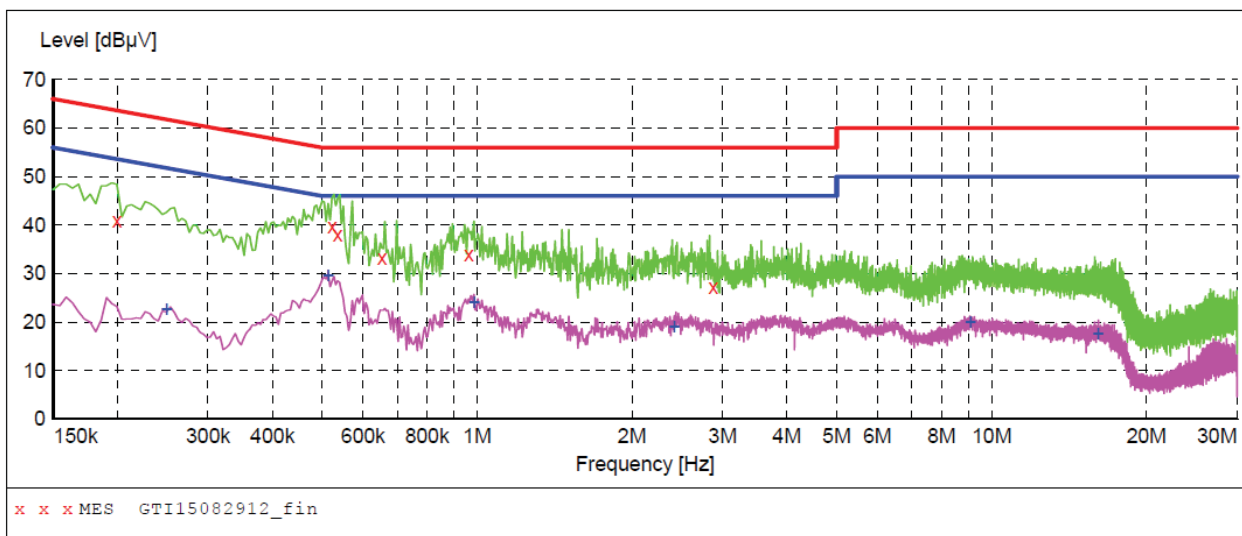
**MEASUREMENT RESULT: "GTI15082912\_fin"**

8/29/2015 3:04PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.199500	40.90	9.5	64	22.7	QP	N	GND
0.522500	39.80	9.6	56	16.2	QP	N	GND
0.536000	38.10	9.6	56	17.9	QP	N	GND
0.653000	33.10	9.6	56	22.9	QP	N	GND
0.963500	34.00	9.7	56	22.0	QP	N	GND
2.876000	27.10	10.1	56	28.9	QP	N	GND

**MEASUREMENT RESULT: "GTI15082912\_fin2"**

8/29/2015 3:04PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.249000	22.50	9.5	52	29.3	AV	N	GND
0.513500	29.50	9.5	46	16.5	AV	N	GND
0.986000	24.10	9.7	46	21.9	AV	N	GND
2.412500	19.10	10.1	46	26.9	AV	N	GND
9.090500	20.00	10.3	50	30.0	AV	N	GND
16.097000	17.50	10.4	50	32.5	AV	N	GND



## 3.2. Radiated Emission

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example


Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
150.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$


## Test Configuration

For the actual test configuration, please refer to the related Item –EUT Test Photos.


### Frequency range 9 KHz – 30MHz

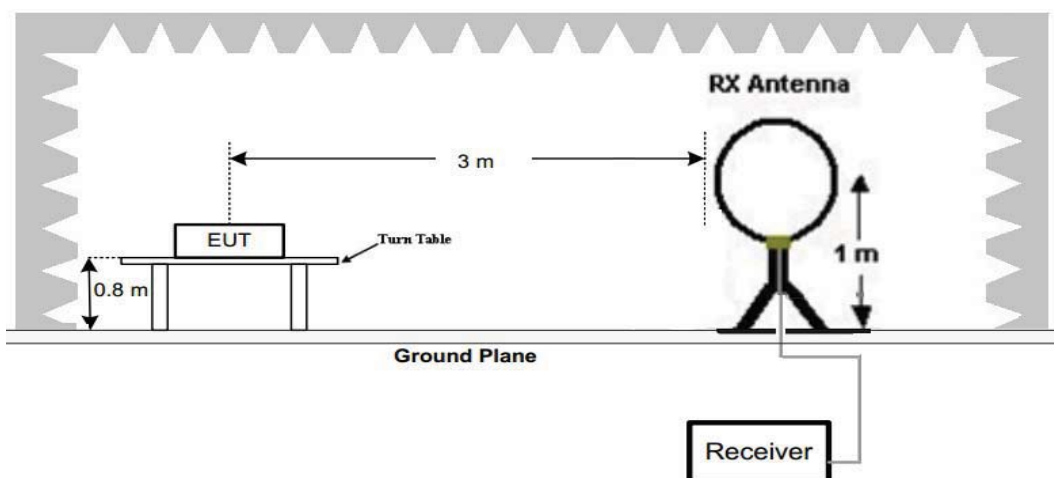

### Frequency range 30MHz – 1000MHz

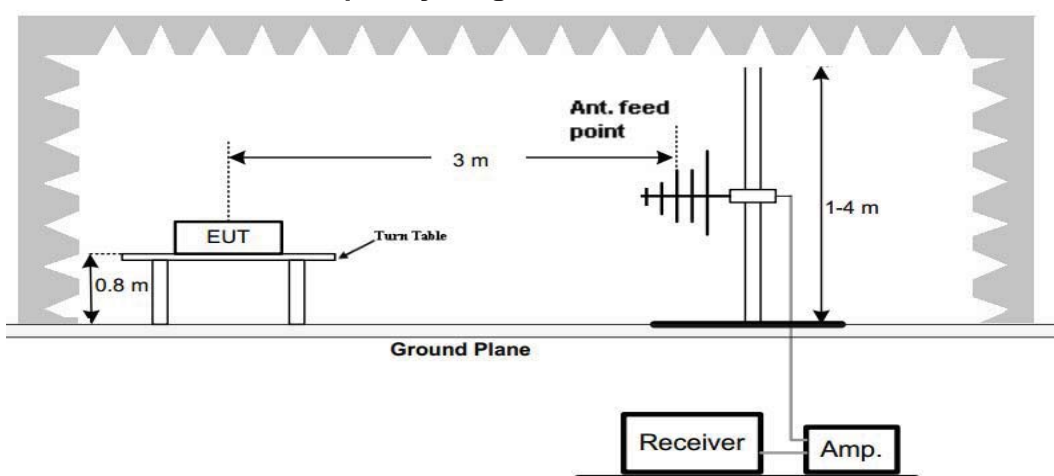

### Frequency range above 1GHz-25GHz

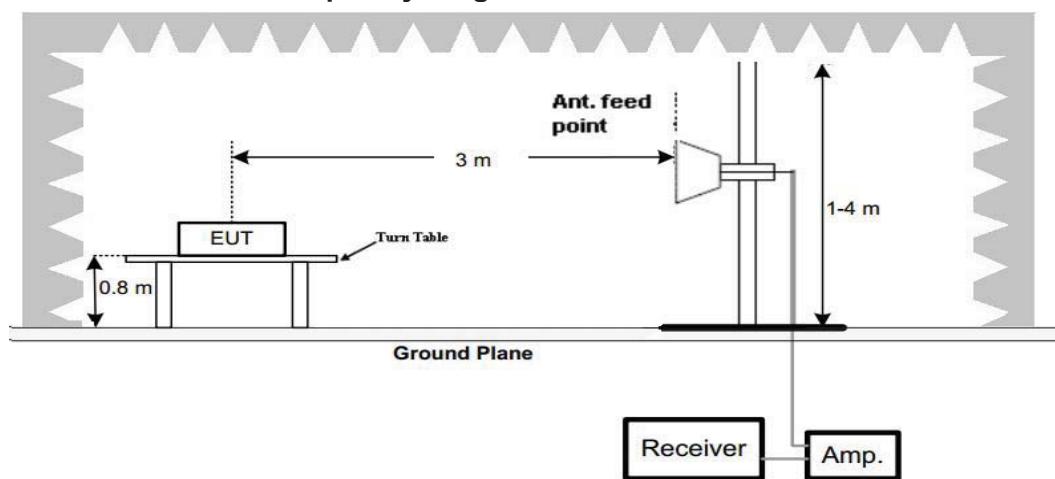

## Test Results

Remark:

1. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK mode.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Z axis” position was the worst, and test data recorded in this report.


# A. SeeSwitch 5S/SmartPanel 52

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.25	55.02	99.65	44.63	Peak	PASS
1.57	48.12	63.69	15.57	QP	PASS
12.46	33.20	69.54	36.34	QP	PASS
24.12	47.86	69.54	21.68	QP	PASS


For 30MHz-1GHz

Horizontal

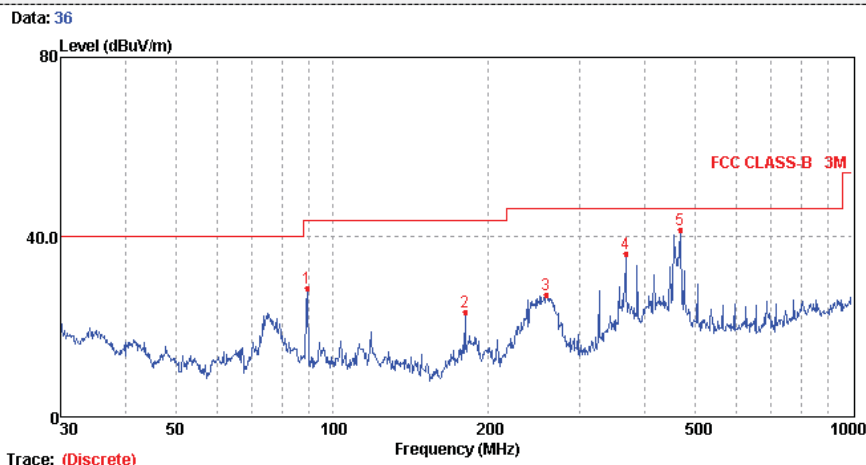

Mark	Frequency MHz	Level dBuV/m	Factor dB/m	Reading dBuV	Limit dBuV/m	Margin dB	Polarization	Detector
1	89.59	28.29	-20.37	48.66	43.50	15.21	HORIZONTAL	Peak
2	180.02	22.89	-19.81	42.70	43.50	20.61	HORIZONTAL	Peak
3	258.33	26.82	-17.55	44.37	46.00	19.18	HORIZONTAL	Peak
4	366.82	35.91	-14.57	50.48	46.00	10.09	HORIZONTAL	Peak
5	467.24	41.41	-12.08	53.49	46.00	4.59	HORIZONTAL	Peak

Vertical

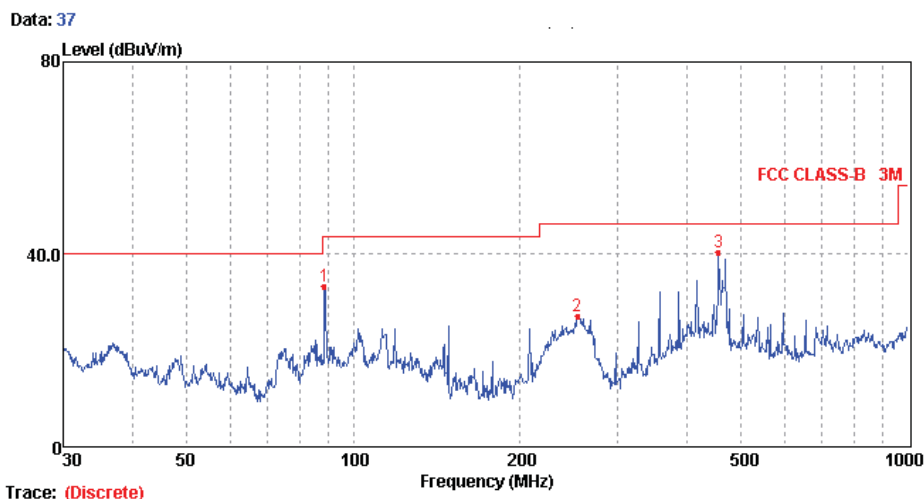

Mark	Frequency MHz	Level dBuV/m	Factor dB/m	Reading dBuV	Limit dBuV/m	Margin dB	Polarization	Detector
1	88.65	33.14	-20.52	53.66	43.50	10.36	VERTICAL	Peak
2	253.84	26.79	-17.57	44.36	46.00	19.21	VERTICAL	Peak
3	455.91	40.28	-12.27	52.55	46.00	5.72	VERTICAL	Peak





## For 1GHz to 25GHz

## GFSK Mode (above 1GHz)

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	46.95	PK	74.00	27.05	1.00	164	45.05	31.42	6.98	36.5	1.90
1	4804.00	36.16	AV	54.00	17.84	1.00	164	34.26	31.42	6.98	36.5	1.90
2	7206.00	40.65	PK	74.00	33.35	1.00	164	30.05	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	46.42	PK	74.00	27.58	1.00	240	44.52	31.42	6.98	36.5	1.90
1	4804.00	35.72	AV	54.00	18.28	1.00	240	33.82	31.42	6.98	36.5	1.90
2	7206.00	40.98	PK	74.00	33.02	1.00	240	30.38	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	47.04	PK	74.00	26.96	1.00	165	44.98	30.98	7.58	36.5	2.06
1	4882.00	36.23	AV	54.00	17.77	1.00	165	34.17	30.98	7.58	36.5	2.06
2	7323.00	39.02	PK	74.00	34.98	1.00	165	28.10	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	44.86	PK	74.00	29.14	1.00	232	42.80	30.98	7.58	36.5	2.06
1	4882.00	38.17	AV	54.00	15.83	1.00	232	36.11	30.98	7.58	36.5	2.06
2	7323.00	40.55	PK	74.00	33.45	1.00	232	29.63	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	46.79	PK	74.00	27.21	1.00	170	43.72	31.47	7.80	36.2	3.07
1	4960.00	35.66	AV	54.00	18.34	1.00	170	32.59	31.47	7.80	36.2	3.07
2	7340.00	38.79	PK	74.00	35.21	1.00	170	27.05	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	46.34	PK	74.00	27.66	1.00	210	43.27	31.47	7.80	36.2	3.07
1	4960.00	35.77	AV	54.00	18.23	1.00	210	32.70	31.47	7.80	36.2	3.07
2	7340.00	39.97	PK	74.00	34.03	1.00	210	28.23	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

### $\pi/4$ DQPSK Mode (above 1GHz)

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.87	PK	74.00	28.13	1.00	168	43.97	31.42	6.98	36.5	1.90
1	4804.00	35.58	AV	54.00	18.42	1.00	168	33.68	31.42	6.98	36.5	1.90
2	7206.00	38.98	PK	74.00	35.02	1.00	168	28.38	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	43.68	PK	74.00	30.32	1.00	215	41.78	31.42	6.98	36.5	1.90
1	4804.00	34.76	AV	54.00	19.24	1.00	215	32.86	31.42	6.98	36.5	1.90
2	7206.00	38.68	PK	74.00	35.32	1.00	215	28.08	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.03	PK	74.00	28.97	1.00	146	42.97	30.98	7.58	36.5	2.06
1	4882.00	34.55	AV	54.00	19.45	1.00	146	32.49	30.98	7.58	36.5	2.06
2	7323.00	38.80	PK	74.00	35.20	1.00	146	27.88	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.15	PK	74.00	28.85	1.00	226	43.09	30.98	7.58	36.5	2.06
1	4882.00	34.88	AV	54.00	19.12	1.00	226	32.82	30.98	7.58	36.5	2.06
2	7323.00	39.00	PK	74.00	35.00	1.00	226	28.08	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	45.12	PK	74.00	28.88	1.00	150	42.05	31.47	7.80	36.2	3.07
1	4960.00	34.32	AV	54.00	19.68	1.00	150	31.25	31.47	7.80	36.2	3.07
2	7340.00	37.73	PK	74.00	36.27	1.00	150	25.99	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	44.73	PK	74.00	29.27	1.00	241	44.73	31.47	7.80	36.2	3.07
1	4960.00	35.61	AV	54.00	18.39	1.00	241	35.61	31.47	7.80	36.2	3.07
2	7340.00	38.75	PK	74.00	35.25	1.00	241	38.75	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

**8DPSK Mode (above 1GHz)**

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.69	PK	74.00	28.31	1.00	165	43.79	31.42	6.98	36.5	1.90
1	4804.00	35.74	AV	54.00	18.26	1.00	165	33.84	31.42	6.98	36.5	1.90
2	7206.00	39.72	PK	74.00	34.28	1.00	165	29.12	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	44.23	PK	74.00	29.77	1.00	221	42.33	31.42	6.98	36.5	1.90
1	4804.00	33.63	AV	54.00	20.37	1.00	221	31.73	31.42	6.98	36.5	1.90
2	7206.00	38.95	PK	74.00	35.05	1.00	221	28.35	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.93	PK	74.00	28.07	1.00	149	43.87	30.98	7.58	36.5	2.06
1	4882.00	36.06	AV	54.00	17.94	1.00	149	34.00	30.98	7.58	36.5	2.06
2	7323.00	37.76	PK	74.00	36.24	1.00	149	26.84	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	44.65	PK	74.00	29.35	1.00	215	42.59	30.98	7.58	36.5	2.06
1	4882.00	34.99	AV	54.00	19.01	1.00	215	32.93	30.98	7.58	36.5	2.06
2	7323.00	39.13	PK	74.00	34.87	1.00	215	28.21	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	45.62	PK	74.00	28.38	1.00	169	42.55	31.47	7.80	36.2	3.07
1	4960.00	36.27	AV	54.00	17.73	1.00	169	33.20	31.47	7.80	36.2	3.07
2	7340.00	36.44	PK	74.00	37.56	1.00	169	24.70	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	45.41	PK	74.00	28.59	1.00	232	42.34	31.47	7.80	36.2	3.07
1	4960.00	36.74	AV	54.00	17.26	1.00	232	33.67	31.47	7.80	36.2	3.07
2	7340.00	39.44	PK	74.00	34.56	1.00	232	27.70	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

# B. SeeSwitch 4S/SmartPanel 42


For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.27	54.21	98.98	44.77	Peak	PASS
1.55	47.86	63.80	15.94	QP	PASS
12.52	32.27	69.54	37.27	QP	PASS
24.36	47.51	69.54	22.03	QP	PASS

For 30MHz-1GHz

Horizontal

Data: 35

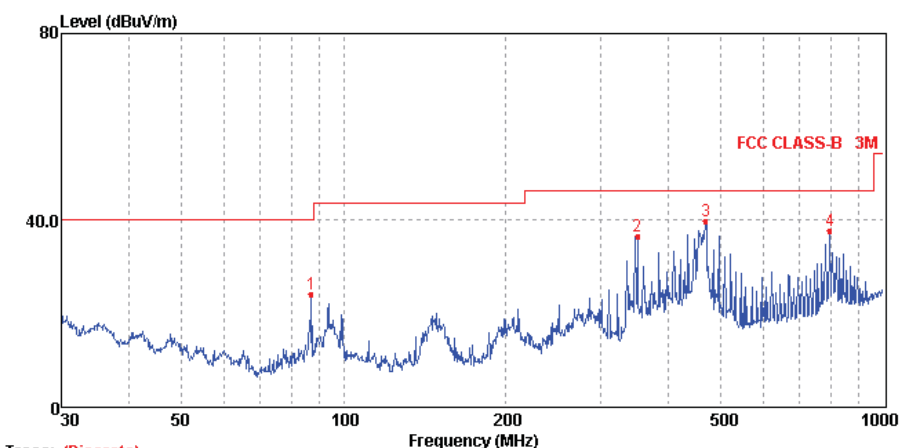


Trace: (Discrete)

Mark	Frequency MHz	Level dBuV/m	Factor dB/m	Reading dBuV	Limit dBuV/m	Margin dB	Polarization	Detector
1	87.11	23.79	-20.66	44.45	40.00	16.21	HORIZONTAL	Peak
2	350.48	36.15	-15.24	51.39	46.00	9.85	HORIZONTAL	Peak
3	468.88	39.59	-12.07	51.66	46.00	6.41	HORIZONTAL	Peak
4	796.18	37.42	-7.32	44.74	46.00	8.58	HORIZONTAL	Peak

Vertical

Data: 34

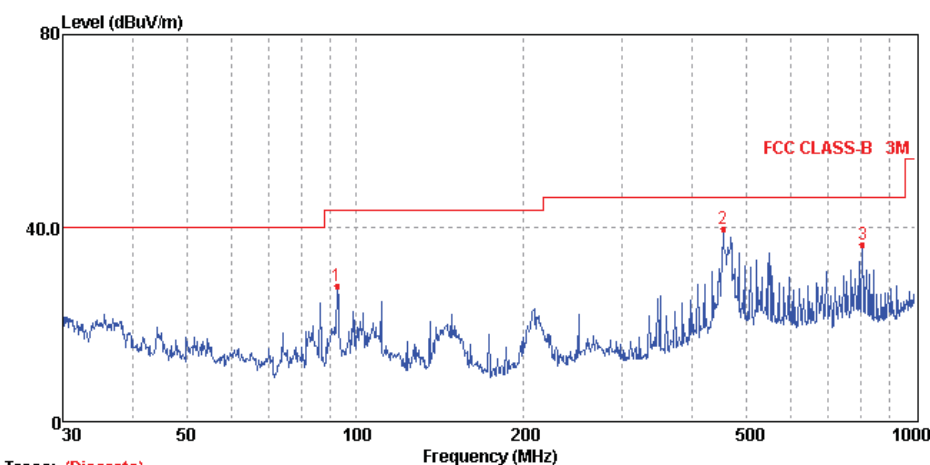

Trace: (Discrete)

Mark	Frequency MHz	Level dBuV/m	Factor dB/m	Reading dBuV	Limit dBuV/m	Margin dB	Polarization	Detector
1	92.79	27.76	-19.97	47.73	43.50	15.74	VERTICAL	Peak
2	454.31	39.69	-12.31	52.00	46.00	6.31	VERTICAL	Peak
3	804.60	36.18	-7.22	43.40	46.00	9.82	VERTICAL	Peak



## For 1GHz to 25GHz

## GFSK Mode (above 1GHz)

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	46.66	PK	74.00	27.34	1.00	152	44.76	31.42	6.98	36.5	1.90
1	4804.00	37.48	AV	54.00	16.52	1.00	152	35.58	31.42	6.98	36.5	1.90
2	7206.00	41.36	PK	74.00	32.64	1.00	152	30.76	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.42	PK	74.00	28.58	1.00	241	43.52	31.42	6.98	36.5	1.90
1	4804.00	35.98	AV	54.00	18.02	1.00	241	34.08	31.42	6.98	36.5	1.90
2	7206.00	40.56	PK	74.00	33.44	1.00	241	29.96	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	47.38	PK	74.00	26.62	1.00	138	45.32	30.98	7.58	36.5	2.06
1	4882.00	38.40	AV	54.00	15.60	1.00	138	36.34	30.98	7.58	36.5	2.06
2	7323.00	40.92	PK	74.00	33.08	1.00	138	30.00	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.22	PK	74.00	28.78	1.00	247	43.16	30.98	7.58	36.5	2.06
1	4882.00	36.55	AV	54.00	17.45	1.00	247	34.49	30.98	7.58	36.5	2.06
2	7323.00	39.61	PK	74.00	34.39	1.00	247	28.69	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	47.14	PK	74.00	26.86	1.00	123	44.07	31.47	7.80	36.2	3.07
1	4960.00	36.48	AV	54.00	17.52	1.00	123	33.41	31.47	7.80	36.2	3.07
2	7340.00	38.45	PK	74.00	35.55	1.00	123	26.71	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	45.14	PK	74.00	28.86	1.00	236	42.07	31.47	7.80	36.2	3.07
1	4960.00	37.94	AV	54.00	16.06	1.00	236	34.87	31.47	7.80	36.2	3.07
2	7340.00	40.62	PK	74.00	33.38	1.00	236	28.88	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--



### $\pi/4$ DQPSK Mode (above 1GHz)

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.52	PK	74.00	28.48	1.00	160	43.62	31.42	6.98	36.5	1.90
1	4804.00	36.56	AV	54.00	17.44	1.00	160	34.66	31.42	6.98	36.5	1.90
2	7206.00	38.90	PK	74.00	35.10	1.00	160	28.30	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.26	PK	74.00	28.74	1.00	235	43.36	31.42	6.98	36.5	1.90
1	4804.00	33.69	AV	54.00	20.31	1.00	235	31.79	31.42	6.98	36.5	1.90
2	7206.00	39.49	PK	74.00	34.51	1.00	235	28.89	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.86	PK	74.00	28.14	1.00	146	43.80	30.98	7.58	36.5	2.06
1	4882.00	35.92	AV	54.00	18.08	1.00	146	33.86	30.98	7.58	36.5	2.06
2	7323.00	39.34	PK	74.00	34.66	1.00	146	28.42	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	45.57	PK	74.00	28.43	1.00	241	43.51	30.98	7.58	36.5	2.06
1	4882.00	36.38	AV	54.00	17.62	1.00	241	34.32	30.98	7.58	36.5	2.06
2	7323.00	38.85	PK	74.00	35.15	1.00	241	27.93	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	46.04	PK	74.00	27.96	1.00	131	42.97	31.47	7.80	36.2	3.07
1	4960.00	35.71	AV	54.00	18.29	1.00	131	32.64	31.47	7.80	36.2	3.07
2	7340.00	39.00	PK	74.00	35.00	1.00	131	27.26	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	45.95	PK	74.00	28.05	1.00	230	42.88	31.47	7.80	36.2	3.07
1	4960.00	36.07	AV	54.00	17.93	1.00	230	33.00	31.47	7.80	36.2	3.07
2	7340.00	39.55	PK	74.00	34.45	1.00	230	27.81	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

**8DPSK Mode (above 1GHz)**

Frequency(MHz):				2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	45.66	PK	74.00	28.34	1.00	148	43.76	31.42	6.98	36.5	1.90
1	4804.00	34.63	AV	54.00	19.37	1.00	148	32.73	31.42	6.98	36.5	1.90
2	7206.00	40.37	PK	74.00	33.63	1.00	148	29.77	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2402			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4804.00	44.48	PK	74.00	29.52	1.00	242	42.58	31.42	6.98	36.5	1.90
1	4804.00	34.64	AV	54.00	19.36	1.00	242	32.74	31.42	6.98	36.5	1.90
2	7206.00	38.51	PK	74.00	35.49	1.00	242	27.91	37.03	8.87	35.3	10.60
2	7206.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	44.74	PK	74.00	29.26	1.00	134	42.68	30.98	7.58	36.5	2.06
1	4882.00	33.93	AV	54.00	20.07	1.00	134	31.87	30.98	7.58	36.5	2.06
2	7323.00	38.19	PK	74.00	35.81	1.00	134	27.27	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2441			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4882.00	44.79	PK	74.00	29.21	1.00	248	42.73	30.98	7.58	36.5	2.06
1	4882.00	34.86	AV	54.00	19.14	1.00	248	32.80	30.98	7.58	36.5	2.06
2	7323.00	38.91	PK	74.00	35.09	1.00	248	27.99	37.66	8.56	35.3	10.92
2	7323.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	44.62	PK	74.00	29.38	1.00	119	41.55	31.47	7.80	36.2	3.07
1	4960.00	35.50	AV	54.00	18.50	1.00	119	32.43	31.47	7.80	36.2	3.07
2	7340.00	37.64	PK	74.00	36.36	1.00	119	25.90	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--

Frequency(MHz):				2480			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4960.00	44.30	PK	74.00	29.70	1.00	237	41.23	31.47	7.80	36.2	3.07
1	4960.00	34.95	AV	54.00	19.05	1.00	237	31.88	31.47	7.80	36.2	3.07
2	7340.00	37.24	PK	74.00	36.76	1.00	237	25.50	38.32	8.72	35.3	11.74
2	7340.00	--	AV	--	--	--	--	--	--	--	--	--



## REMARKS:

6. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
7. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
8. Margin value = Limit value - Emission level.
9. -- Mean the PK detector measured value is below average limit.
10. The other emission levels were very low against the limit.

### 3.3. Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

#### Test Configuration

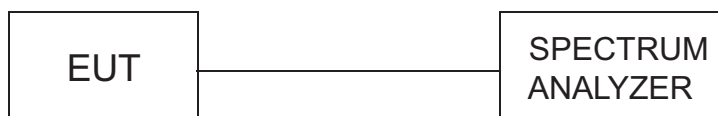


#### Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.03	30.00	Pass
	39	4.16		
	78	3.66		
$\pi/4$ DQPSK	00	2.56	30.00	Pass
	39	2.42		
	78	2.23		
8DPSK	00	2.90	30.00	Pass
	39	3.42		
	78	3.03		


Note: 1.The test results including the cable lose.

Test plot as follows:


### GFSK Modulation

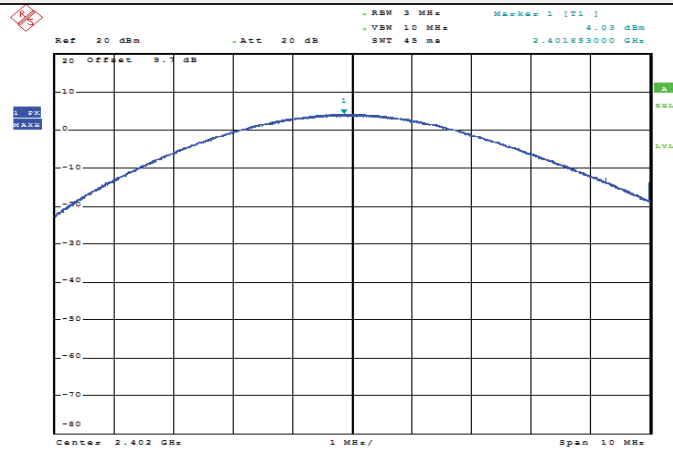

### CH00

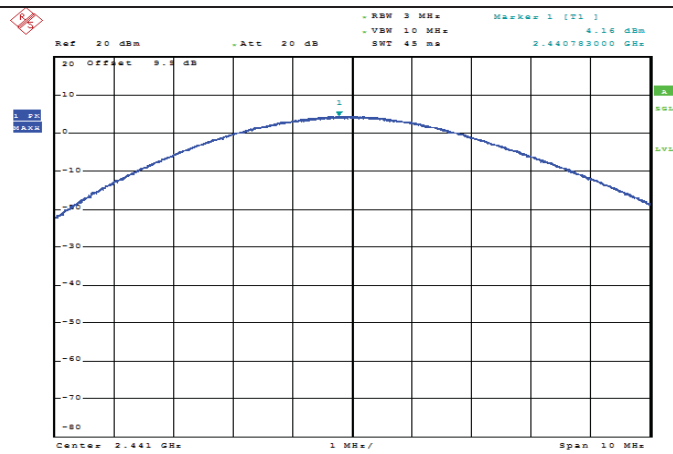


### CH39

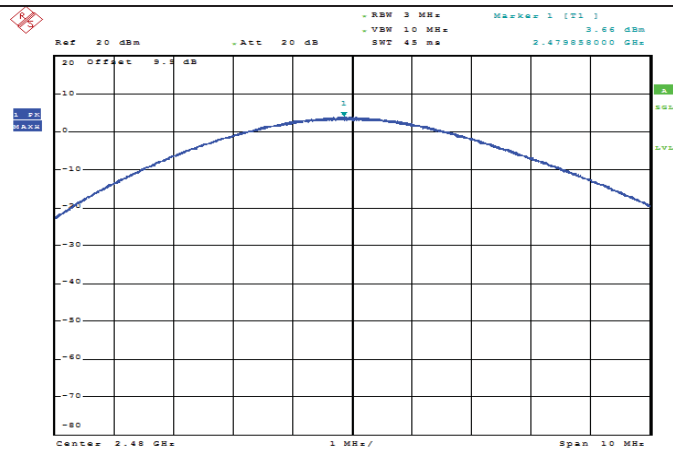


### CH78


### $\pi/4$ DQPSK Modulation

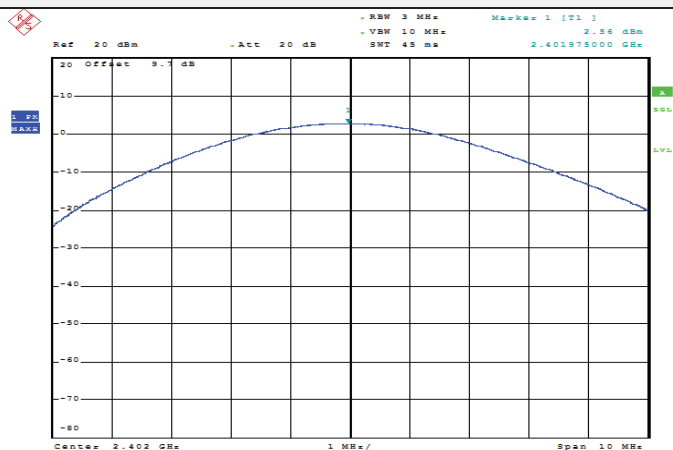

### CH00

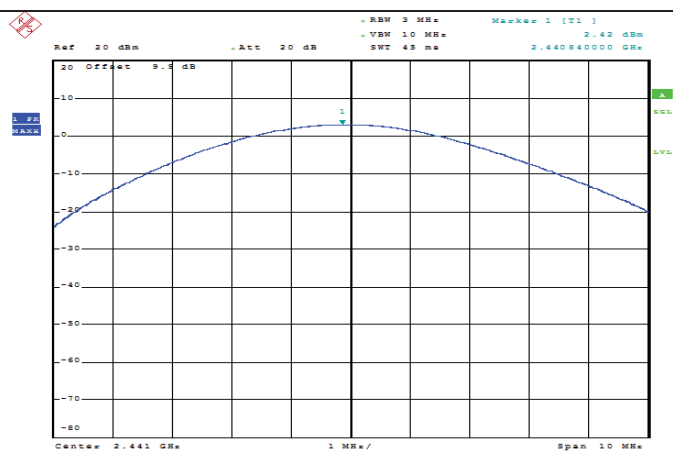


### CH39

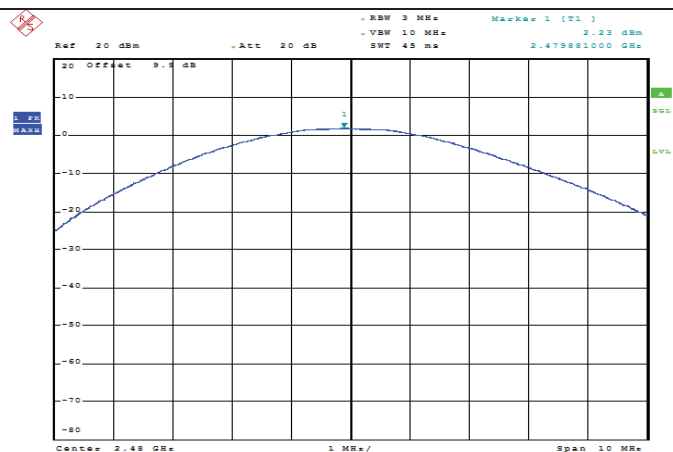


### CH78


### 8DPSK Modulation

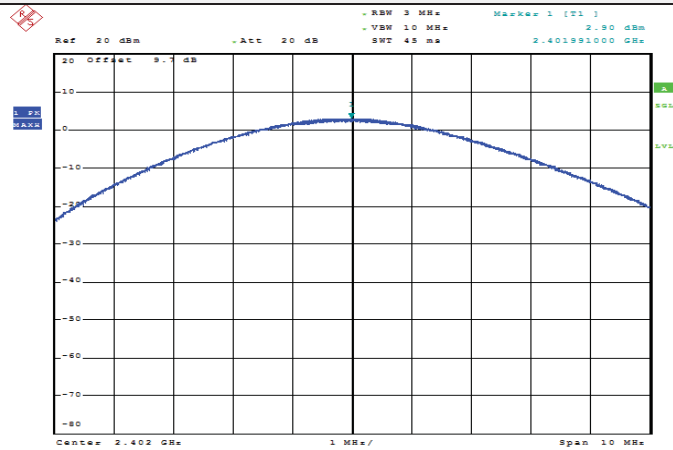

### CH00

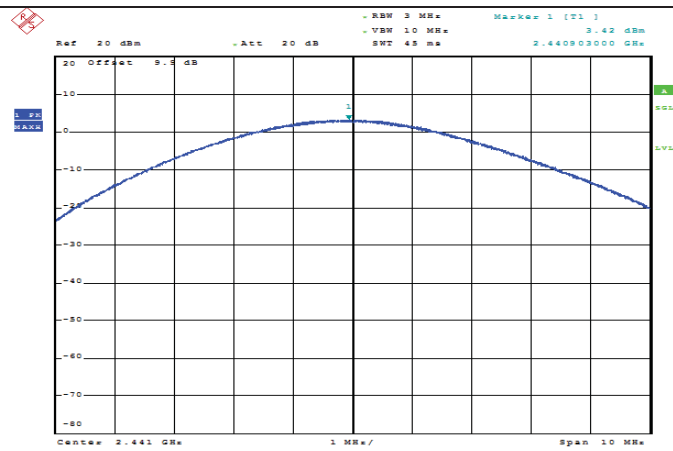

### CH39

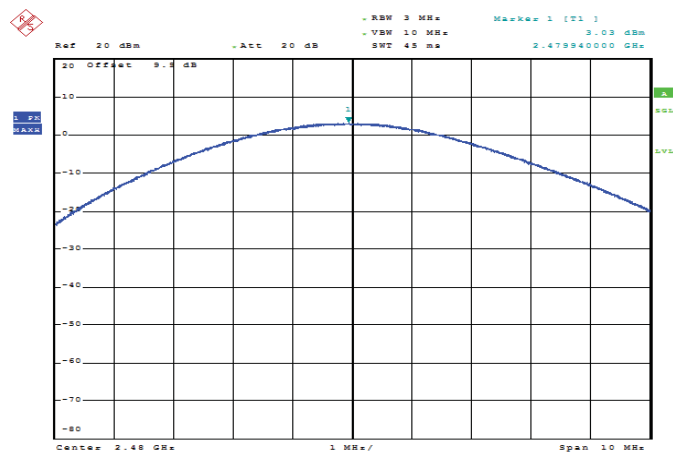

### CH78

### 3.4. 20dB Bandwidth

#### Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Configuration

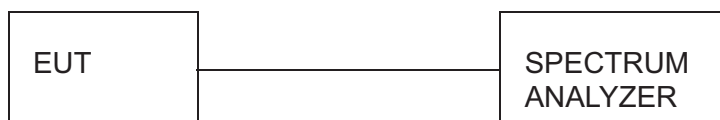


#### Test Results


Modulation	Channel	20dB bandwidth (MHz)	99% OBW(MHz)	Result
GFSK	CH00	1.038	0.905	Pass
	CH39	1.039	0.910	
	CH78	1.040	0.912	
$\pi/4$ DQPSK	CH00	1.355	1.198	
	CH39	1.332	1.198	
	CH78	1.357	1.196	
8DPSK	CH00	1.291	1.172	
	CH39	1.290	1.172	
	CH78	1.292	1.171	

Test plot as follows:


### GFSK Modulation

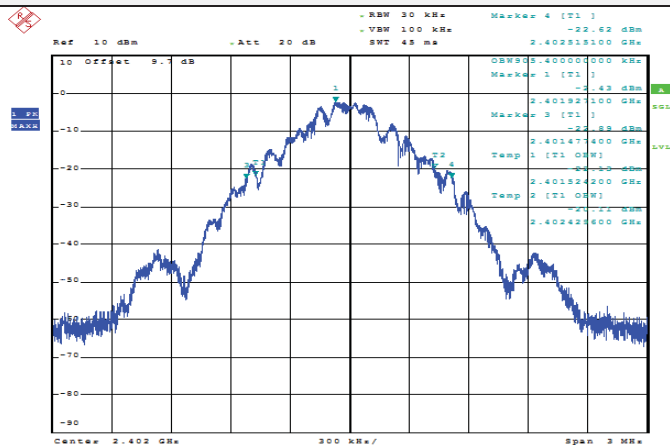

### CH00

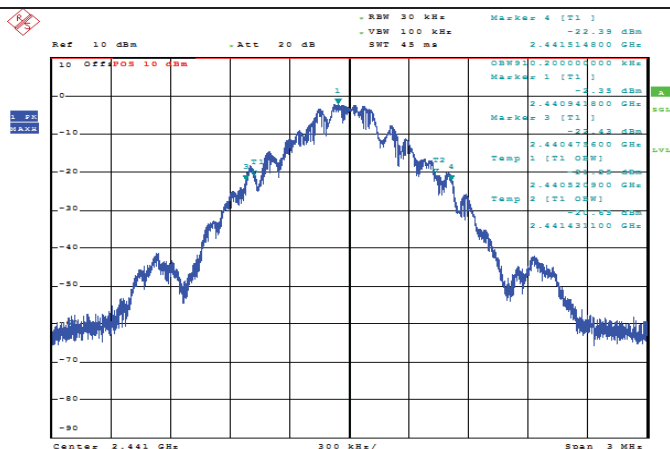


### CH39

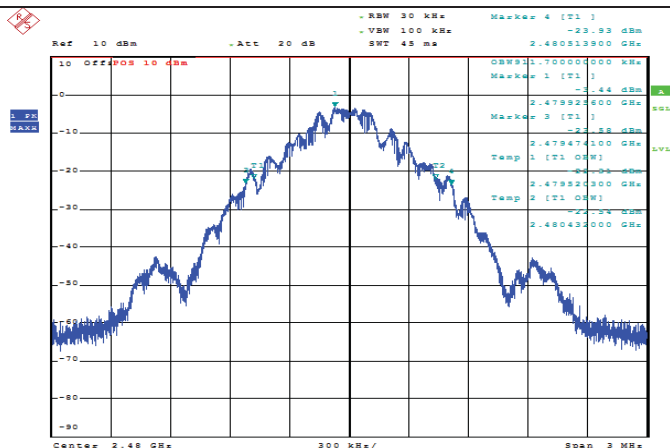


### CH78


### $\pi/4$ DQPSK Modulation

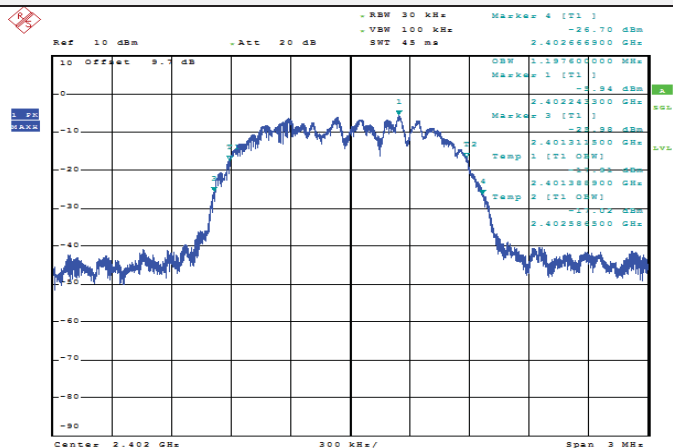

### CH00

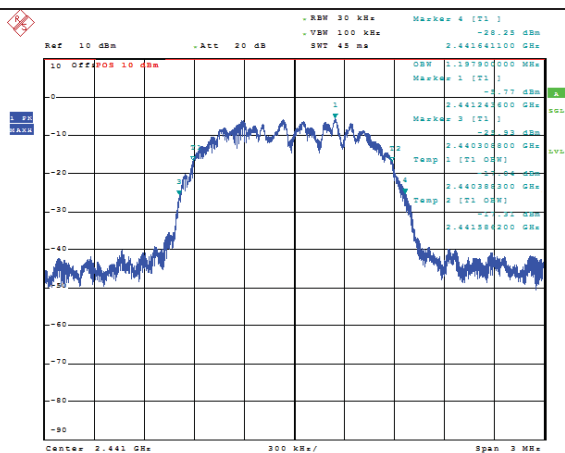


### CH39

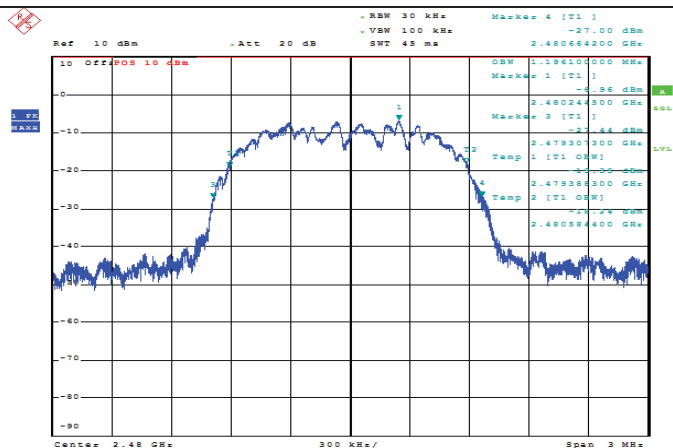


### CH78




### 8DPSK Modulation

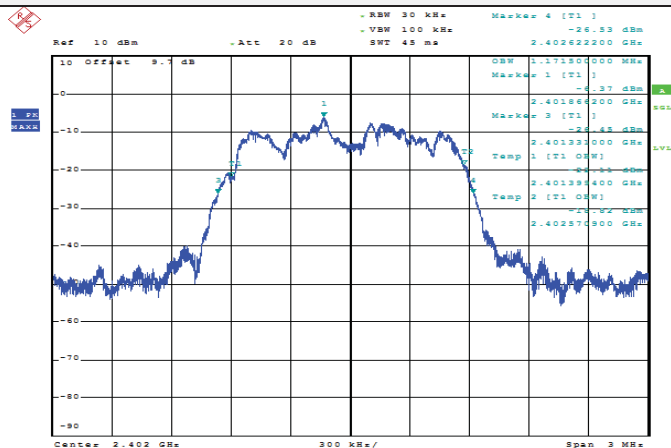

### CH00

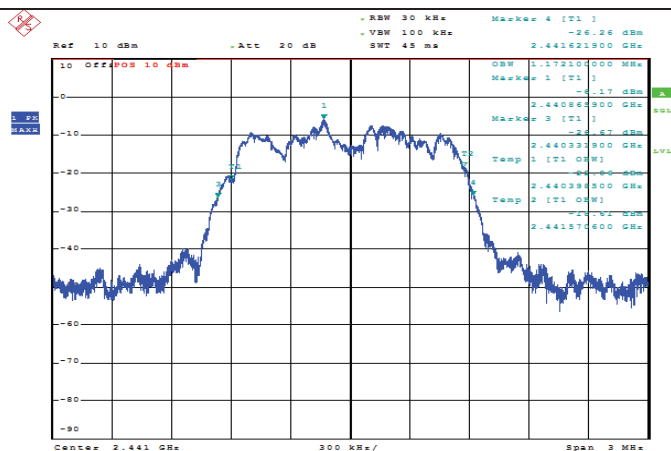

### CH39

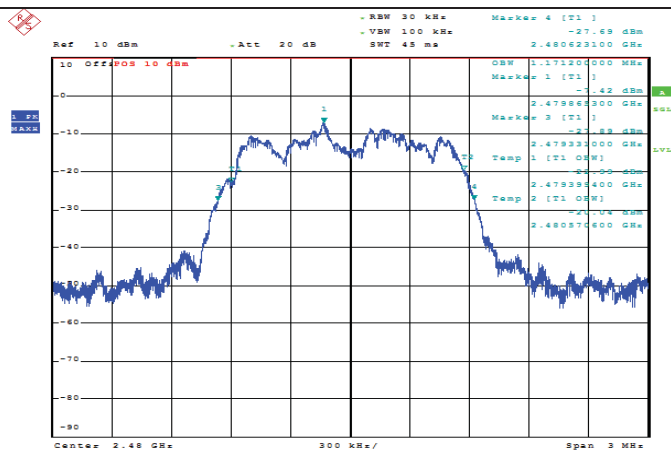

### CH78

### 3.5. Band Edge

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **Test Procedure**

##### **Test Procedure for conducted method**

1. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a spectrum analyzer
2. Turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer RBW =100 kHz and VBW=300 kHz
4. Use spectrum analyzer Maxhold function to allow trace to fully stabilize
5. Marker the highest point which fall into restricted frequency bands
6. Repeat above procedures until all measured frequencies were complete.

##### **Test Procedure for radiated method**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
7. Test the EUT in the lowest channel, the highest channel
8. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
9. Repeat above procedures until all frequencies measured was complete.


#### **TEST RESULTS**

Remark: we measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

# A. Conducted Bandedge Measurement


## GFSK

Frequency (MHz)	Delta Peak to Band emission (dBc)	Hopping Mode	Limit (dBc)	Verdict
2375.906	53.014	OFF	20	PASS
2378.816	53.577	ON	20	PASS
2496.101	53.246	OFF	20	PASS
2487.980	48.422	ON	20	PASS

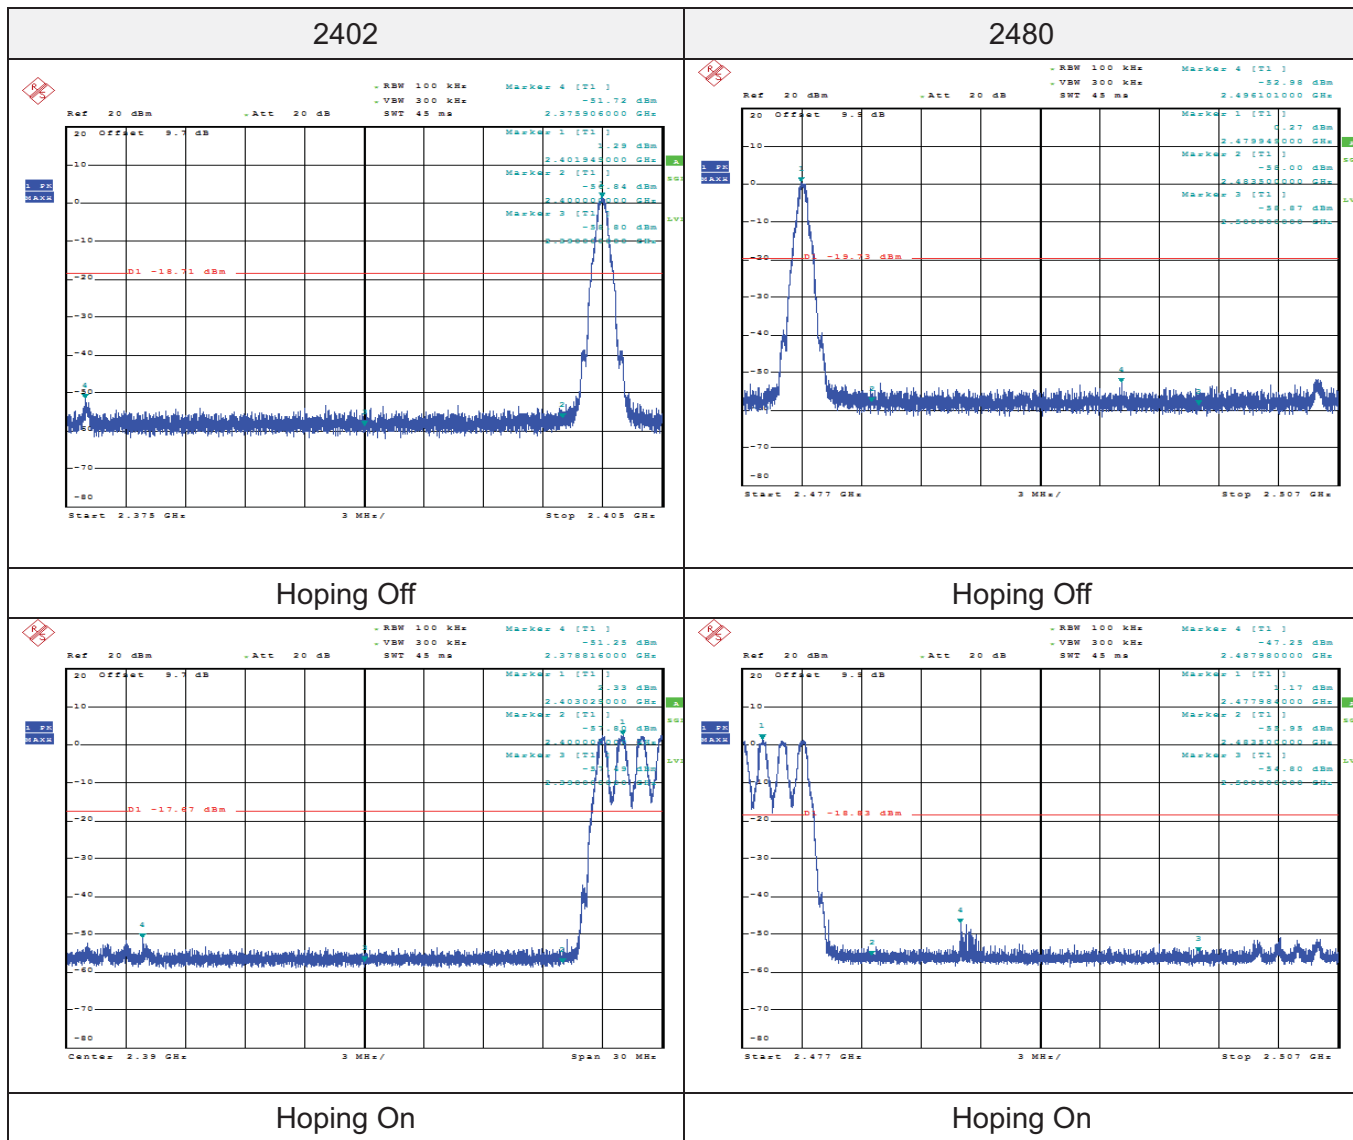


$\pi/4$ DQPSK

Frequency (MHz)	Delta Peak to Band emission (dBc)	Hopping Mode	Limit (dBc)	Verdict
2379.101	52.004	OFF	20	PASS
2376.155	53.455	ON	20	PASS
2498.555	51.213	OFF	20	PASS
2497.112	51.885	ON	20	PASS

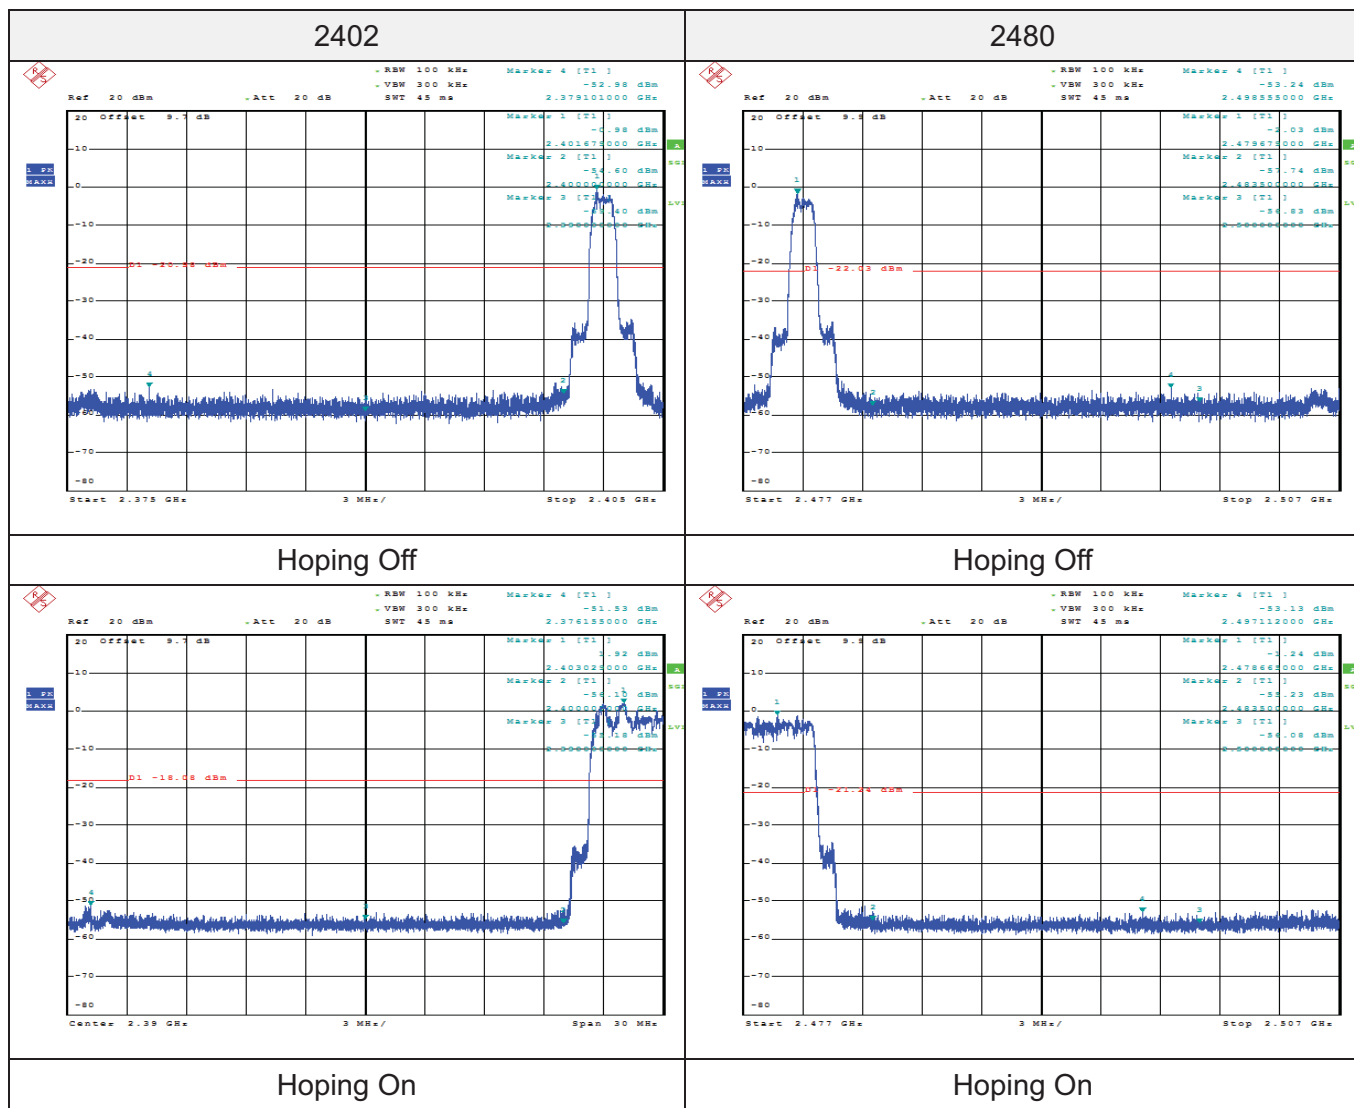

### 8DPSK

Frequency (MHz)	Delta Peak to Band emission (dBc)	Hopping Mode	Limit (dBc)	Verdict
2375.855	50.353	OFF	20	PASS
2382.857	52.480	ON	20	PASS
2492.813	48.435	OFF	20	PASS
2483.690	52.124	ON	20	PASS

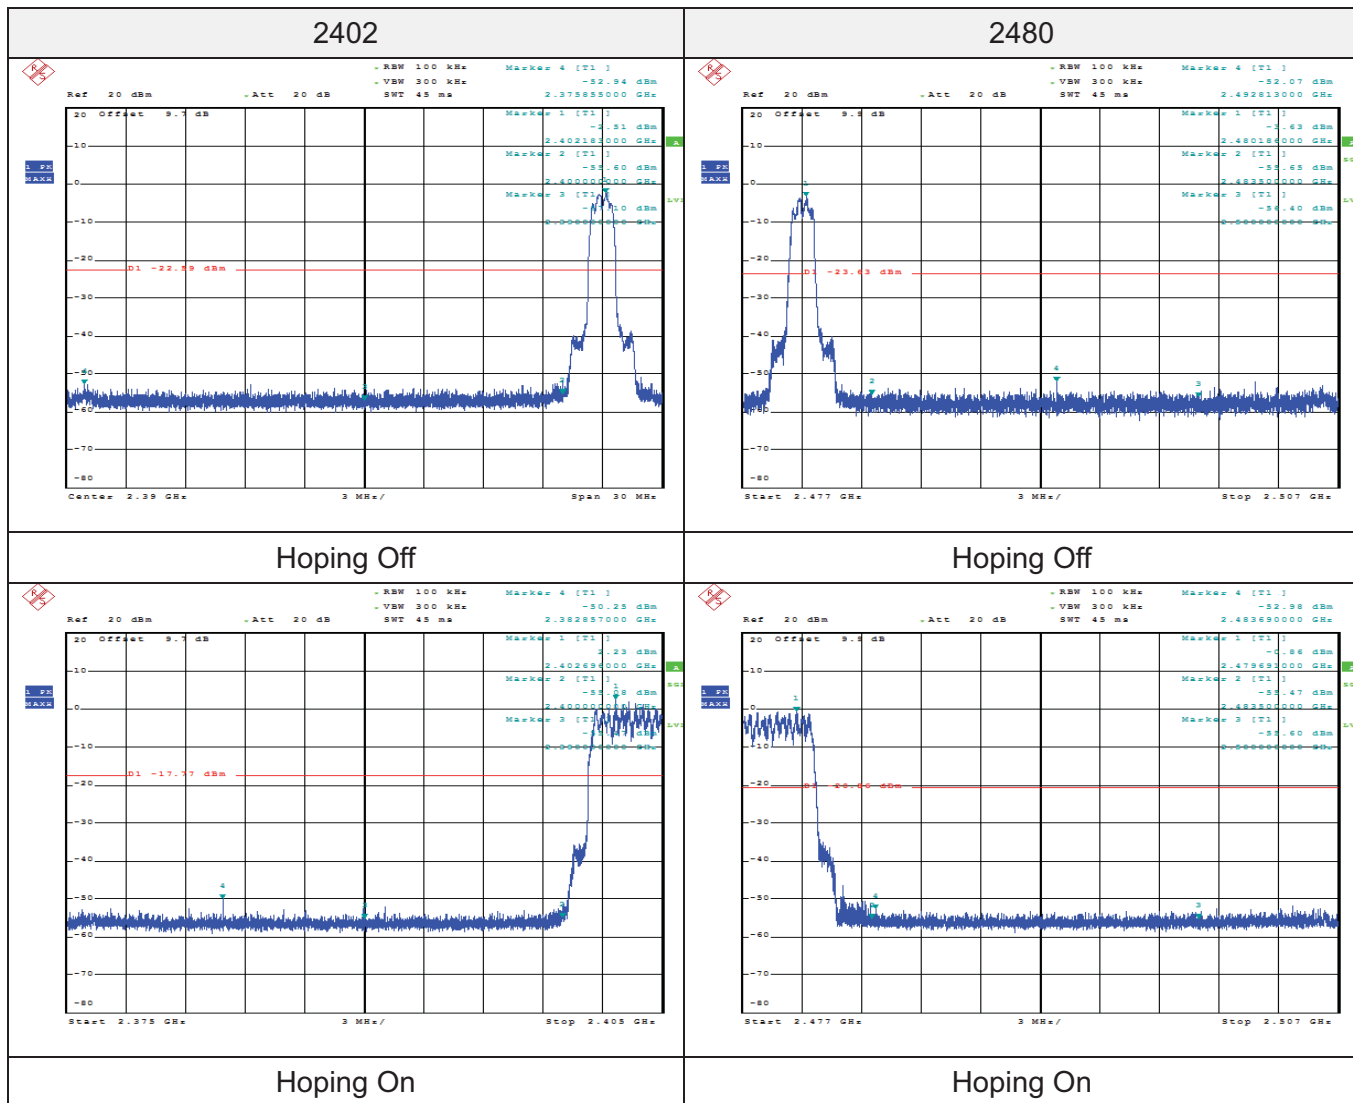

# A. Radiated measurements

## 1. SeeSwitch 5S/SmartPanel 52

### GFSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	47.59	PK	74.00	26.41	1.00	108	52.90	27.49	3.32	36.12	-5.31
2390.00	36.59	AV	54.00	17.41	1.00	108	41.90	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	48.22	PK	74.00	25.78	1.00	125	53.53	27.49	3.32	36.12	-5.31
2390.00	36.77	AV	54.00	17.23	1.00	125	42.08	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.76	PK	74.00	28.24	1.00	132	51.48	27.45	3.38	36.55	-5.72
2483.50	37.13	AV	54.00	16.87	1.00	132	42.85	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	47.10	PK	74.00	26.90	1.00	104	52.82	27.45	3.38	36.55	-5.72
2483.50	36.52	AV	54.00	17.48	1.00	104	42.24	27.45	3.38	36.55	-5.72

### $\pi/4$ DQPSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.97	PK	74.00	27.03	1.00	100	52.28	27.49	3.32	36.12	-5.31
2390.00	37.56	AV	54.00	16.44	1.00	100	42.87	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.97	PK	74.00	27.03	1.00	120	52.28	27.49	3.32	36.12	-5.31
2390.00	35.70	AV	54.00	18.30	1.00	120	41.01	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.19	PK	74.00	28.81	1.00	108	50.91	27.45	3.38	36.55	-5.72
2483.50	35.37	AV	54.00	18.63	1.00	108	41.09	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	46.43	PK	74.00	27.57	1.00	105	52.15	27.45	3.38	36.55	-5.72
2483.50	36.63	AV	54.00	17.37	1.00	105	42.35	27.45	3.38	36.55	-5.72

### 8DPSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.82	PK	74.00	27.18	1.00	85	52.13	27.49	3.32	36.12	-5.31
2390.00	36.14	AV	54.00	17.86	1.00	85	41.45	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	45.98	PK	74.00	28.02	1.00	120	51.29	27.49	3.32	36.12	-5.31
2390.00	36.12	AV	54.00	17.88	1.00	120	41.43	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	44.95	PK	74.00	29.05	1.00	93	50.67	27.45	3.38	36.55	-5.72
2483.50	36.74	AV	54.00	17.26	1.00	93	42.46	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.50	PK	74.00	28.50	1.00	105	51.22	27.45	3.38	36.55	-5.72
2483.50	35.48	AV	54.00	18.52	1.00	105	41.20	27.45	3.38	36.55	-5.72

## 2. SeeSwitch 4S/SmartPanel 42

### GFSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	47.21	PK	74.00	26.79	1.00	90	52.52	27.49	3.32	36.12	-5.31
2390.00	37.20	AV	54.00	16.80	1.00	90	42.51	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	47.82	PK	74.00	26.18	1.00	145	53.13	27.49	3.32	36.12	-5.31
2390.00	36.34	AV	54.00	17.66	1.00	145	41.65	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	46.21	PK	74.00	27.79	1.00	98	51.93	27.45	3.38	36.55	-5.72
2483.50	35.90	AV	54.00	18.10	1.00	98	41.62	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.60	PK	74.00	28.40	1.00	130	51.32	27.45	3.38	36.55	-5.72
2483.50	35.37	AV	54.00	18.63	1.00	130	41.09	27.45	3.38	36.55	-5.72



$\pi/4$ DQPSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.58	PK	74.00	27.42	1.00	95	51.89	27.49	3.32	36.12	-5.31
2390.00	34.98	AV	54.00	19.02	1.00	95	40.29	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.52	PK	74.00	27.48	1.00	140	51.83	27.49	3.32	36.12	-5.31
2390.00	35.37	AV	54.00	18.63	1.00	140	40.68	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.13	PK	74.00	28.87	1.00	105	50.85	27.45	3.38	36.55	-5.72
2483.50	35.59	AV	54.00	18.41	1.00	105	41.31	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	46.19	PK	74.00	27.81	1.00	134	51.91	27.45	3.38	36.55	-5.72
2483.50	36.75	AV	54.00	17.25	1.00	134	42.47	27.45	3.38	36.55	-5.72

## 8DPSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.49	PK	74.00	27.51	1.00	75	51.80	27.49	3.32	36.12	-5.31
2390.00	35.34	AV	54.00	18.66	1.00	75	40.65	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	46.45	PK	74.00	27.55	1.00	136	51.76	27.49	3.32	36.12	-5.31
2390.00	35.22	AV	54.00	18.78	1.00	136	40.53	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.63	PK	74.00	28.37	1.00	83	51.35	27.45	3.38	36.55	-5.72
2483.50	35.59	AV	54.00	18.41	1.00	83	41.31	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	45.00	PK	74.00	29.00	1.00	121	50.72	27.45	3.38	36.55	-5.72
2483.50	36.02	AV	54.00	17.98	1.00	121	41.74	27.45	3.38	36.55	-5.72



### 3.6. Frequency Separation


#### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100KHz VBW.

#### TEST CONFIGURATION

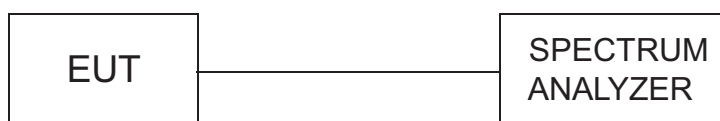


#### TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.000	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.000	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.000	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			


Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle


Test plot as follows:

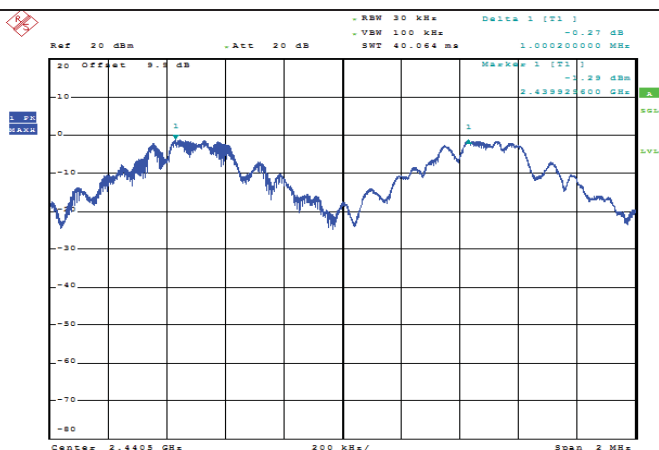

### GFSK

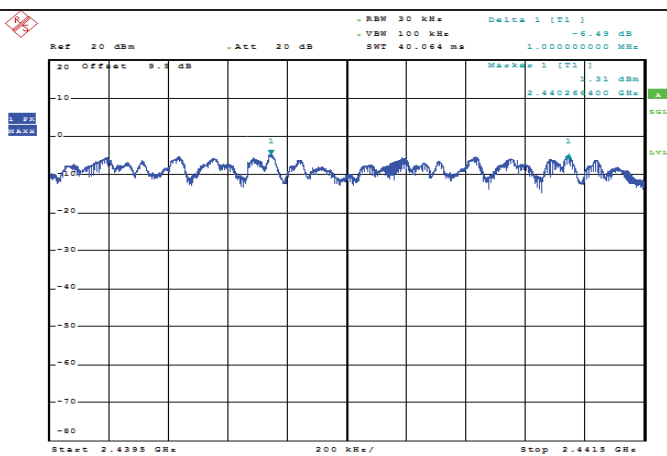

### $\pi/4$ DQPSK

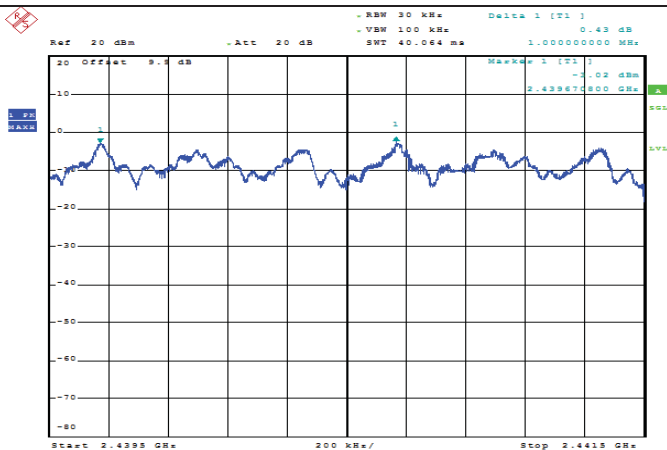

### 8DPSK

### 3.7. Number of hopping frequency

#### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.


#### Test Configuration




#### Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		


#### Test plot as follows:

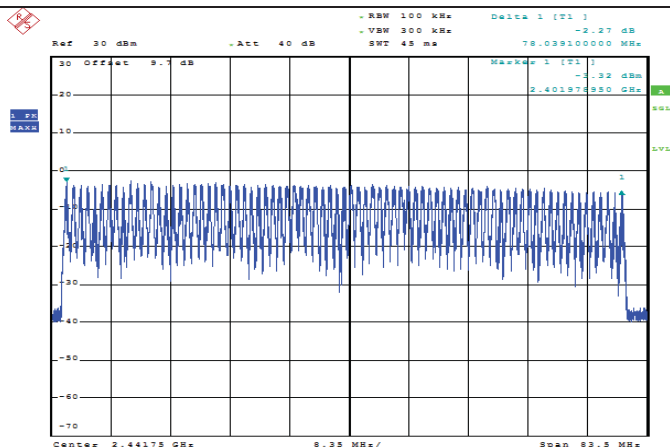

### GFSK Modulation

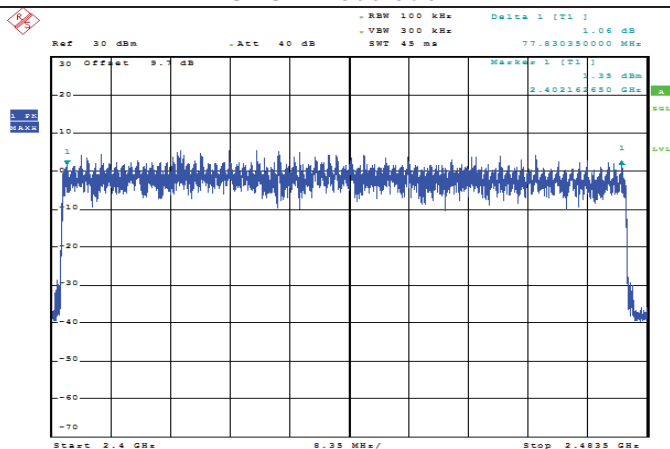

### $\pi/4$ DQPSK Modulation

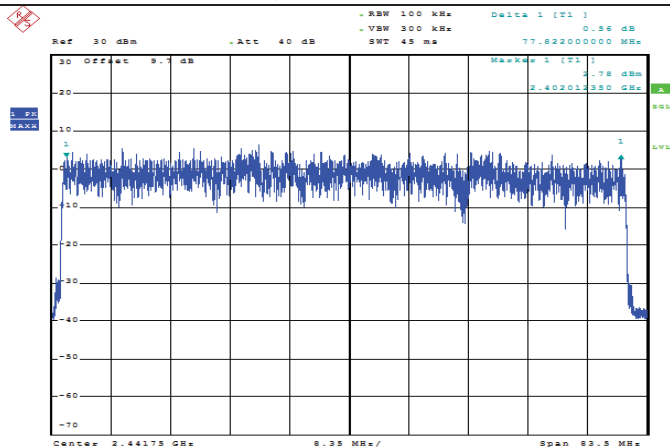

### 8DPSK Modulation

### 3.8. Time of Occupancy (Dwell Time)

#### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 3MHz VBW, Span 0Hz.

#### Test Configuration



#### Test Results


Modulation	Packet	Pulse time (s)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.371	0.119	0.40	Pass
	DH3	1.626	0.26		
	DH5	2.874	0.307		
$\pi/4$ DQPSK	2-DH1	0.378	0.121	0.40	Pass
	2-DH3	1.626	0.261		
	2-DH5	2.877	0.307		
8DPSK	3-DH1	0.378	0.042	0.40	Pass
	3-DH3	1.628	0.26		
	3-DH5	2.879	0.307		

Note:


1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$ 31.6 Second for DH1, 2-DH1, 3-DH1  
Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$ 31.6 Second for DH3, 2-DH3, 3-DH3  
Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$ 31.6 Second for DH5, 2-DH5, 3-DH5

#### Test plot as follows:


### GFSK Modulation

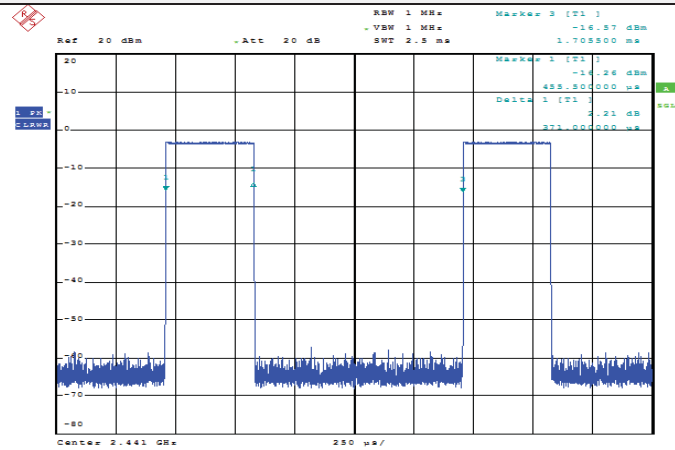

### DH1

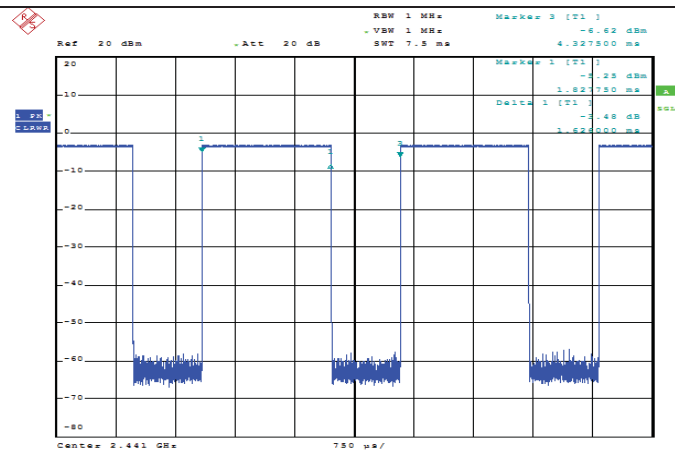


### DH3

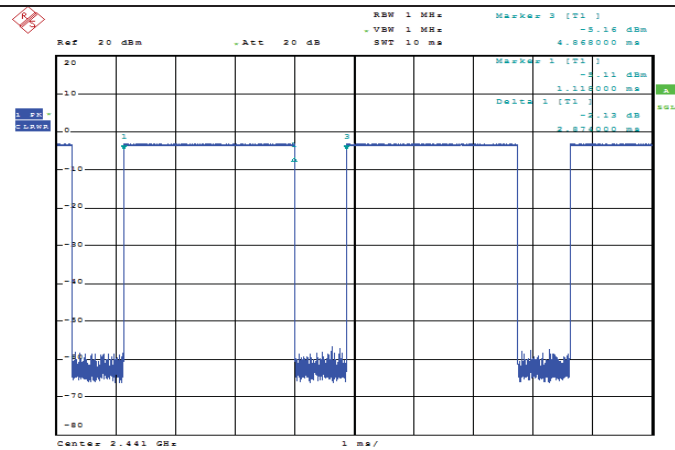


### DH5


### $\pi/4$ DQPSK Modulation

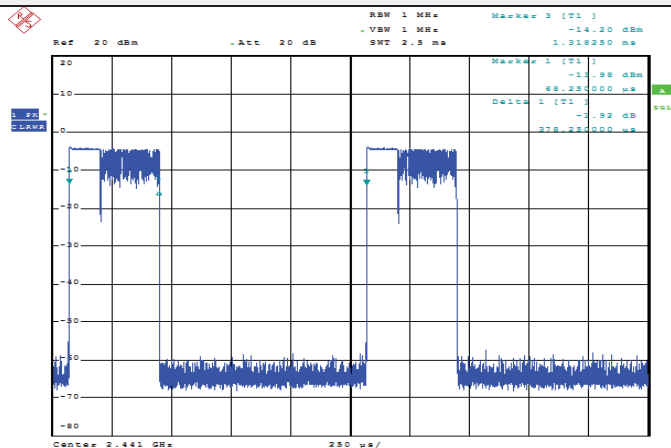

### 2DH1

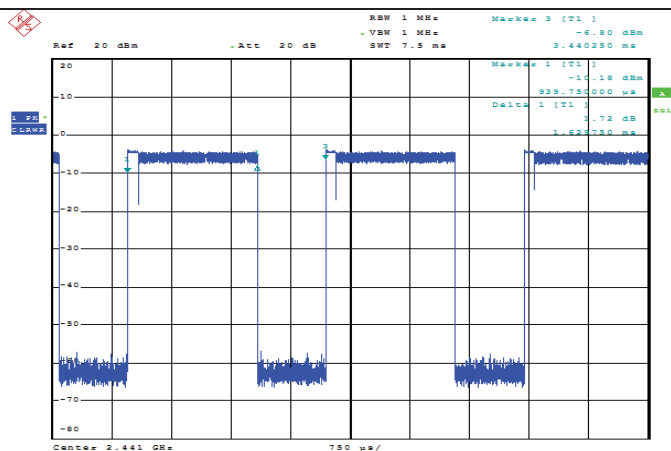


### 2DH3

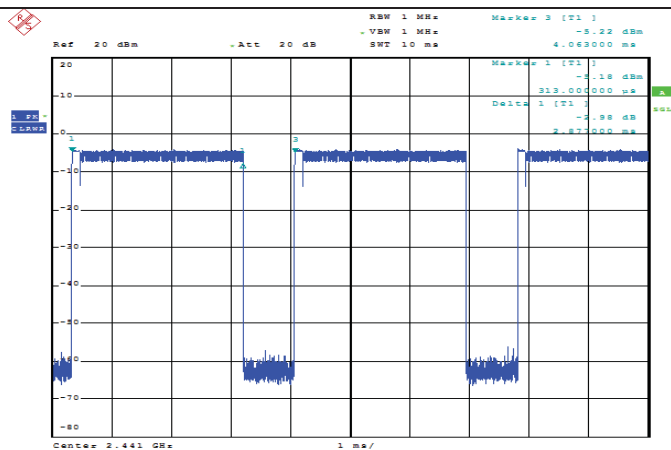


### 2DH5


### 8DPSK Modulation

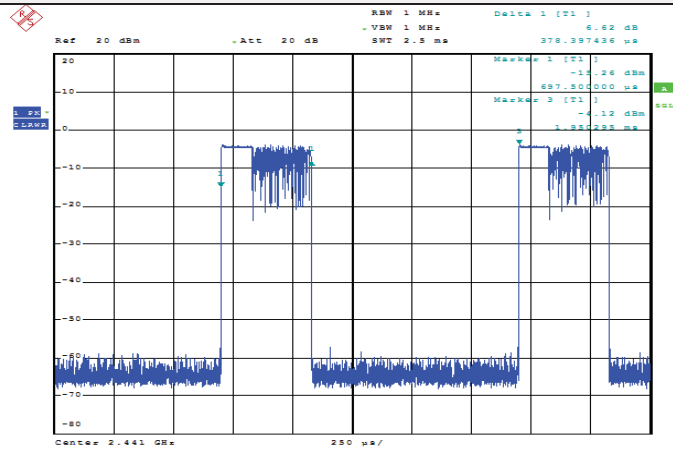

### 3DH1

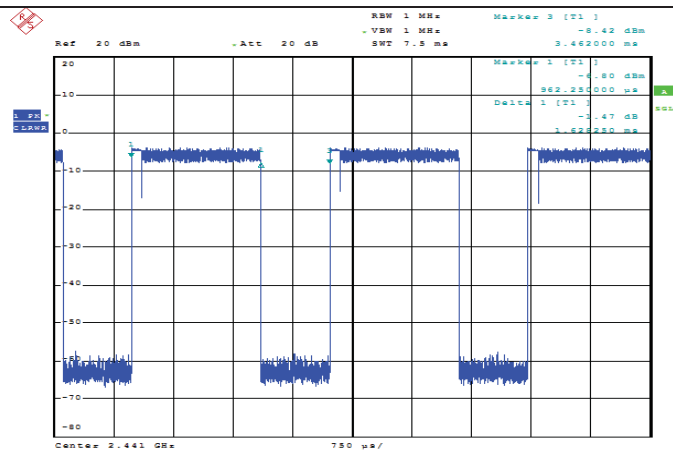

### 3DH3

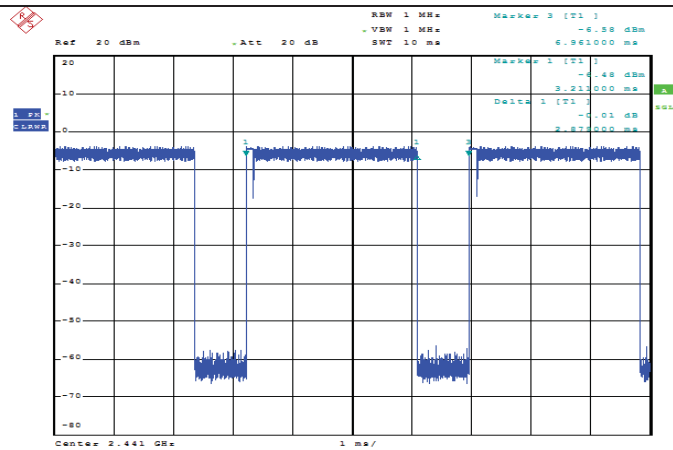

### 3DH5



### 3.9. Spurious RF Conducted Emission


#### Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### Test Procedure


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBM= 300 KHz to measure the peak field strength, and measurement frequency range from 30MHz to 26.5GHz.


#### Test Configuration

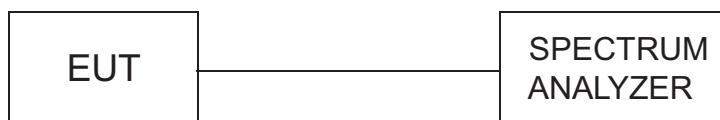



#### Test Results


Remark: We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

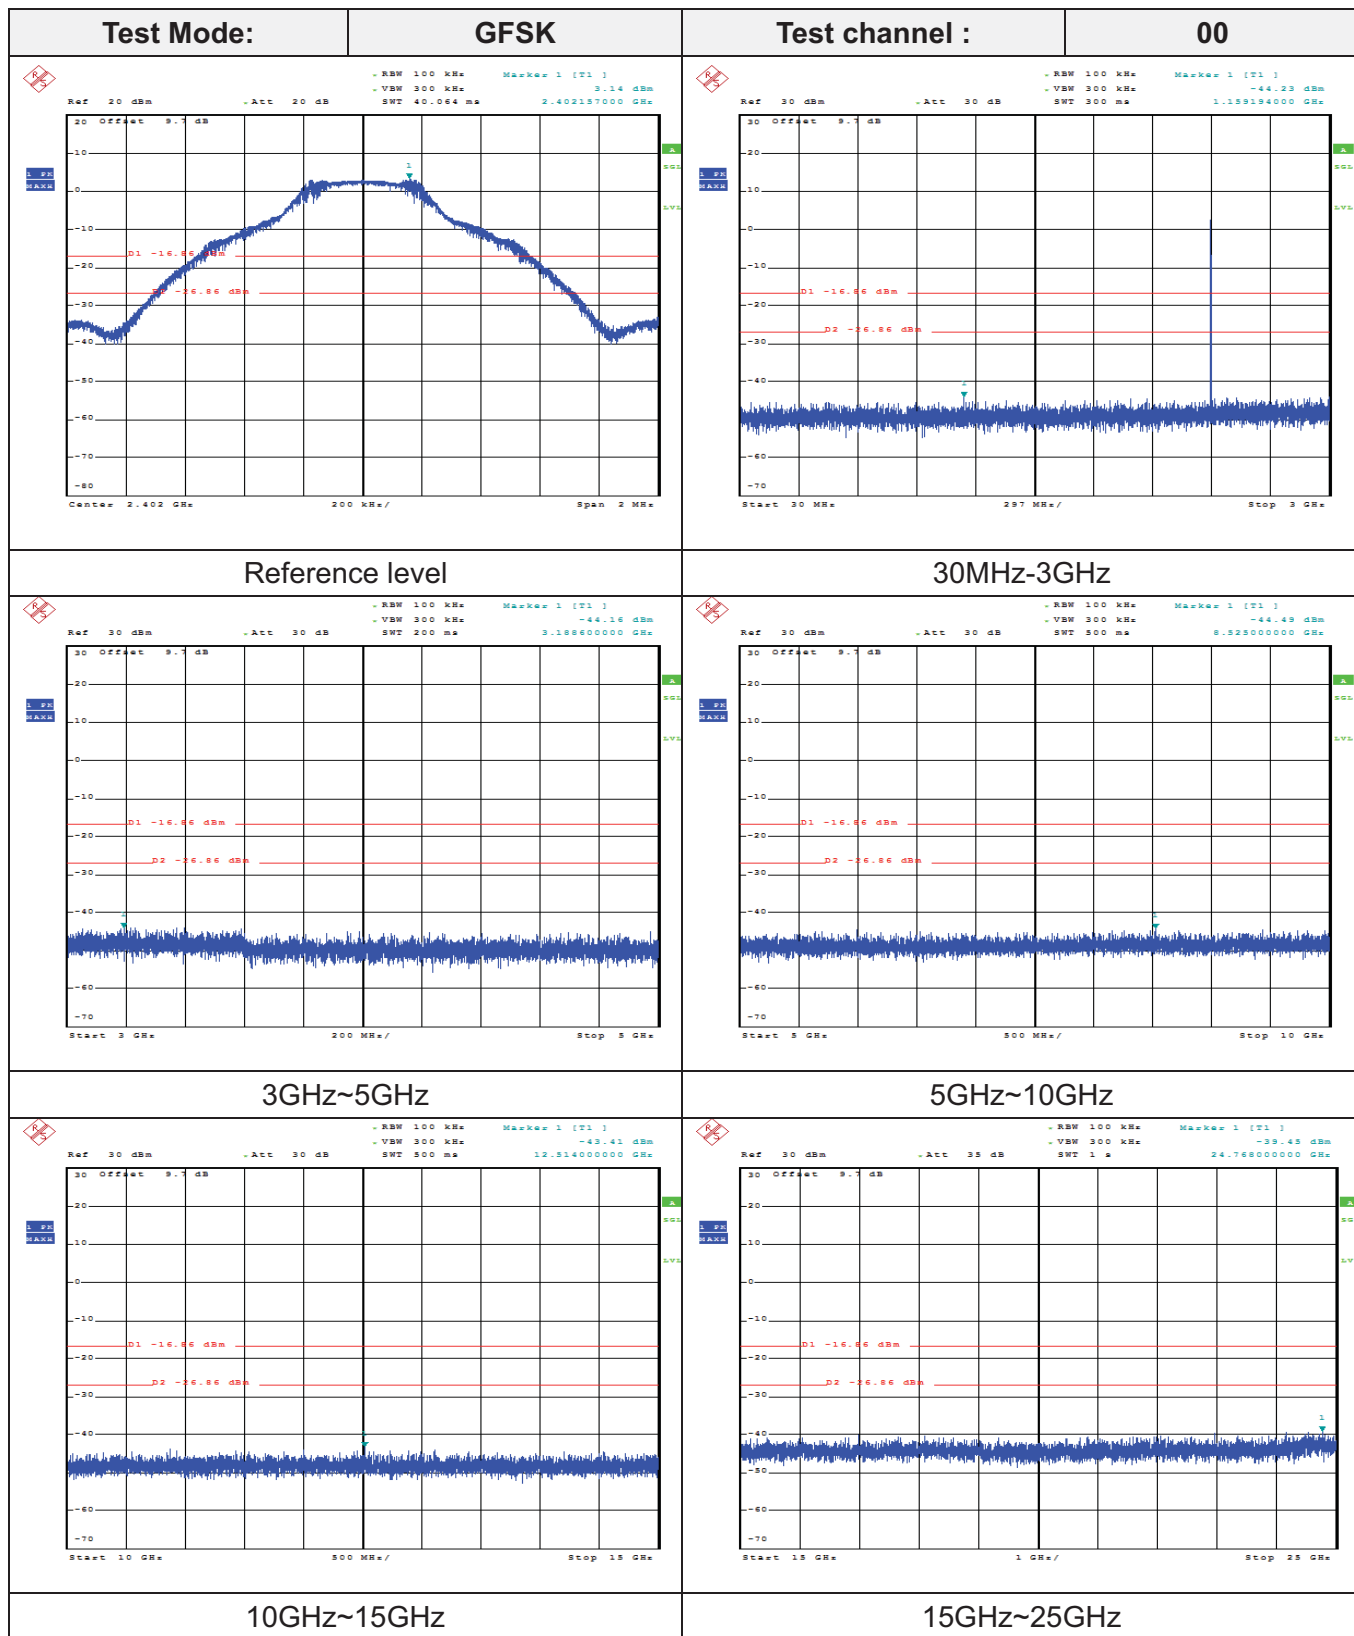


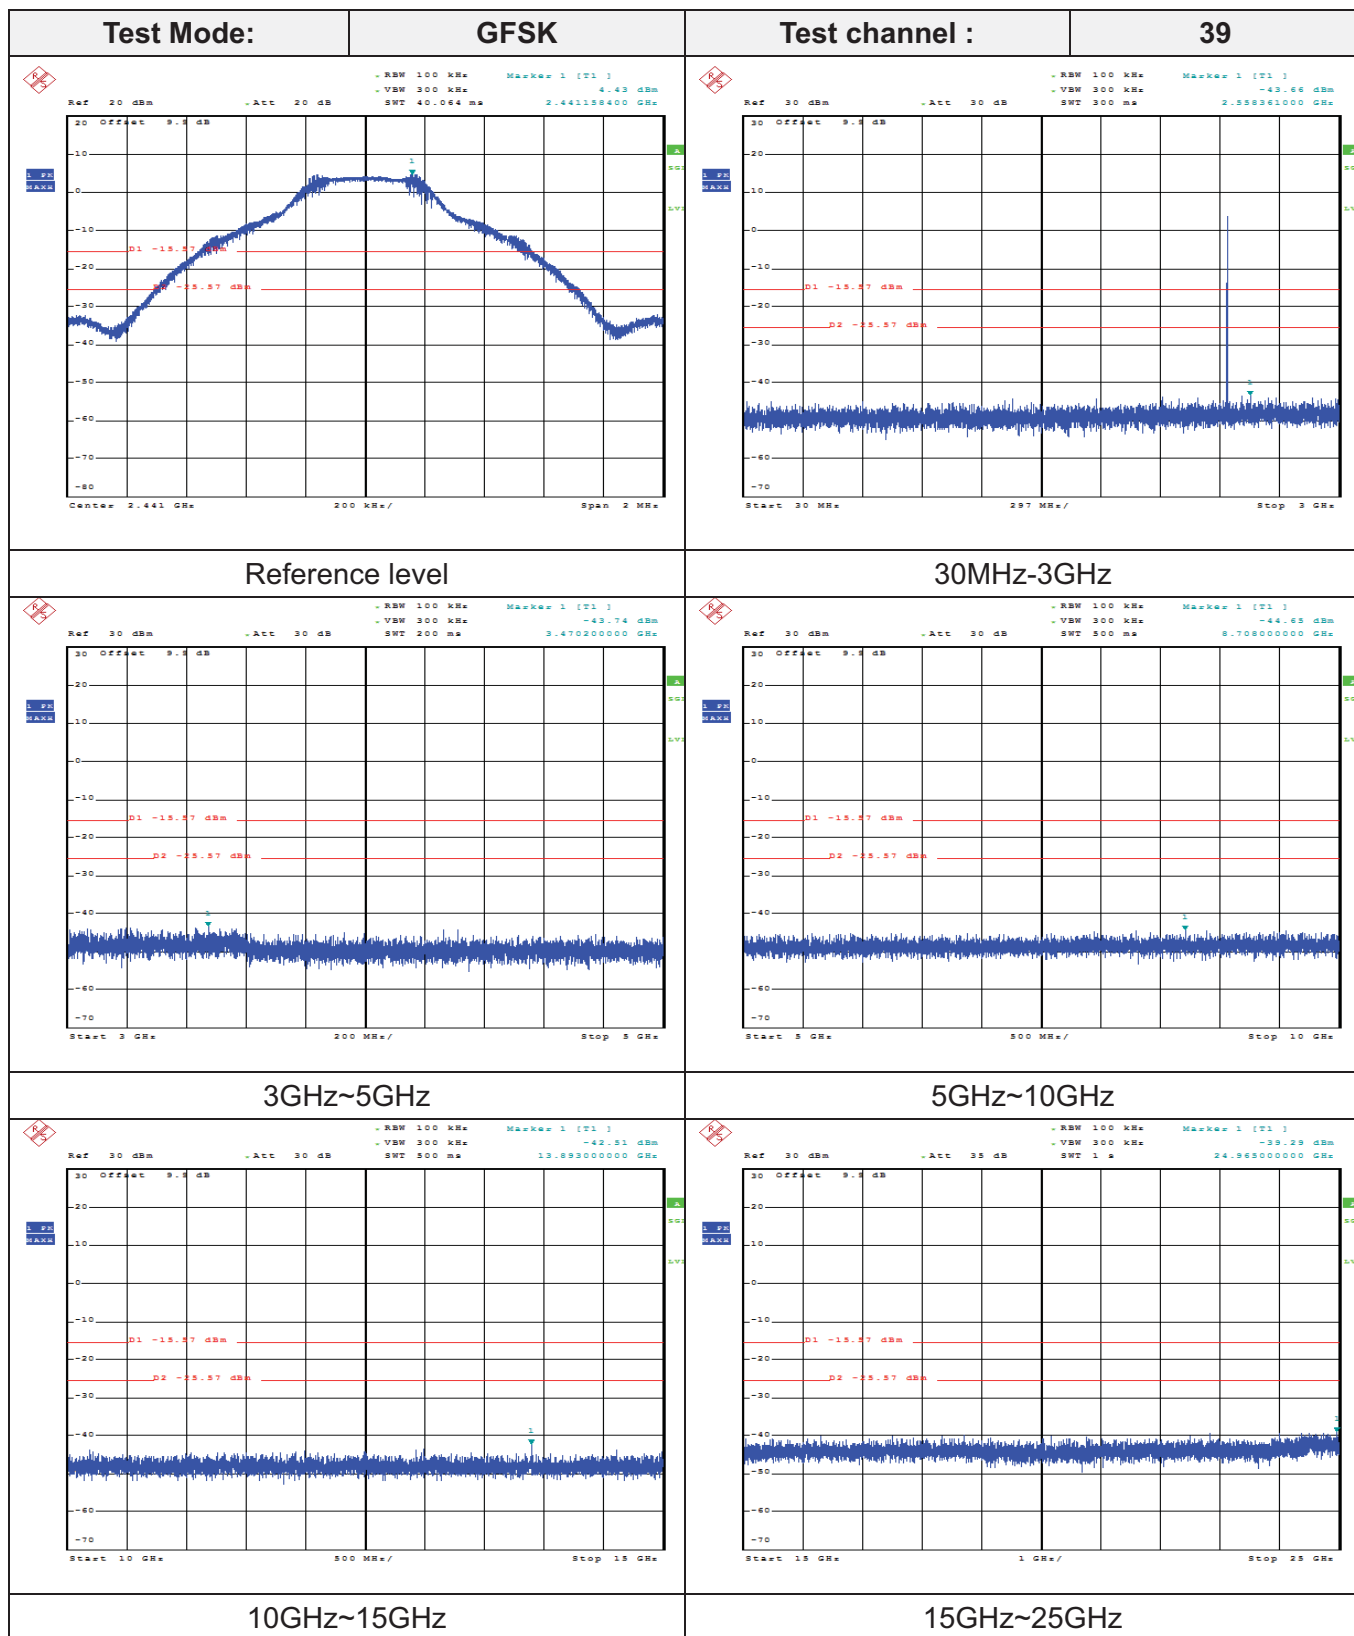


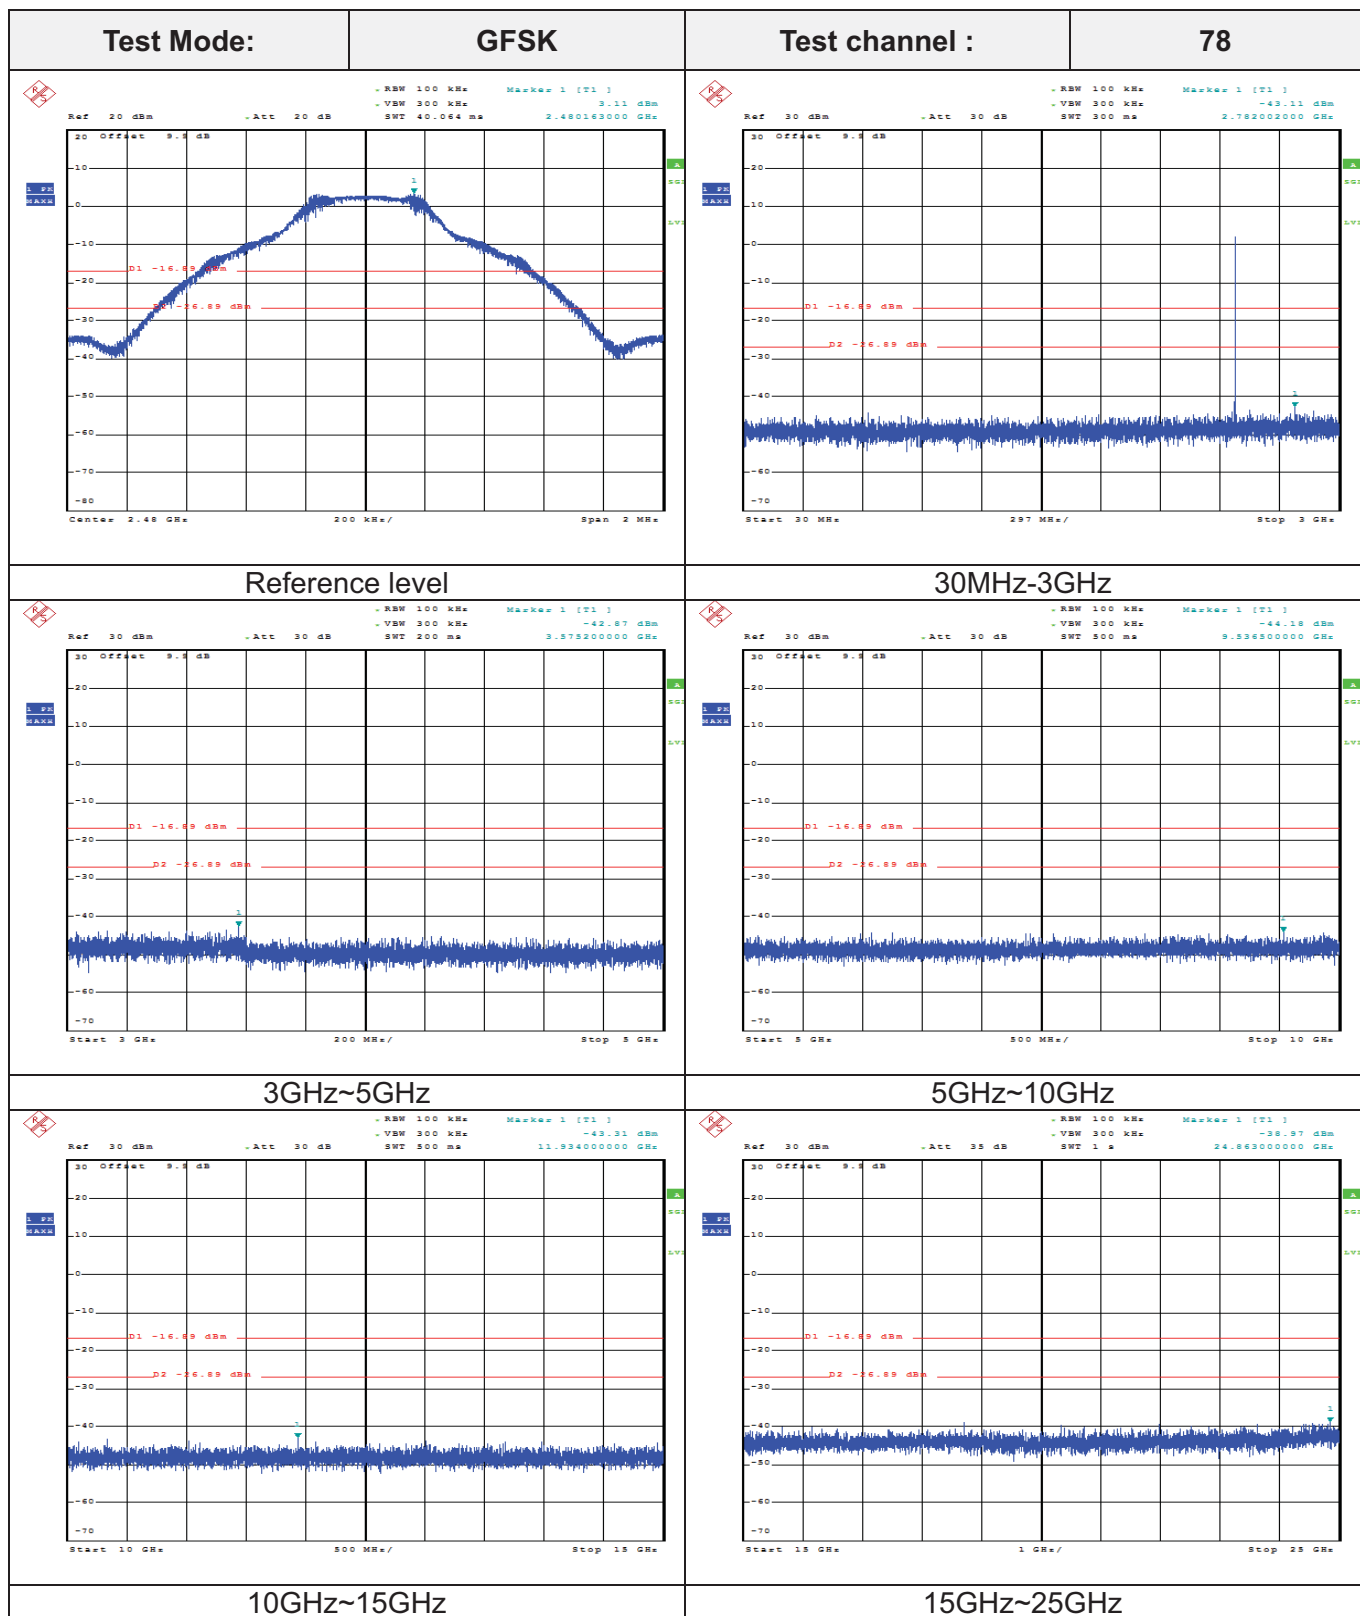

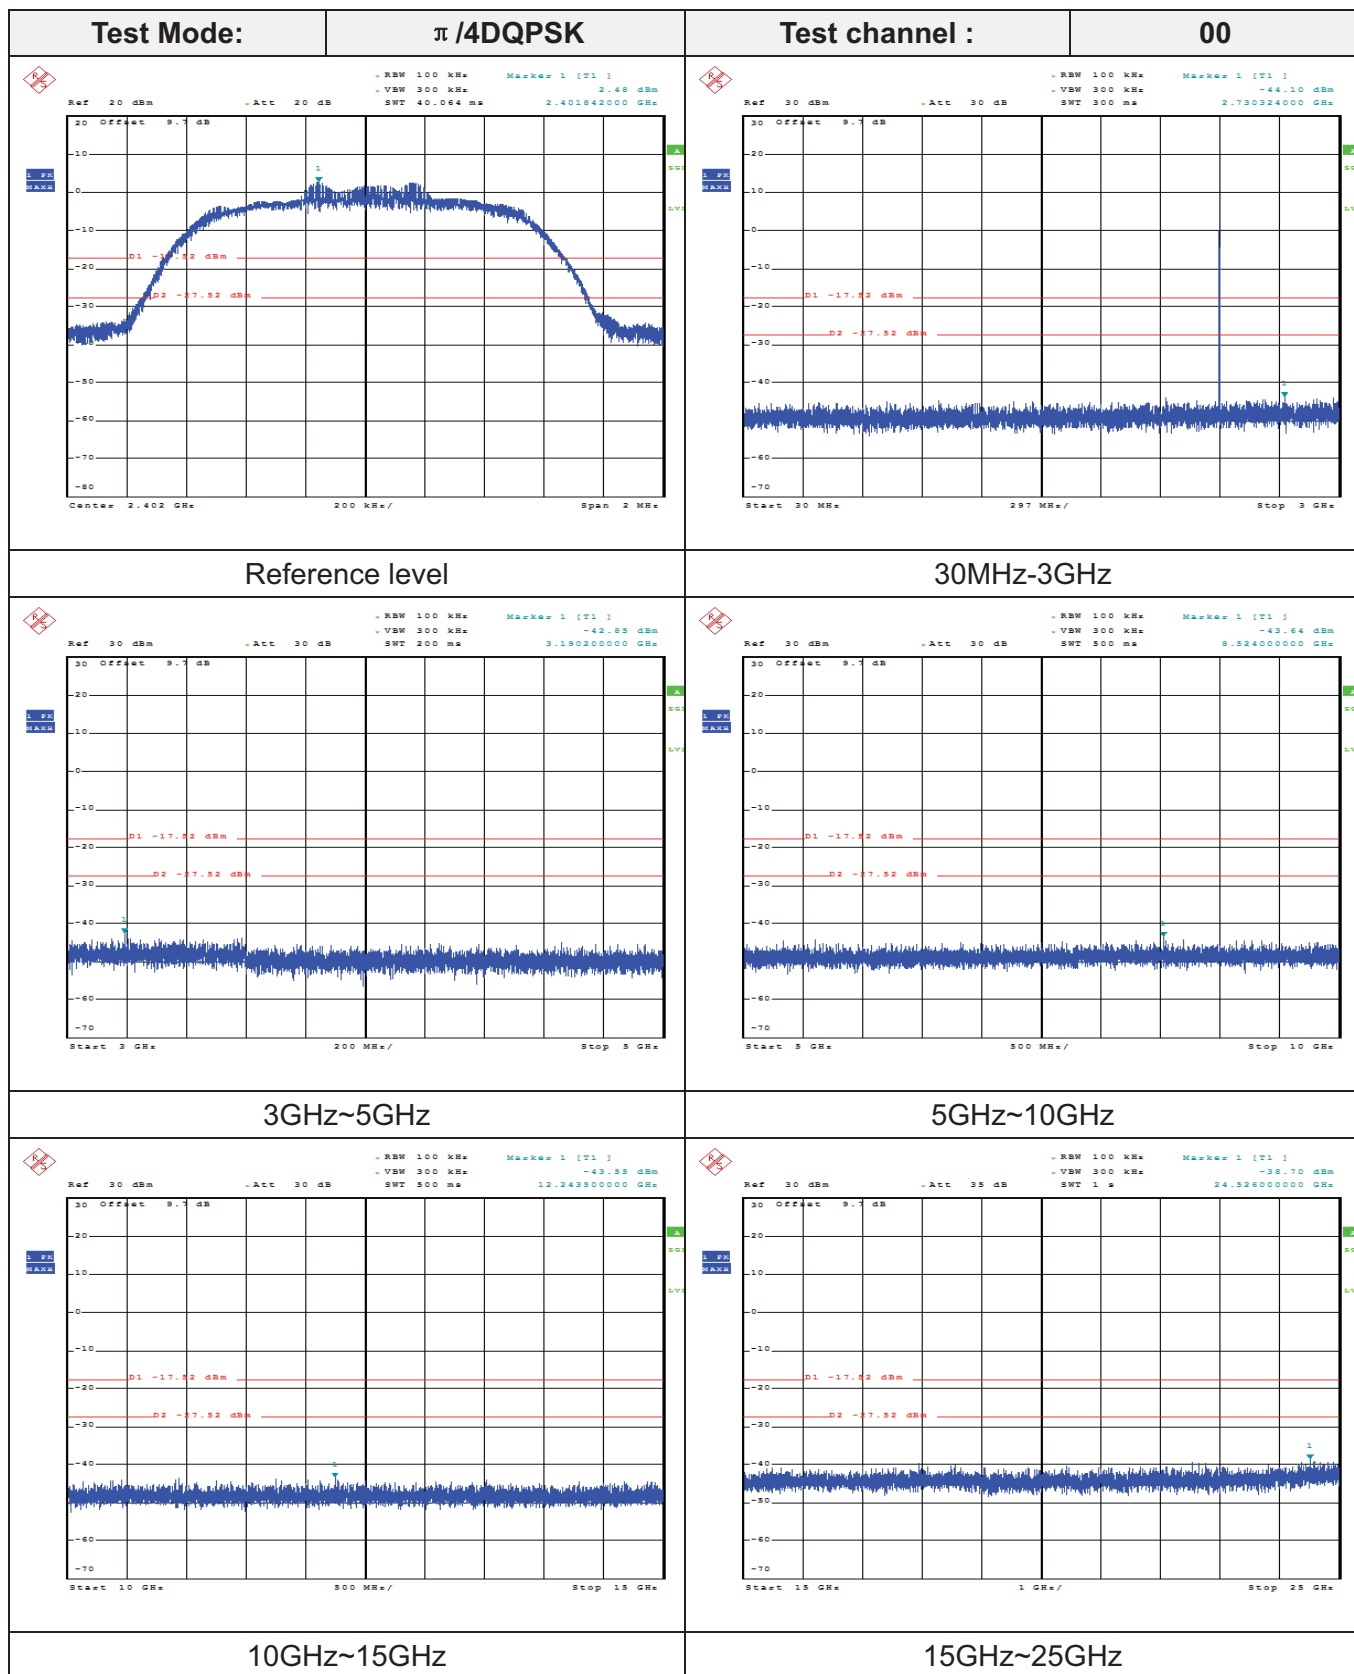


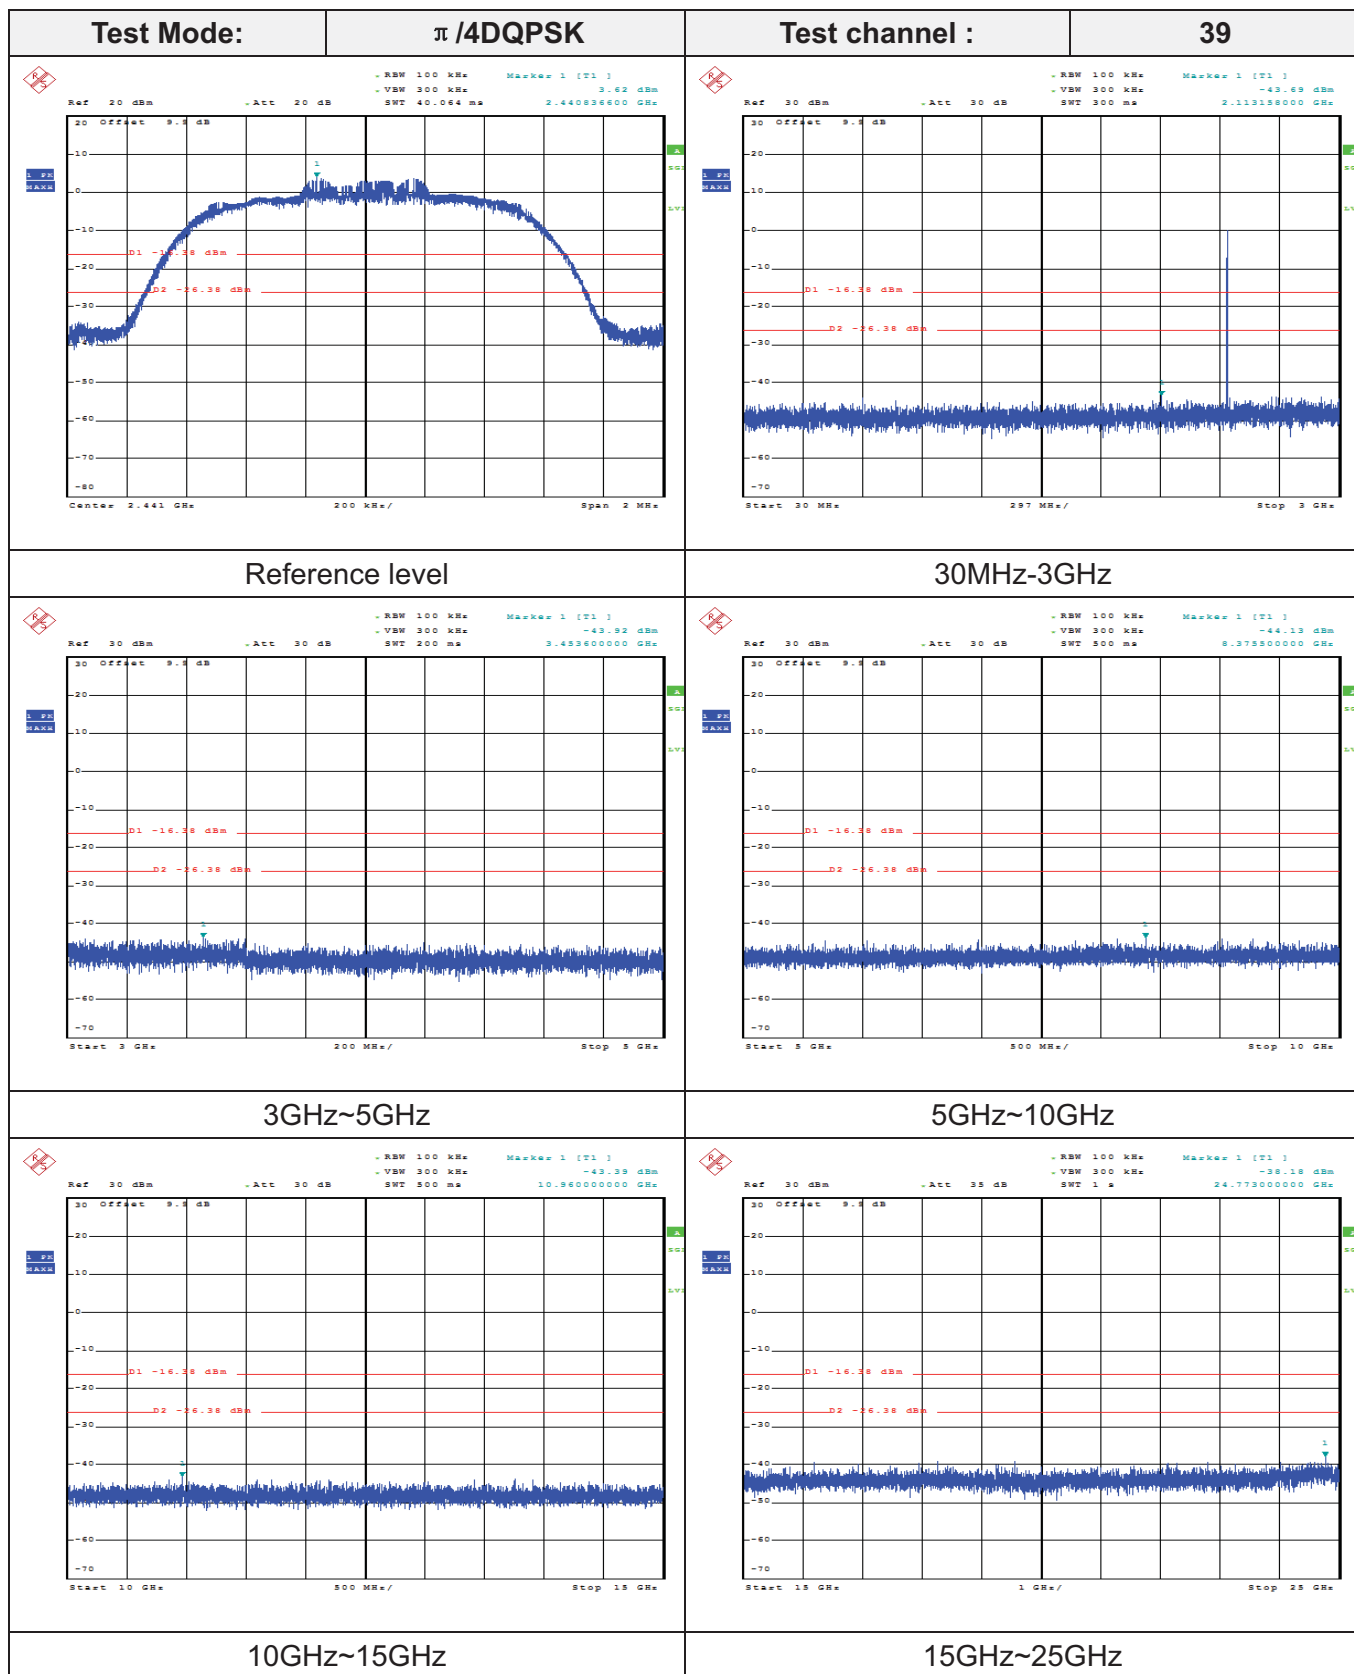


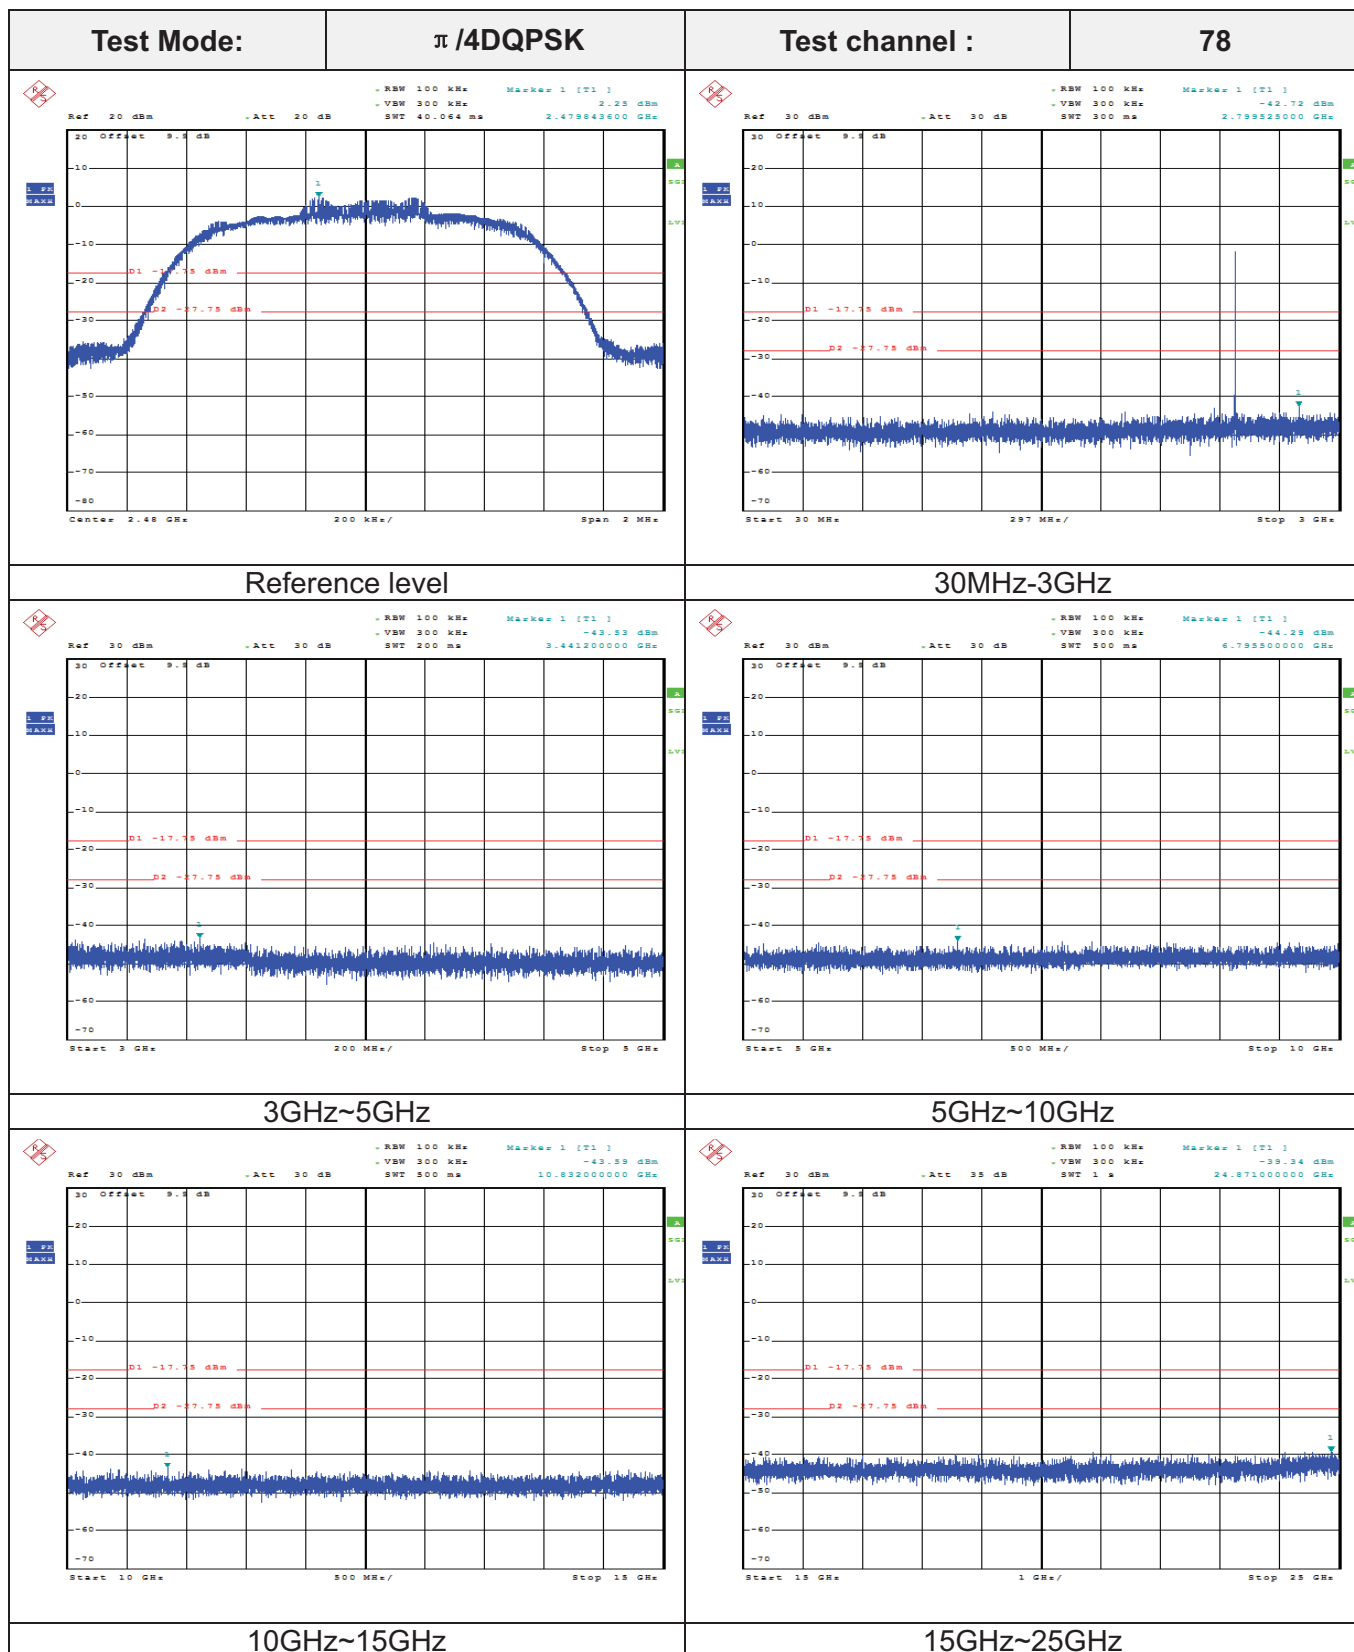

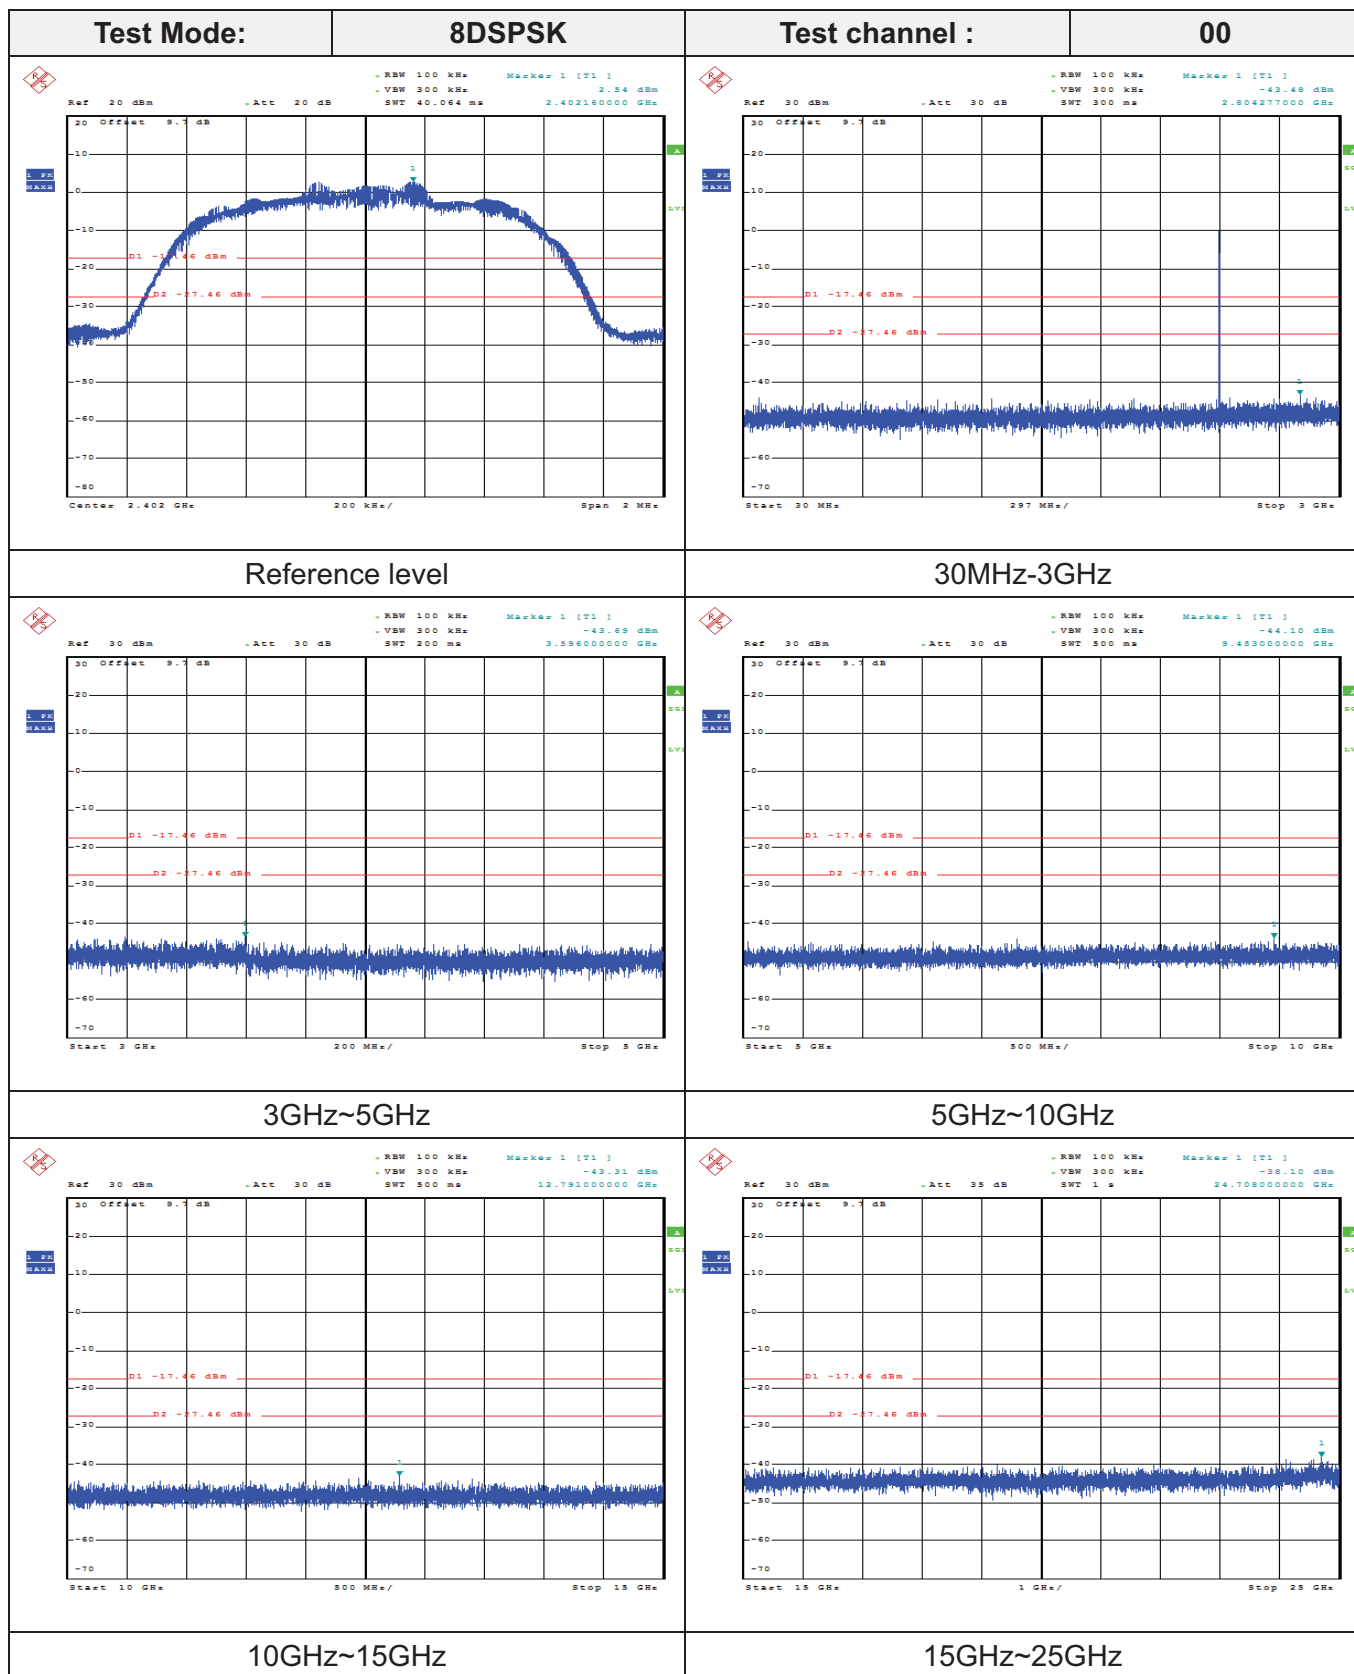



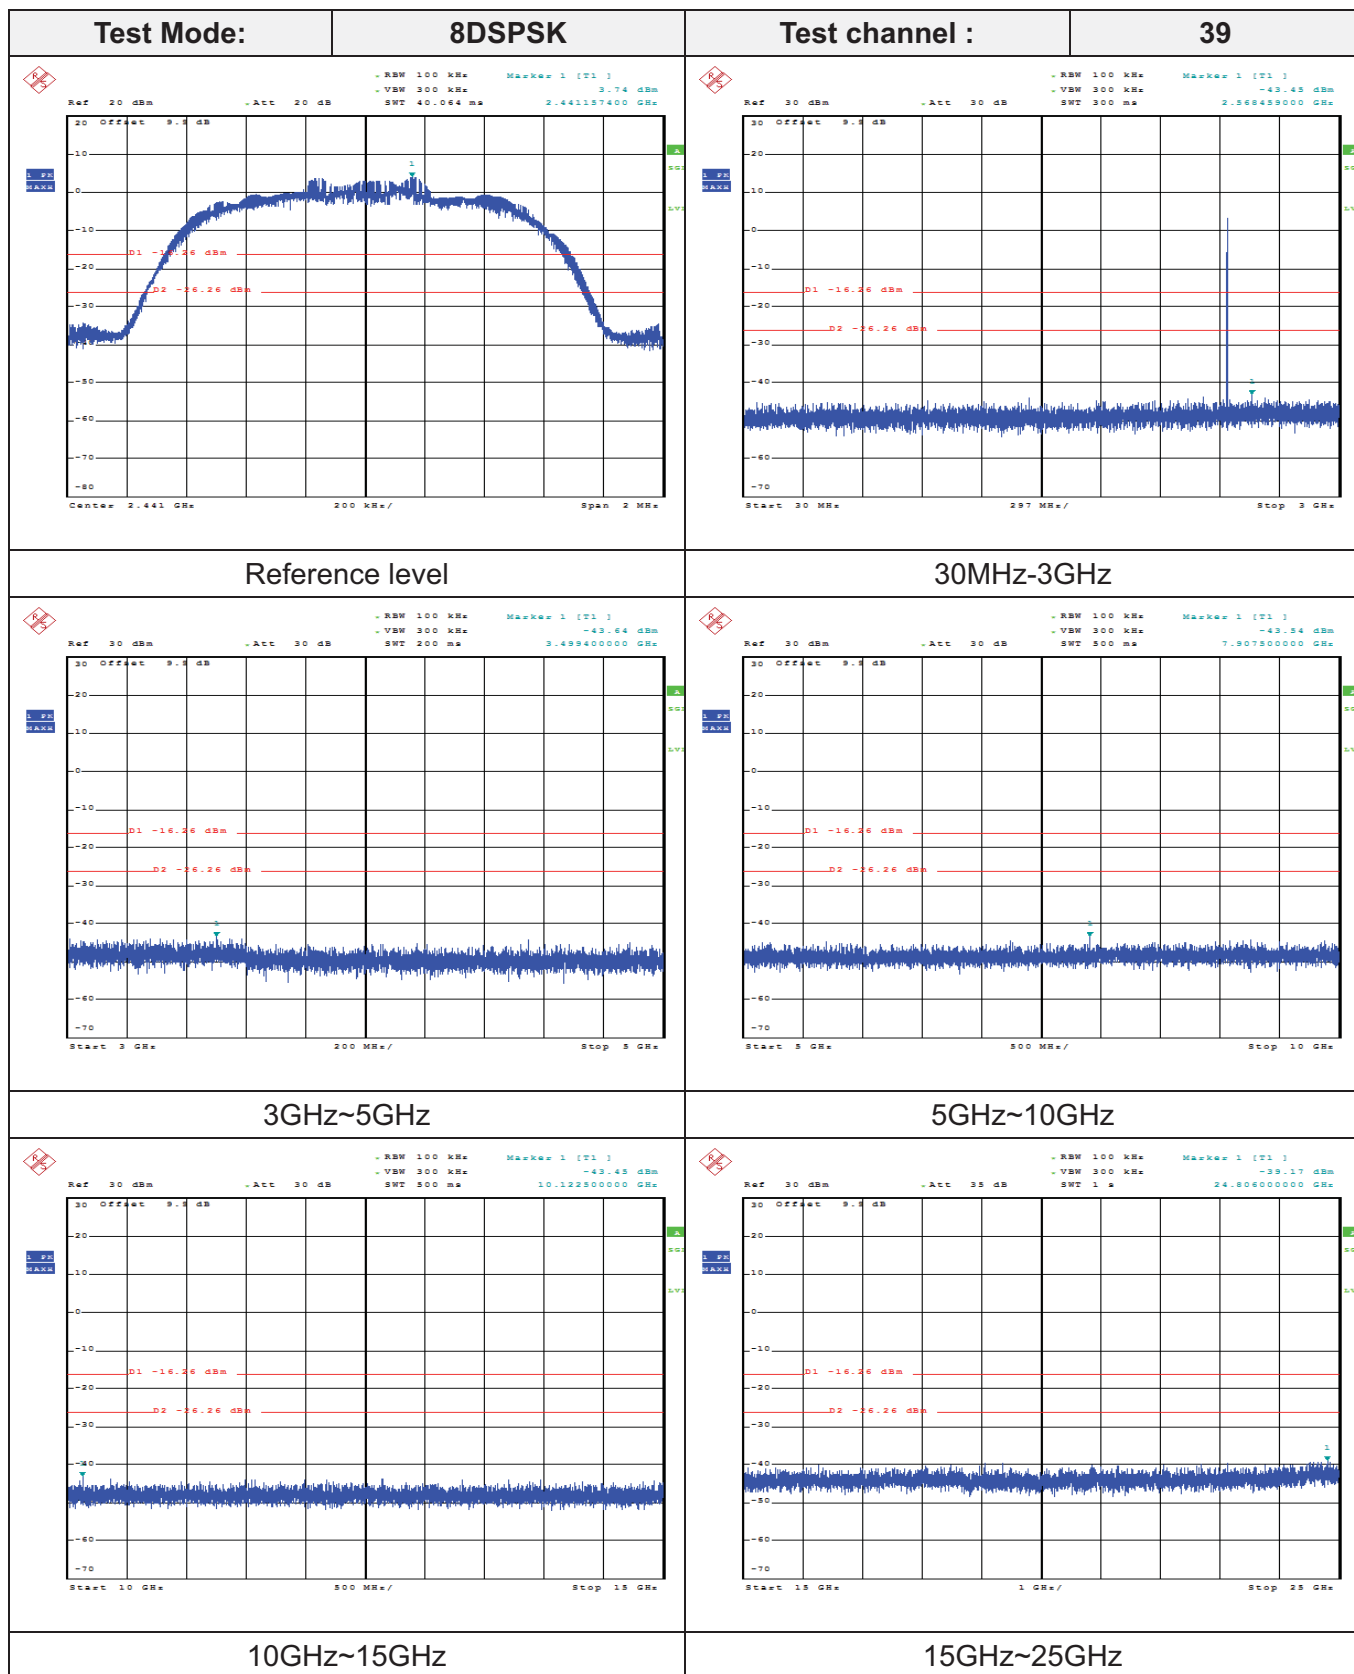

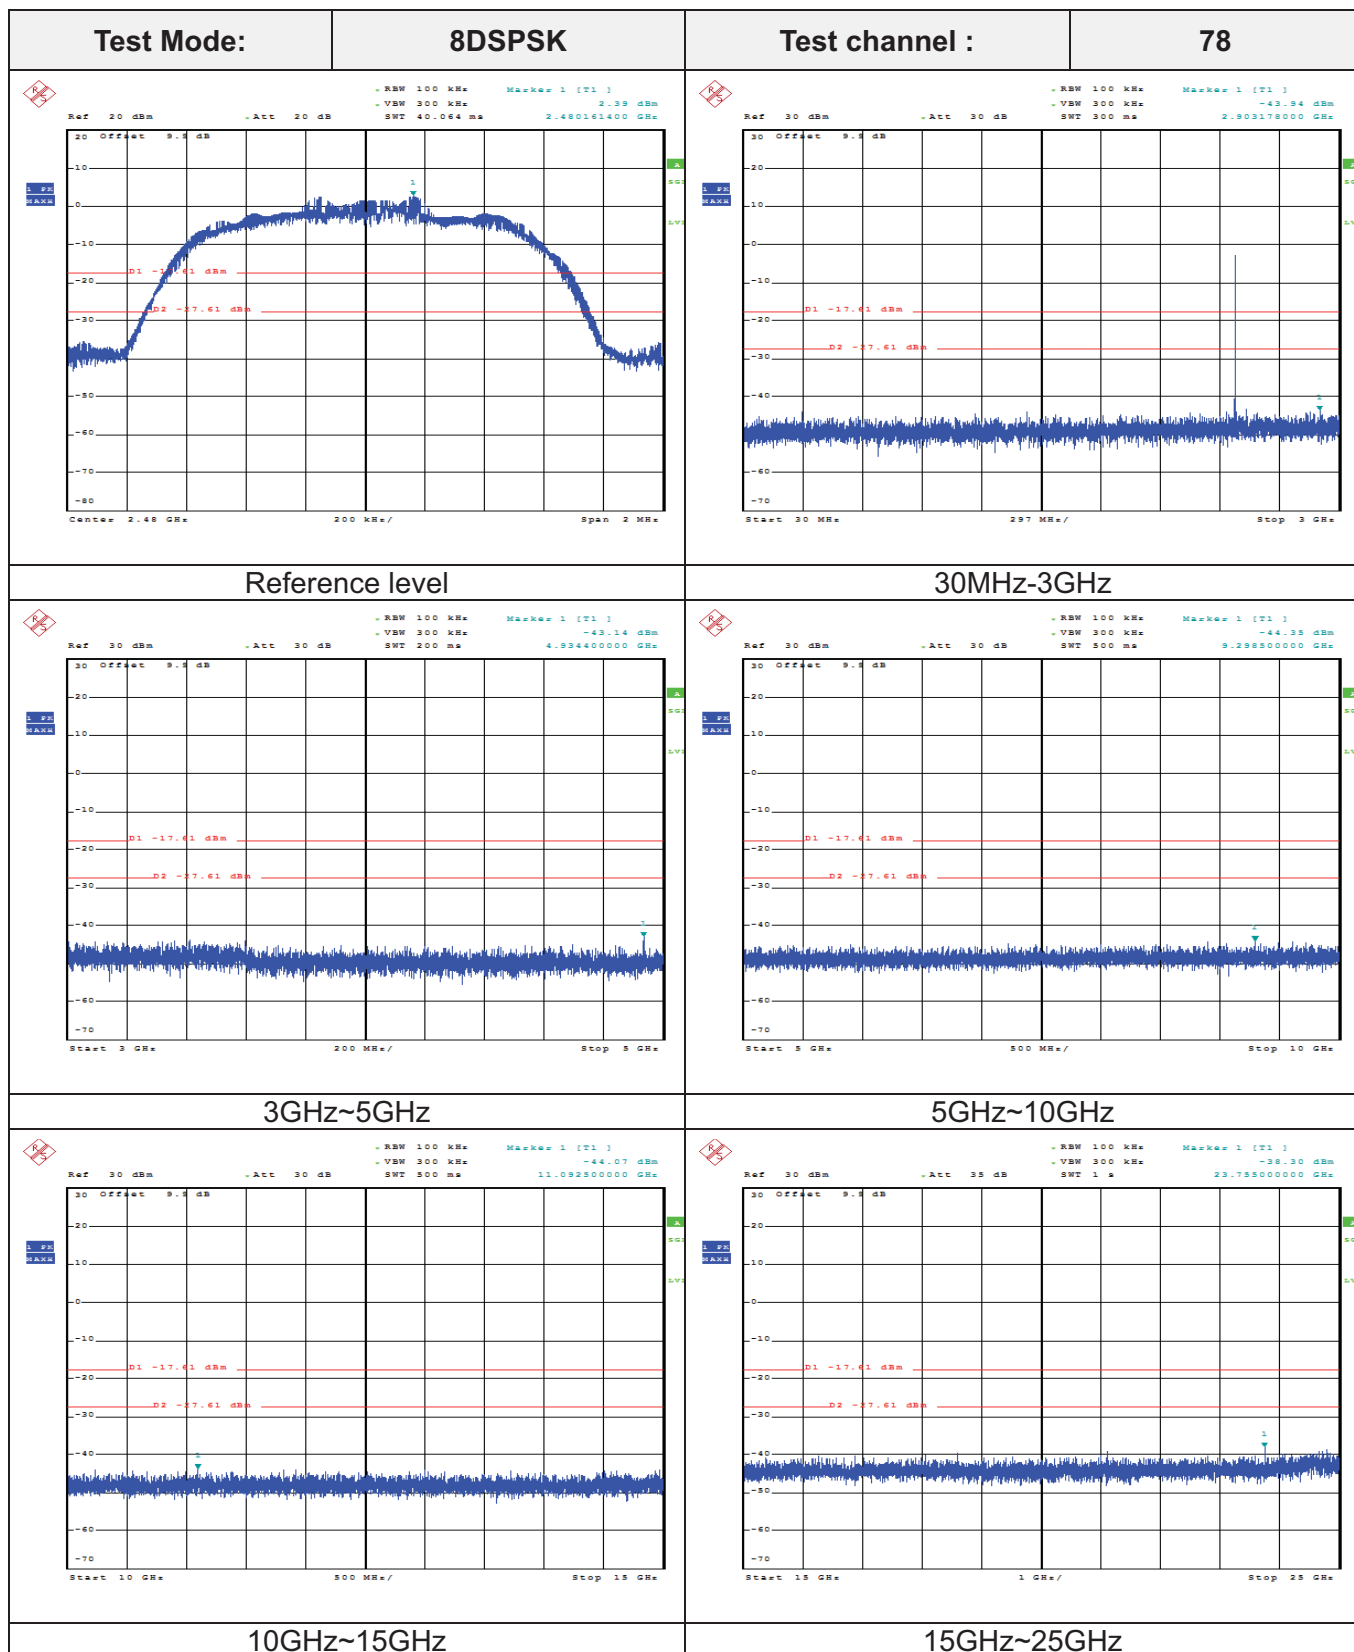

### 3.10. Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


**For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

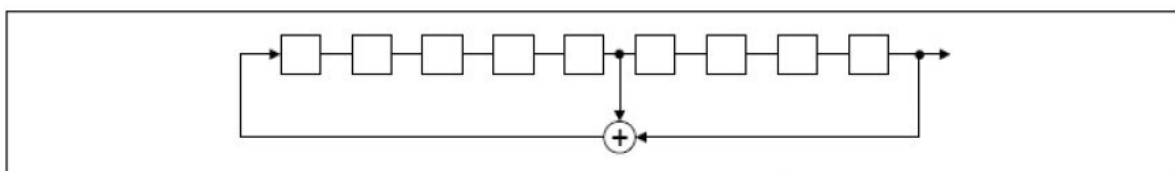

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

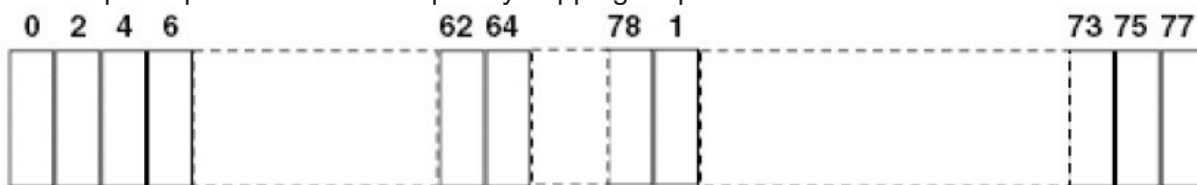

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

### 3.11. Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **Refer to statement below for compliance**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### Antenna Connected Construction

The maximum gain of Bluetooth antenna was 2.3dBi.

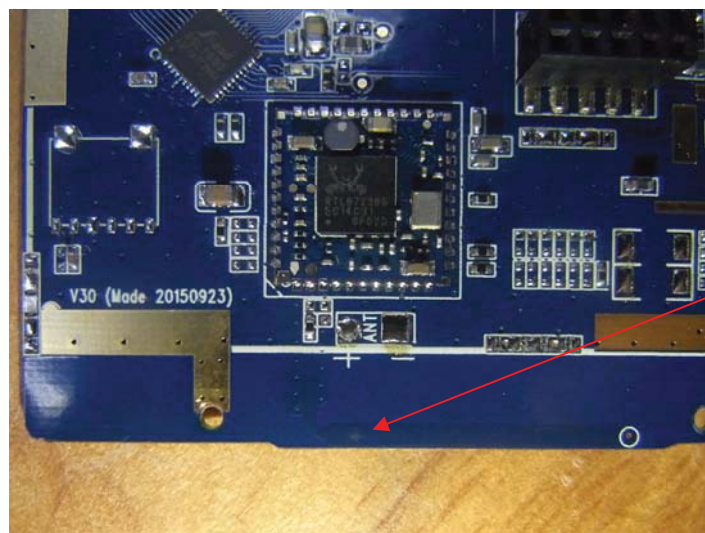

WIFI/BT Antenna  
For SeeSwitch5S/  
SmartPanel 52

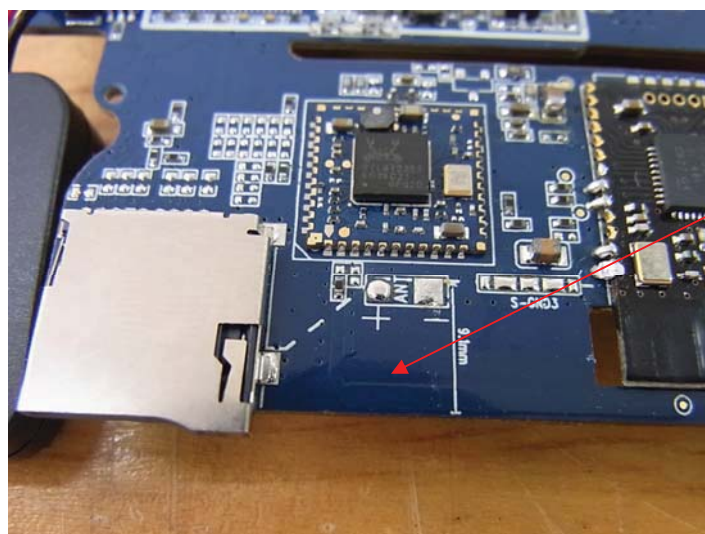

WIFI/BT Antenna  
For SeeSwitch4S/  
SmartPanel 42

## 4. EUT TEST PHOTO

Radiated Emission (30MHz-1GHz)



Radiated Emission (1GHz-25GHz)



Conducted Emission





## 5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Please reference to the test report No.: GTI20150428F-1

\*\*\*\*\*THE END\*\*\*\*\*