

Report No.: FR850432C

: 1 of 38



FCC RADIO TEST REPORT

FCC ID : 2AFZZ-XMSD2SG

Equipment Mobile Phone

Brand Name : MI

Model Name : M1804D2SG

Applicant : Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe

Middle Street, Haidian District, Beijing, China

Manufacturer : Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe

Middle Street, Haidian District, Beijing, China

Standard : FCC Part 15 Subpart C §15.247

The product was received on May 04, 2018 and testing was started from May 14, 2018 and completed on Jun. 07, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

TEL: 886-3-327-3456

SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Page Number FAX: 886-3-328-4978 : Jun. 08, 2018 Issued Date

Table of Contents

Report No.: FR850432C

His	story o	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	
	1.3	Testing Location	6
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Carrier Frequency and Channel	7
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	9
	2.4	Support Unit used in test configuration and system	9
	2.5	EUT Operation Test Setup	10
	2.6	Measurement Results Explanation Example	10
3	Test	Result	11
	3.1	6dB and 99% Bandwidth Measurement	11
	3.2	Output Power Measurement	13
	3.3	Power Spectral Density Measurement	14
	3.4	Conducted Band Edges and Spurious Emission Measurement	16
	3.5	Radiated Band Edges and Spurious Emission Measurement	29
	3.6	AC Conducted Emission Measurement	33
	3.7	Antenna Requirements	35
4	List	of Measuring Equipment	36
5	Unce	ertainty of Evaluation	38
Ар	pendi	x A. Conducted Test Results	
Ар	pendi	x B. AC Conducted Emission Test Result	
۸n	nondi	v C. Padiated Spurious Emission	

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots

Appendix F. Setup Photographs

TEL: 886-3-327-3456 : 2 of 38 Page Number FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018 Report Version : 01

Report Template No.: BU5-FR15CWL AC MA Version 2.1

History of this test report

Report No.: FR850432C

Report No.	Version	Description	Issued Date
FR850432C	01	Initial issue of report	Jun. 08, 2018

TEL: 886-3-327-3456 Page Number : 3 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Summary of Test Result

Report No.: FR850432C

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
		Conducted Band Edges	Pass	-
3.4	15.247(d)	Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 3.04 dB at 45.930 MHz
3.6	3.6 15.207 AC Conducted Emission		Pass	Under limit 15.12 dB at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Reviewed by: Joseph Lin

Report Producer: Nancy Yang

TEL: 886-3-327-3456 Page Number : 4 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.

Product Specification subjective to this standard					
	WWAN: Coupling type (LDS) Antenna				
	WLAN: Coupling type (LDS) Antenna				
Antenna Type	Bluetooth: Coupling type (LDS) Antenna				
	GPS/A-GPS/Glonass/BDS/Galileo/SBAS/VOIP: Coupling type				
	(LDS) Antenna				

Report No.: FR850432C

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 5 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FR850432C

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton	Site No.	
rest site NO.	TH05-HY	CO05-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

TEL: 886-3-327-3456 Page Number : 6 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Report No.: FR850432C

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	1	2412	7	2442
	2	2417	8	2447
2400 2492 E MU-	3	2422	9	2452
2400-2483.5 MHz	4	2427	10	2457
	5	2432	11	2462
	6	2437		

TEL: 886-3-327-3456 Page Number : 7 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Report No.: FR850432C

	Test Cases					
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + SD Card + Camera (Front) + Type-C USB Cable 2 (Charging from Adapter 1) + SIM 1					
Remark: For	Radiated Test Cases, the tests were performed with Adapter 2 and USB Cable 1.					

TEL: 886-3-327-3456 Page Number : 8 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

2.3 Connection Diagram of Test System

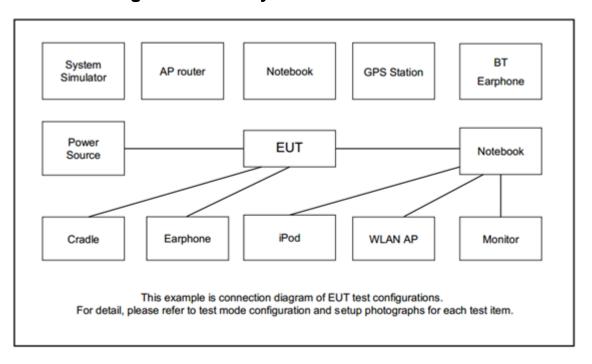

Report No.: FR850432C

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

TEL: 886-3-327-3456 Page Number : 9 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

Report No.: FR850432C

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 10 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Report No.: FR850432C

- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
- 6. Measure and record the results in the test report.


3.1.4 Test Setup



TEL: 886-3-327-3456 Page Number : 11 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

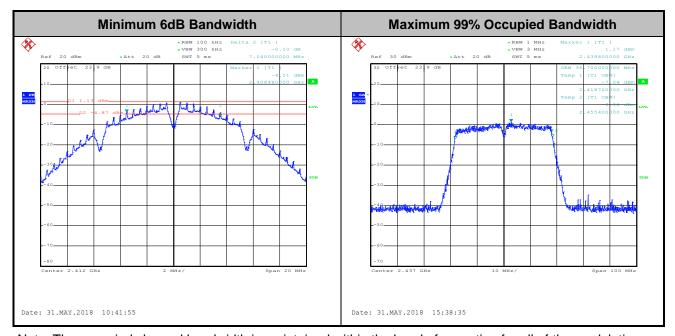

Report No.: FR850432C

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

TEL: 886-3-327-3456 Page Number : 12 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Report No.: FR850432C


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

- For Peak Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
- 2. For Average Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.2.3.2 Method AVGPM-G.
- 3. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 13 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

Report No.: FR850432C

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

- The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.


3.3.4 Test Setup



TEL: 886-3-327-3456 Page Number : 14 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

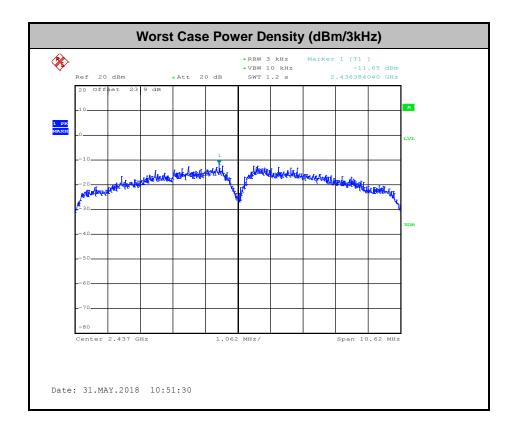

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 15 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

Report No.: FR850432C


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup




TEL: 886-3-327-3456 Page Number : 16 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018


3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Tost Engineer:	Shiang Wang and Shiming Liu	Temperature :	21~25℃
rest Engineer.		Relative Humidity :	51~54%

Report No.: FR850432C

Number of TX = 1, Ant. 1 (Measured)




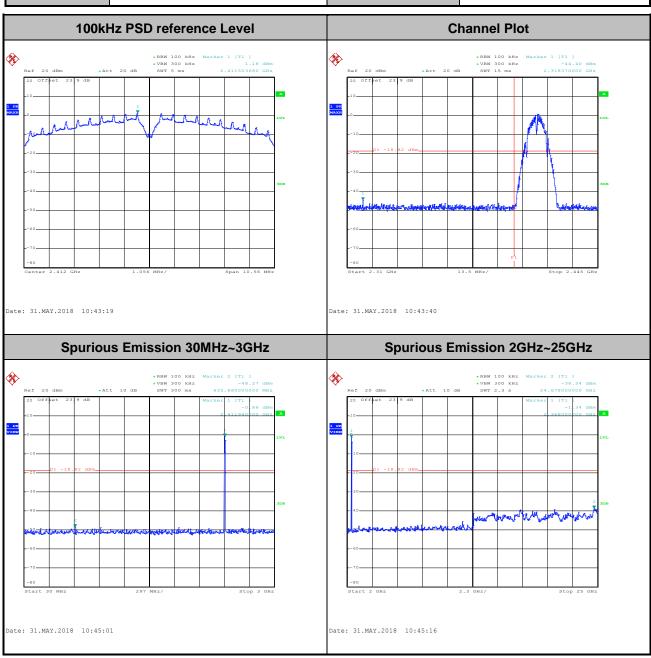

TEL: 886-3-327-3456 Page Number : 17 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Test Mode: 802.11b Test Channel: 06

Report No.: FR850432C

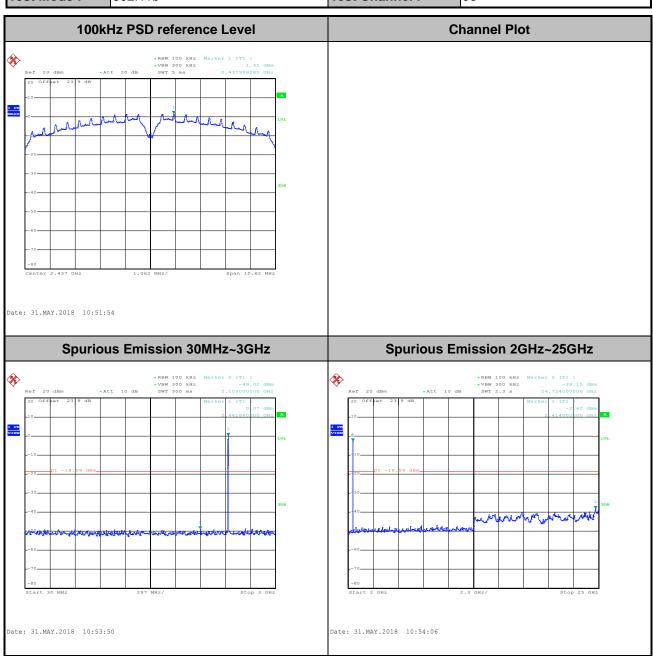

TEL: 886-3-327-3456 Page Number : 18 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 11:17:52

Test Mode: 802.11b Test Channel: 11 100kHz PSD reference Level **Channel Plot** ﴾ Date: 31.MAY.2018 11:16:52 Date: 31.MAY.2018 11:17:31 Spurious Emission 30MHz~3GHz Spurious Emission 2GHz~25GHz **% %**

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 19 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 11:18:07

Date: 31.MAY.2018 11:24:23

Test Mode: 802.11g Test Channel: 01 100kHz PSD reference Level **Channel Plot** ﴾ Date: 31.MAY.2018 11:23:19 Date: 31.MAY.2018 11:23:46 Spurious Emission 30MHz~3GHz Spurious Emission 2GHz~25GHz **% %**


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 20 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 11:24:40

Test Mode: 802.11g Test Channel: 06

Report No.: FR850432C

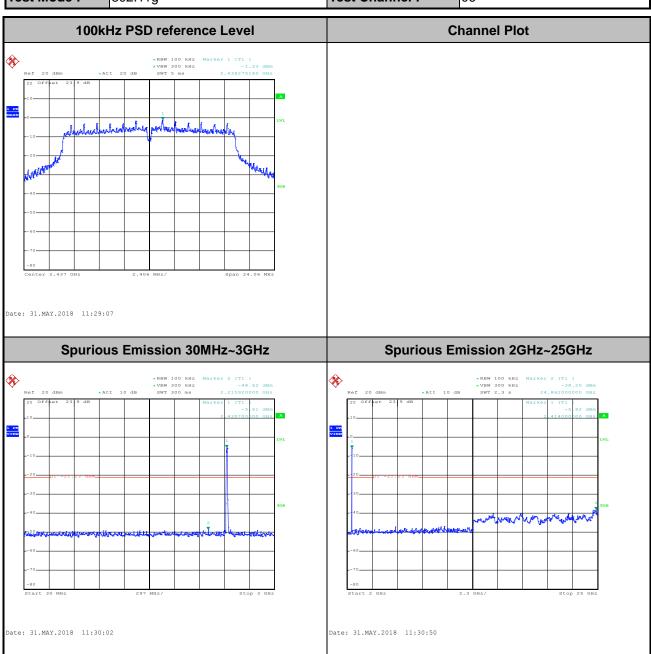


TEL: 886-3-327-3456 Page Number : 21 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Test Mode: 802.11g Test Channel: 11

100kHz PSD reference Level Channel Plot

Report No.: FR850432C

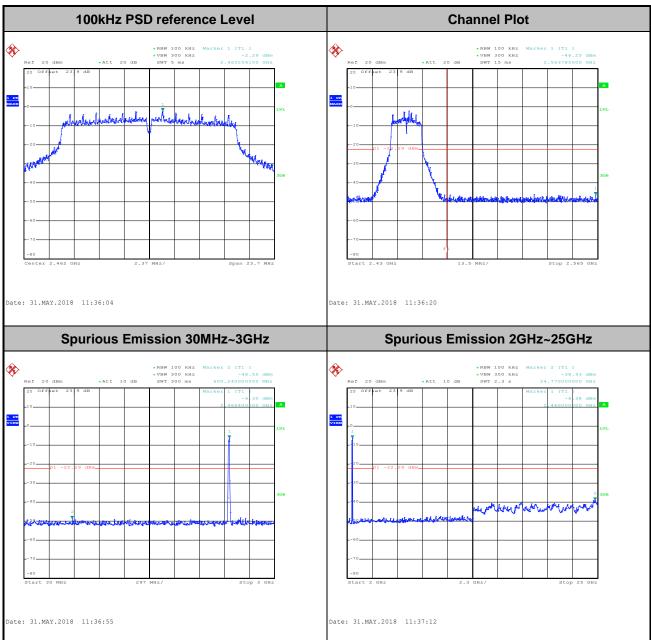

TEL: 886-3-327-3456 Page Number : 22 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 11:47:54

Test Mode: 802.11n HT20 Test Channel: 01 100kHz PSD reference Level **Channel Plot** ﴾ Date: 31.MAY.2018 11:44:07 Date: 31.MAY.2018 11:44:23 Spurious Emission 30MHz~3GHz Spurious Emission 2GHz~25GHz **% %**


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 23 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 11:48:09

Test Mode: 802.11n HT20 Test Channel: 06

Report No.: FR850432C

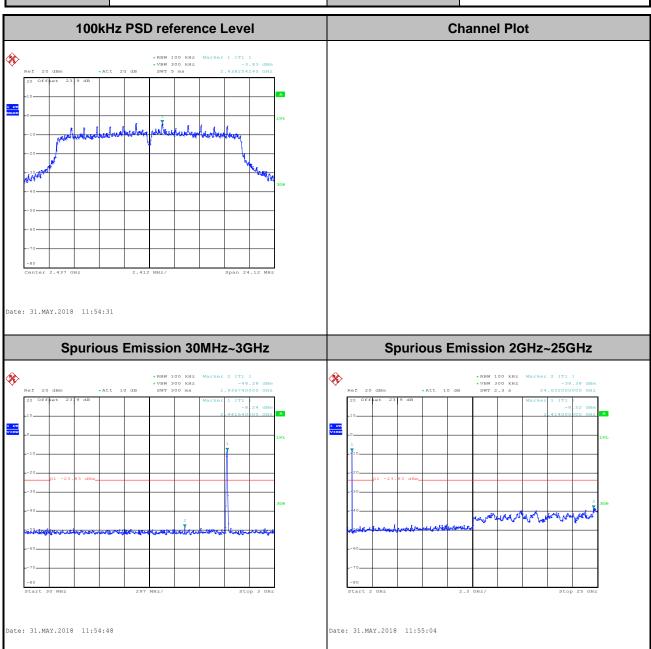

TEL: 886-3-327-3456 Page Number : 24 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 15:19:58

Test Mode: 802.11n HT20 Test Channel: 11 100kHz PSD reference Level **Channel Plot** ﴾ ullu. Date: 31.MAY.2018 15:19:21 Date: 31.MAY.2018 15:19:37 Spurious Emission 30MHz~3GHz Spurious Emission 2GHz~25GHz **% %**


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 25 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 15:20:22

Test Mode: 802.11n HT40 Test Channel: 03 100kHz PSD reference Level **Channel Plot**


Report No.: FR850432C

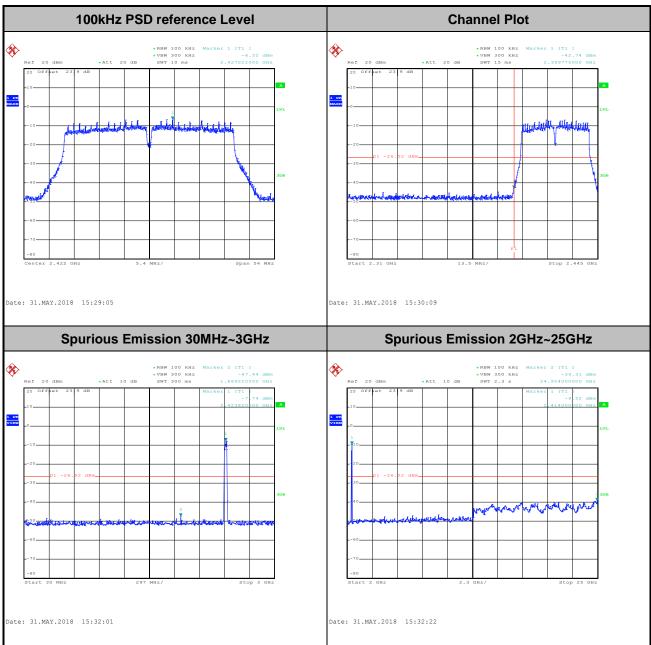

TEL: 886-3-327-3456 Page Number : 26 of 38 FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Test Mode: 802.11n HT40 Test Channel: 06

Report No.: FR850432C

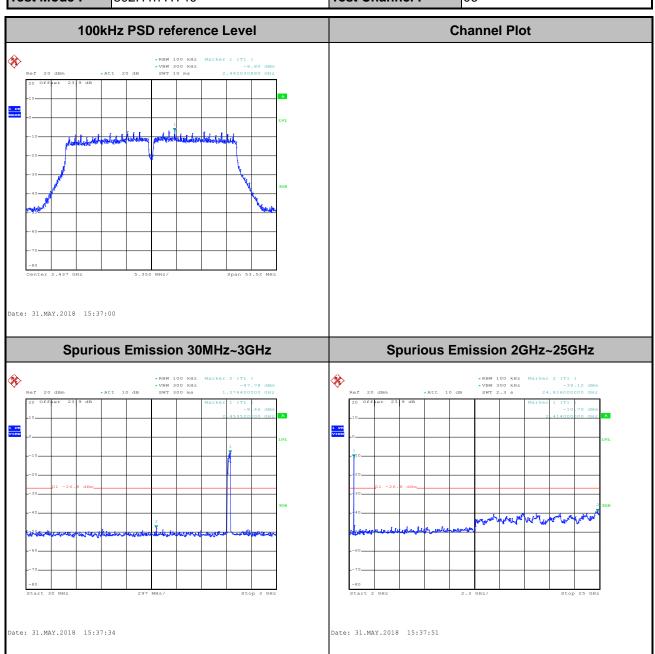

TEL: 886-3-327-3456 Page Number : 27 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 15:45:11

Test Mode: 802.11n HT40 Test Channel: 09 100kHz PSD reference Level **Channel Plot** ﴾ Date: 31.MAY.2018 15:43:31 Date: 31.MAY.2018 15:43:48 Spurious Emission 30MHz~3GHz Spurious Emission 2GHz~25GHz **% %**

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 28 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Date: 31.MAY.2018 15:45:36

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Report No.: FR850432C

Frequency	Field Strength	Measurement Distance	
(MHz)	(microvolts/meter)	(meters)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	
30 – 88	100	3	
88 – 216	150	3	
216 - 960	200	3	
Above 960	500	3	

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

TEL: 886-3-327-3456 Page Number : 29 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.5.3 Test Procedures

- The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.

Report No.: FR850432C

- 3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

TEL: 886-3-327-3456 Page Number : 30 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018


3.5.4 Test Setup

For radiated emissions below 30MHz




Report No.: FR850432C

For radiated emissions from 30MHz to 1GHz

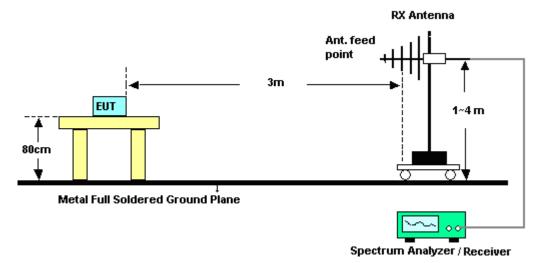

TEL: 886-3-327-3456 Page Number : 31 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

For radiated emissions above 1GHz

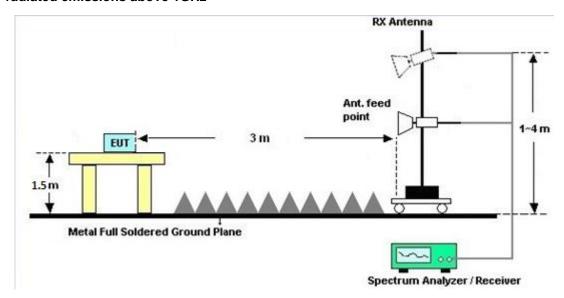

Report No.: FR850432C

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

TEL: 886-3-327-3456 Page Number : 32 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR850432C

Frequency of Emission	Conducted Limit (dBμV)				
(MHz)	Quasi-Peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

^{*}Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

TEL: 886-3-327-3456 Page Number : 33 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.6.4 Test Setup

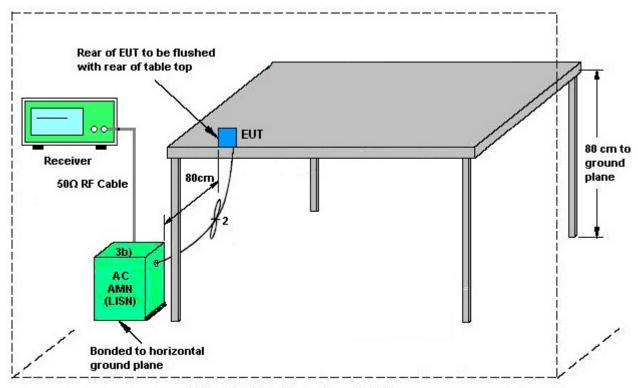

Report No.: FR850432C

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 34 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

Report No.: FR850432C

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 886-3-327-3456 Page Number : 35 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	May 11, 2018~ May 31, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GH z	Sep. 07, 2017	May 11, 2018~ May 31, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	May 11, 2018~ May 31, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	May 11, 2018~ May 31, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 07, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 07, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 07, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Test Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 07, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 07, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 07, 2018	Jan. 02, 2019	Conduction (CO05-HY)

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 36 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018



FCC RADIO TEST REPORT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz,V SWR : 2.5:1 max	Jul. 18, 2017	May 16, 2018~ Jun. 01, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	May 16, 2018~ Jun. 01, 2018	Jan. 15, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N- 6-06	35414&AT- N0602	30MHz~1GHz	Oct. 14, 2017	May 16, 2018~ Jun. 01, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	May 16, 2018~ Jun. 01, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	May 16, 2018~ Jun. 01, 2018	Nov. 22, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Jan. 16, 2018	May 16, 2018~ Jun. 01, 2018	Jan. 15, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2017	May 16, 2018~ Jun. 01, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS- 4500-B	N/A	1~4m	N/A	May 16, 2018~ Jun. 01, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 16, 2018~ Jun. 01, 2018	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	May 16, 2018~ Jun. 01, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55- 303K	171000180005 4002	1GHz~18GHz	Apr. 17, 2018	May 16, 2018~ Jun. 01, 2018	Apr. 16, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	9K-30M	Mar. 20, 2018	May 16, 2018~ Jun. 01, 2018	Mar. 19, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	30M-18G	Mar. 15, 2018	May 16, 2018~ Jun. 01, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2589/2	30M-18G	Mar. 15, 2018	May 16, 2018~ Jun. 01, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	2.7G High Pass	Sep. 18, 2017	May 16, 2018~ Jun. 01, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1G Low Pass	Sep. 18, 2017	May 16, 2018~ Jun. 01, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	May 16, 2018~ Jun. 01, 2018	N/A	Radiation (03CH11-HY)

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : 37 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Report Template No.: BU5-FR15CWL AC MA Version 2.1 Report Version : 01

5 Uncertainty of Evaluation

<u>Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)</u>

Measuring Uncertainty for a Level of Confidence	2.70
of 95% (U = 2Uc(y))	2.70

Report No.: FR850432C

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5 20
of 95% (U = 2Uc(y))	5.20

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	5.50
of 95% (U = 2Uc(y))	5.50

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	5.00
of 95% (U = 2Uc(y))	5.20

TEL: 886-3-327-3456 Page Number : 38 of 38
FAX: 886-3-328-4978 Issued Date : Jun. 08, 2018

Report Template No.: BU5-FR15CWL AC MA Version 2.1 Report Version : 01

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiang Wang/Shiming Liu	Temperature:	21~25	°C
Test Date:	2018/5/11~5/31	Relative Humidity:	51~54	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

	2.4GHz Band											
Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)		upied BW Hz)	6dB (MI		6dB BW Limit (MHz)	Pass/Fail		
					Ant 1	Ant 2	Ant 1	Ant 2				
11b	1Mbps	1	1	2412	12.75	-	7.04		0.50	Pass		
11b	1Mbps	1	6	2437	12.80	-	7.08	-	0.50	Pass		
11b	1Mbps	1	11	2462	12.75	-	7.56	-	0.50	Pass		
11g	6Mbps	1	1	2412	17.70	-	15.48	-	0.50	Pass		
11g	6Mbps	1	6	2437	17.80	-	16.04	-	0.50	Pass		
11g	6Mbps	1	11	2462	17.65	-	15.80	-	0.50	Pass		
HT20	MCS0	1	1	2412	18.75	-	15.72	-	0.50	Pass		
HT20	MCS0	1	6	2437	18.85	-	16.08	-	0.50	Pass		
HT20	MCS0	1	11	2462	18.75	-	15.86	-	0.50	Pass		
HT40	MCS0	1	3	2422	36.50	-	36.00	-	0.50	Pass		
HT40	MCS0	1	6	2437	36.70	-	35.68	-	0.50	Pass		
HT40	MCS0	1	9	2452	36.50	-	35.36	-	0.50	Pass		

TEST RESULTS DATA Peak Output Power

	2.4GHz Band															
Mod.	nod. Data Rate NTX CH.	INTXI (:H	INTXI (:F	CH.	Freq. (MHz)	Cond Pov	ak ucted wer Bm)	Pov Lir	ucted wer nit Bm)		G Bi)	Po	RP wer 3m)	EIF Pov Lin (dB	ver nit	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	13.06	-	30.00	-	-1.03	-	12.03	-	36.00	-	Pass	
11b	1Mbps	1	6	2437	13.13	1	30.00	-	-1.03	-	12.10	-	36.00	-	Pass	
11b	1Mbps	1	11	2462	13.10	-	30.00	-	-1.03	-	12.07	-	36.00	-	Pass	
11g	6Mbps	1	1	2412	13.80	-	30.00	-	-1.03	-	12.77	-	36.00	-	Pass	
11g	6Mbps	1	6	2437	13.86	1	30.00	-	-1.03	-	12.83	-	36.00	-	Pass	
11g	6Mbps	1	11	2462	13.83	-	30.00	-	-1.03	-	12.80	-	36.00	-	Pass	
HT20	MCS0	1	1	2412	12.46	ı	30.00	-	-1.03	-	11.43	-	36.00	-	Pass	
HT20	MCS0	1	6	2437	11.90	1	30.00	-	-1.03	-	10.87	-	36.00	-	Pass	
HT20	MCS0	1	11	2462	12.49	-	30.00	-	-1.03	-	11.46	-	36.00	-	Pass	
HT40	MCS0	1	3	2422	12.75	-	30.00	-	-1.03	-	11.72	-	36.00	-	Pass	
HT40	MCS0	1	6	2437	12.65	1	30.00	-	-1.03	-	11.62	-	36.00	-	Pass	
HT40	MCS0	1	9	2452	12.90	-	30.00	-	-1.03	-	11.87	-	36.00	-	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA Average Output Power

	2.4GHz Band								
Mod. Data Nate Nate		I NTY I (CH I		Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)			
					Ant 1	Ant 1			
11b	1Mbps	1	1	2412	0.06	10.26			
11b	1Mbps	1	6	2437	0.06	10.36			
11b	1Mbps	1	11	2462	0.06	10.29			
11g	6Mbps	1	1	2412	0.29	9.24			
11g	6Mbps	1	6	2437	0.29	9.49			
11g	6Mbps	1	11	2462	0.29	9.31			
HT20	MCS0	1	1	2412	0.26	7.41			
HT20	MCS0	1	6	2437	0.26	7.16			
HT20	MCS0	1	11	2462	0.26	7.49			
HT40	MCS0	1	3	2422	0.43	7.23			
HT40	MCS0	1	6	2437	0.43	7.13			
HT40	MCS0	1	9	2452	0.43	7.28			

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA Peak Power Spectral Density

	2.4GHz Band										
Mod.	Mod. Data	Νтх	CH.	Freq.	Peak PSD (dBm/3kHz)		DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
	raio			(1711 12)	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-12.70	-	-1.03	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-11.65	-	-1.03	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-13.30	-	-1.03	-	8.00	1	Pass
11g	6Mbps	1	1	2412	-16.91	-	-1.03	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-16.46	-	-1.03	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-16.47	-	-1.03	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-19.40	-	-1.03	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-18.70	-	-1.03	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-18.17	-	-1.03	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-21.71	-	-1.03	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-21.70	-	-1.03	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-20.96	-	-1.03	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Haigh	Temperature :	22~25 ℃
rest Engineer.	Althur Hsien	Relative Humidity :	51~55%

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : B1 of B

EUT Information


 Report NO :
 850432

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

Full Spectrum

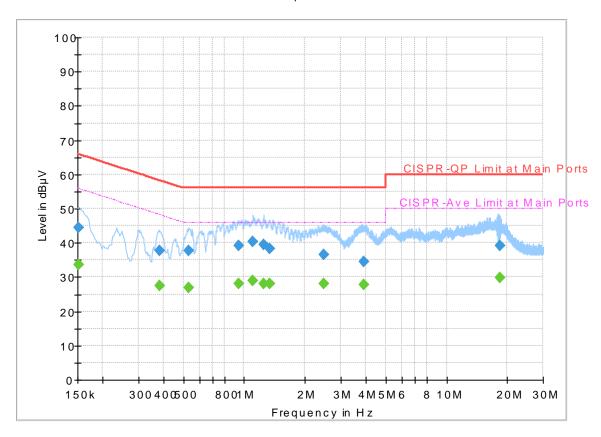


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250		33.53	55.88	22.35	L1	OFF	19.5
0.152250	44.37		65.88	21.51	L1	OFF	19.5
0.381750		27.36	48.24	20.88	L1	OFF	19.5
0.381750	37.68		58.24	20.56	L1	OFF	19.5
0.530250	-	26.80	46.00	19.20	L1	OFF	19.5
0.530250	37.63		56.00	18.37	L1	OFF	19.5
0.935250		27.94	46.00	18.06	L1	OFF	19.6
0.935250	39.17		56.00	16.83	L1	OFF	19.6
1.106250		28.90	46.00	17.10	L1	OFF	19.6
1.106250	40.23		56.00	15.77	L1	OFF	19.6
1.245750	-	28.11	46.00	17.89	L1	OFF	19.6
1.245750	39.45		56.00	16.55	L1	OFF	19.6
1.342500		28.04	46.00	17.96	L1	OFF	19.6
1.342500	38.27		56.00	17.73	L1	OFF	19.6
2.485500		28.00	46.00	18.00	L1	OFF	19.6
2.485500	36.45		56.00	19.55	L1	OFF	19.6
3.894000		27.71	46.00	18.29	L1	OFF	19.7
3.894000	34.57		56.00	21.43	L1	OFF	19.7
18.276000		29.87	50.00	20.13	L1	OFF	20.2
18.276000	39.04		60.00	20.96	L1	OFF	20.2

EUT Information

Report NO: 850432
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

Full Spectrum

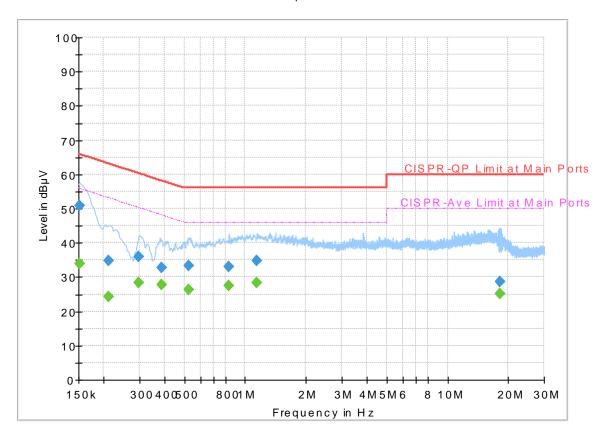

Final_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.152250		33.88	55.88	22.00	N	OFF	19.5
0.152250	50.76		65.88	15.12	N	OFF	19.5
0.210750		24.41	53.18	28.77	N	OFF	19.5
0.210750	34.72		63.18	28.46	N	OFF	19.5
0.298500		28.32	50.28	21.96	N	OFF	19.5
0.298500	36.10		60.28	24.18	N	OFF	19.5
0.386250		27.86	48.14	20.28	N	OFF	19.5
0.386250	32.70		58.14	25.44	N	OFF	19.5
0.523500		26.27	46.00	19.73	N	OFF	19.5
0.523500	33.24		56.00	22.76	N	OFF	19.5
0.831750		27.38	46.00	18.62	N	OFF	19.6
0.831750	33.05		56.00	22.95	N	OFF	19.6
1.142250		28.42	46.00	17.58	N	OFF	19.6
1.142250	34.91		56.00	21.09	N	OFF	19.6
18.138750		25.16	50.00	24.84	N	OFF	20.2
18.138750	28.51		60.00	31.49	N	OFF	20.2

Appendix C. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Ken Wu, and Chuan Zhu	Temperature :	21~26°C
rest Engineer.		Relative Humidity :	51~56%

Report No.: FR850432C

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2348.745	52.56	-21.44	74	43.01	27	16.15	33.6	100	102	Р	Н
		2389.065	41.74	-12.26	54	31.92	27.13	16.29	33.6	100	102	Α	Н
	*	2412	103.67	-	-	93.78	27.18	16.3	33.59	100	102	Р	Н
	*	2412	100.48	-	-	90.59	27.18	16.3	33.59	100	102	Α	Н
802.11b													Н
CH 01													Н
2412MHz		2327.535	52.27	-21.73	74	42.85	26.95	16.08	33.61	360	81	Р	V
24 ZIVII Z		2389.905	41.53	-12.47	54	31.7	27.13	16.29	33.59	360	81	Α	V
	*	2412	101.14	-	-	91.25	27.18	16.3	33.59	360	81	Р	V
	*	2412	97.96	-	-	88.07	27.18	16.3	33.59	360	81	Α	V
													V
													V
		2346.64	52.14	-21.86	74	42.59	27	16.15	33.6	100	105	Р	Н
		2389.04	41.5	-12.5	54	31.68	27.13	16.29	33.6	100	105	Α	Н
	*	2437	104.41	-	-	94.42	27.27	16.31	33.59	100	105	Р	Н
	*	2437	101.13	-	-	91.14	27.27	16.31	33.59	100	105	Α	Н
000 441		2489.28	52.43	-21.57	74	42.29	27.4	16.32	33.58	100	105	Р	Н
802.11b CH 06		2485.04	42.22	-11.78	54	32.12	27.36	16.32	33.58	100	105	Α	Н
2437MHz		2334.64	51.96	-22.04	74	42.42	27	16.15	33.61	352	82	Р	V
2437 WII 12		2389.52	41.36	-12.64	54	31.54	27.13	16.29	33.6	352	82	Α	V
	*	2437	102.63	-	-	92.64	27.27	16.31	33.59	352	82	Р	V
	*	2437	99.35	-	-	89.36	27.27	16.31	33.59	352	82	Α	V
		2486	53.1	-20.9	74	43	27.36	16.32	33.58	352	82	Р	V
		2484.72	41.78	-12.22	54	31.68	27.36	16.32	33.58	352	82	Α	V

TEL: 886-3-327-3456 Page Number : C1 of C15



FCC RADIO TEST REPORT

302.11b CH 11 462MHz	*	2462	105.52	-	-	95.48	27.31	16.31	33.58	100	106	Р	H
	*	2462	102.37	-	-	92.33	27.31	16.31	33.58	100	106	Α	H
		2485.28	53.85	-20.15	74	43.75	27.36	16.32	33.58	100	106	Р	Н
		2484.12	42.28	-11.72	54	32.19	27.36	16.31	33.58	100	106	Α	H
000 446													F
													F
	*	2462	102.77	-	-	92.73	27.31	16.31	33.58	345	88	Р	٧
-402111112	*	2462	99.57	-	-	89.53	27.31	16.31	33.58	345	88	Α	٧
		2488.44	52.92	-21.08	74	42.78	27.4	16.32	33.58	345	88	Р	٧
		2484.2	41.87	-12.13	54	31.77	27.36	16.32	33.58	345	88	Α	٧
													V
													٧

Report No.: FR850432C

Remark

TEL: 886-3-327-3456 Page Number : C2 of C15

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		4824	52.55	-21.45	74	67.81	31.29	10.02	56.57	108	115	Р	Н
		4824	49.87	-4.13	54	65.13	31.29	10.02	56.57	108	115	Α	Н
802.11b													Н
CH 01													Н
		4824	47.33	-26.67	74	62.59	31.29	10.02	56.57	100	0	Р	V
2412MHz													V
													V
													V
		4874	52.48	-21.52	74	67.66	31.38	9.99	56.55	101	116	Р	Н
		4874	50.4	-3.6	54	65.58	31.38	9.99	56.55	101	116	Α	Н
000 441		7311	40.79	-33.21	74	48.97	36.28	11.77	56.23	100	0	Р	Н
802.11b													Н
CH 06 2437MHz		4874	47.13	-26.87	74	62.31	31.38	9.99	56.55	100	0	Р	V
2407111112		7311	41.99	-32.01	74	50.16	36.28	11.78	56.23	100	0	Р	V
													V
		4924	52.49	-21.51	74	67.55	31.48	9.99	56.53	109	117	Р	V
		4924	50.27	-3.73	54	65.33	31.48	9.99	56.53	109	117	A	Н
		7386	41.35	-32.65	74	49.32	36.47	11.68	56.12	100	0	P	Н
802.11b			11.00	02.00		10.02	00.11		00.12			•	Н
CH 11		4924	46.05	-27.95	74	61.11	31.48	9.99	56.53	100	0	Р	V
2462MHz		7386	42.5	-31.5	74	50.47	36.47	11.68	56.12	100	0	Р	V
													V
													V

TEL: 886-3-327-3456 Page Number : C3 of C15

2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)

Report No.: FR850432C

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBµV/m)	Limit (dB)	Line (dBµV/m)	Level	Factor (dB/m)	Loss (dB)	Factor	Pos	Pos	Avg. (P/A)	
		2385.81	53.07	-20.93	74	(dBµV) 43.25	27.13	16.29	(dB) 33.6	(cm) 100	(deg)	(F/A)	(n/v) H
		2390	44.74	-9.26	54	34.91	27.13	16.29	33.59	100	105	A	Н
	*	2412	106.32	-	-	96.43	27.18	16.3	33.59	100	105	P	Н
	*	2412	98.34	-	-	88.45	27.18	16.3	33.59	100	105	A	Н
													Н
802.11g													Н
CH 01		2327.745	52.74	-21.26	74	43.32	26.95	16.08	33.61	308	99	Р	V
2412MHz		2390	42.73	-11.27	54	32.9	27.13	16.29	33.59	308	99	Α	V
	*	2412	102.46	-	-	92.57	27.18	16.3	33.59	308	99	Р	٧
	*	2414	94.14	-	-	84.25	27.18	16.3	33.59	308	99	Α	V
													V
													٧
		2387.6	52.95	-21.05	74	43.13	27.13	16.29	33.6	100	119	Р	Н
		2388.4	42.31	-11.69	54	32.49	27.13	16.29	33.6	100	119	Α	Н
	*	2437	107.01	-	-	97.02	27.27	16.31	33.59	100	119	Р	Н
	*	2437	99.11	-	-	89.12	27.27	16.31	33.59	100	119	Α	Н
000 44		2485.68	56.87	-17.13	74	46.77	27.36	16.32	33.58	100	119	Р	Н
802.11g CH 06		2483.92	44.28	-9.72	54	34.19	27.36	16.31	33.58	100	119	Α	Н
2437MHz		2324.88	51.45	-22.55	74	42.03	26.95	16.08	33.61	340	77	Р	V
2437111112		2388.72	41.86	-12.14	54	32.04	27.13	16.29	33.6	340	77	Α	V
	*	2437	104.36	-	-	94.37	27.27	16.31	33.59	340	77	Р	V
	*	2437	96.43	-	-	86.44	27.27	16.31	33.59	340	77	Α	V
		2484.08	53.72	-20.28	74	43.63	27.36	16.31	33.58	340	77	Р	V
		2484.24	42.75	-11.25	54	32.65	27.36	16.32	33.58	340	77	Α	V

TEL: 886-3-327-3456 Page Number : C4 of C15



FCC RADIO TEST REPORT

	*	2462	107.38	-	-	97.34	27.31	16.31	33.58	118	114	Р	
	*	2462	99.55	-	-	89.51	27.31	16.31	33.58	118	114	Α	Ī
		2485.16	59.98	-14.02	74	49.88	27.36	16.32	33.58	118	114	Р	
		2483.88	46.13	-7.87	54	36.04	27.36	16.31	33.58	118	114	Α	
0.44													
2.11g H 11													
62MHz	*	2462	104.62	-	-	94.58	27.31	16.31	33.58	375	99	Р	
2111112	*	2462	96.59	-	-	86.55	27.31	16.31	33.58	375	99	Α	
_		2484.08	57.59	-16.41	74	47.5	27.36	16.31	33.58	375	99	Р	
		2483.64	44.47	-9.53	54	34.38	27.36	16.31	33.58	375	99	Α	

Report No.: FR850432C

Remark

TEL: 886-3-327-3456 Page Number : C5 of C15

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		4824	56.12	-17.88	74	71.38	31.29	10.02	56.57	100	118	Р	Н
		4824	44.87	-9.13	54	60.13	31.29	10.02	56.57	100	118	Α	Н
802.11g													Н
CH 01													Н
2412MHz		4824	47.72	-26.28	74	62.98	31.29	10.02	56.57	100	0	Р	V
													V
													V
													V
		4874	48.72	-25.28	74	63.9	31.38	9.99	56.55	100	0	Р	Н
		7311	41.57	-32.43	74	49.75	36.28	11.77	56.23	100	0	Р	Н
802.11g													Н
CH 06													Н
2437MHz		4874	44.84	-29.16	74	60.02	31.38	9.99	56.55	100	0	Р	V
		7311	42.14	-31.86	74	50.32	36.28	11.77	56.23	100	0	Р	V
													V
													V
		4924	49.55	-24.45	74	64.61	31.48	9.99	56.53	100	0	Р	Н
		7386	41.38	-32.62	74	49.35	36.47	11.68	56.12	100	0	Р	Н
802.11g													Н
CH 11													Н
2462MHz		4924	44.65	-29.35	74	59.71	31.48	9.99	56.53	100	0	Р	V
		7386	41.06	-32.94	74	49.03	36.47	11.68	56.12	100	0	Р	V
													V
													V

Remark

- 1. No other spurious found.
- 2. All results are PASS against Peak and Average limit line.

TEL: 886-3-327-3456 Page Number : C6 of C15

2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)

Report No.: FR850432C

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBµV/m)	Limit (dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(HVV)
•		2389.8	54.42	-19.58	74	44.59	27.13	16.29	33.59	100	105	P	(11/ V)
		2389.905	44.4	-9.6	54	34.57	27.13	16.29	33.59	100	105	Α	Н
	*	2412	105.31	_	-	95.42	27.18	16.3	33.59	100	105	Р	Н
	*	2412	97.17	-	-	87.28	27.18	16.3	33.59	100	105	Α	Н
802.11n													Н
HT20													Н
CH 01		2389.065	51.87	-22.13	74	42.05	27.13	16.29	33.6	392	75	Р	V
2412MHz		2389.38	42.31	-11.69	54	32.49	27.13	16.29	33.6	392	75	Α	V
	*	2412	101.13	-	-	91.24	27.18	16.3	33.59	392	75	Р	٧
	*	2412	93.07	-	-	83.18	27.18	16.3	33.59	392	75	Α	٧
													٧
													٧
		2388.08	51.57	-22.43	74	41.75	27.13	16.29	33.6	100	107	Р	Н
		2389.2	42.49	-11.51	54	32.67	27.13	16.29	33.6	100	107	Α	Н
	*	2437	105.85	-	-	95.86	27.27	16.31	33.59	100	107	Р	Н
	*	2437	97.83	-	-	87.84	27.27	16.31	33.59	100	107	Α	Н
802.11n		2484.64	58.19	-15.81	74	48.09	27.36	16.32	33.58	100	107	Р	Н
HT20		2485.04	43.94	-10.06	54	33.84	27.36	16.32	33.58	100	107	Α	Н
CH 06		2372.72	51.89	-22.11	74	42.18	27.09	16.22	33.6	386	70	Р	V
2437MHz		2389.36	41.72	-12.28	54	31.9	27.13	16.29	33.6	386	70	Α	٧
	*	2437	102.14	-	-	92.15	27.27	16.31	33.59	386	70	Р	V
	*	2437	94.2	-	-	84.21	27.27	16.31	33.59	386	70	Α	V
		2485.92	52.97	-21.03	74	42.87	27.36	16.32	33.58	386	70	Р	V
		2484.96	42.42	-11.58	54	32.32	27.36	16.32	33.58	386	70	Α	V

TEL: 886-3-327-3456 Page Number : C7 of C15



FCC RADIO TEST REPORT

		1		1		ì		1	ì				
	*	2462	107.54	-	-	97.5	27.31	16.31	33.58	100	104	Р	Н
	*	2462	98.63	-	-	88.59	27.31	16.31	33.58	100	104	Α	Н
		2484.64	59.28	-14.72	74	49.18	27.36	16.32	33.58	100	104	Р	Н
		2483.6	45.22	-8.78	54	35.13	27.36	16.31	33.58	100	104	Α	Н
802.11n													Н
HT20													Н
CH 11	*	2462	102.81	-	-	92.77	27.31	16.31	33.58	380	78	Р	V
2462MHz	*	2462	94.74	-	-	84.7	27.31	16.31	33.58	380	78	Α	V
		2484.56	55.07	-18.93	74	44.97	27.36	16.32	33.58	380	78	Р	V
		2484.2	43	-11	54	32.9	27.36	16.32	33.58	380	78	Α	V
													V
													V

Report No.: FR850432C

Remark

TEL: 886-3-327-3456 Page Number : C8 of C15

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11n HT20 (Harmonic @ 3m)

						,					-		
WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	. ,	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)		(P/A)	_
		4824	48.44	-25.56	74	63.7	31.29	10.02	56.57	100	0	Р	Н
													Н
802.11n													Н
HT20													Н
CH 01		4824	46.37	-27.63	74	61.63	31.29	10.02	56.57	100	0	Р	V
2412MHz													V
													V
													V
		4874	49.01	-24.99	74	64.19	31.38	9.99	56.55	100	0	Р	Н
		7311	41.55	-32.45	74	49.73	36.28	11.77	56.23	100	0	Р	Н
802.11n													Н
HT20													Н
CH 06		4874	44.23	-29.77	74	59.41	31.38	9.99	56.55	100	0	Р	V
2437MHz		7311	41.81	-32.19	74	49.99	36.28	11.77	56.23	100	0	Р	V
													V
													V
		4924	48.45	-25.55	74	63.51	31.48	9.99	56.53	100	0	Р	Н
		7386	41	-33	74	48.97	36.47	11.68	56.12	100	0	Р	Н
802.11n													Н
HT20													Н
CH 11		4924	43.07	-30.93	74	58.13	31.48	9.99	56.53	100	0	Р	V
2462MHz		7386	41.82	-32.18	74	49.79	36.47	11.68	56.12	100	0	Р	V
													V
									 		 		V

Remark

- 1. No other spurious found.
- 2. All results are PASS against Peak and Average limit line.

TEL: 886-3-327-3456 Page Number : C9 of C15

2.4GHz 2400~2483.5MHz WIFI 802.11n HT40 (Band Edge @ 3m)

Report No.: FR850432C

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)		(P/A)	, ,
		2381.55	51.35	-22.65	74	41.57	27.09	16.29	33.6	123	142	Р	Н
		2386.35	42.7	-11.3	54	32.88	27.13	16.29	33.6	123	142	Α	Н
	*	2422	100.11	-	-	90.18	27.22	16.3	33.59	123	142	Р	Н
	*	2422	91.85	-	-	81.92	27.22	16.3	33.59	123	142	Α	Н
802.11n		2484.4	53.03	-20.97	74	42.93	27.36	16.32	33.58	123	142	Р	Н
HT40		2484.56	43.33	-10.67	54	33.23	27.36	16.32	33.58	123	142	Α	Н
CH 03		2385.9	51.66	-22.34	74	41.84	27.13	16.29	33.6	311	81	Р	V
2422MHz		2386.5	42.53	-11.47	54	32.71	27.13	16.29	33.6	311	81	Α	V
	*	2422	96.17	-	-	86.24	27.22	16.3	33.59	311	81	Р	V
	*	2422	88.56	-	-	78.63	27.22	16.3	33.59	311	81	Α	V
		2497.12	52.27	-21.73	74	42.12	27.4	16.32	33.57	311	81	Р	<
		2496.8	42.85	-11.15	54	32.7	27.4	16.32	33.57	311	81	Α	V
		2333.4	51.86	-22.14	74	42.37	26.95	16.15	33.61	123	142	Р	П
		2372.85	42.66	-11.34	54	32.95	27.09	16.22	33.6	123	142	Α	Н
	*	2437	98.03	-	-	88.04	27.27	16.31	33.59	123	142	Р	Н
	*	2437	90.33	-	-	80.34	27.27	16.31	33.59	123	142	Α	Н
802.11n		2484.48	54.73	-19.27	74	44.63	27.36	16.32	33.58	123	142	Р	Н
HT40		2483.68	43.3	-10.7	54	33.21	27.36	16.31	33.58	123	142	Α	Н
CH 06		2365.35	51.14	-22.86	74	41.48	27.04	16.22	33.6	340	85	Р	V
2437MHz		2383.35	42.51	-11.49	54	32.73	27.09	16.29	33.6	340	85	Α	V
	*	2437	95.02	-	-	85.03	27.27	16.31	33.59	340	85	Р	V
	*	2437	87.14	-	-	77.15	27.27	16.31	33.59	340	85	Α	V
		2488.8	51.78	-22.22	74	41.64	27.4	16.32	33.58	340	85	Р	V
		2484.48	43.24	-10.76	54	33.14	27.36	16.32	33.58	340	85	Α	V

TEL: 886-3-327-3456 Page Number : C10 of C15



FCC RADIO TEST REPORT

		2389.35	51.73	-22.27	74	41.91	27.13	16.29	33.6	149	140	Р	Н
		2388.15	42.54	-11.46	54	32.72	27.13	16.29	33.6	149	140	Α	Н
	*	2452	98.26	-	-	88.26	27.27	16.31	33.58	149	140	Р	Н
	*	2452	90.65	-	-	80.65	27.27	16.31	33.58	149	140	Α	Н
802.11n		2486.72	54.54	-19.46	74	44.44	27.36	16.32	33.58	149	140	Р	Н
HT40		2484.64	43.72	-10.28	54	33.62	27.36	16.32	33.58	149	140	Α	Н
CH 09		2357.55	51.88	-22.12	74	42.22	27.04	16.22	33.6	298	84	Р	V
2452MHz		2349	42.63	-11.37	54	33.08	27	16.15	33.6	298	84	Α	٧
	*	2452	95.13	-	-	85.13	27.27	16.31	33.58	298	84	Р	٧
	*	2452	87.14	-	-	77.14	27.27	16.31	33.58	298	84	Α	٧
		2485.12	52.62	-21.38	74	42.52	27.36	16.32	33.58	298	84	Р	V
		2485.04	43.08	-10.92	54	32.98	27.36	16.32	33.58	298	84	Α	V

Report No.: FR850432C

Remark

TEL: 886-3-327-3456 Page Number : C11 of C15

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)		(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		4844	38.9	-35.1	74	54.13	31.32	10.01	56.56	100	0	Р	Н
		7266	42.18	-31.82	74	50.42	36.21	11.82	56.27	100	0	Р	Н
802.11n													Н
HT40													Н
CH 03		4844	39.51	-34.49	74	54.74	31.32	10.01	56.56	100	0	Р	V
2422MHz		7266	41.95	-32.05	74	50.19	36.21	11.82	56.27	100	0	Р	V
													V
													V
		4874	38.53	-35.47	74	53.71	31.38	9.99	56.55	100	0	Р	Н
		7311	42.51	-31.49	74	50.69	36.28	11.77	56.23	100	0	Р	Н
802.11n													Н
HT40													Н
CH 06		4874	38.35	-35.65	74	53.53	31.38	9.99	56.55	100	0	Р	V
2437MHz		7311	41.05	-32.95	74	49.23	36.28	11.77	56.23	100	0	Р	V
													V
													V
		4904	38.62	-35.38	74	53.72	31.44	9.99	56.53	100	0	Р	Н
		7356	41.41	-32.59	74	49.47	36.4	11.71	56.17	100	0	Р	Н
802.11n													Н
HT40													Н
CH 09		4904	38.2	-35.8	74	53.3	31.44	9.99	56.53	100	0	Р	V
2452MHz		7356	40.69	-33.31	74	48.75	36.4	11.71	56.17	100	0	Р	V
													V
													V

Remark

- 1. No other spurious found.
- 2. All results are PASS against Peak and Average limit line.

TEL: 886-3-327-3456 Page Number : C12 of C15

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		91.02	25.51	-17.99	43.5	42.03	14.72	1.24	32.48	-	-	Р	Н
		122.88	22	-21.5	43.5	35.65	17.26	1.55	32.46	-	-	Р	Н
		252.21	21.94	-24.06	46	33.44	18.72	2.16	32.38	-	-	Р	Н
		528.9	25.02	-20.98	46	30.56	23.88	2.98	32.4	-	-	Р	Н
		713	27.55	-18.45	46	29.8	26.7	3.48	32.43	-	-	Р	Н
		922.3	32.01	-13.99	46	30.11	29.41	3.95	31.46	100	0	Р	Н
													Н
													Н
													Н
													Н
0.4011-													Н
2.4GHz 802.11b													Н
LF		45.93	36.96	-3.04	40	52.29	16.14	1.02	32.49	100	0	Р	V
L1		117.21	28.97	-14.53	43.5	42.86	17.14	1.43	32.46	-	-	Р	V
		177.15	19.83	-23.67	43.5	35.54	14.92	1.78	32.41	-	-	Р	V
		423.2	22.36	-23.64	46	29.47	22.55	2.68	32.34	-	-	Р	V
		651.4	26.95	-19.05	46	29.84	26.27	3.31	32.47	-	-	Р	V
		863.5	32.49	-13.51	46	31.47	29.05	3.82	31.85	-	-	Р	V
													V
													V
													V
													V
						_							V
													V

Remark 2.

1. No other spurious found.

2. All results are PASS against limit line.

TEL: 886-3-327-3456 Page Number : C13 of C15

Note symbol

Report No.: FR850432C

*	Fundamental Frequency which can be ignored. However, the level of any
	unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

TEL: 886-3-327-3456 Page Number : C14 of C15

A calculation example for radiated spurious emission is shown as below:

Report No.: FR850432C

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

- 1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
- 2. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

TEL: 886-3-327-3456 Page Number : C15 of C15

Appendix D. Radiated Spurious Emission Plots

Toot Engineer :	Hao Hsu, Ken Wu, and Chuan Zhu	Temperature :	21~26°C	
Test Engineer :		Relative Humidity :	51~56%	

Report No.: FR850432C


Note symbol

-L	Low channel location
-R	High channel location


TEL: 886-3-327-3456 Page Number : D1 of D50

2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)


Report No.: FR850432C

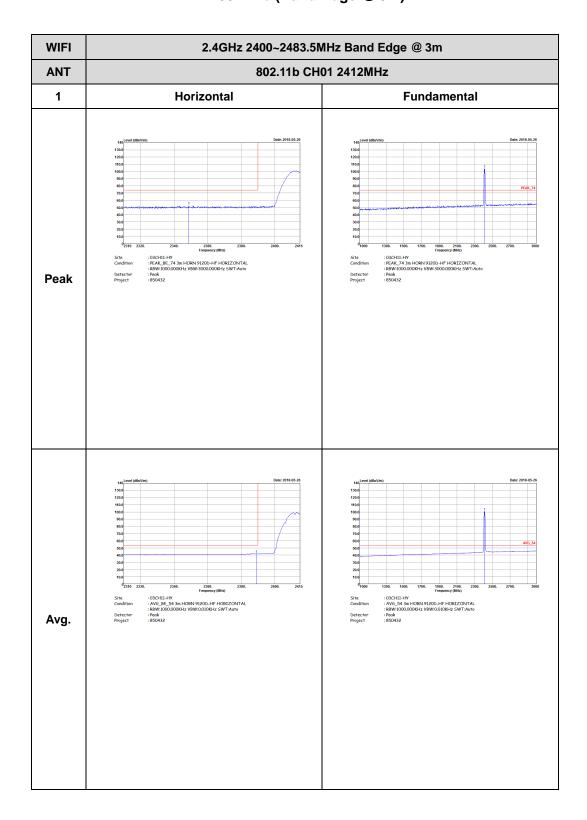


TEL: 886-3-327-3456 Page Number : D2 of D50

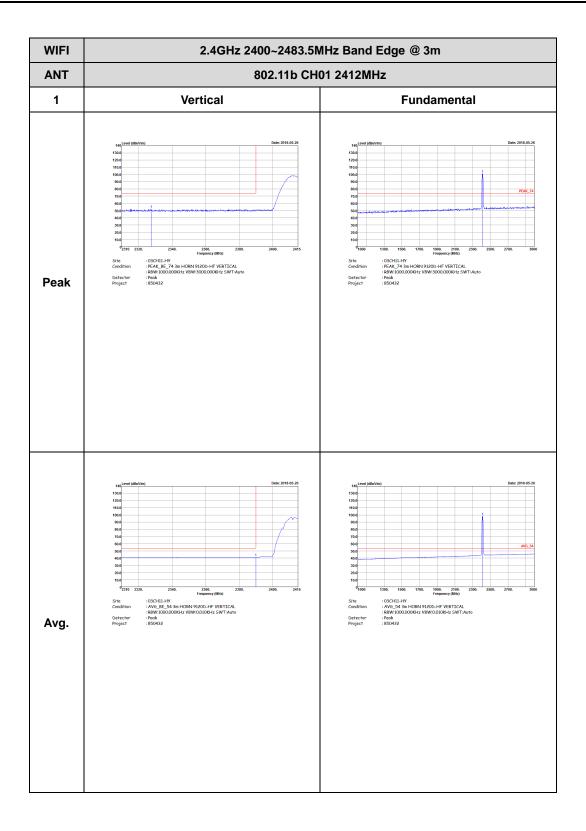


TEL: 886-3-327-3456 Page Number : D3 of D50

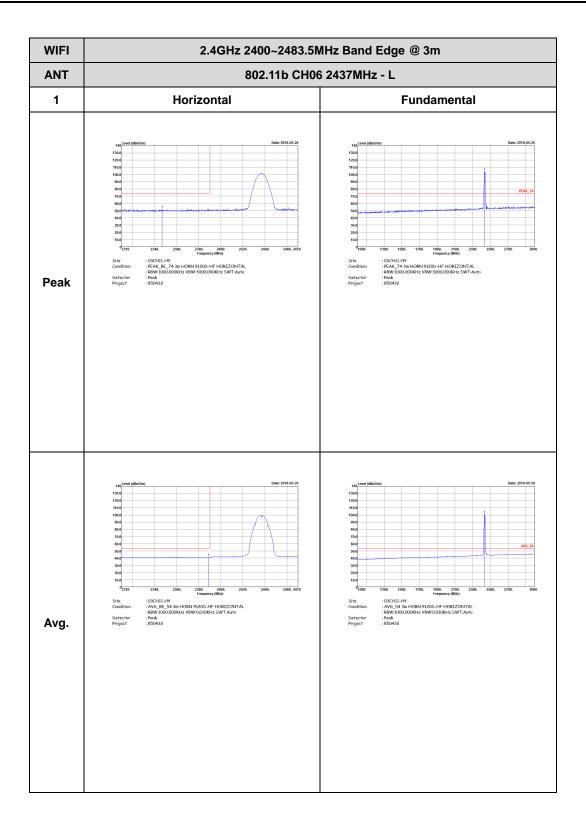


TEL: 886-3-327-3456 Page Number : D4 of D50

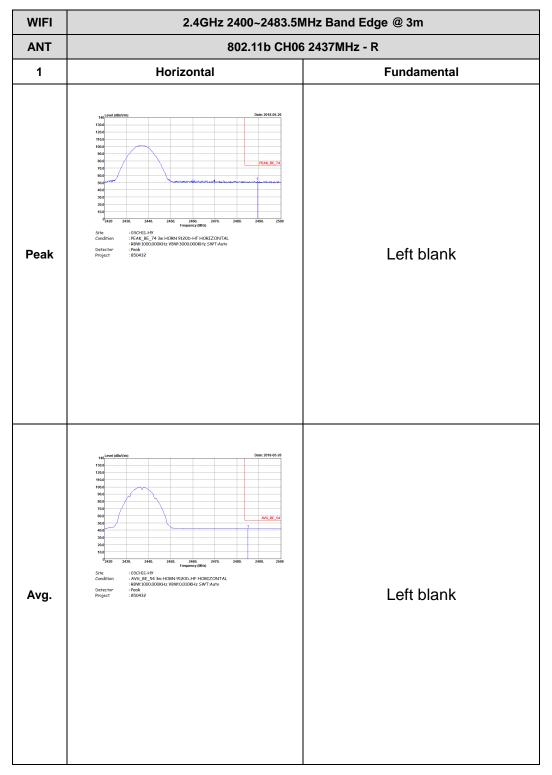


TEL: 886-3-327-3456 Page Number : D5 of D50

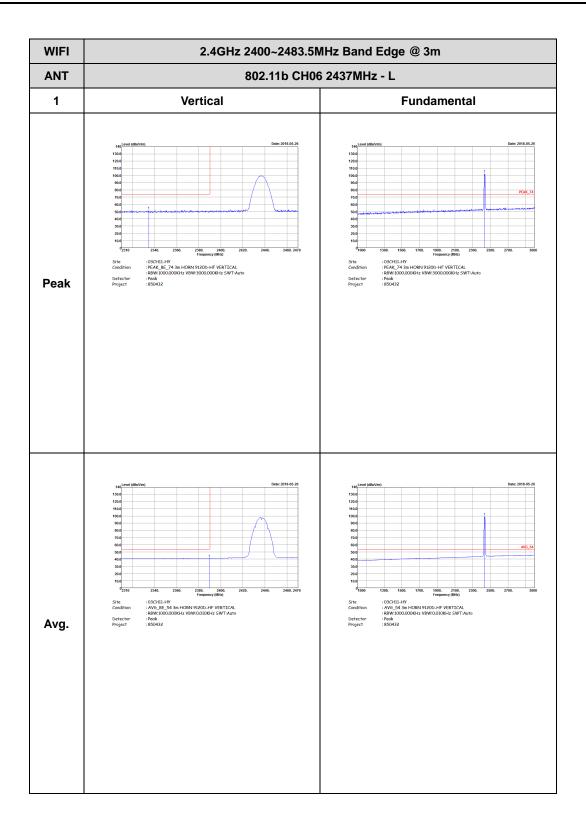

TEL: 886-3-327-3456 Page Number : D6 of D50

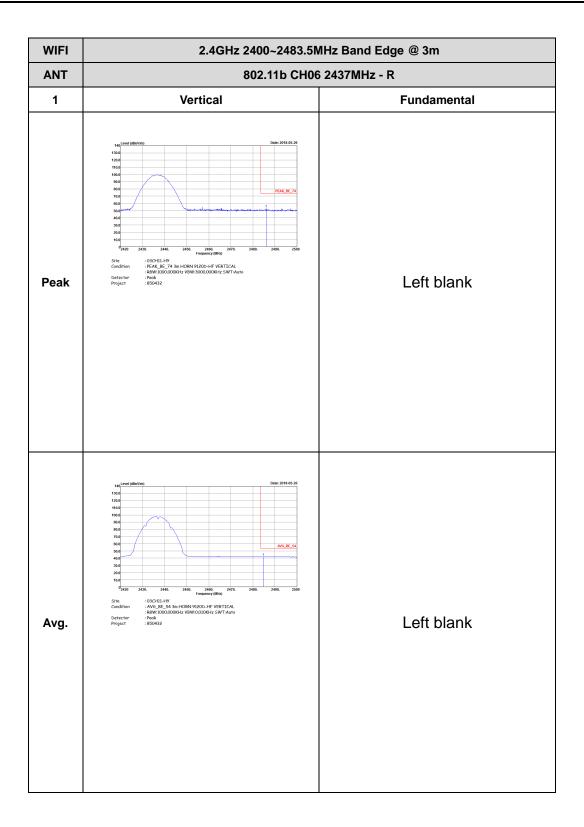


TEL: 886-3-327-3456 Page Number : D7 of D50

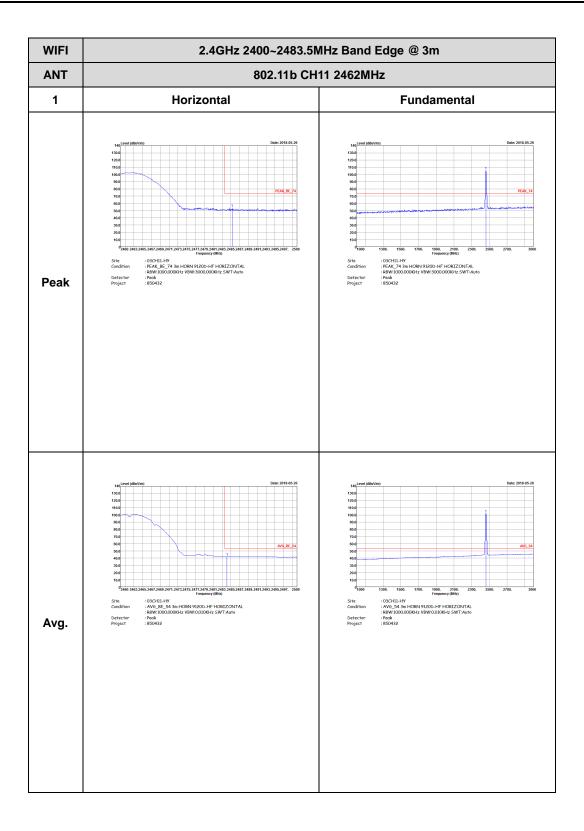

TEL: 886-3-327-3456 Page Number : D8 of D50




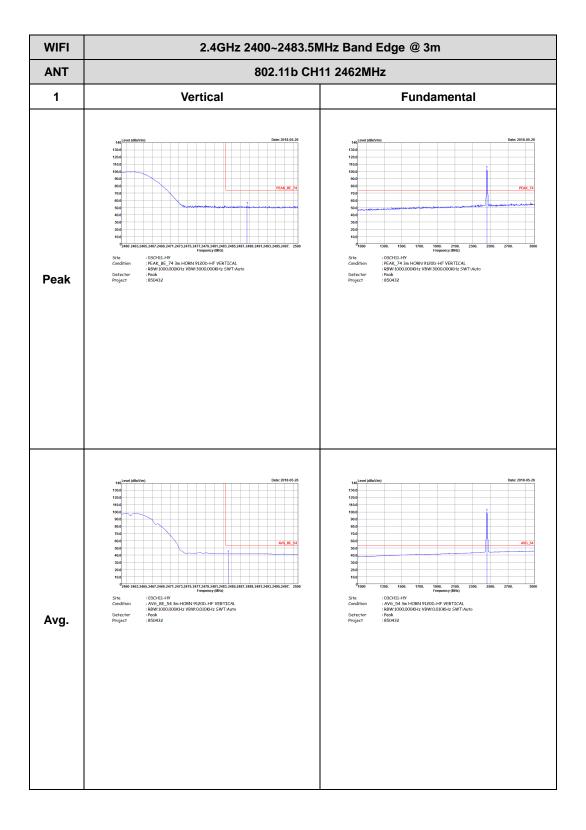

TEL: 886-3-327-3456 Page Number : D9 of D50


2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)

Report No.: FR850432C

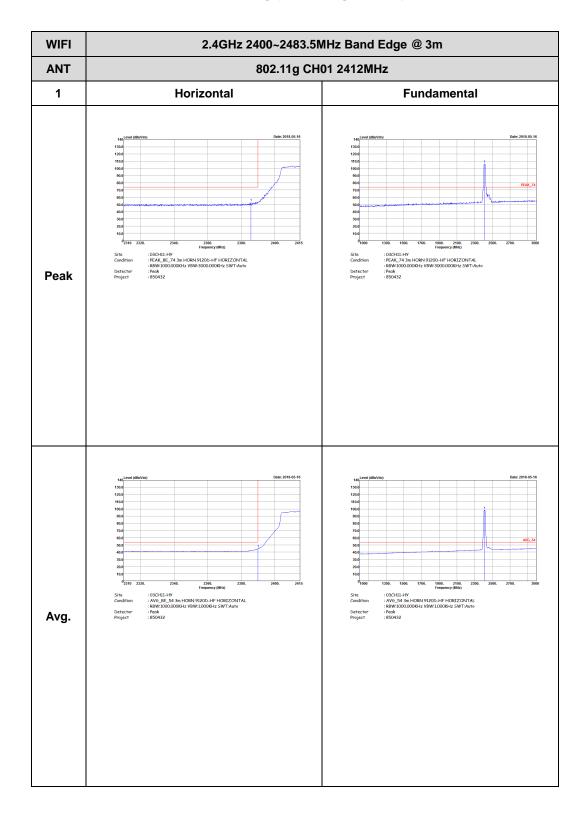


TEL: 886-3-327-3456 Page Number : D10 of D50



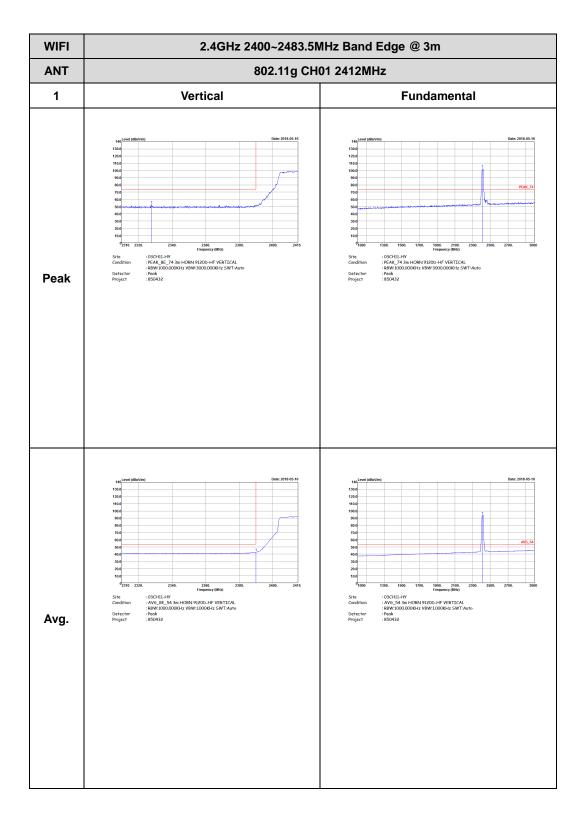


TEL: 886-3-327-3456 Page Number : D11 of D50

Report No.: FR850432C

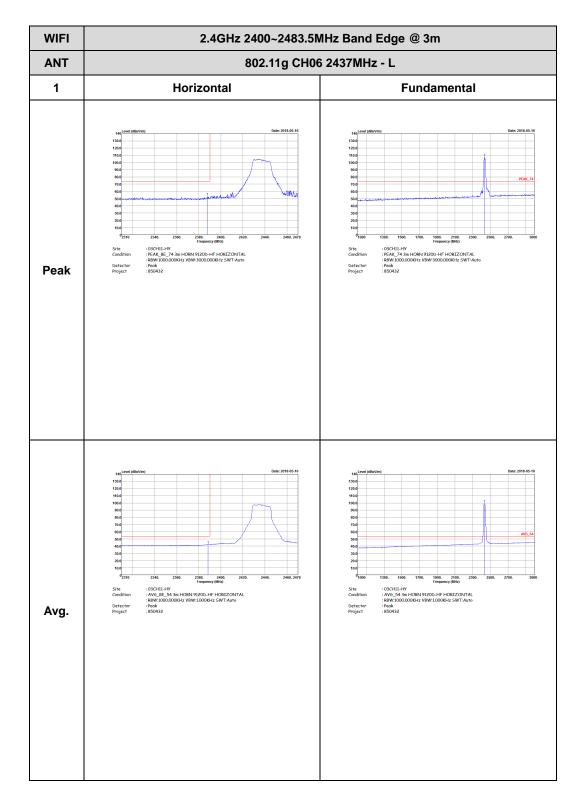


TEL: 886-3-327-3456 Page Number : D12 of D50



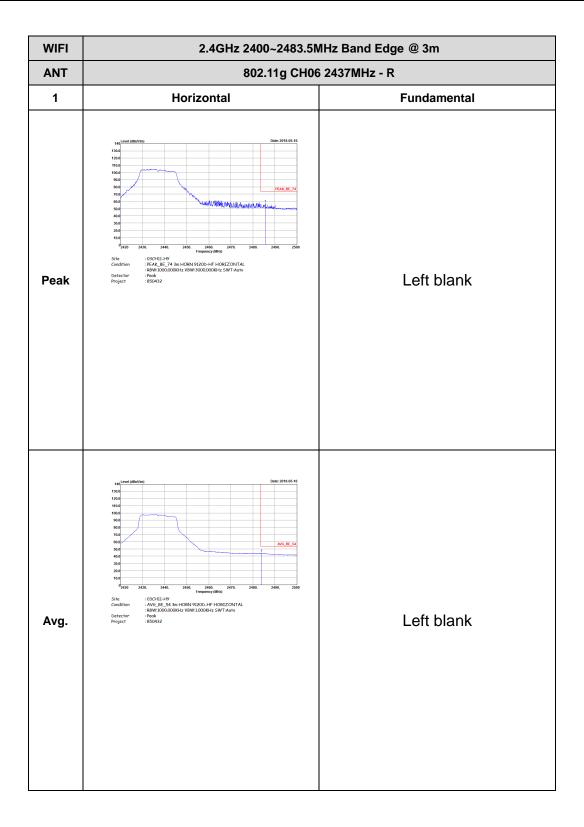


Report No.: FR850432C


TEL: 886-3-327-3456 Page Number : D13 of D50

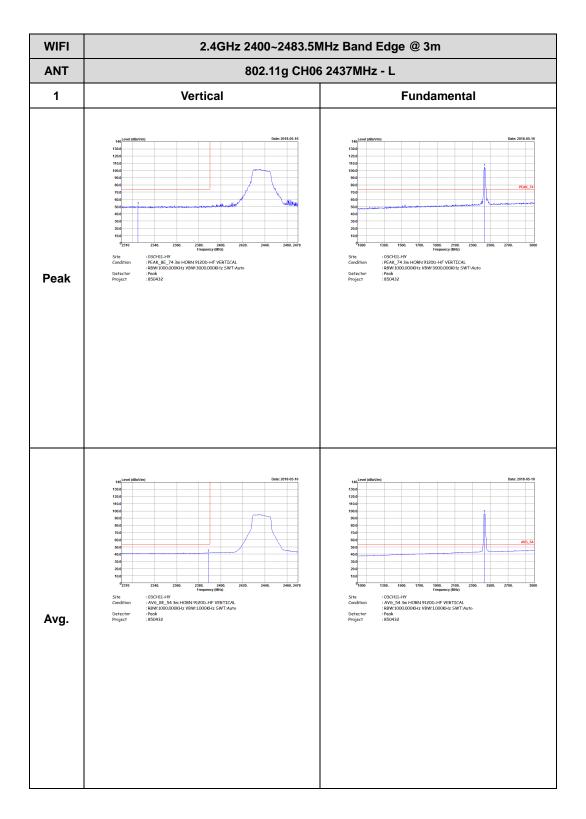

TEL: 886-3-327-3456 Page Number : D14 of D50

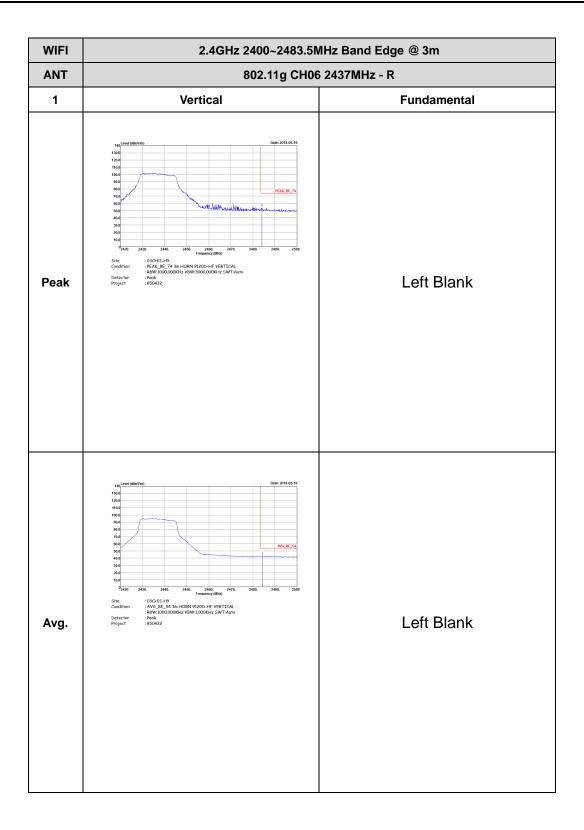


TEL: 886-3-327-3456 Page Number : D15 of D50

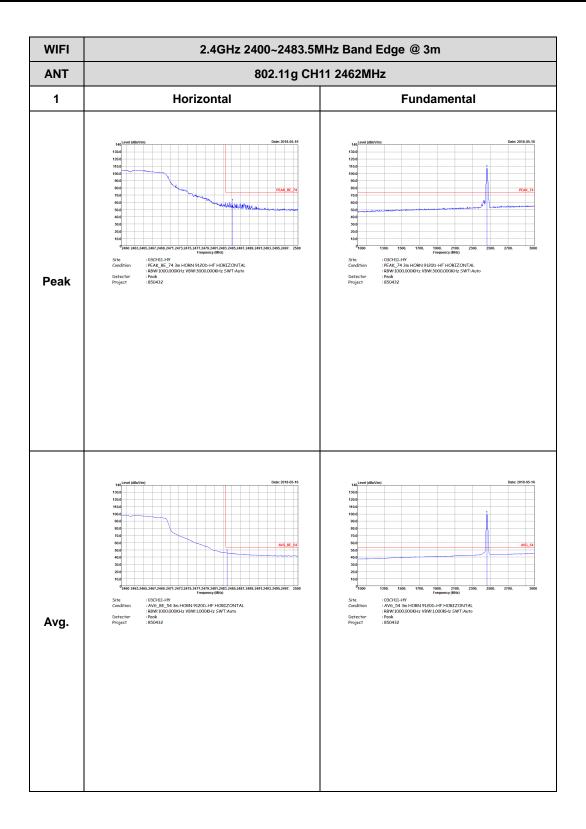

TEL: 886-3-327-3456 Page Number : D16 of D50



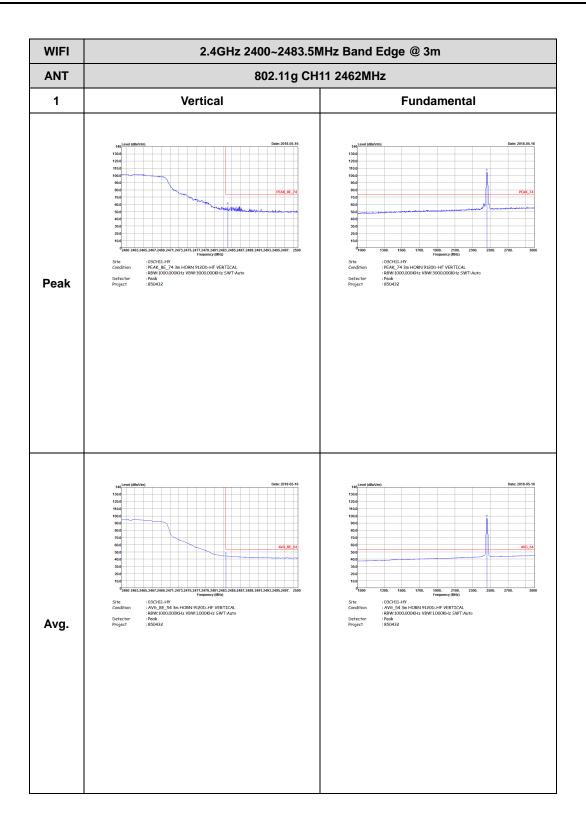


TEL: 886-3-327-3456 Page Number : D17 of D50

2.4GHz 2400~2483.5MHz


Report No.: FR850432C

WIFI 802.11n HT20 (Band Edge @ 3m)

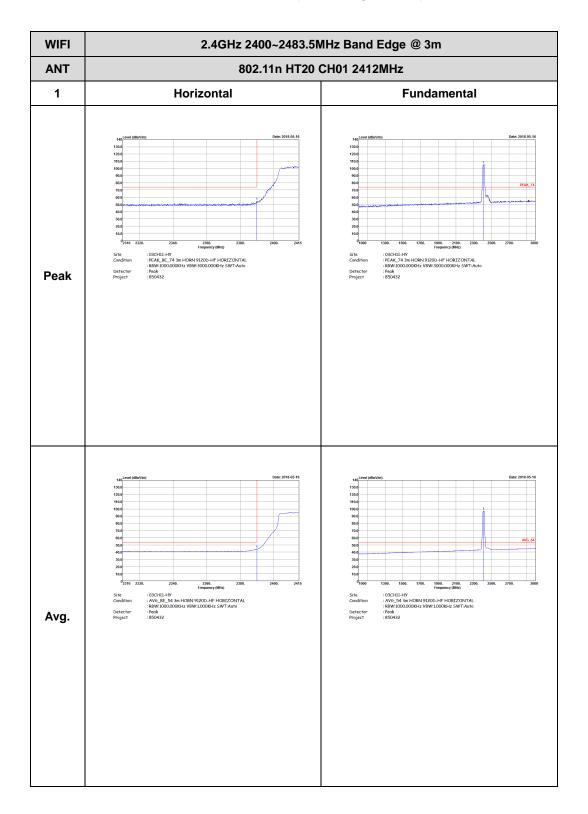


TEL: 886-3-327-3456 Page Number : D18 of D50



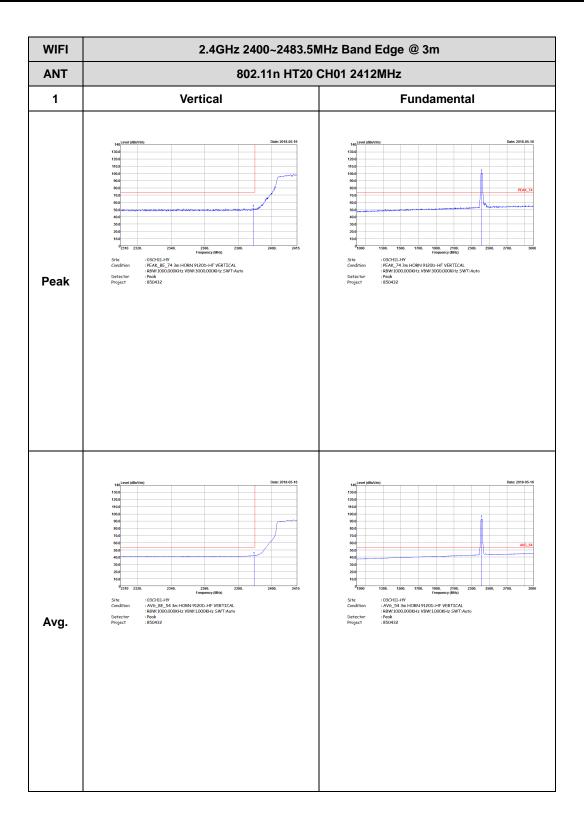


TEL: 886-3-327-3456 Page Number : D19 of D50

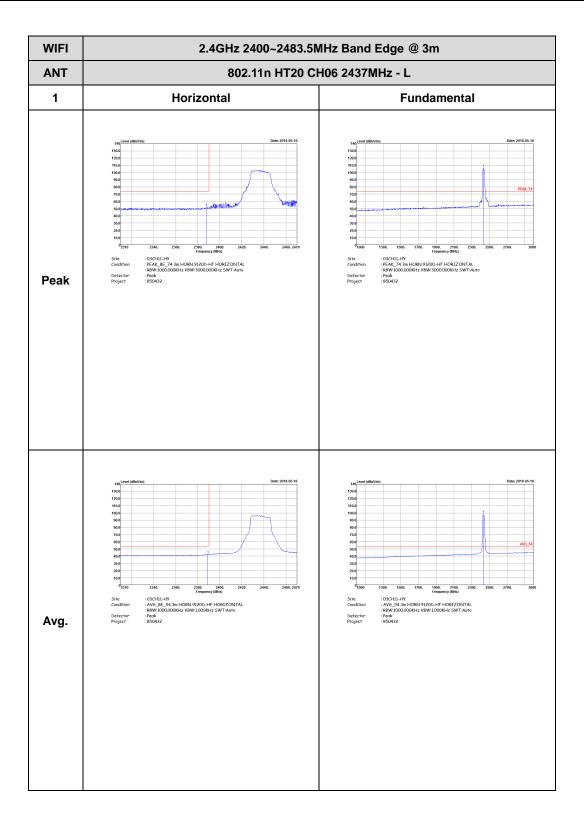


TEL: 886-3-327-3456 Page Number : D20 of D50


Report No.: FR850432C

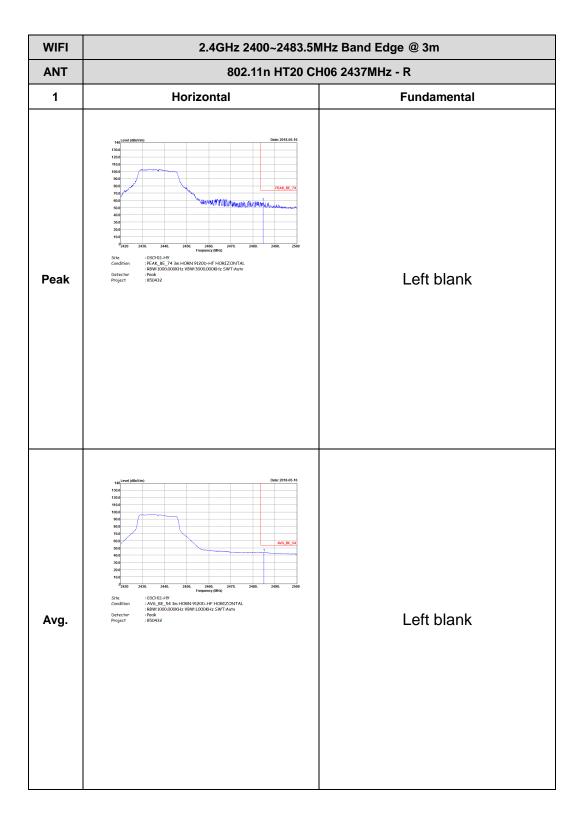

TEL: 886-3-327-3456 Page Number : D21 of D50

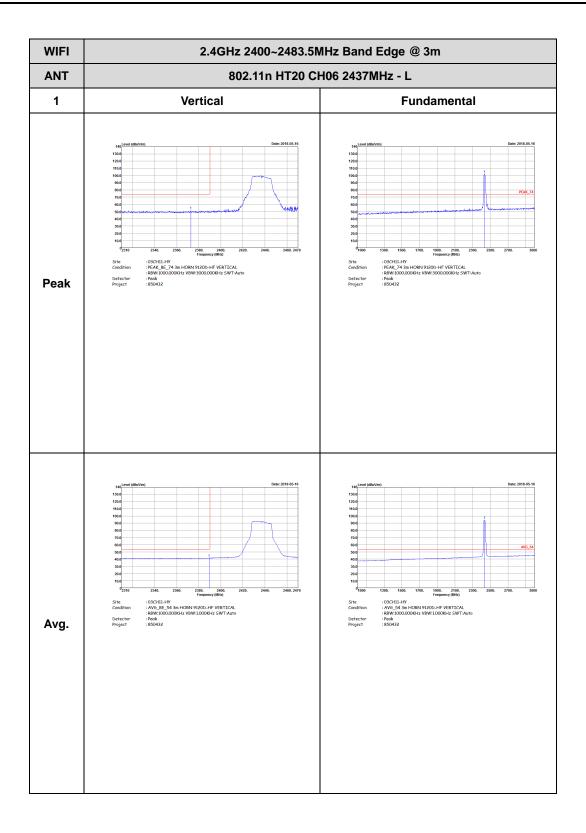


TEL: 886-3-327-3456 Page Number : D22 of D50

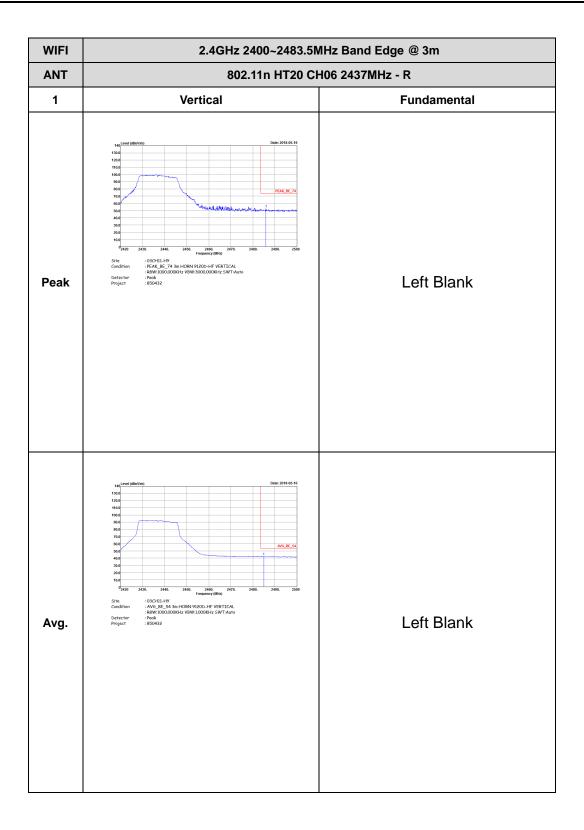


TEL: 886-3-327-3456 Page Number : D23 of D50



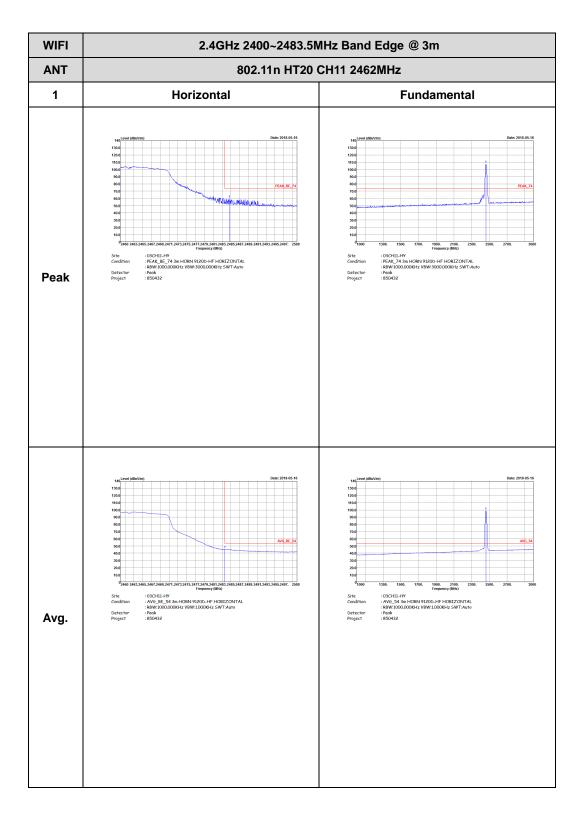

TEL: 886-3-327-3456 Page Number : D24 of D50



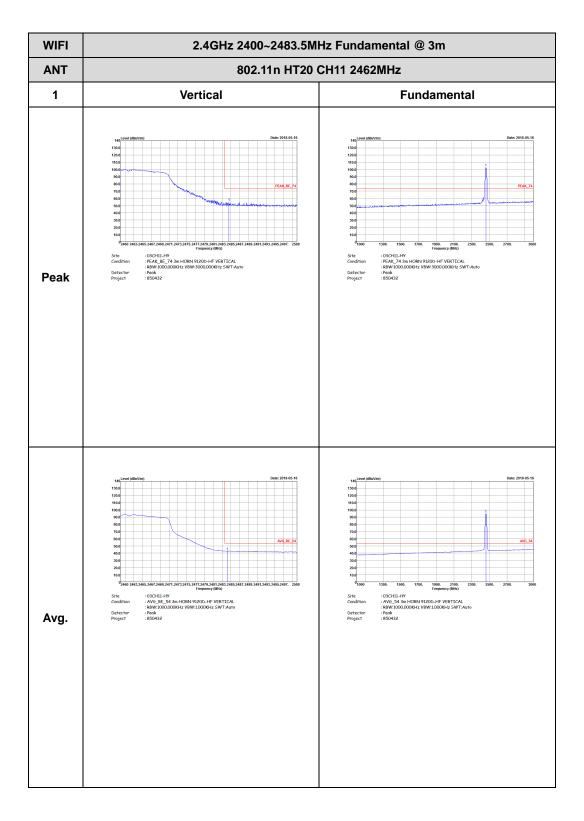


TEL: 886-3-327-3456 Page Number : D25 of D50


2.4GHz 2400~2483.5MHz


WIFI 802.11n HT40 (Band Edge @ 3m)

Report No.: FR850432C

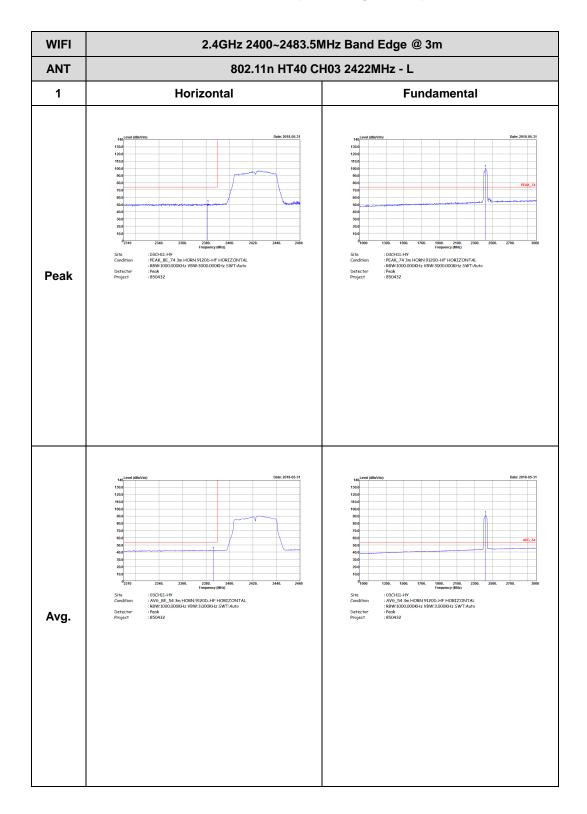


TEL: 886-3-327-3456 Page Number : D26 of D50



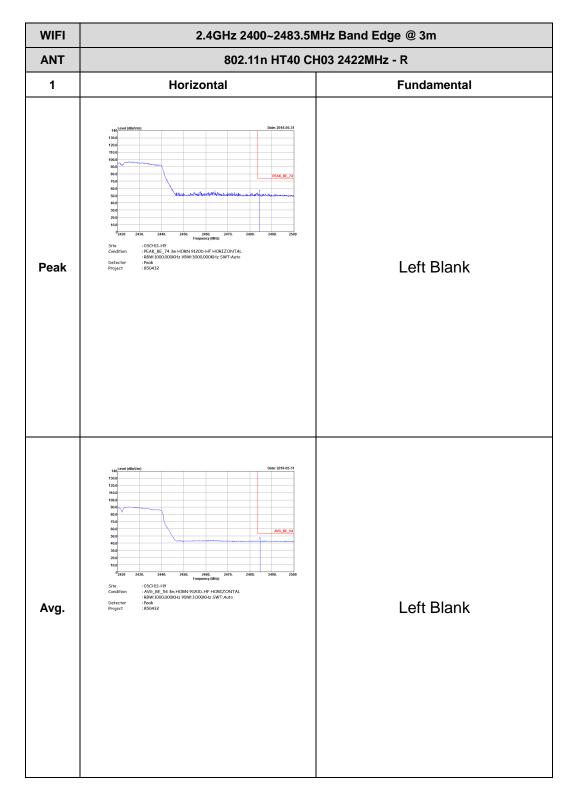

TEL: 886-3-327-3456 Page Number : D27 of D50


Report No.: FR850432C

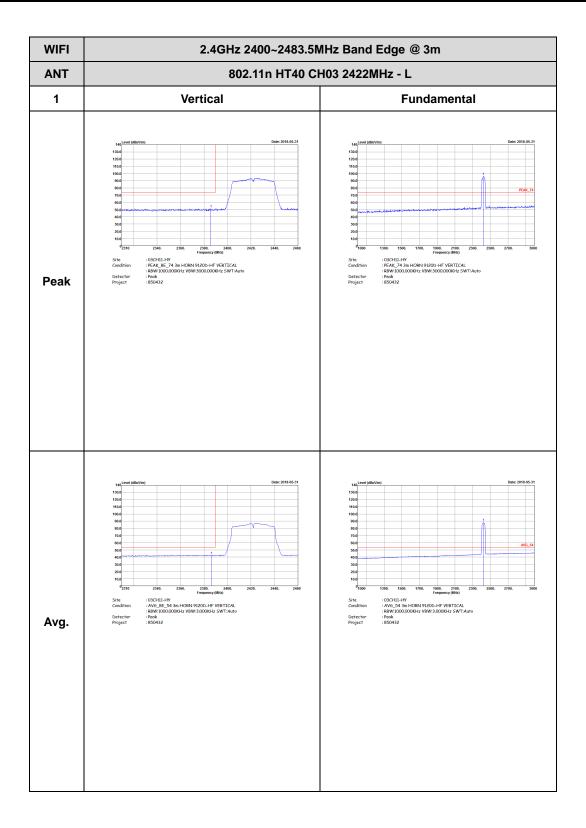


TEL: 886-3-327-3456 Page Number : D28 of D50

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m							
ANT	802.11n HT40 CH03 2422MHz - R							
1	Vertical	Fundamental						
Peak	1300 1500	Left blank						
Avg.	100.0 110.0	Left blank						


TEL: 886-3-327-3456 Page Number : D29 of D50

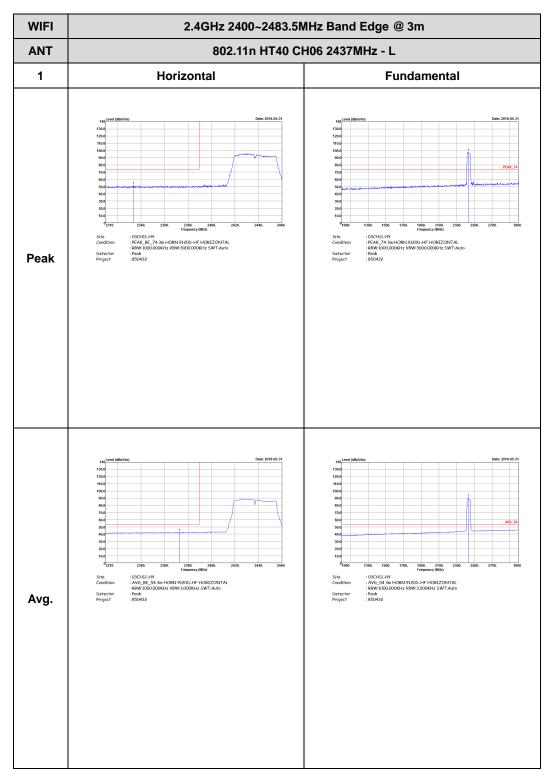


TEL: 886-3-327-3456 Page Number : D30 of D50

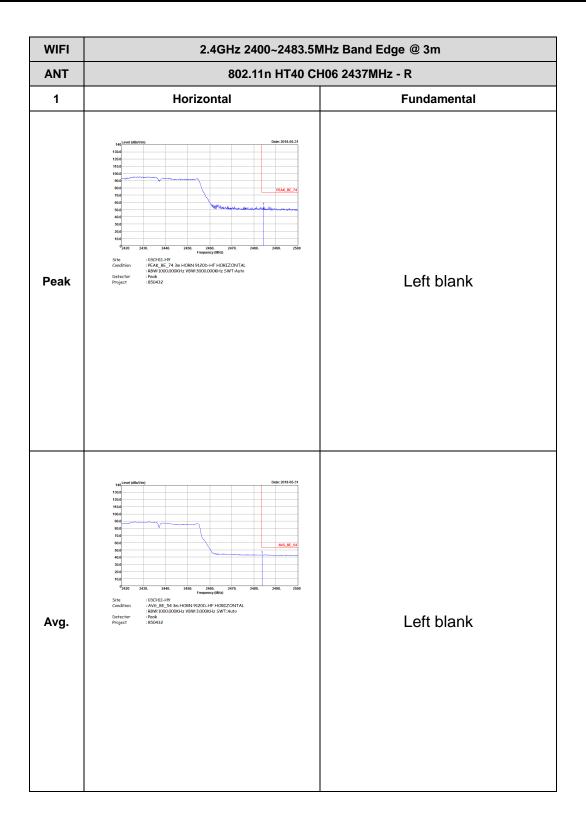


TEL: 886-3-327-3456 Page Number : D31 of D50

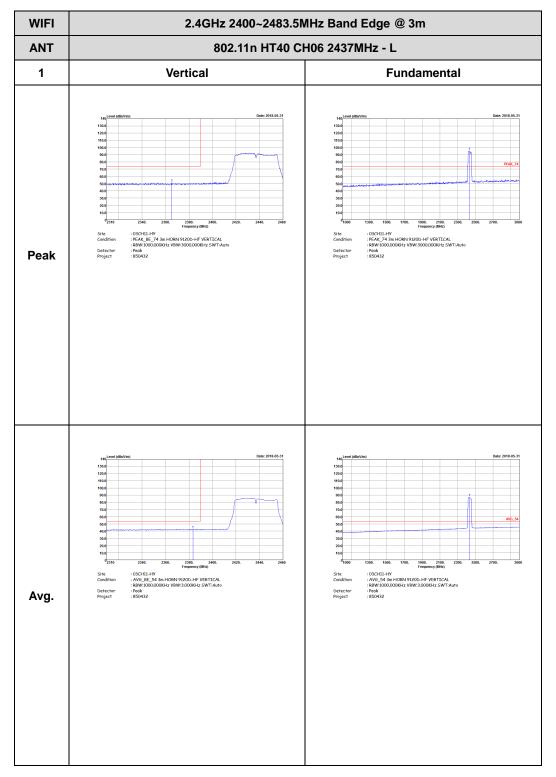

TEL: 886-3-327-3456 Page Number : D32 of D50

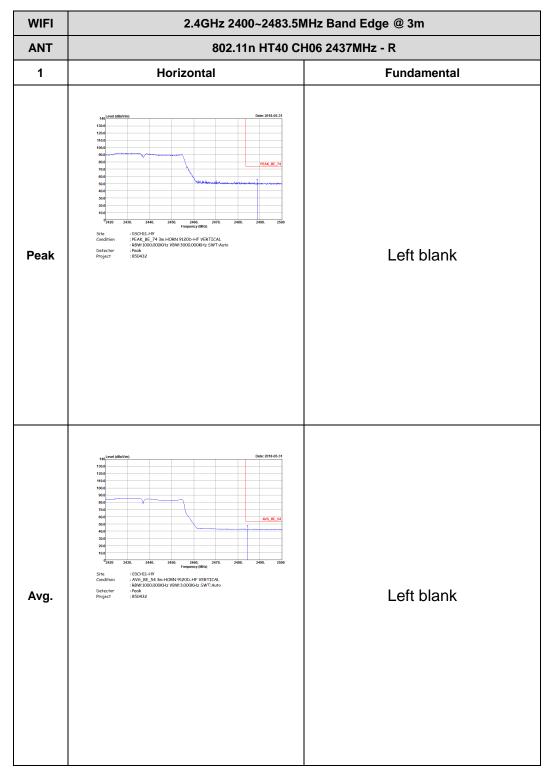

TEL: 886-3-327-3456 Page Number : D33 of D50

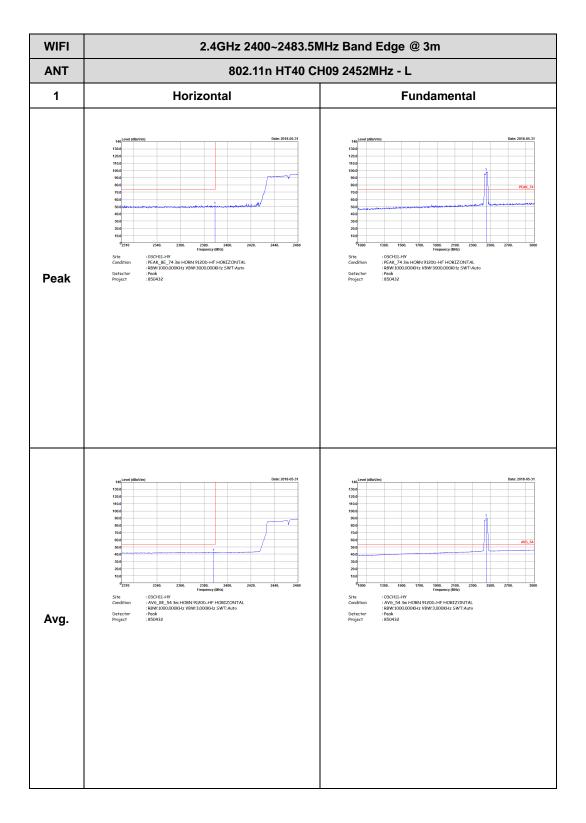


TEL: 886-3-327-3456 Page Number : D34 of D50


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m							
ANT	802.11n HT40 CH09 2452MHz - R							
1	Horizontal	Fundamental						
Peak	Tool (Billion) Date: 2018-05-31 170-0 170-	Left blank						
Avg.	1928 1928	Left blank						

TEL: 886-3-327-3456 Page Number : D35 of D50



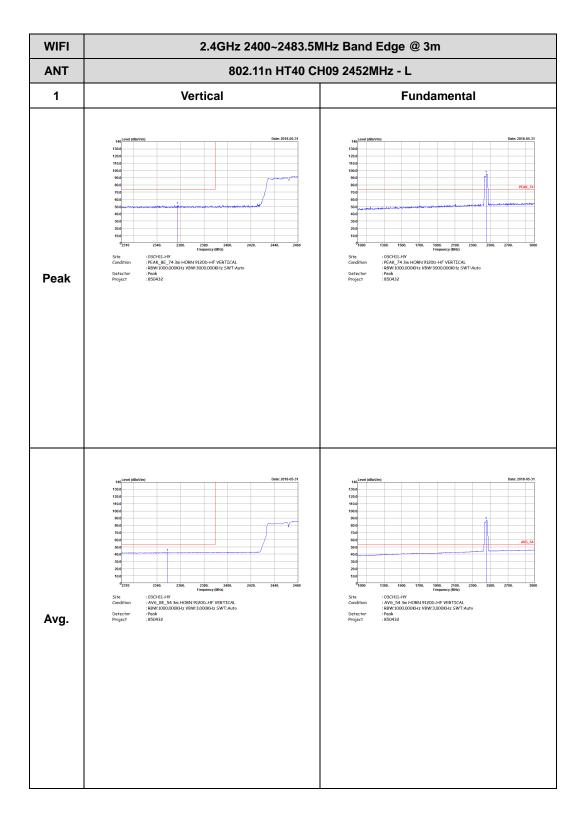

TEL: 886-3-327-3456 Page Number : D36 of D50

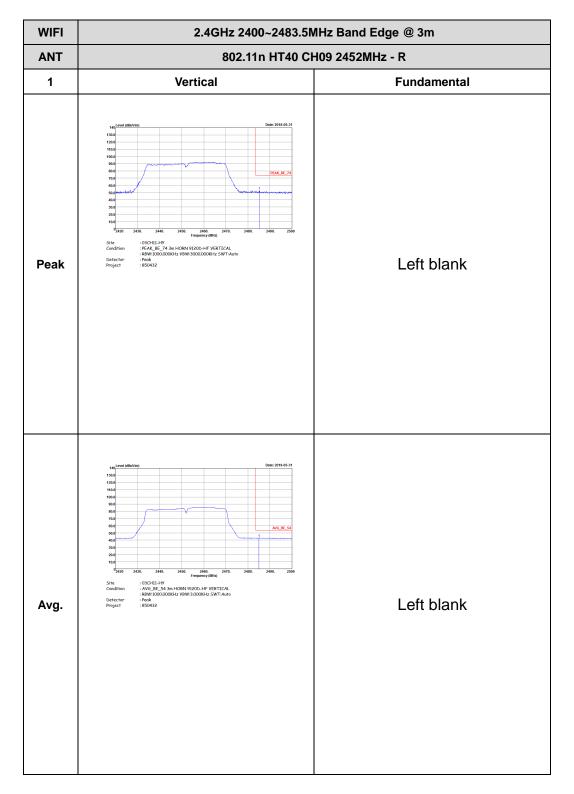


TEL: 886-3-327-3456 Page Number : D37 of D50

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11b (Harmonic @ 3m)

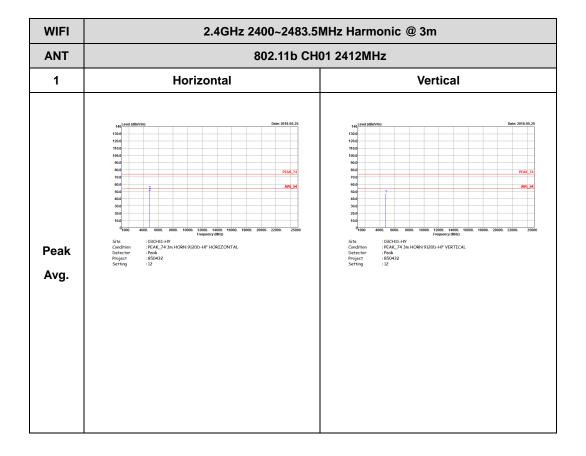

TEL: 886-3-327-3456 Page Number : D38 of D50

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D39 of D50


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D40 of D50


2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11g (Harmonic @ 3m)

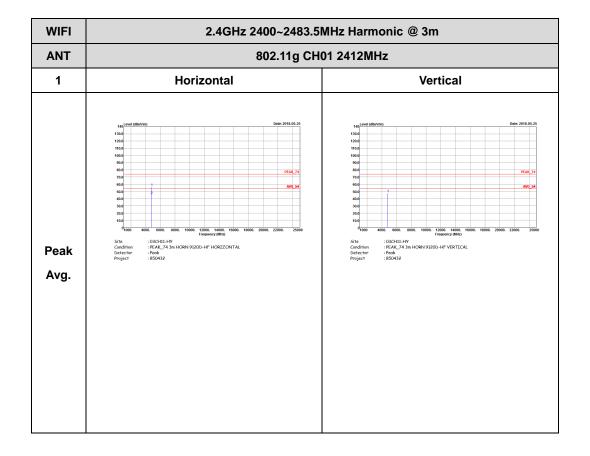

TEL: 886-3-327-3456 Page Number : D41 of D50

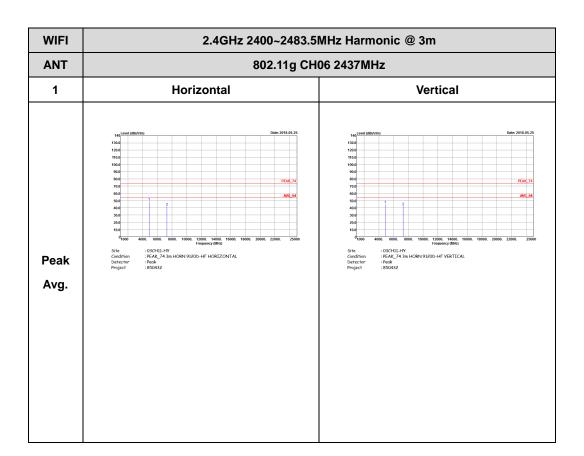

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D42 of D50


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D43 of D50

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11n HT20 (Harmonic @ 3m)

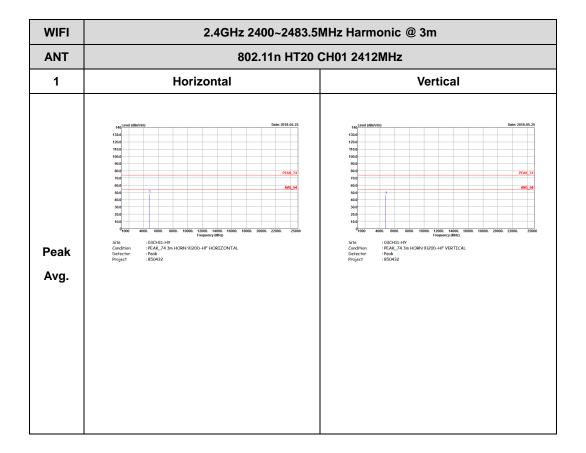

TEL: 886-3-327-3456 Page Number : D44 of D50

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D45 of D50


Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D46 of D50

2.4GHz 2400~2483.5MHz

Report No.: FR850432C

WIFI 802.11n HT40 (Harmonic @ 3m)

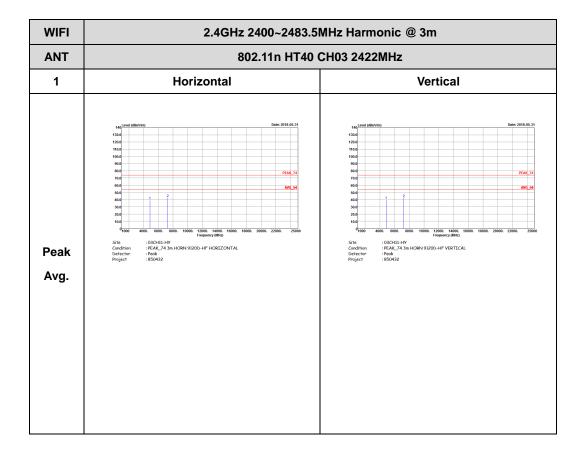

TEL: 886-3-327-3456 Page Number : D47 of D50

Report No.: FR850432C


TEL: 886-3-327-3456 Page Number : D48 of D50

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : D49 of D50

Emission below 1GHz 2.4GHz WIFI 802.11b (LF)

Report No.: FR850432C

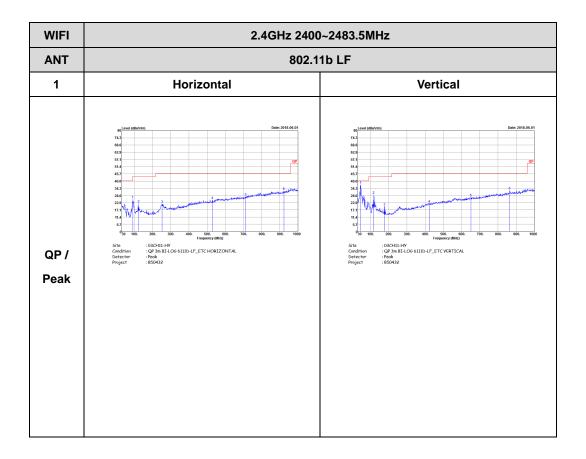

TEL: 886-3-327-3456 Page Number : D50 of D50



FCC RADIO TEST REPORT

Appendix E. Duty Cycle Plots


Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11b	98.70	-	-	10Hz	0.06
802.11g	93.61	2050	0.49	1kHz	0.29
2.4GHz 802.11n HT20	94.12	1920	0.52	1kHz	0.26
2.4GHz 802.11n HT40	90.48	950	1.05	3kHz	0.43

Report No.: FR850432C

TEL: 886-3-327-3456 Page Number : E-1 of 3


Report No.: FR850432C



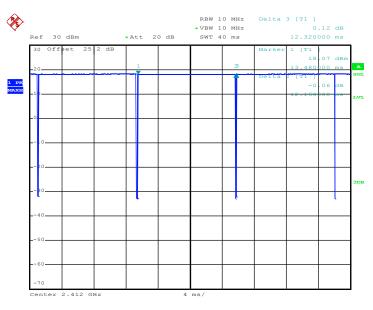

Date: 11.MAY.2018 23:41:04

802.11g

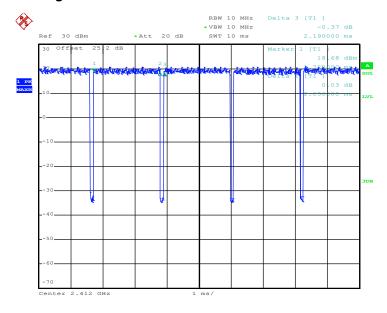


Date: 11.MAY.2018 23:51:56

TEL: 886-3-327-3456 Page Number : E-2 of 3

FCC RADIO TEST REPORT


Report No.: FR850432C



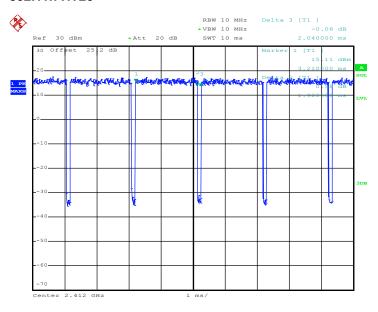

Date: 11.MAY.2018 23:58:43

802.11n HT40

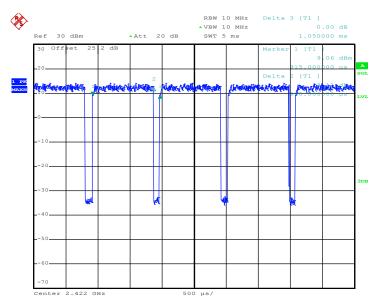

Date: 12.MAY.2018 00:18:30

TEL: 886-3-327-3456 Page Number : E-3 of 3