

Report No.: R1907A0357-R3

5.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR(dB) = PPk(dBm) - PAvg(dBm).

Test Setup

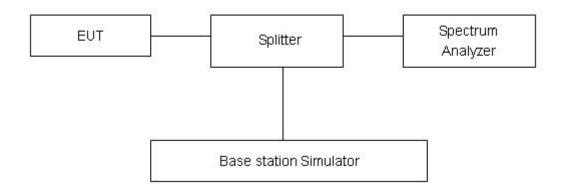

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U = 0.4 dB.

Report No.: R1907A0357-R3

WCDMA Band IV	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
RMC	1312	1712.4	26.29	23.61	2.68	≤13	PASS
	1413	1732.6	26.67	23.69	2.98	≤13	PASS
	1513	1752.6	26.30	23.71	2.59	≤13	PASS

			LTE Bar	nd 4				
Maraladia a	Bandwidth	01	Frequency	Peak	Avg	PAPR	Limit	0
Modulation	(MHz)	Channel	(MHz)	(dBm)	(dBm)	(dB)	(dB)	Conclusion
		19957	1710.7	26.63	20.59	6.04	≤13	PASS
	1.4	20175	1732.5	26.79	20.44	6.35	≤13	PASS
		20393	1754.3	26.58	20.62	5.96	≤13	PASS
		19965	1711.5	26.72	20.69	6.03	≤13	PASS
	3	20175	1732.5	26.78	20.51	6.27	≤13	PASS
		20385	1753.5	26.65	20.75	5.90	≤13	PASS
		19975	1712.5	26.71	20.69	6.02	≤13	PASS
	5	20175	1732.5	26.83	20.56	6.27	≤13	PASS
ODOK		20375	1752.5	26.62	20.77	5.85	≤13	PASS
QPSK		20000	1715	26.66	20.66	6.00	≤13	PASS
	10	20175	1732.5	26.76	20.55	6.21	≤13	PASS
		20350	1750	26.46	20.70	5.76	≤13	PASS
		20025	1717.5	26.74	20.63	6.11	≤13	PASS
	15	20175	1732.5	26.78	20.52	6.26	≤13	PASS
		20325	1747.5	26.38	20.63	5.75	≤13	PASS
		20050	1720	26.74	20.67	6.07	≤13	PASS
	20	20175	1732.5	26.68	20.61	6.07	≤13	PASS
		20300	1745	26.43	20.63	5.80	≤13	PASS
		19957	1710.7	24.88	19.98	4.90	≤13	PASS
	1.4	20175	1732.5	25.05	19.91	5.14	≤13	PASS
		20393	1754.3	25.16	20.34	4.82	≤13	PASS
		19965	1711.5	24.81	20.08	4.73	≤13	PASS
	3	20175	1732.5	24.92	20.03	4.89	≤13	PASS
10000		20385	1753.5	25.04	20.39	4.65	≤13	PASS
16QAM		19975	1712.5	24.99	20.07	4.92	≤13	PASS
	5	20175	1732.5	25.17	20.02	5.15	≤13	PASS
		20375	1752.5	25.18	20.38	4.80	≤13	PASS
		20000	1715	24.95	20.09	4.86	≤13	PASS
	10	20175	1732.5	25.04	20.01	5.03	≤13	PASS
		20350	1750	24.98	20.36	4.62	≤13	PASS
		1	ı	MD 05 0			1	400 of 470

TA				
1/4				
	RF T	est	Rend	art

Report No.: R1907A0357-R3 20025 1717.5 25.01 20.00 5.01 ≤13 **PASS** 15 20175 1732.5 25.08 19.94 5.14 ≤13 **PASS** 1747.5 20325 24.82 20.15 4.67 ≤13 **PASS** 20050 1720 24.89 20.04 **PASS** 4.85 ≤13 20 20175 1732.5 24.90 20.02 4.88 **PASS** ≤13 20300 1745 24.77 20.12 4.65 ≤13 **PASS** 1710.7 19957 25.09 19.10 5.99 ≤13 **PASS** 1.4 20175 1732.5 25.49 19.09 6.40 ≤13 **PASS** 1754.3 25.37 19.40 ≤13 **PASS** 20393 5.97 1711.5 **PASS** 19965 25.18 19.16 6.02 ≤13 3 20175 1732.5 25.43 19.15 6.28 ≤13 **PASS** 1753.5 25.41 **PASS** 20385 19.50 5.91 ≤13 19975 1712.5 **PASS** 25.17 19.15 6.02 ≤13 5 20175 1732.5 25.45 19.15 6.30 ≤13 **PASS** 20375 1752.5 **PASS** 25.34 19.48 5.86 ≤13 64QAM 20000 1715 25.15 19.14 **PASS** 6.01 ≤13 1732.5 25.34 19.12 **PASS** 10 20175 6.22 ≤13 1750 25.12 **PASS** 20350 19.36 5.76 ≤13 20025 1717.5 25.21 19.14 6.07 ≤13 **PASS** 15 20175 1732.5 25.33 19.08 6.25 ≤13 **PASS** 1747.5 5.70 24.94 19.24 **PASS** 20325 ≤13 1720 **PASS** 20050 25.16 19.13 6.03 ≤13 20 20175 1732.5 25.23 19.16 6.07 ≤13 **PASS** 20300 1745 24.97 19.20 5.77 ≤13 **PASS**

	LTE Band 7												
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion					
	(**************************************	20775	2502.5	26.10	21.59	4.51	≤13	PASS					
	5	21100	2535	25.93	21.56	4.37	≤13	PASS					
		21425	2567.5	26.06	21.77	4.29	≤13	PASS					
	10	20800	2505	25.97	21.53	4.44	≤13	PASS					
QPSK		21100	2535	25.88	21.52	4.36	≤13	PASS					
QFSK		21400	2565	26.05	21.76	4.29	≤13	PASS					
		20825	2507.5	25.92	21.57	4.35	≤13	PASS					
	15	21100	2535	26.12	21.60	4.52	≤13	PASS					
		21375	2562.5	25.98	21.74	4.24	≤13	PASS					
	20	20850	2510	25.86	21.60	4.26	≤13	PASS					

RF Test				Report No.: R1907A0357-R3				
		21100	2535	26.04	21.57	4.47	≤13	PASS
		21350	2560	26.04	21.73	4.31	≤13	PASS
		20775	2502.5	26.17	20.60	5.57	≤13	PASS
	5	21100	2535	26.03	20.63	5.40	≤13	PASS
		21425	2567.5	26.08	20.76	5.32	≤13	PASS
		20800	2505	26.11	20.58	5.53	≤13	PASS
	10	21100	2535	26.01	20.59	5.42	≤13	PASS
10001		21400	2565	26.10	20.74	5.36	≤13	PASS
16QAM	15	20825	2507.5	26.03	20.66	5.37	≤13	PASS
		21100	2535	26.24	20.69	5.55	≤13	PASS
		21375	2562.5	26.06	20.83	5.23	≤13	PASS
		20850	2510	26.01	20.63	5.38	≤13	PASS
	20	21100	2535	26.21	20.63	5.58	≤13	PASS
		21350	2560	26.17	20.74	5.43	≤13	PASS
		20775	2502.5	25.68	20.19	5.49	≤13	PASS
	5	21100	2535	25.67	20.24	5.43	≤13	PASS
		21425	2567.5	25.40	20.35	5.05	≤13	PASS
		20800	2505	25.62	20.15	5.47	≤13	PASS
	10	21100	2535	25.70	20.26	5.44	≤13	PASS
C40AN4		21400	2565	25.44	20.32	5.12	≤13	PASS
64QAM		20825	2507.5	25.68	20.21	5.47	≤13	PASS
	15	21100	2535	25.64	20.35	5.29	≤13	PASS
		21375	2562.5	25.41	20.46	4.95	≤13	PASS
		20850	2510	25.70	20.25	5.45	≤13	PASS
	20	21100	2535	25.59	20.19	5.40	≤13	PASS

	LTE Band 38											
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion				
	QPSK 5	37775	2572.5	26.65	19.64	7.01	≤13	PASS				
QPSK		38000	2595	26.70	19.66	7.04	≤13	PASS				
		38225	2617.5	26.30	19.68	6.62	≤13	PASS				

25.53

20.33


5.20

≤13

PASS

2560

21350

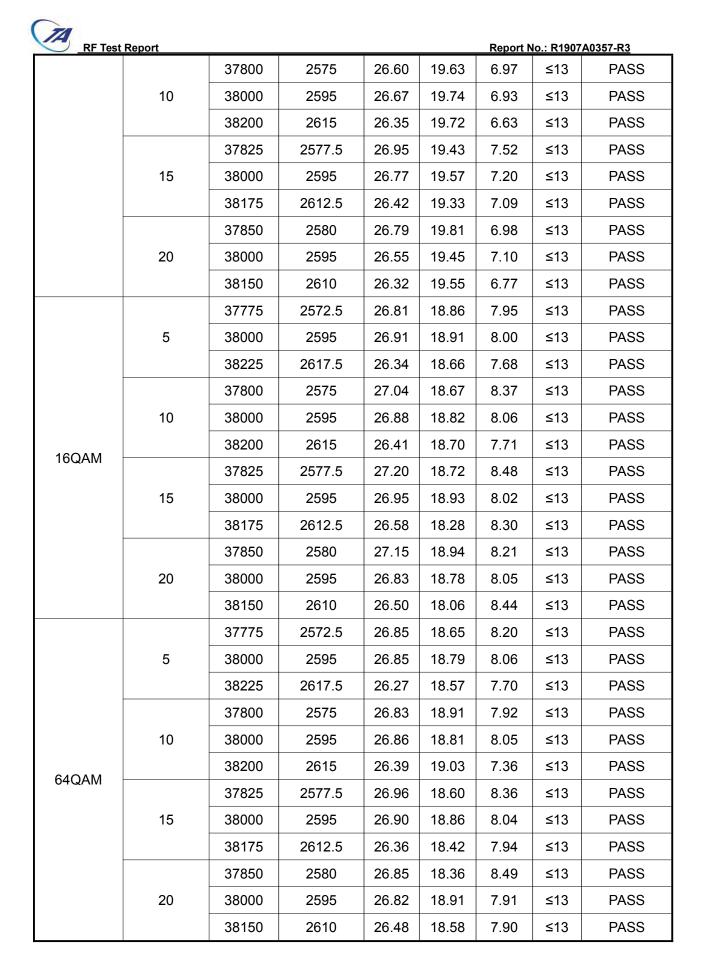



			CA_70					
Do or dividable	Р	СС	S	CC1	Modulat		o-Average atio (PAP	
Bandwidth	Chann el	Frequen cy(MHz)	Chan nel	Frequenc y(MHz)	ion	Peak (dBm)	Avg (dBm)	PAPR (dB)
CA_7C_10MHz+20MHz _QPSK	21006	2525.6	21150	2540	QPSK	26.16	20.52	5.64
CA_7C_10MHz+20MHz _16QAM	21006	2525.6	21150	2540	16QAM	26.04	19.57	6.47
CA_7C_10MHz+20MHz _64QAM	21006	2525.6	21150	2540	64QAM	25.69	19.21	6.48
CA_7C_20MHz+10MHz _QPSK	21051	2530.1	21195	2544.5	QPSK	26.49	20.67	5.82
CA_7C_20MHz+10MHz _16QAM	21051	2530.1	21195	2544.5	16QAM	26.28	19.71	6.57
CA_7C_20MHz+10MHz _64QAM	21051	2530.1	21195	2544.5	64QAM	25.92	19.31	6.61
CA_7C_15MHz+10MHz _QPSK	21051	2530.1	21171	2542.1	QPSK	26.34	20.65	5.69
CA_7C_15MHz+10MHz _16QAM	21051	2530.1	21171	2542.1	16QAM	26.26	19.74	6.52
CA_7C_15MHz+10MHz _64QAM	21051	2530.1	21171	2542.1	64QAM	25.82	19.30	6.52
CA_7C_15MHz+15MHz _QPSK	21025	2527.5	21175	2542.5	QPSK	26.64	20.61	6.03
CA_7C_15MHz+15MHz _16QAM	21025	2527.5	21175	2542.5	16QAM	26.40	19.72	6.68
CA_7C_15MHz+15MHz _64QAM	21025	2527.5	21175	2542.5	64QAM	25.97	19.27	6.70
CA_7C_15MHz+20MHz _QPSK	21003	2525.3	21174	2542.4	QPSK	26.54	20.19	6.35
CA_7C_15MHz+20MHz _16QAM	21003	2525.3	21174	2542.4	16QAM	26.21	19.27	6.94
CA_7C_15MHz+20MHz _64QAM	21003	2525.3	21174	2542.4	64QAM	25.75	18.82	6.93
CA_7C_20MHz+15MHz _QPSK	21026	2527.6	21197	2544.7	QPSK	26.76	20.31	6.45
CA_7C_20MHz+15MHz _16QAM	21026	2527.6	21197	2544.7	16QAM	26.32	19.34	6.98
CA_7C_20MHz+15MHz _64QAM	21026	2527.6	21197	2544.7	64QAM	25.81	18.87	6.94
CA_47C_20MHz+20MH	21001	2525.1	21199	2544.9	QPSK	26.18	19.58	6.60

RF Test Report Report No.: R1907A0357-R3 z QPSK CA_7C_20MHz+20MHz 21001 2525.1 21199 2544.9 16QAM 25.73 18.63 7.10 _16QAM CA_7C_20MHz+20MHz 21001 2525.1 21199 2544.9 64QAM 25.26 18.18 7.08 64QAM

	CA_38C												
Bandwidth	PCC		S	CC1	NA dolation		Peak-to-Average Power Ratio (PAPR)						
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Modulation	Peak (dBm)	Avg (dBm)	PAPR (dB)					
CA_38C_15MHz+ 15MHz_QPSK	37925	2587.5	38075	2602.5	QPSK	27.02	17.20	9.82					
CA_38C_15MHz+ 15MHz_16QAM	37925	2587.5	38075	2602.5	16QAM	26.75	16.50	10.25					
CA_38C_15MHz+ 15MHz_64QAM	37925	2587.5	38075	2602.5	64QAM	26.31	15.90	10.41					
CA_38C_20MHz+ 20MHz_QPSK	37901	2585.1	38099	2604.9	QPSK	26.27	16.27	10.00					
CA_38C_20MHz+ 20MHz_16QAM	37901	2585.1	38099	2604.9	16QAM	25.85	15.12	10.73					
CA_38C_20MHz+ 20MHz_64QAM	37901	2585.1	38099	2604.9	64QAM	25.36	14.66	10.70					

Test Report No.: R1907A0357-R3

5.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size.

- (1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.
- (2)Measure the carrier frequency with the test equipment in a "call mode". These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.
- (3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.65 V and 4.45 V, with a nominal voltage of 3.85 V.

Test setup

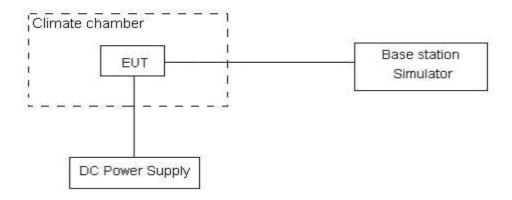

Limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor k = 3, U = 0.01ppm.



Test Result

WCDMA Band IV

Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal (25℃)		5.31	13.48	0.00283	0.00717	PASS
Extreme (55℃)		2.08	5.02	0.00110	0.00267	PASS
Extreme (50°C)		1.90	6.40	0.00101	0.00340	PASS
Extreme (40°C)		15.29	7.82	0.00813	0.00416	PASS
Extreme (30℃)		10.19	17.82	0.00542	0.00948	PASS
Extreme (20℃)	Normal	13.36	1.28	0.00711	0.00068	PASS
Extreme (10°C)		8.72	16.03	0.00464	0.00853	PASS
Extreme (0°C)		8.71	3.86	0.00463	0.00205	PASS
Extreme (-10°C)		11.30	8.19	0.00601	0.00435	PASS
Extreme (-20°C)		14.22	15.28	0.00756	0.00813	PASS
Extreme (-30°C)		17.03	13.14	0.00906	0.00699	PASS
25℃	LV	10.44	15.30	0.00555	0.00814	PASS
23 (HV	7.67	16.79	0.00408	0.00893	PASS

	LTE Band 4(BANDWIDTH, 20MHz)											
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability	Frequency Stability	Frequency Stability	Verdict				
BANDWIDTH	20MHz	(112)	(112)	(112)	(ppm)	(ppm)	(ppm)	Verdict				
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK					
Normal (25°C)		10.20	14.90	6.57	0.00542	0.00792	0.00349	PASS				
Extreme (55°C)		8.44	12.18	9.58	0.00449	0.00648	0.00509	PASS				
Extreme (50°C)		9.91	8.40	7.05	0.00527	0.00447	0.00375	PASS				
Extreme (40°C)		13.92	11.57	1.66	0.00740	0.00615	0.00088	PASS				
Extreme (30°C)		13.98	11.20	17.69	0.00744	0.00596	0.00941	PASS				
Extreme (20°C)	Normal	2.52	16.93	17.71	0.00134	0.00900	0.00942	PASS				
Extreme (10°C)		4.28	2.67	8.25	0.00227	0.00142	0.00439	PASS				
Extreme (0°C)		9.88	1.89	13.14	0.00525	0.00100	0.00699	PASS				
Extreme (-10°C)		4.14	13.25	2.82	0.00220	0.00705	0.00150	PASS				
Extreme (-20℃)		4.97	1.65	17.39	0.00264	0.00088	0.00925	PASS				
Extreme (-30°C)		11.91	15.83	14.03	0.00634	0.00842	0.00746	PASS				
25 ℃	LV	10.10	11.56	16.61	0.00537	0.00615	0.00884	PASS				
250	HV	7.61	12.86	10.00	0.00405	0.00684	0.00532	PASS				



Report No.: R1907A0357-R3

LTE Band 7(BANDWIDTH, 20MHz)									
Condition		Freq.Error Freq.Error	Freq.Error Freq.Error	Frequency Stability	Frequency Stability	Frequency Stability	Voudint		
BANDWIDTH	20MHz	(Hz)	(Hz)	(Hz)	(ppm)	(ppm)	(ppm)	Verdict	
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK		
Normal (25°C)		2.33	17.36	17.42	0.00124	0.00923	0.00926	PASS	
Extreme (55°C)		12.97	3.86	5.95	0.00690	0.00205	0.00316	PASS	
Extreme (50°C)		4.21	5.29	12.23	0.00224	0.00282	0.00651	PASS	
Extreme (40°C)		13.01	8.87	14.09	0.00692	0.00472	0.00750	PASS	
Extreme (30°C)		14.90	11.50	17.93	0.00793	0.00612	0.00954	PASS	
Extreme (20°C)	Normal	7.95	3.34	12.54	0.00423	0.00178	0.00667	PASS	
Extreme (10°C)		1.15	17.28	16.99	0.00061	0.00919	0.00904	PASS	
Extreme (0°C)		10.68	10.31	9.35	0.00568	0.00548	0.00497	PASS	
Extreme (-10°C)		1.55	14.29	13.17	0.00082	0.00760	0.00700	PASS	
Extreme (-20℃)		1.87	3.15	9.91	0.00099	0.00168	0.00527	PASS	
Extreme (-30°C)		16.57	4.55	4.57	0.00881	0.00242	0.00243	PASS	
25 ℃	LV	12.24	1.86	10.57	0.00651	0.00099	0.00562	PASS	
23 C	HV	14.69	2.66	2.16	0.00782	0.00141	0.00115	PASS	

LTE Band 38(BANDWIDTH, 20MHz)								
Condition	20MHz	Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)		4.08	7.24	2.93	0.00217	0.00385	0.00156	PASS
Extreme (55°℃)		2.86	9.76	15.06	0.00152	0.00519	0.00801	PASS
Extreme (50°C)		3.91	17.10	1.01	0.00208	0.00909	0.00054	PASS
Extreme (40°C)		13.52	9.99	8.51	0.00719	0.00532	0.00453	PASS
Extreme (30°C)		8.24	4.31	15.53	0.00439	0.00229	0.00826	PASS
Extreme (20°C)	Normal	11.54	9.28	17.16	0.00614	0.00494	0.00913	PASS
Extreme (10°C)		1.40	10.38	15.92	0.00075	0.00552	0.00847	PASS
Extreme (0°C)		13.01	13.32	11.57	0.00692	0.00708	0.00615	PASS
Extreme (-10°C)		7.96	1.56	2.89	0.00423	0.00083	0.00154	PASS
Extreme (-20°C)		1.44	4.00	14.66	0.00076	0.00213	0.00780	PASS
Extreme (-30°C)		6.18	9.89	2.31	0.00329	0.00526	0.00123	PASS
25 ℃	LV	13.44	13.31	8.52	0.00715	0.00708	0.00453	PASS
23 0	HV	3.91	7.62	3.45	0.00208	0.00405	0.00183	PASS



CA_7C_QPSK		20MHz+10MHz (Bandwidth)		20MHz+20MHz (Bandwidth)		
Condition		Delta	Frequency	Delta	Frequency	Verdict
Temperature	Voltage	(Hz)	Stability (ppm)	(Hz)	Stability (ppm)	
Normal (25℃)		12.84	0.00683	6.93	0.00368	PASS
Extreme (55℃)		10.00	0.00532	8.06	0.00429	PASS
Extreme (50°C)	Normal	2.46	0.00131	16.15	0.00859	PASS
Extreme (40°C)		11.19	0.00595	8.00	0.00426	PASS
Extreme (30°C)		8.93	0.00475	17.21	0.00916	PASS
Extreme (20°C)		11.07	0.00589	14.93	0.00794	PASS
Extreme (10°C)		10.49	0.00558	15.67	0.00833	PASS
Extreme (0°C)		13.87	0.00738	4.62	0.00246	PASS
Extreme (-10℃)		4.56	0.00243	13.41	0.00713	PASS
Extreme (-20℃)		11.27	0.00599	13.98	0.00744	PASS
Extreme (-30°C)		6.65	0.00354	4.75	0.00253	PASS
25 ℃	LV	8.23	0.00438	15.77	0.00839	PASS
25 (HV	17.87	0.00951	15.94	0.00848	PASS

CA_7C_16QAM		20MHz+10MHz (Bandwidth)		20MHz+20MHz (Bandwidth)		
Condition		Dolto	Frequency	Dolto	Frequency	Verdict
Temperature	Voltage	Delta (Hz)	Stability (ppm)	Delta (Hz)	Stability (ppm)	
Normal (25℃)		1.22	0.00065	6.37	0.00339	PASS
Extreme (55°C)		13.97	0.00743	14.24	0.00757	PASS
Extreme (50°C)	Normal	16.94	0.00901	14.08	0.00749	PASS
Extreme (40°C)		17.53	0.00932	14.32	0.00762	PASS
Extreme (30°C)		6.49	0.00345	11.01	0.00586	PASS
Extreme (20°C)		16.47	0.00876	2.60	0.00138	PASS
Extreme (10°C)		14.54	0.00774	8.81	0.00469	PASS
Extreme (0°C)		7.17	0.00381	8.98	0.00477	PASS
Extreme (-10°C)		1.78	0.00095	2.48	0.00132	PASS
Extreme (-20℃)		4.20	0.00223	15.96	0.00849	PASS
Extreme (-30°C)		14.62	0.00778	11.00	0.00585	PASS
25 ℃	LV	12.36	0.00658	8.75	0.00465	PASS
25 (HV	2.36	0.00126	7.78	0.00414	PASS



CA_7C_64QAM		20MHz+10MHz (Bandwidth)		20MHz+20MHz (Bandwidth)		
Condition		Dolto	Frequency	Dolto	Frequency	Verdict
Temperature	Voltage	Delta (Hz)	Stability (ppm)	Delta (Hz)	Stability (ppm)	
Normal (25℃)		14.01	0.00745	16.43	0.00874	PASS
Extreme (55°C)		11.31	0.00601	1.16	0.00062	PASS
Extreme (50°C)	Normal	10.29	0.00547	9.27	0.00493	PASS
Extreme (40°C)		13.52	0.00719	5.71	0.00304	PASS
Extreme (30°C)		12.37	0.00658	13.18	0.00701	PASS
Extreme (20℃)		13.74	0.00731	6.13	0.00326	PASS
Extreme (10°C)		6.25	0.00332	7.71	0.00410	PASS
Extreme (0°C)		6.46	0.00344	2.36	0.00126	PASS
Extreme (-10°C)		12.51	0.00666	3.15	0.00168	PASS
Extreme (-20℃)		7.84	0.00417	16.99	0.00904	PASS
Extreme (-30°C)		8.88	0.00472	9.90	0.00527	PASS
25 ℃	LV	14.49	0.00771	10.00	0.00532	PASS
25 (HV	4.66	0.00248	7.66	0.00407	PASS

CA_38C_QP	SK	15MHz+15	5MHz (Bandwidth)	20MHz+20MHz (Bandwidth)		
Condition Temperature	Voltage	Delta (Hz)	Frequency Stability (ppm)	Delta (Hz)	Frequency Stability (ppm)	Verdict
Normal (25℃)		11.21	0.00596	14.20	0.00755	PASS
Extreme (55°C)		7.23	0.00384	8.36	0.00445	PASS
Extreme (50°C)		6.29	0.00335	17.44	0.00928	PASS
Extreme (40°C)		6.27	0.00333	4.83	0.00257	PASS
Extreme (30°C)		17.61	0.00937	15.08	0.00802	PASS
Extreme (20°C)	Normal	12.97	0.00690	9.00	0.00479	PASS
Extreme (10°C)		7.07	0.00376	12.14	0.00646	PASS
Extreme (0°C)		2.76	0.00147	9.53	0.00507	PASS
Extreme (-10°C)		4.69	0.00249	16.49	0.00877	PASS
Extreme (-20℃)		15.81	0.00841	2.33	0.00124	PASS
Extreme (-30°C)		1.92	0.00102	1.32	0.00070	PASS
25 ℃	LV	4.47	0.00238	16.19	0.00861	PASS
25 (HV	16.50	0.00878	5.10	0.00271	PASS



CA_38C_16Q	AM	15MHz+15MHz (Bandwidth)		20MHz+20		
Condition		Delta	Frequency	Dolto	Frequency	Verdict
Temperature	Voltage	(Hz)	Stability (ppm)	Delta (Hz)	Stability (ppm)	
Normal (25℃)		16.72	0.00890	11.30	0.00601	PASS
Extreme (55°C)		9.93	0.00528	5.00	0.00266	PASS
Extreme (50°C)		6.23	0.00332	6.33	0.00337	PASS
Extreme (40°C)		9.78	0.00520	17.45	0.00928	PASS
Extreme (30°C)		11.91	0.00634	16.41	0.00873	PASS
Extreme (20°C)	Normal	15.73	0.00837	3.95	0.00210	PASS
Extreme (10°C)		10.35	0.00551	10.12	0.00538	PASS
Extreme (0°C)		8.21	0.00437	16.42	0.00874	PASS
Extreme (-10°C)		13.69	0.00728	2.77	0.00148	PASS
Extreme (-20°C)		17.51	0.00932	9.35	0.00497	PASS
Extreme (-30°C)		3.67	0.00195	11.31	0.00602	PASS
25 ℃	LV	10.50	0.00558	16.36	0.00870	PASS
25 0	HV	16.91	0.00899	9.60	0.00511	PASS

CA_38C_64Q	AM	15MHz+15MHz (Bandwidth)		20MHz+20		
Condition	Voltago	Delta	Frequency Stability	Delta (Hz)	Frequency Stability	Verdict
Temperature	Voltage	(Hz)	(ppm)	(ПZ)	(ppm)	
Normal (25℃)		6.10	0.00325	9.72	0.00517	PASS
Extreme (55°C)		9.14	0.00486	14.35	0.00763	PASS
Extreme (50°C)		7.34	0.00390	8.42	0.00448	PASS
Extreme (40°C)		4.21	0.00224	4.65	0.00247	PASS
Extreme (30°C)		4.78	0.00254	4.85	0.00258	PASS
Extreme (20°C)	Normal	3.78	0.00201	12.19	0.00648	PASS
Extreme (10°C)		6.68	0.00355	4.84	0.00257	PASS
Extreme (0°C)		17.74	0.00944	3.53	0.00188	PASS
Extreme (-10°C)		9.86	0.00524	3.57	0.00190	PASS
Extreme (-20°C)		13.44	0.00715	15.87	0.00844	PASS
Extreme (-30°C)		10.53	0.00560	10.24	0.00545	PASS
25 ℃	LV	5.98	0.00318	3.81	0.00203	PASS
25 (HV	15.71	0.00836	8.51	0.00453	PASS



5.7 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure		
23°C ~25°C	45%~50%	101.5kPa		

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.


RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

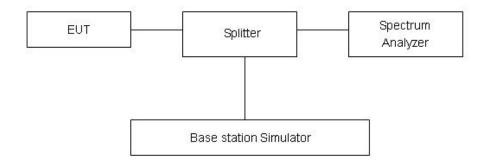

Limits

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB.."

Rule Part 27.53(m) 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53((h) Limit	-13 dBm
Part 27.53(m) Limit	-25 dBm



RF Test Report No.: R1907A0357-R3

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor k = 1.96.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-27GHz	1.407 dB




Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

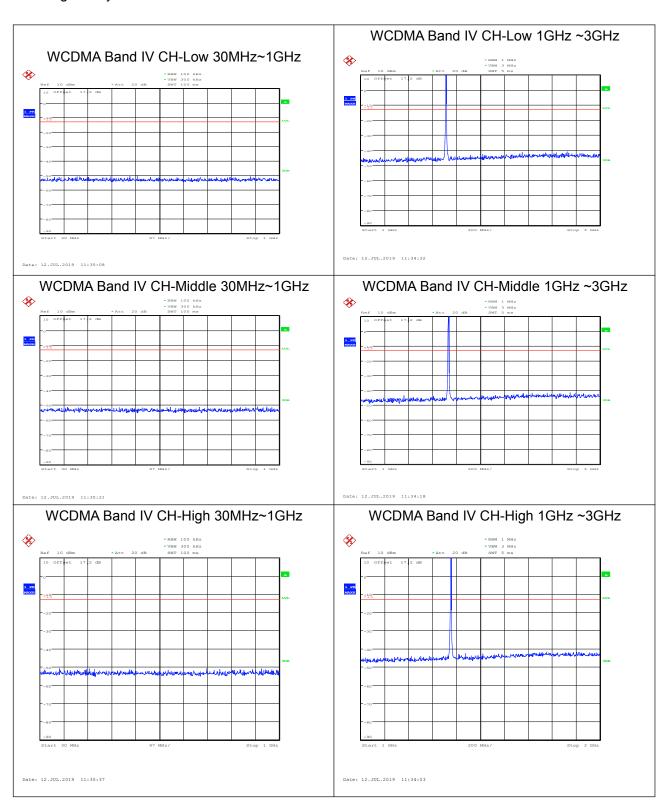


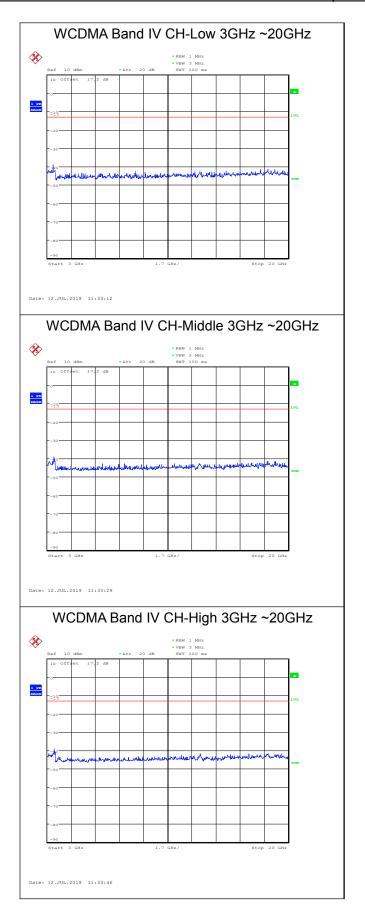





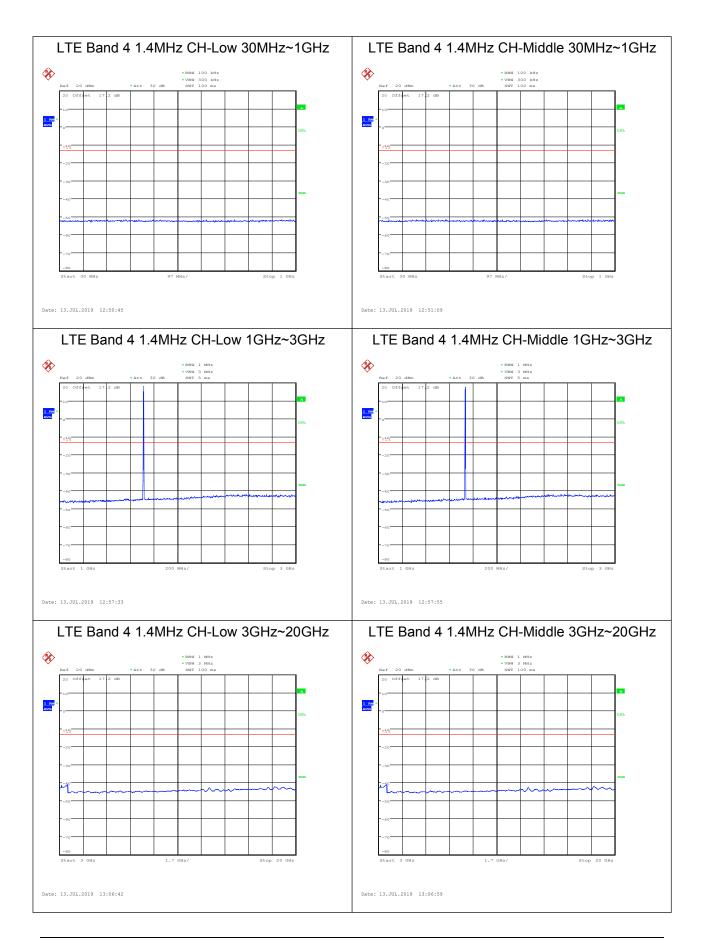




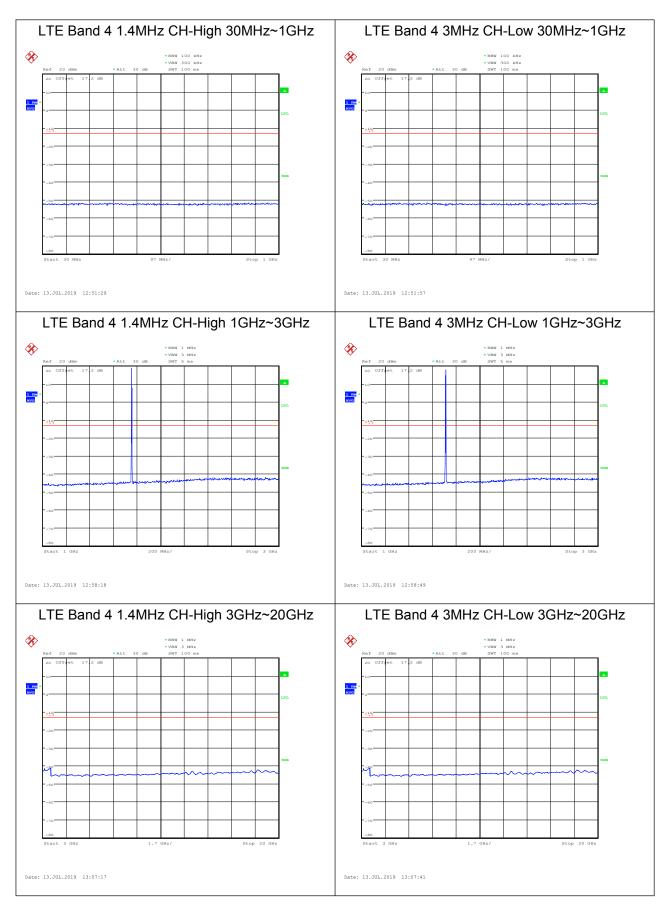







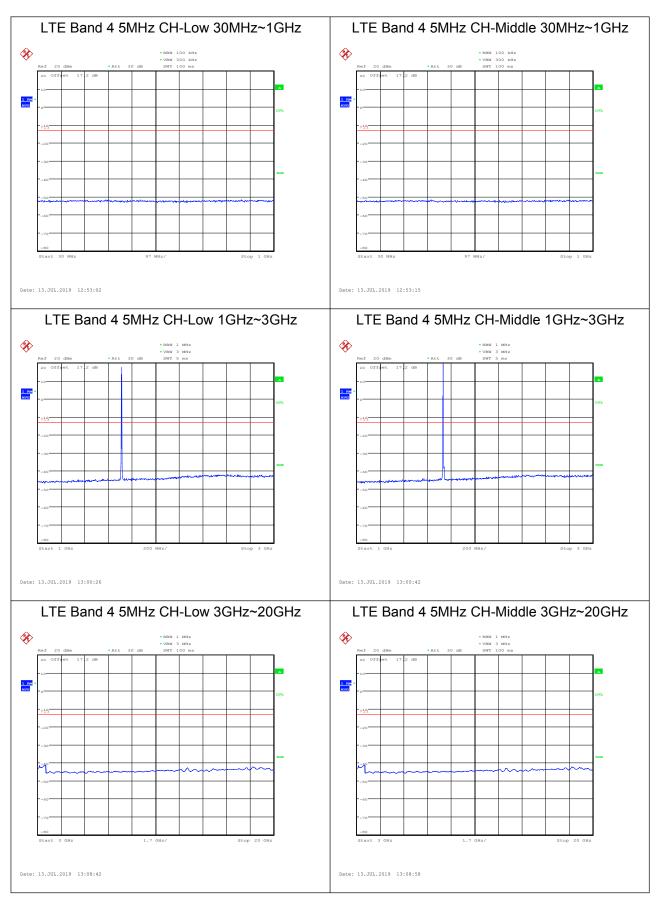


* PARM 1 MONE * ARE 20 dBm * ARE 30 dB * A




Date: 13.JUL.2019 13:09:17



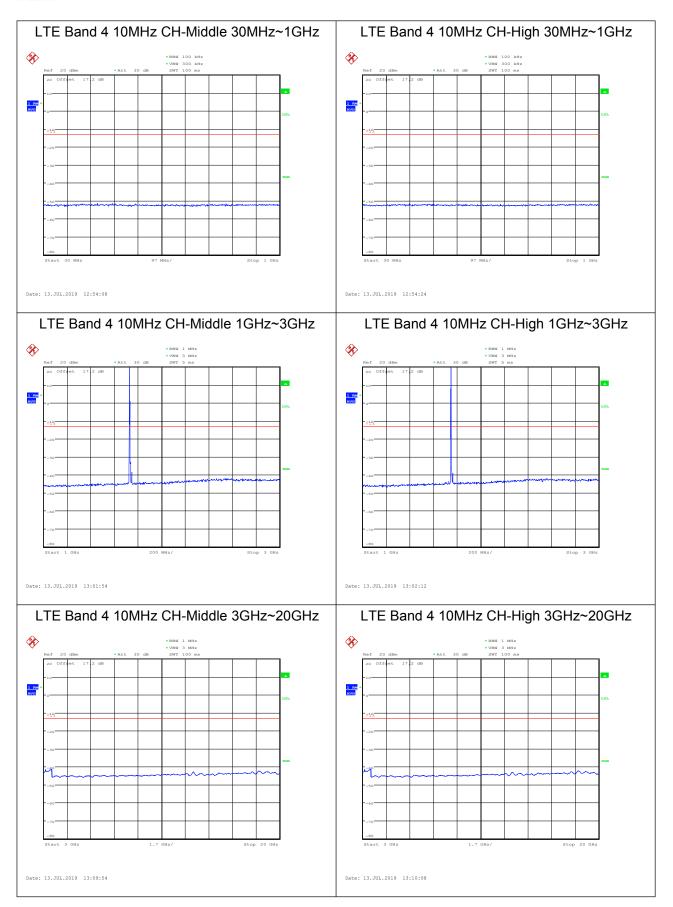




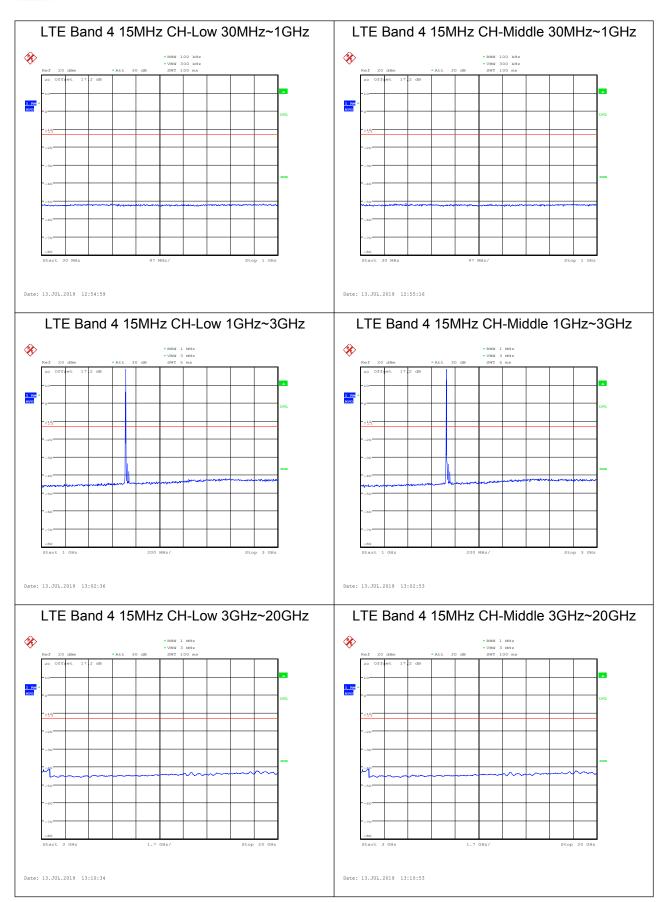


RMM 100 kHz **RMM 100 kHz** **VBM 300 kHz** **VBM


Report No.: R1907A0357-R3

**RBW 1 1888 **VPN 3 1882 **PNN 1 1888 **PNN 1 1888 **VPN 3 1882 **PNN 1 1888 **PNN



Date: 13.JUL.2019 12:55:56











Report No.: R1907A0357-R3 LTE Band 4 20MHz CH- Middle 30MHz~1GHz LTE Band 4 20MHz CH- High 30MHz~1GHz **%** * Date: 13.JUL.2019 12:56:25 Date: 13.JUL.2019 12:56:09 LTE Band 4 20MHz CH- Middle 1GHz~3GHz LTE Band 4 20MHz CH- High 1GHz~3GHz **% %** Date: 13.JUL.2019 13:04:22 Date: 13.JUL.2019 13:04:05 LTE Band 4 20MHz CH- Middle 3GHz~20GHz LTE Band 4 20MHz CH High 3GHz~20GHz **%**> **%** 1 RM Date: 13.JUL.2019 13:04:54 Date: 13.JUL.2019 13:05:09



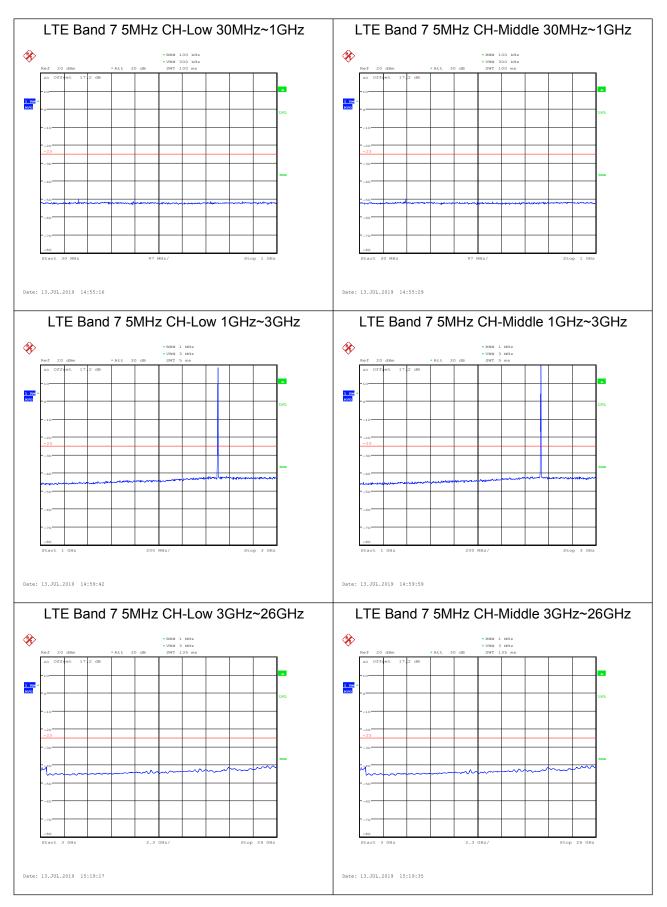

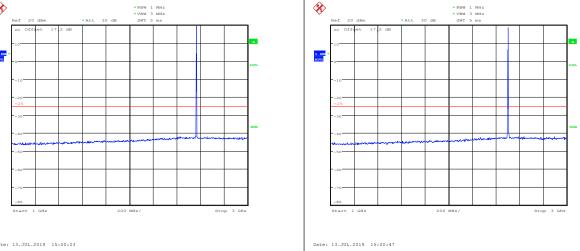








Date: 13.JUL.2019 15:19:56



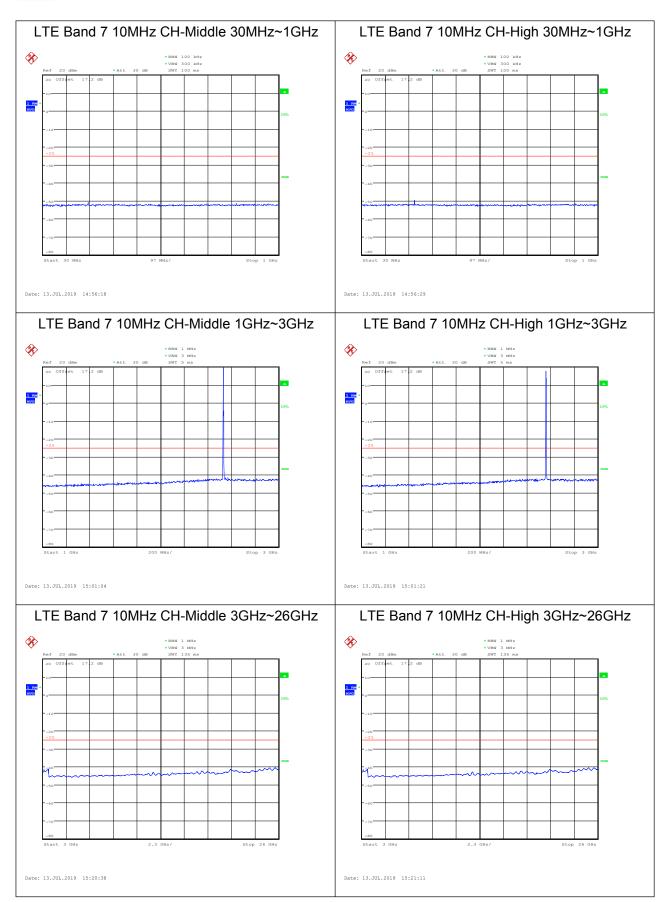




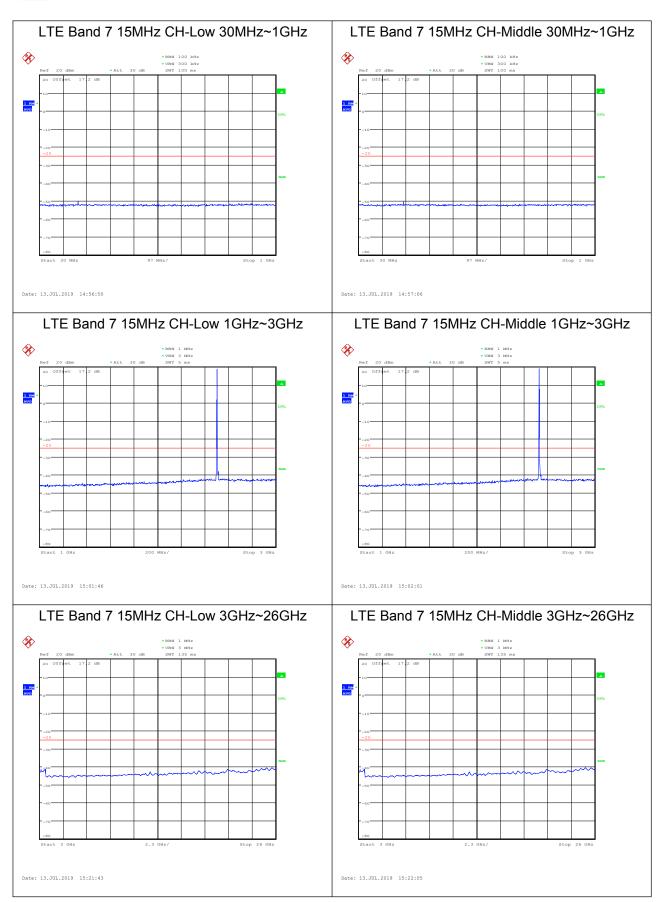

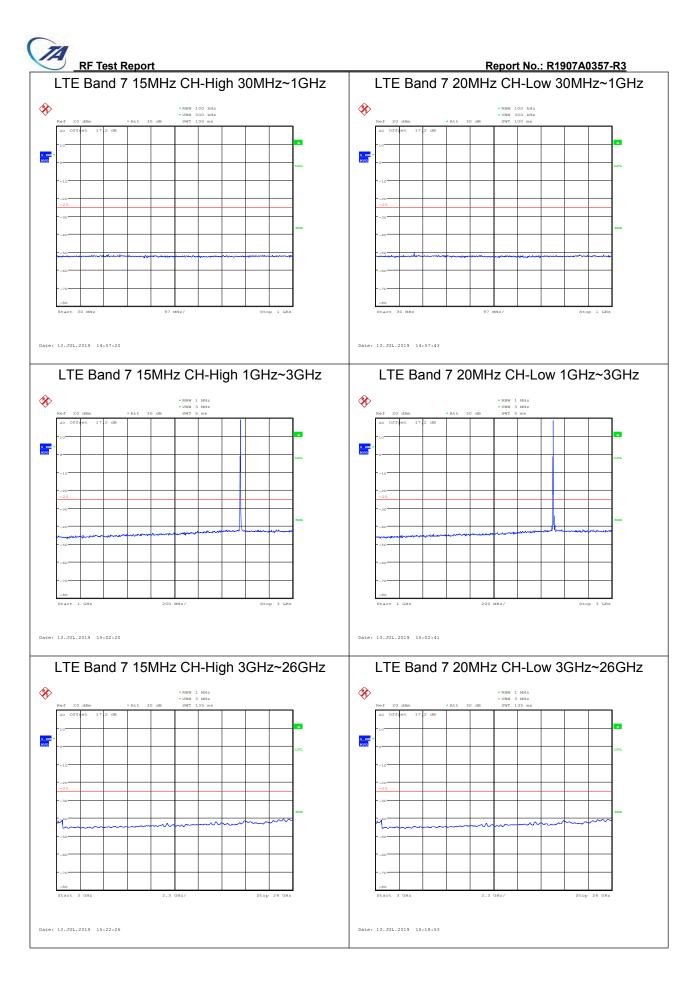


LTE Band 7 20MHz CH-Middle 30MHz~1GHz


LTE Band 7 20MHz CH-High 30MHz~1GHz

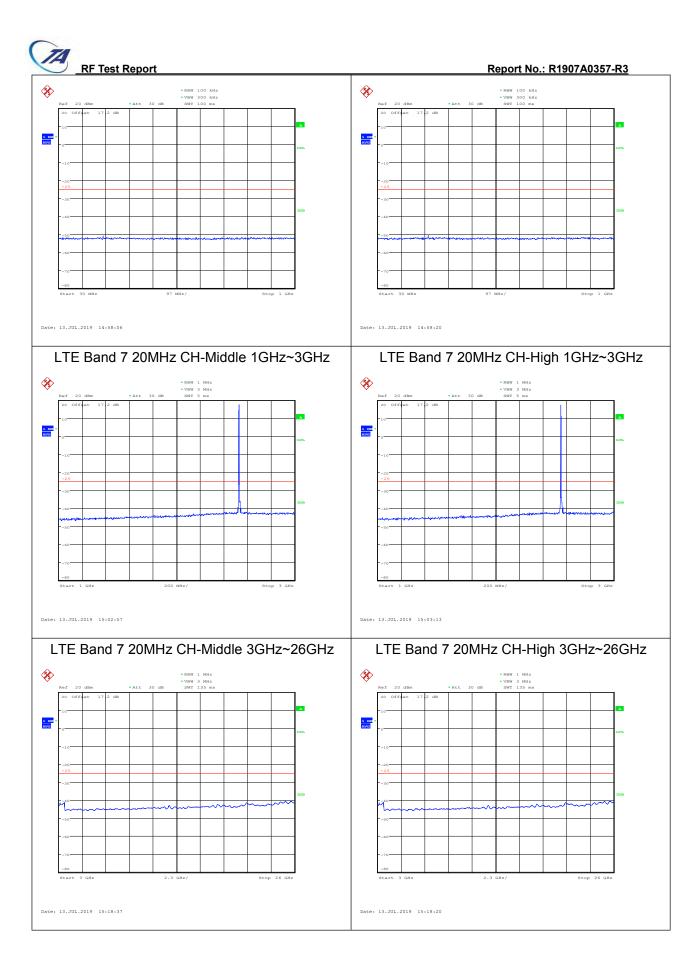




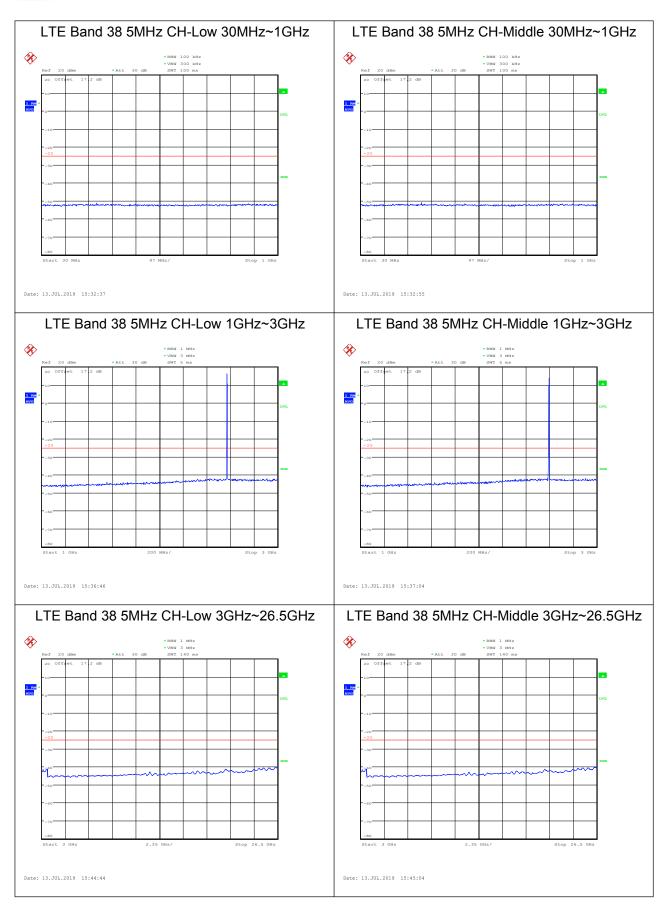




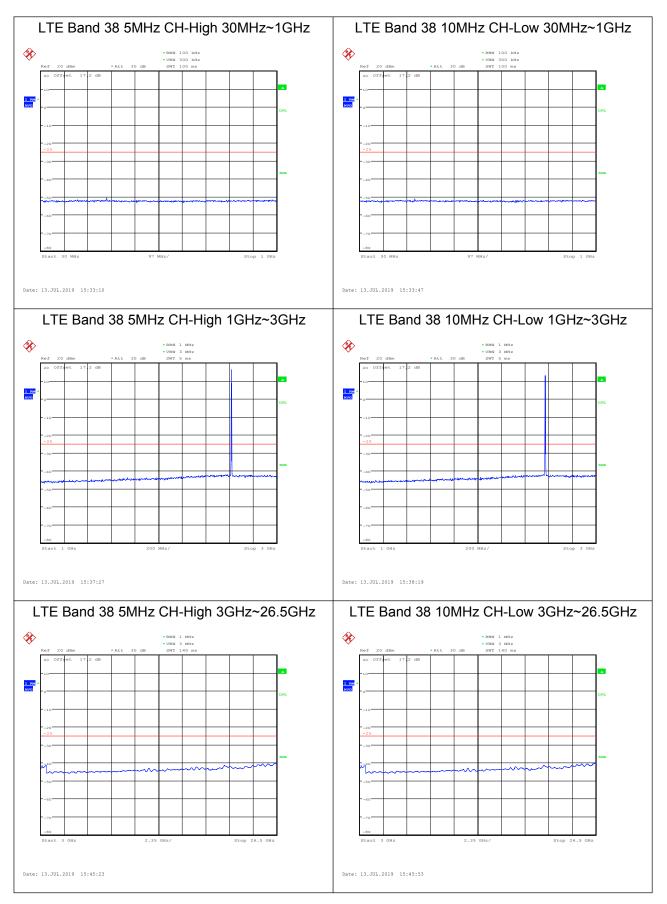




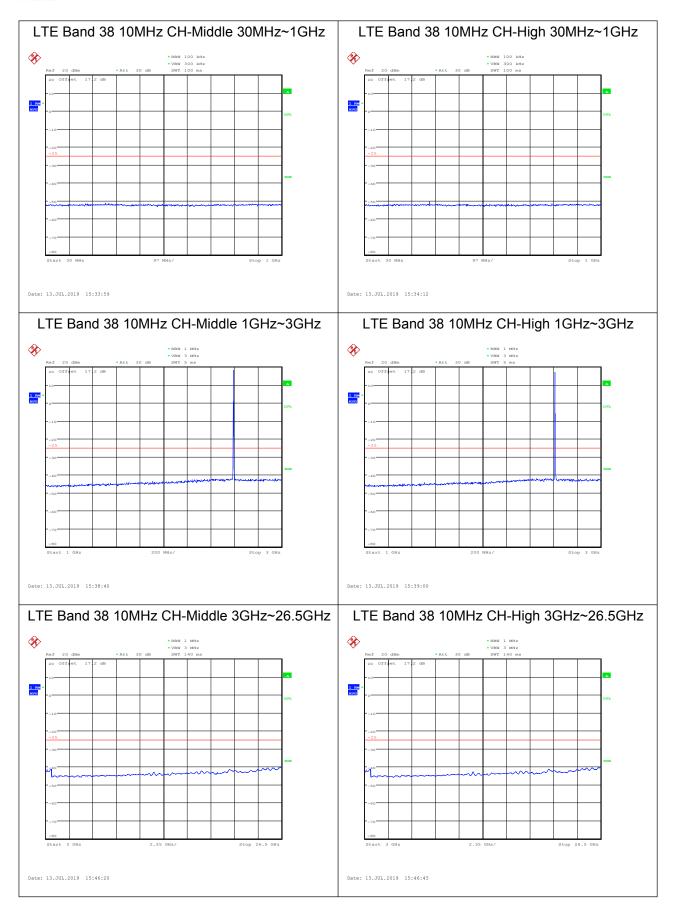




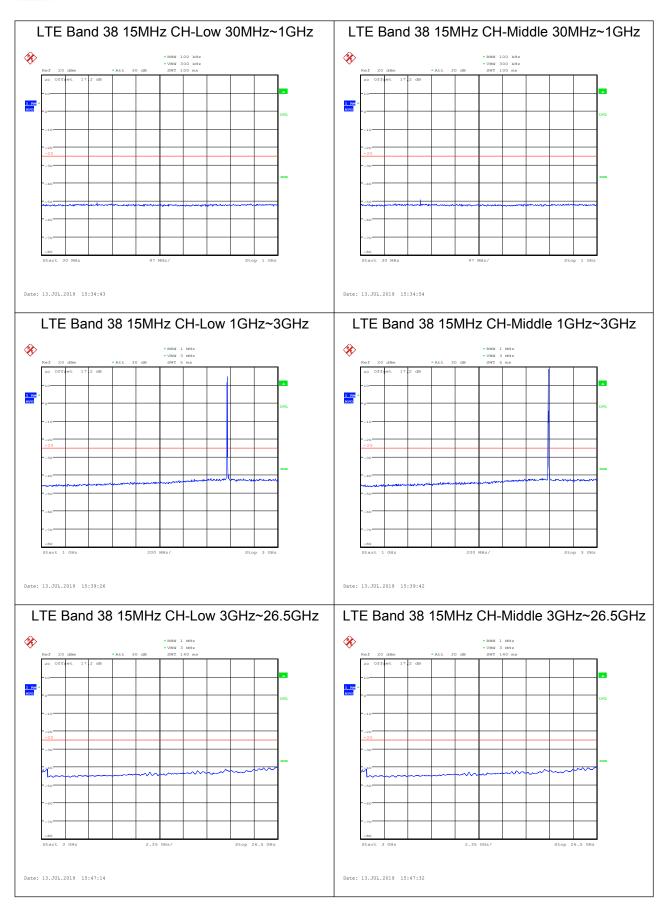




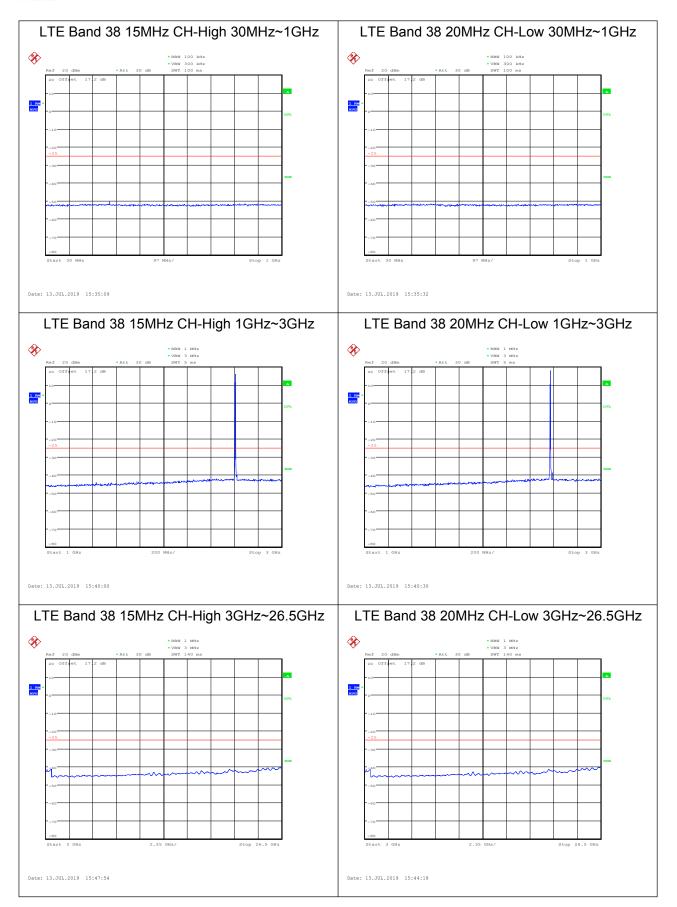




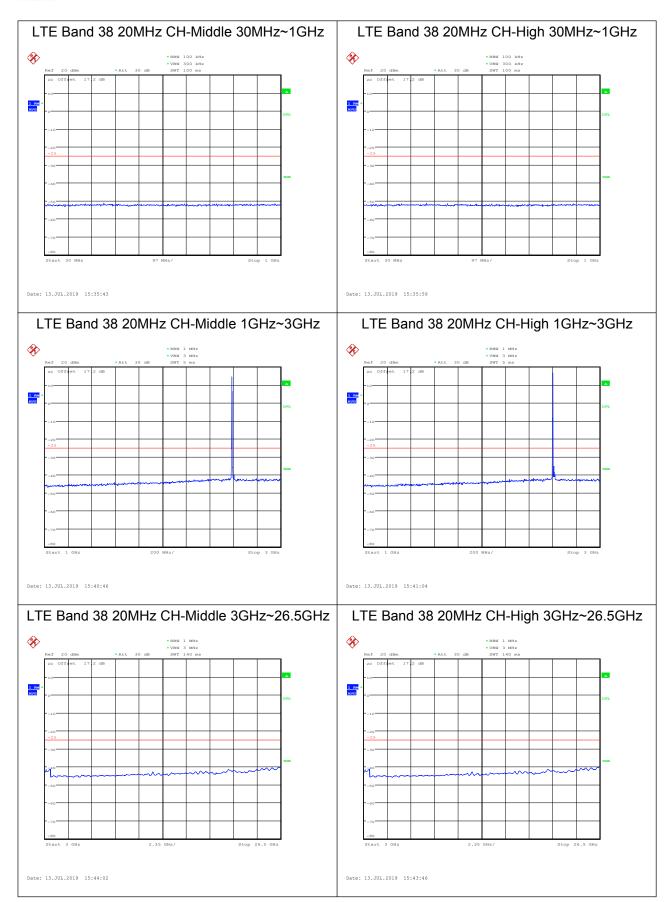




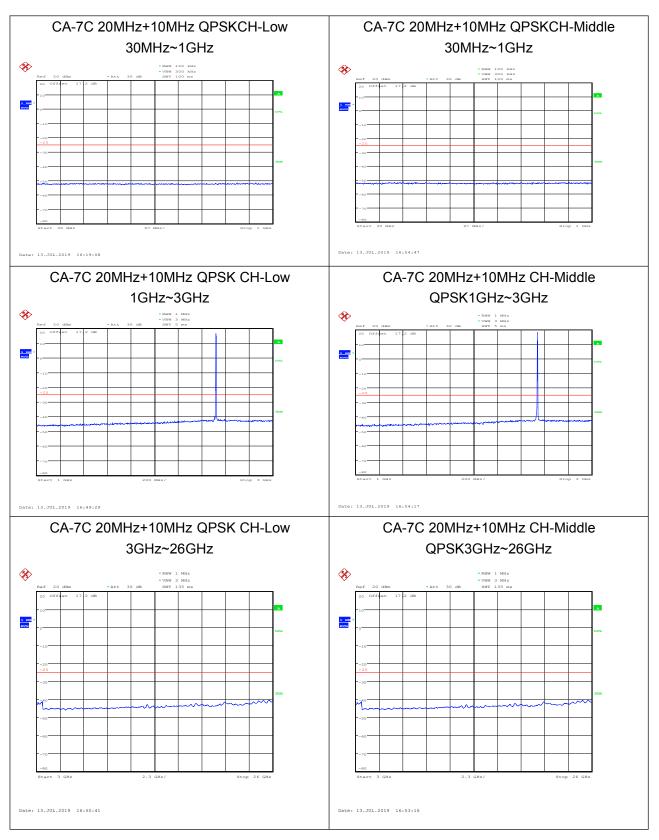




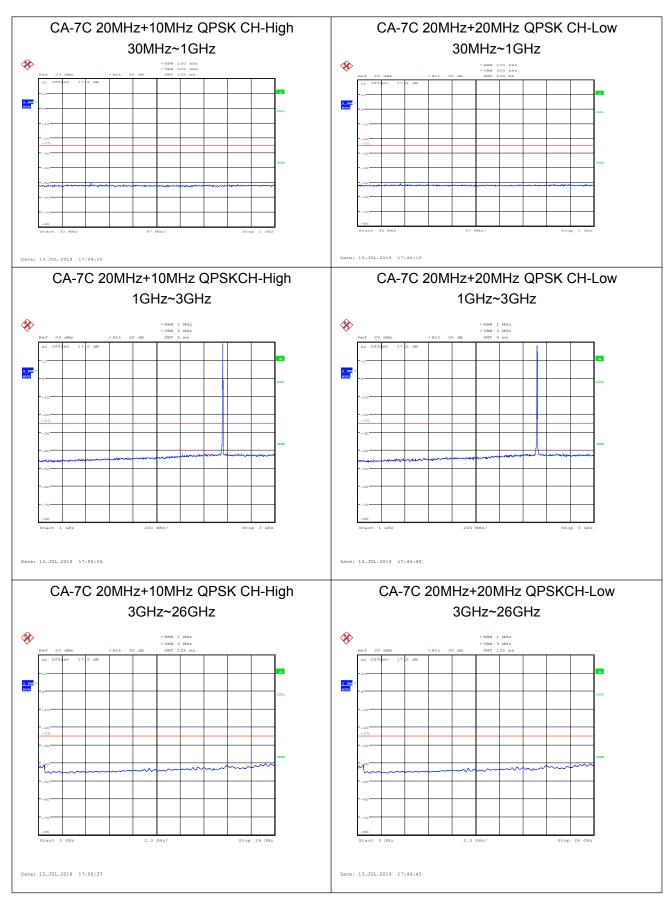





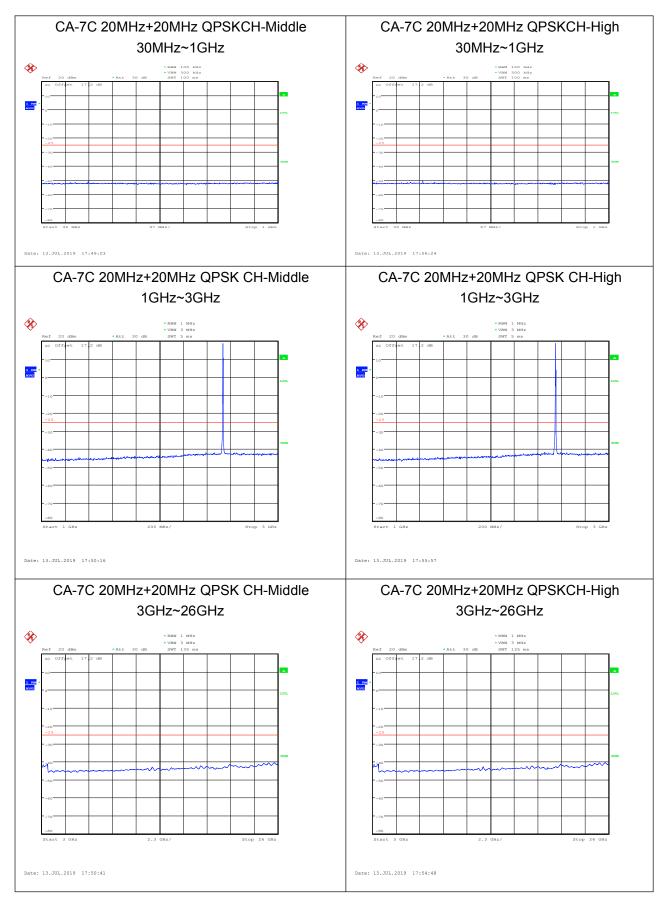

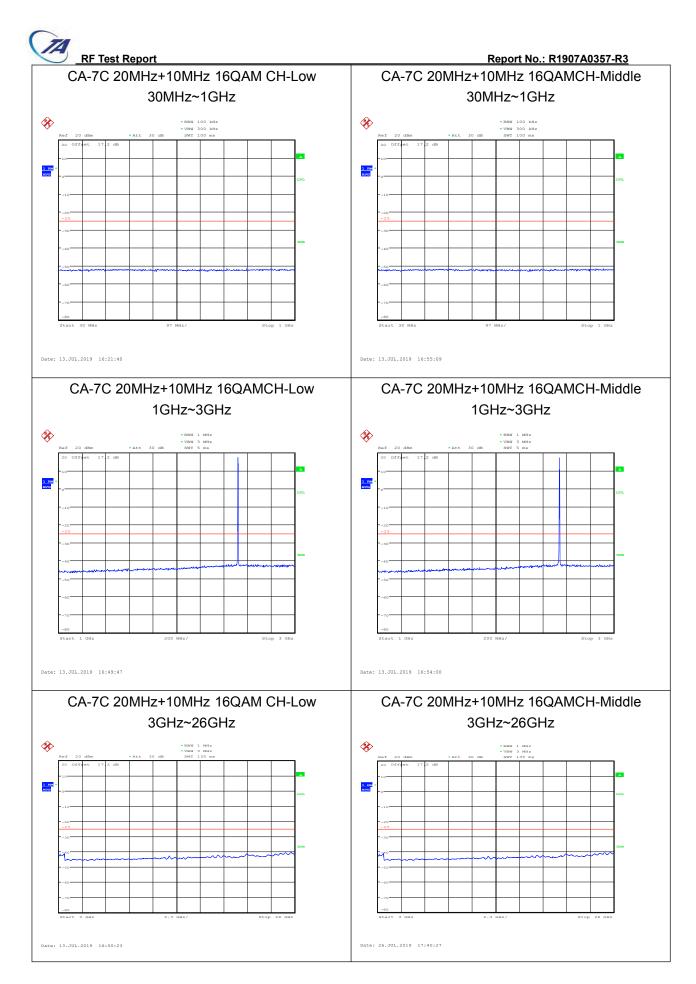




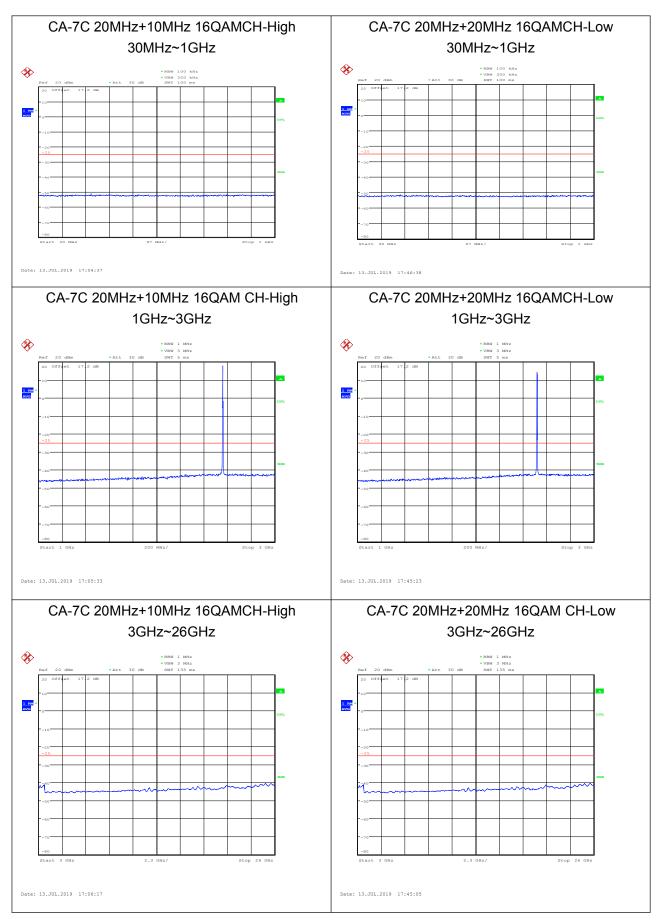


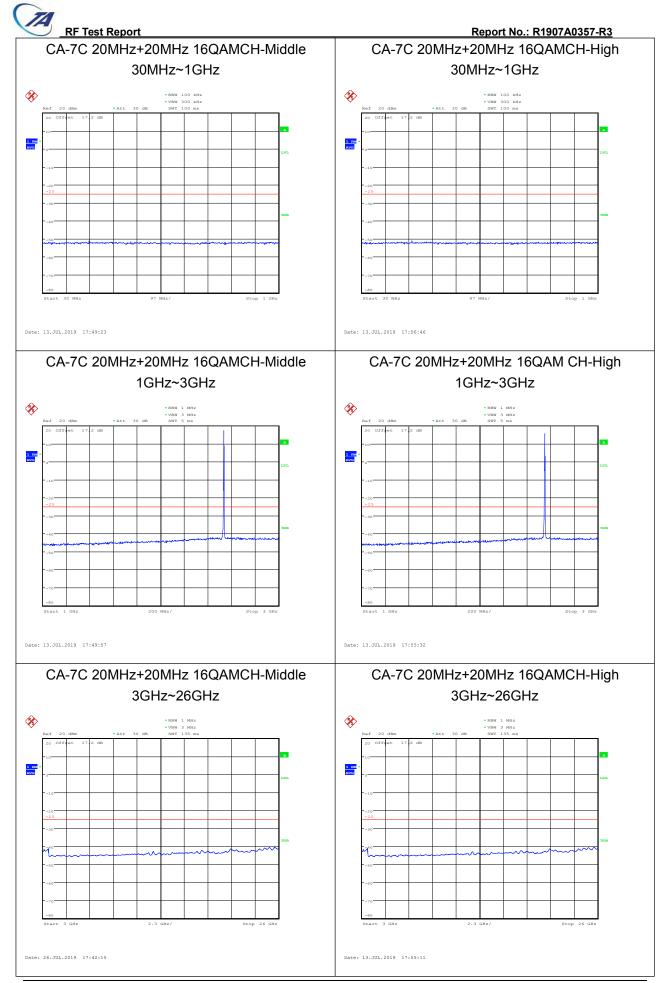




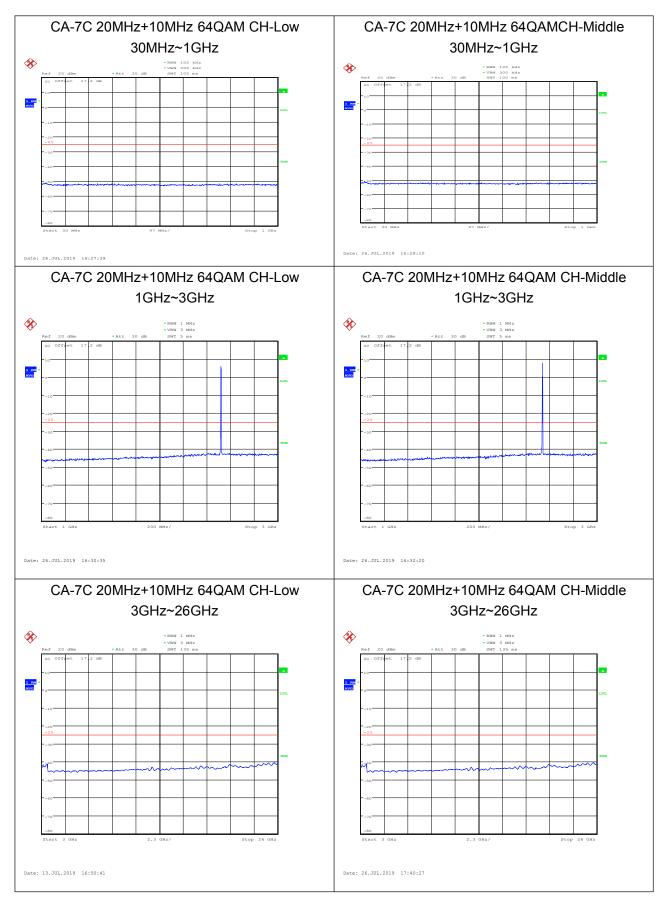




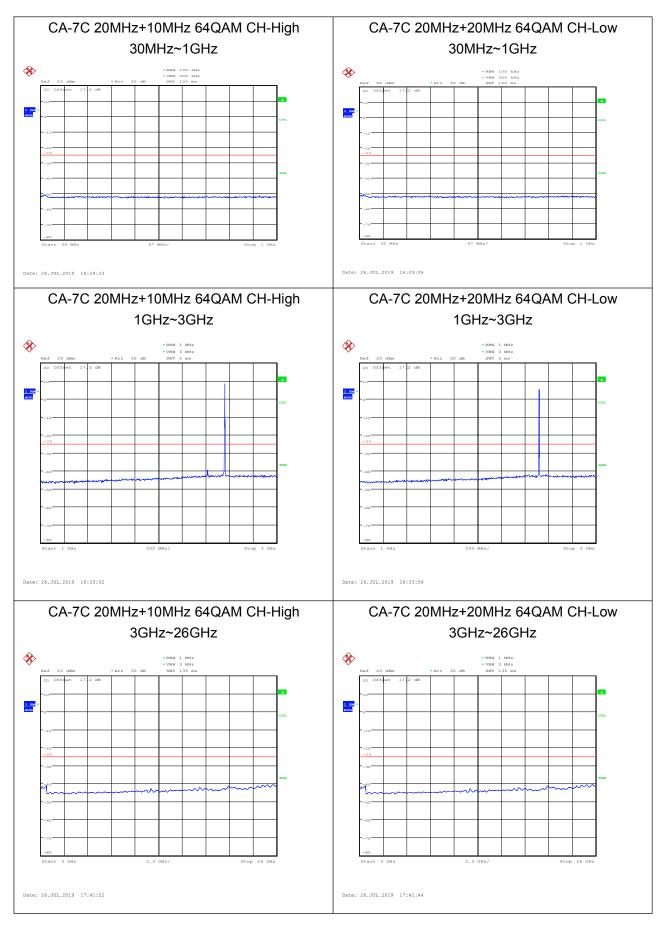


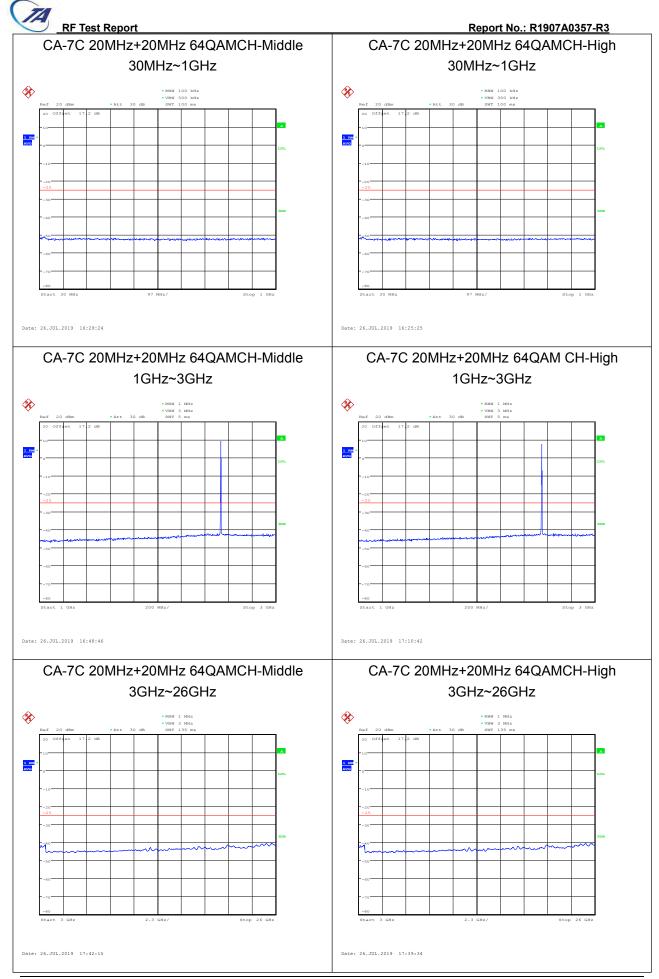




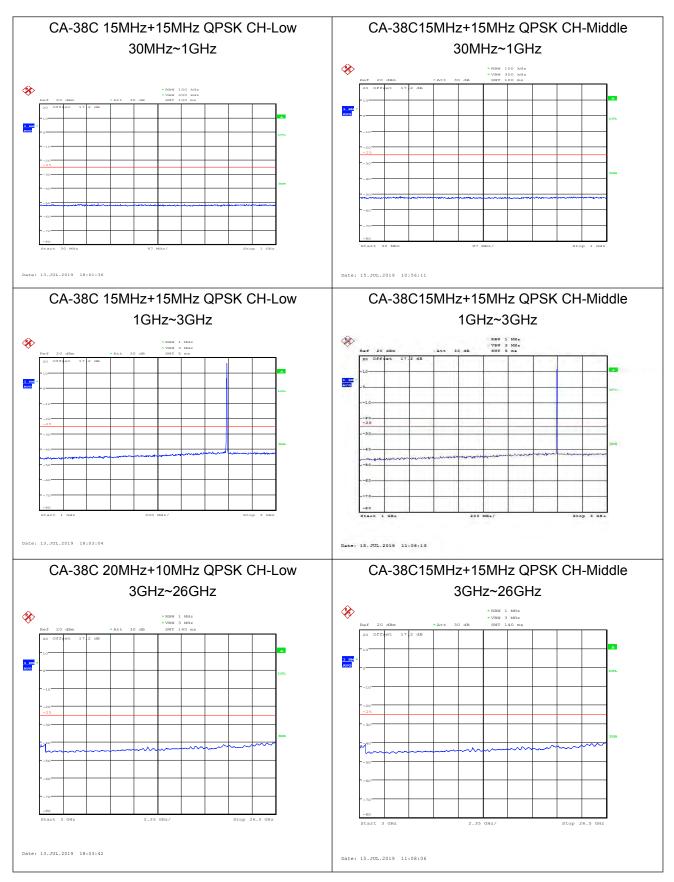




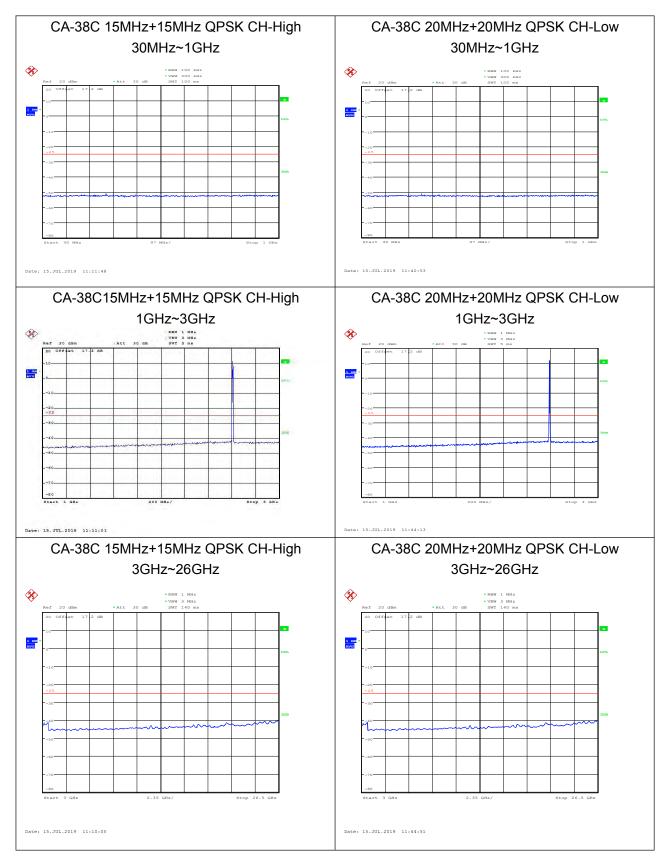




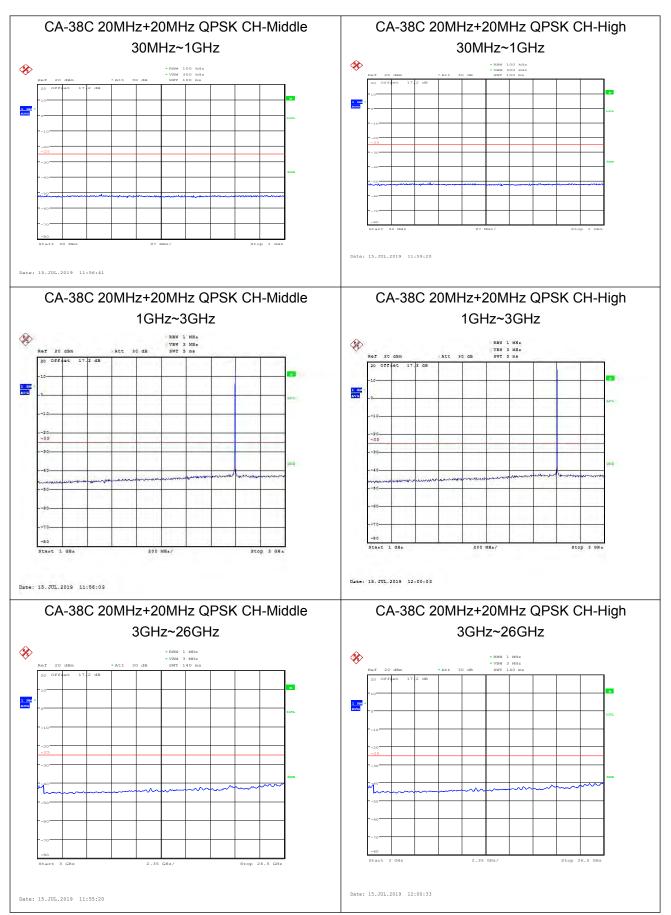




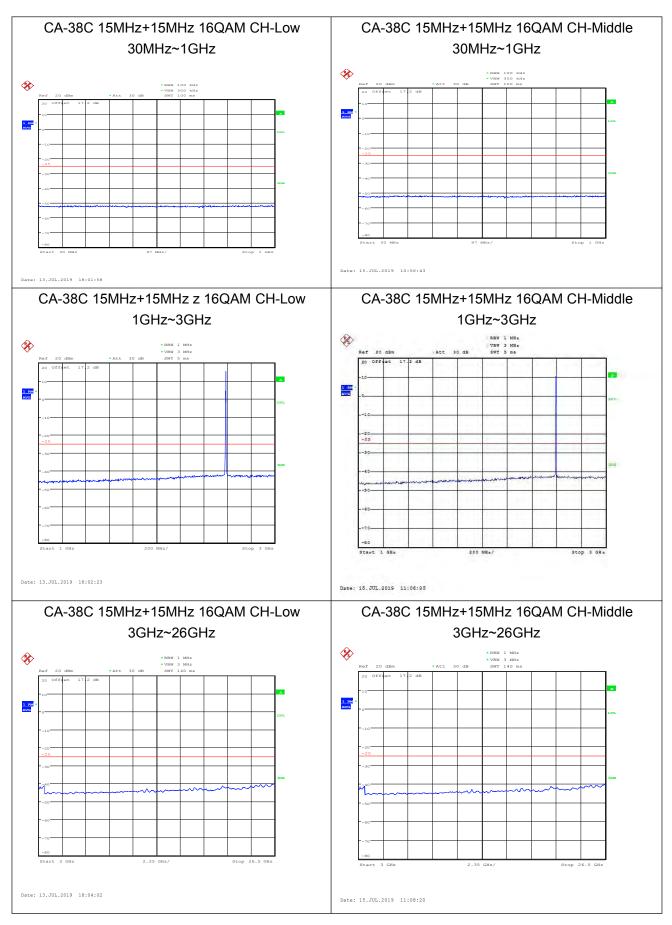


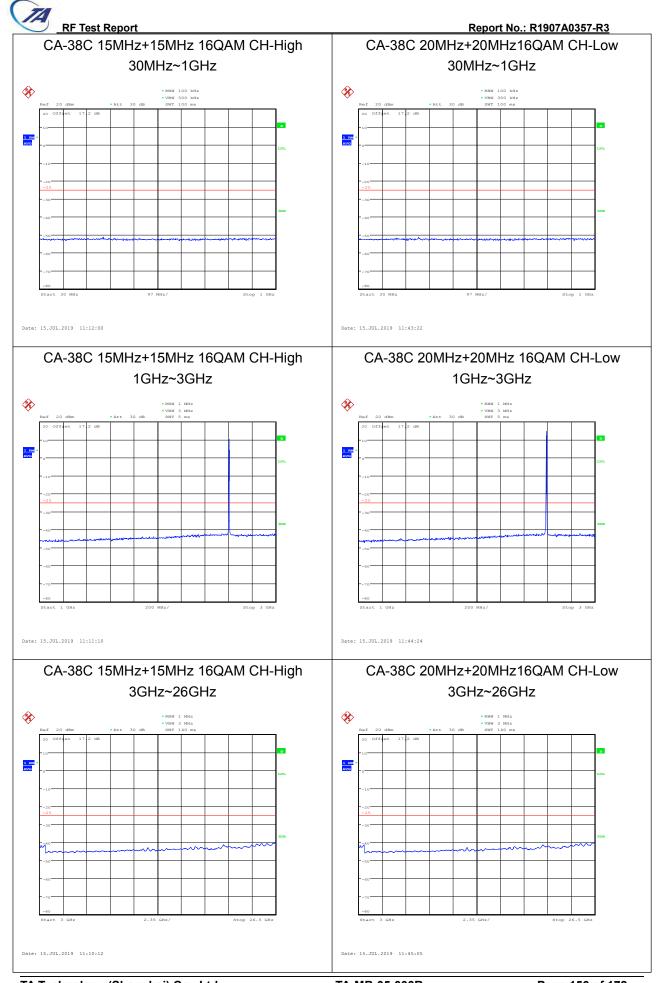




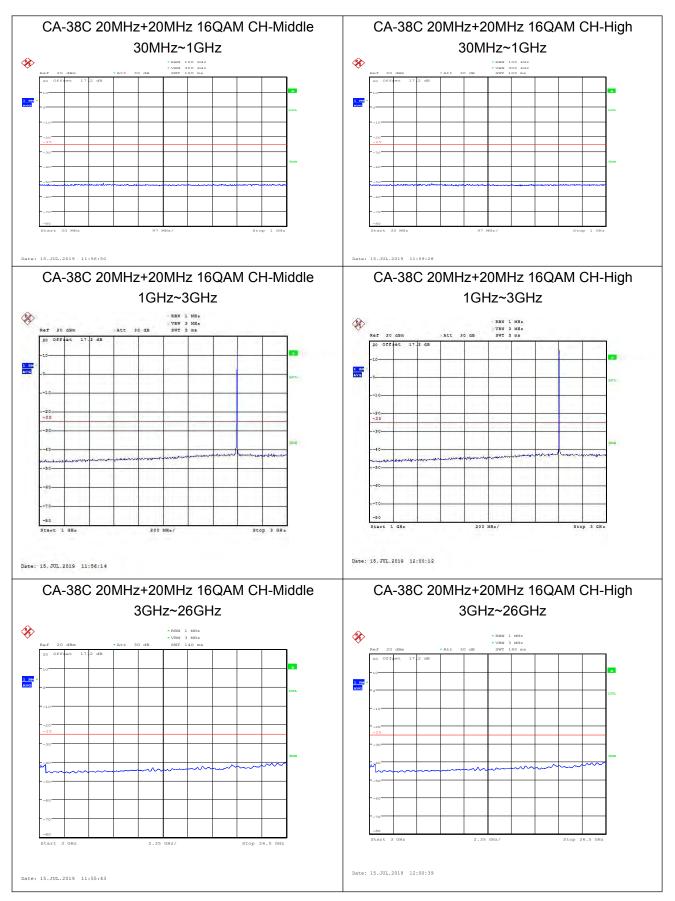




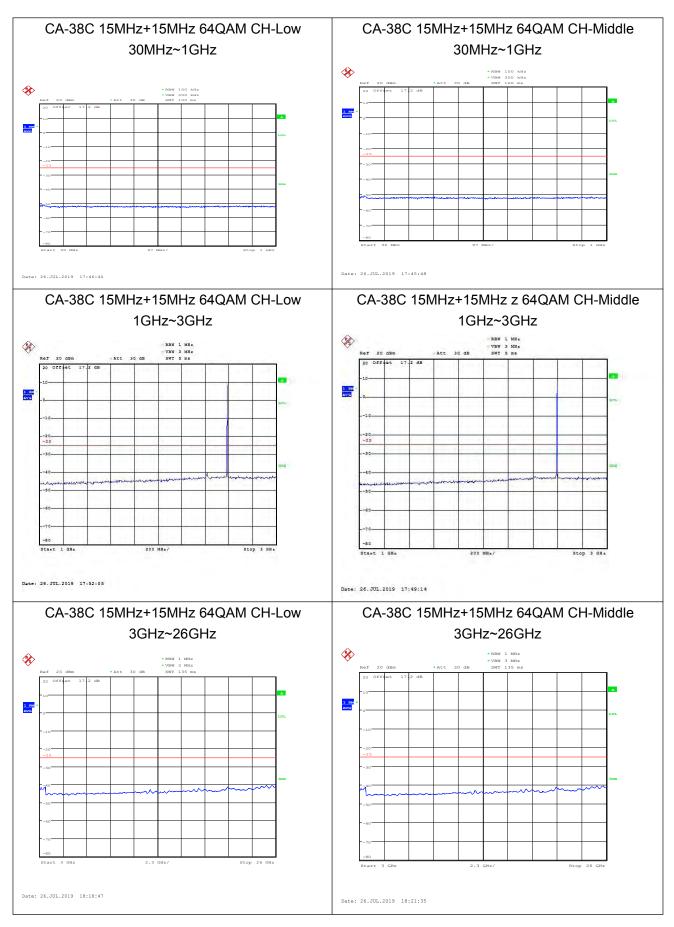

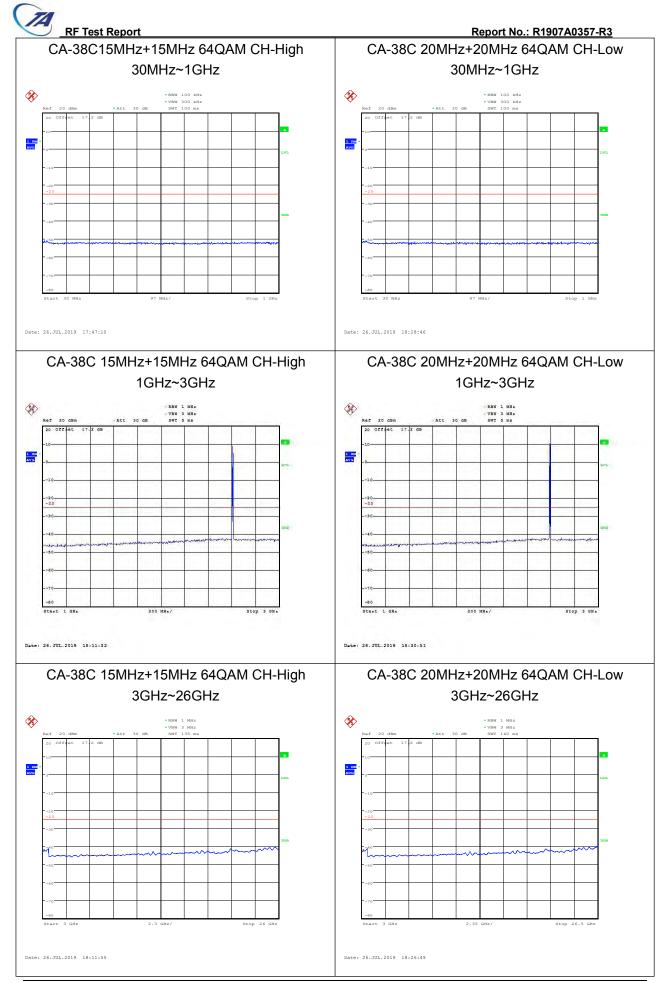



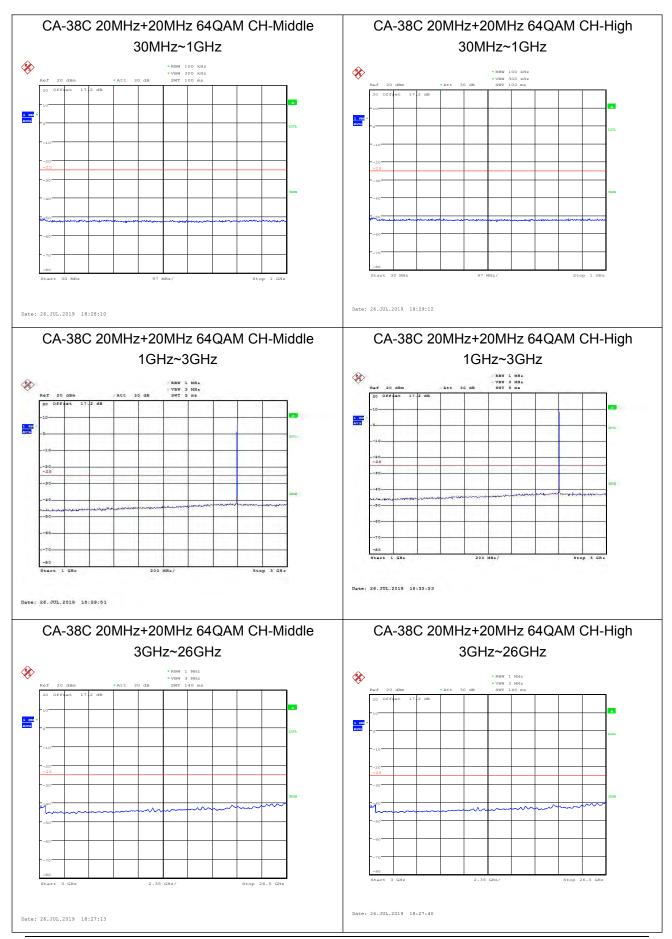



RF Test Report No.: R1907A0357-R3

5.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

- 1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
- 2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- 3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz, RBW=10kHz, VBW=30kHz 150kHz-30MHz, RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz And the maximum value of the receiver should be recorded as (Pr).
- 5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

The measurement results are amend as described below:

Power(EIRP)=PMea-Pcl + Ga

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

Page 161 of 172




= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

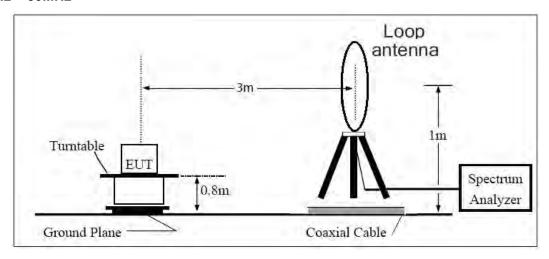

30MHz ~ 1GHz

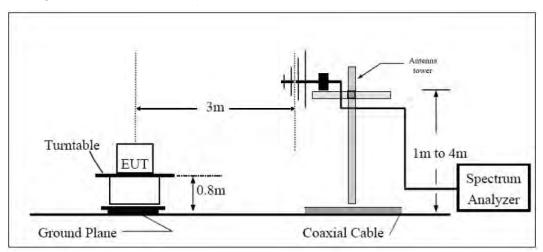

Above 1GHz

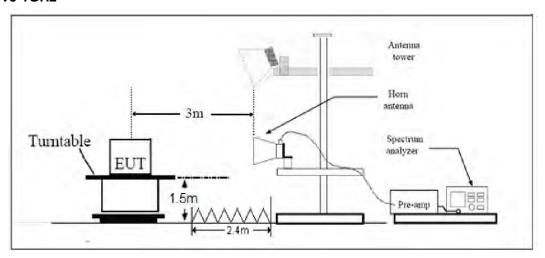

Note: Area side:2.4mX3.6m

Test Report Report No.: R1907A0357-R3

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB."

Rule Part 27.53(m) 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(h)Limit	-13 dBm
Part 27.53(m) Limit	-25 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.



Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band IV CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3462.8	-60.58	2.6	10.75	Horizontal	-52.43	-13.00	39.43	45
3	5201.3	-57.53	2.4	11.05	Horizontal	-48.88	-13.00	35.88	0
4	6925.1	-57.07	4.5	11.15	Horizontal	-50.42	-13.00	37.42	180
5	8663.0	-52.91	5.1	11.35	Horizontal	-46.66	-13.00	33.66	90
6	10395.6	-49.70	5.3	11.95	Horizontal	-43.05	-13.00	30.05	90
7	12128.2	-49.34	5.5	13.55	Horizontal	-41.29	-13.00	28.29	270
8	13860.8	-47.88	6.3	13.75	Horizontal	-40.43	-13.00	27.43	225
9	15593.4	-47.46	6.7	13.85	Horizontal	-40.31	-13.00	27.31	180
10	17326.0	-46.72	6.8	14.25	Horizontal	-39.27	-13.00	26.27	90

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-58.26	2.6	10.75	Horizontal	-50.11	-13.00	37.11	270
3	5197.5	-43.46	2.4	11.05	Horizontal	-34.81	-13.00	21.81	225
4	6930.0	-57.43	4.5	11.15	Horizontal	-50.78	-13.00	37.78	135
5	8662.5	-51.71	5.1	11.35	Horizontal	-45.46	-13.00	32.46	45
6	10395.0	-49.59	5.3	11.95	Horizontal	-42.94	-13.00	29.94	135
7	12127.5	-47.19	5.5	13.55	Horizontal	-39.14	-13.00	26.14	0
8	13860.0	-48.52	6.3	13.75	Horizontal	-41.07	-13.00	28.07	90
9	15592.5	-49.46	6.7	13.85	Horizontal	-42.31	-13.00	29.31	180
10	17325.0	-45.87	6.8	14.25	Horizontal	-38.42	-13.00	25.42	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-59.55	2.6	10.75	Horizontal	-51.40	-13.00	38.40	135
3	5191.5	-48.86	2.4	11.05	Horizontal	-40.21	-13.00	27.21	0
4	6930.0	-58.66	4.5	11.15	Horizontal	-52.01	-13.00	39.01	90
5	8662.5	-52.33	5.1	11.35	Horizontal	-46.08	-13.00	33.08	180
6	10395.0	-50.03	5.3	11.95	Horizontal	-43.38	-13.00	30.38	135
7	12127.5	-47.51	5.5	13.55	Horizontal	-39.46	-13.00	26.46	45
8	13860.0	-50.11	6.3	13.75	Horizontal	-42.66	-13.00	29.66	135
9	15592.5	-48.77	6.7	13.85	Horizontal	-41.62	-13.00	28.62	0
10	17325.0	-46.44	6.8	14.25	Horizontal	-38.99	-13.00	25.99	90

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3447.0	-59.60	2.6	10.75	Horizontal	-51.45	-13.00	38.45	180
3	5170.5	-53.36	2.4	11.05	Horizontal	-44.71	-13.00	31.71	135
4	6930.0	-55.50	4.5	11.15	Horizontal	-48.85	-13.00	35.85	135
5	8662.5	-51.99	5.1	11.35	Horizontal	-45.74	-13.00	32.74	0
6	10395.0	-49.35	5.3	11.95	Horizontal	-42.70	-13.00	29.70	90
7	12127.5	-57.26	5.5	13.55	Horizontal	-49.21	-13.00	36.21	180
8	13860.0	-50.19	6.3	13.75	Horizontal	-42.74	-13.00	29.74	135
9	15592.5	-48.47	6.7	13.85	Horizontal	-41.32	-13.00	28.32	270
10	17325.0	-46.20	6.8	14.25	Horizontal	-38.75	-13.00	25.75	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

^{2.} The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-60.02	2.00	9.15	Horizontal	-52.87	-25.00	27.87	45
3	7605.0	-57.16	2.50	11.35	Horizontal	-48.31	-25.00	23.31	135
4	10140.0	-57.30	4.20	12.05	Horizontal	-49.45	-25.00	24.45	0
5	12675.0	-52.60	5.20	12.85	Horizontal	-44.95	-25.00	19.95	90
6	15210.0	-51.12	5.50	14.23	Horizontal	-42.39	-25.00	17.39	180
7	17745.0	-50.54	5.70	14.15	Horizontal	-42.09	-25.00	17.09	135
8	20280.0								
9	22815.0								
10	25350.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-60.40	2.00	10.15	Horizontal	-52.25	-25.00	27.25	135
3	7605.0	-57.62	2.50	11.35	Horizontal	-48.77	-25.00	23.77	270
4	10140.0	-55.88	4.20	12.05	Horizontal	-48.03	-25.00	23.03	225
5	12675.0	-52.31	5.20	14.85	Horizontal	-42.66	-25.00	17.66	135
6	15210.0	-48.44	5.50	13.23	Horizontal	-40.71	-25.00	15.71	45
7	17745.0	-47.09	5.70	12.15	Horizontal	-40.64	-25.00	15.64	0
8	20280.0								
9	22815.0								
10	25350.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 38 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5190.5	-60.37	2.00	9.15	Horizontal	-53.22	-13.00	40.22	45
3	7789.1	-59.37	2.50	11.35	Horizontal	-50.52	-13.00	37.52	135
4	10386.0	-57.06	4.20	12.05	Horizontal	-49.21	-13.00	36.21	45
5	12976.9	-55.72	5.20	12.85	Horizontal	-48.07	-13.00	35.07	135
6	15573.4	-52.72	5.50	14.23	Horizontal	-43.99	-13.00	30.99	0
7	18165.0								
8	20760.0								
9	23355.0								
10	25950.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 38 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5191.9	-59.99	2.00	10.15	Horizontal	-51.84	-13.00	38.84	45
3	7781.6	-56.61	2.50	11.35	Horizontal	-47.76	-13.00	34.76	135
4	10380.4	-58.46	4.20	12.05	Horizontal	-50.61	-13.00	37.61	225
5	12976.9	-56.23	5.20	14.85	Horizontal	-46.58	-13.00	33.58	270
6	15570.0	-52.22	5.50	13.23	Horizontal	-44.49	-13.00	31.49	135
7	18165.0								
8	20760.0								
9	23355.0								
10	25950.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

RF Test Report No.: R1907A0357-R3

LTE Band 38 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5222.6	-59.50	2.00	10.15	Horizontal	-51.35	-25	38.35	90
3	7831.1	-52.66	2.50	11.35	Horizontal	-43.81	-25	30.81	45
4	10446.8	-45.94	4.20	12.05	Horizontal	-38.09	-25	25.09	270
5	13053.4	-52.42	5.20	14.85	Horizontal	-42.77	-25	29.77	180
6	15667.9	-46.25	5.50	13.23	Horizontal	-38.52	-25	25.52	225
7	18270.0								
8	20880.0								
9	23490.0								
10	26100.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

CA Band 7 QPSK 10MHz+20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5051.2	-58.99	2.00	9.15	Horizontal	-51.84	-13.00	38.84	45
3	7576.8	-56.61	2.50	11.35	Horizontal	-47.76	-13.00	34.76	135
4	10102.4	-58.46	4.20	12.05	Horizontal	-50.61	-13.00	37.61	225
5	12628.0	-54.23	5.20	12.85	Horizontal	-46.58	-13.00	33.58	270
6	15153.6	-53.22	5.50	14.23	Horizontal	-44.49	-13.00	31.49	135
7	17679.2	-51.00	5.70	14.15	Horizontal	-42.55	-13.00	29.55	225
8	20204.8								
9	22730.4								
10	25256.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

F Test Report No.: R1907A0357-R3

CA Band 7 QPSK 20MHz+10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5060.2	-57.72	2.00	9.15	Horizontal	-50.57	-13.00	37.57	45
3	7590.3	-57.67	2.50	11.35	Horizontal	-48.82	-13.00	35.82	135
4	10120.4	-58.46	4.20	12.05	Horizontal	-50.61	-13.00	37.61	225
5	12650.5	-53.54	5.20	12.85	Horizontal	-45.89	-13.00	32.89	270
6	15180.6	-51.88	5.50	14.23	Horizontal	-43.15	-13.00	30.15	135
7	17710.7	-51.64	5.70	14.15	Horizontal	-43.19	-13.00	30.19	0
8	20240.8								
9	22770.9								
10	25301.0								

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

CA Band 7 QPSK 15MHz +15MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5055.0	-59.42	2.00	10.15	Horizontal	-51.27	-13.00	38.27	45
3	7582.5	-58.53	2.50	11.35	Horizontal	-49.68	-13.00	36.68	135
4	10110.0	-54.49	4.20	12.05	Horizontal	-46.64	-13.00	33.64	225
5	12637.5	-52.66	5.20	14.85	Horizontal	-43.01	-13.00	30.01	270
6	15165.0	-51.85	5.50	13.23	Horizontal	-44.12	-13.00	31.12	135
7	17692.5	-49.41	5.70	12.15	Horizontal	-42.96	-13.00	29.96	270
8	20220.0								
9	22747.5								
10	25275.0								

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

Page 169 of 172

Report No.: R1907A0357-R3

CA Band 7 QPSK 20MHz+20MH CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5050.2	-58.78	2.00	9.15	Horizontal	-51.63	-13.00	38.63	45
3	7575.3	-57.67	2.50	11.35	Horizontal	-48.82	-13.00	35.82	135
4	10100.4	-54.73	4.20	12.05	Horizontal	-46.88	-13.00	33.88	225
5	12625.5	-50.84	5.20	12.85	Horizontal	-43.19	-13.00	30.19	270
6	15150.6	-51.64	5.50	14.23	Horizontal	-42.91	-13.00	29.91	135
7	17675.7	-50.36	5.70	14.15	Horizontal	-41.91	-13.00	28.91	135
8	20200.8								
9	22725.9								
10	25251.0								

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

CA Band 38 QPSK 15MHz+15MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5175.0	-59.23	2.00	9.15	Horizontal	-52.08	-13.00	39.08	45
3	7762.5	-58.87	2.50	11.35	Horizontal	-50.02	-13.00	37.02	135
4	10350.0	-54.50	4.20	12.05	Horizontal	-46.65	-13.00	33.65	225
5	12937.5	-52.38	5.20	12.85	Horizontal	-44.73	-13.00	31.73	270
6	15525.0	-51.84	5.50	14.23	Horizontal	-43.11	-13.00	30.11	135
7	18112.5								
8	20700.0								
9	23287.5								
10	25875.0								

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd. TA-MB-05-003R

^{2.} The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



Test Report Report No.: R1907A0357-R3

CA Band 38 QPSK 20MHz+20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5170.2	-58.70	2.00	10.15	Horizontal	-50.55	-13.00	37.55	45
3	7755.3	-59.96	2.50	11.35	Horizontal	-51.11	-13.00	38.11	135
4	10340.4	-55.50	4.20	12.05	Horizontal	-47.65	-13.00	34.65	225
5	12925.5	-55.75	5.20	14.85	Horizontal	-46.10	-13.00	33.10	270
6	15510.6	-51.03	5.50	13.23	Horizontal	-43.30	-13.00	30.30	135
7	18095.7								
8	20680.8								
9	23265.9								
10	25851.0								

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



6 Main Test Instruments

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	1	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Horn Antenna	STEATITE	QSH-SL-26-40- K-15	16779	2017-07-20	2019-07-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preampflier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-19	2020-05-18
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-09-13
Software	R&S	EMC32	9.26.0	1	1

*****END OF REPORT *****