



# FCC RF Test Report

**APPLICANT** : Xiaomi Communications Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : MI  
**MODEL NAME** : M1903F10G  
**FCC ID** : 2AFZZ-XMSF10G  
**STANDARD** : FCC Part 15 Subpart E § 15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Mar. 12, 2019 and testing was completed on Apr. 17, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

James Huang



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**  
**No. 1098, Pengxi North Road, Kunshan Economic Development Zone,**  
**Jiangsu Province 215335, China**



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
1 GENERAL DESCRIPTION .....	5
1.1 Applicant .....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT .....	7
1.6 Testing Location .....	7
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....	9
2.1 Carrier Frequency and Channel .....	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system .....	13
2.5 EUT Operation Test Setup .....	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT.....	15
3.1 26dB & 99% Occupied Bandwidth Measurement .....	15
3.2 Maximum Conducted Output Power Measurement .....	17
3.3 Power Spectral Density Measurement .....	19
3.4 Unwanted Emissions Measurement.....	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Automatically Discontinue Transmission .....	29
3.7 Antenna Requirements .....	30
4 LIST OF MEASURING EQUIPMENT .....	31
5 UNCERTAINTY OF EVALUATION .....	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR931204E	Rev. 01	Initial issue of report	Apr. 25, 2019



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	$\leq 24$ dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	$\leq 11$ dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.19 dB at 5350.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.21 dB at 0.195 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Xiaomi Communications Co., Ltd.**

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

## 1.2 Manufacturer

**Xiaomi Communications Co., Ltd.**

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
Model Name	M1903F10G
FCC ID	2AFZZ-XMSF10G
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR /EDR/ LE FM Receiver / GNSS
IMEI Code	Conducted: 866962040001897/866962040001905 Radiation: 866962040001871/866962040001889 Conduction: 866962040001871/866962040001889
HW Version	P1
SW Version	MIUI 10
EUT Stage	Identical Prototype

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples is for memory, sample 1 is 6+64GB capacity and sample 2 is 6+128GB capacity. According to the difference, we only choose sample 1 to perform full tests.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
<b>Maximum Output Power to Antenna</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 18.75 dBm / 0.0750 W 802.11n HT20 : 17.92 dBm / 0.0619 W 802.11n HT40 : 17.73 dBm / 0.0593 W 802.11ac VHT20 : 17.95 dBm / 0.0624 W 802.11ac VHT40 : 17.74 dBm / 0.0594 W 802.11ac VHT80 : 14.06 dBm / 0.0255 W <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 18.71 dBm / 0.0743 W 802.11n HT20 : 17.57 dBm / 0.0571 W 802.11n HT40 : 16.36 dBm / 0.0433 W 802.11ac VHT20 : 17.66 dBm / 0.0583 W 802.11ac VHT40 : 16.18 dBm / 0.0415 W 802.11ac VHT80 : 12.67 dBm / 0.0185 W <b>&lt;5500 MHz ~ 5700 MHz &gt;</b> 802.11a : 18.86 dBm / 0.0769 W 802.11n HT20 : 17.75 dBm / 0.0596 W 802.11n HT40 : 17.78 dBm / 0.0600 W 802.11ac VHT20 : 17.76 dBm / 0.0597 W 802.11ac VHT40 : 17.79 dBm / 0.0601 W 802.11ac VHT80 : 16.99 dBm / 0.0500 W
<b>99% Occupied Bandwidth</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 17.53 MHz 802.11ac VHT20 : 18.73 MHz 802.11ac VHT40 : 36.46 MHz 802.11ac VHT80 : 75.64 MHz <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 17.54 MHz 802.11ac VHT20 : 18.73 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz <b>&lt;5500 MHz ~ 5700 MHz &gt;</b> 802.11a : 17.63 MHz 802.11ac VHT20 : 18.73 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz
<b>Antenna Gain / Gain</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> Fixed Internal Antenna with gain -2.30 dBi <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> Fixed Internal Antenna with gain -1.50 dBi <b>&lt;5500 MHz ~ 5700 MHz &gt;</b> Fixed Internal Antenna with gain -0.50 dBi
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11an HT20 / ac VHT20 and 802.11an HT40 / ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/ VHT40 for 5180 MHz ~ 5240 MHz, 5500 MHz ~ 5700 MHz and 802.11ac VHT20/an HT40 for 5260 MHz ~ 5320 MHz by referring to their maximum conducted power.



## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS CO01-KS 03CH04-KS	CN5013	630927



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1(Charging from Adapter 1)



Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122

## 2.3 Connection Diagram of Test System

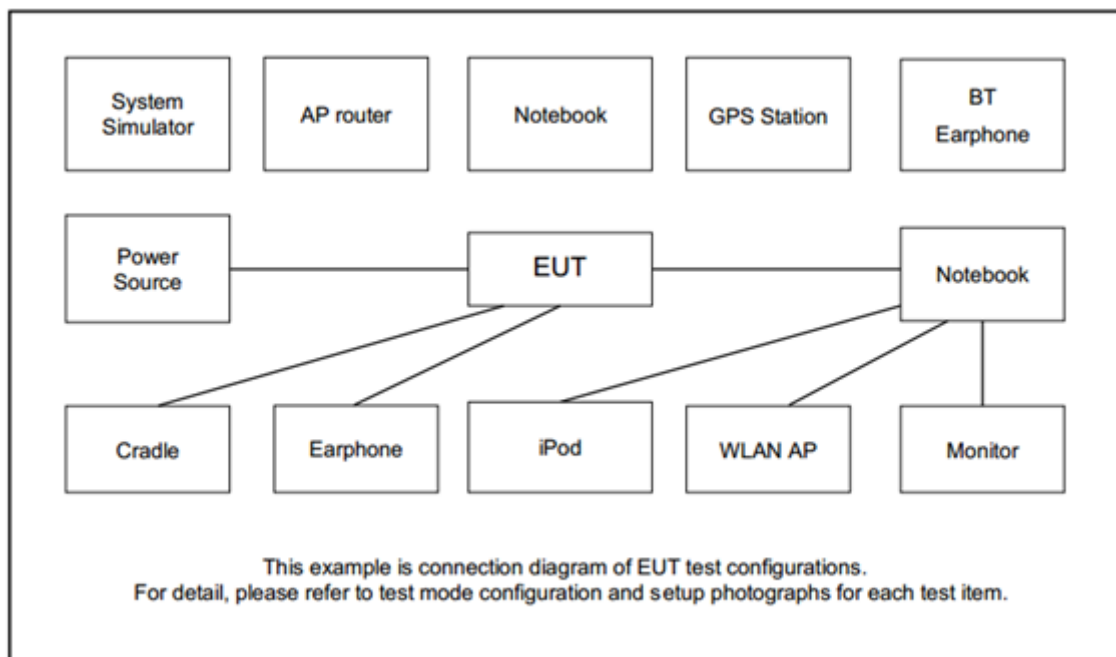

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss*

Following shows an offset computation example with cable loss 6.9dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.9 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

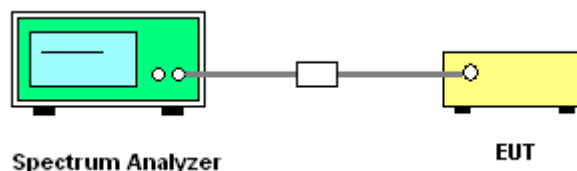

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

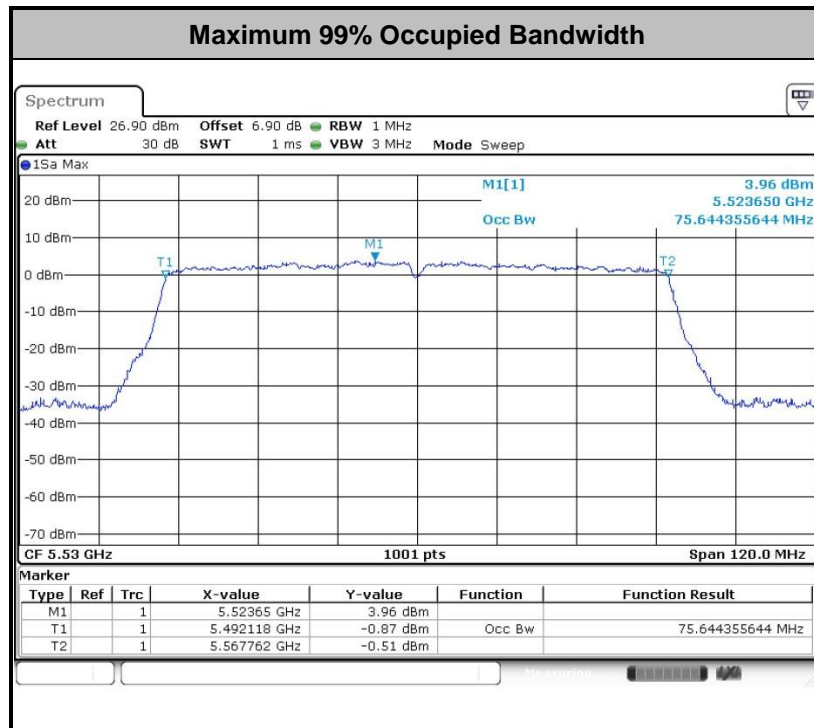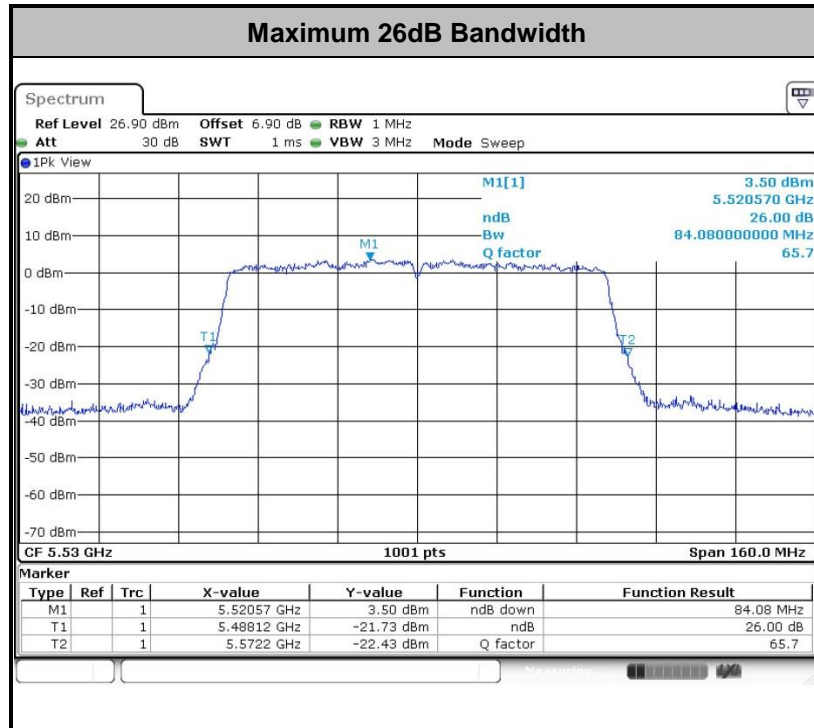

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

#### <FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm  $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

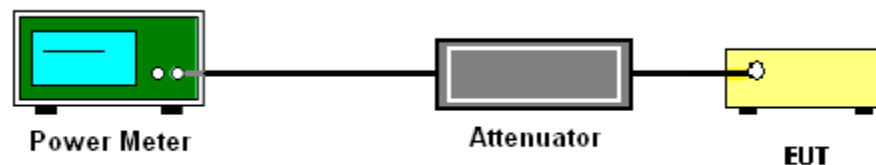

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15 – 5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

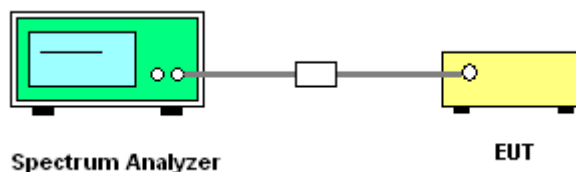

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

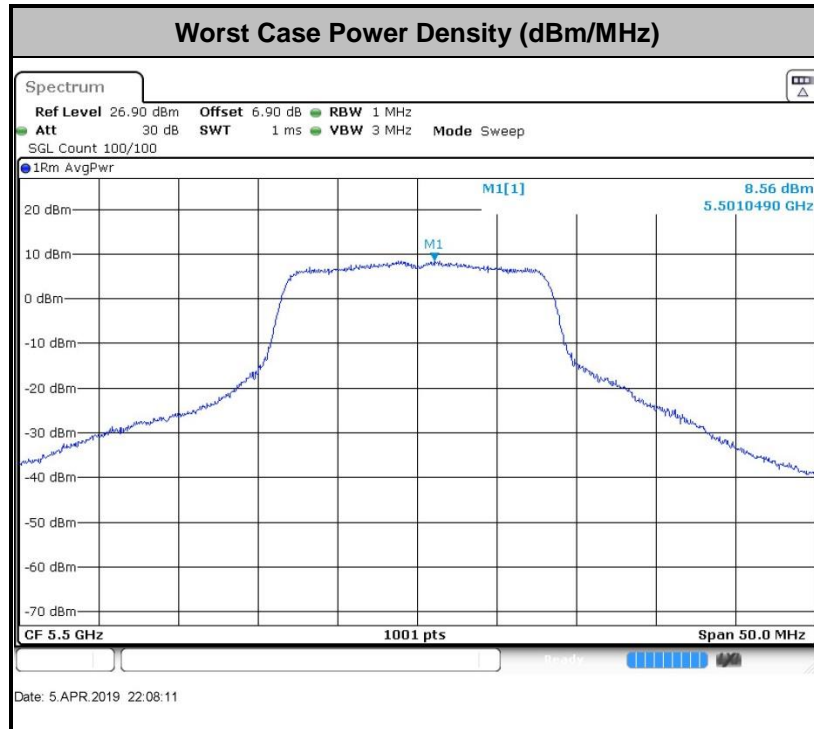

### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{dBm/MHz}$ .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27\text{ dBm/MHz}$  in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ .

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in dBμV/m

$d_{\text{Meas}}$  is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




### 3.4.4 Test Setup


For radiated emissions below 30MHz

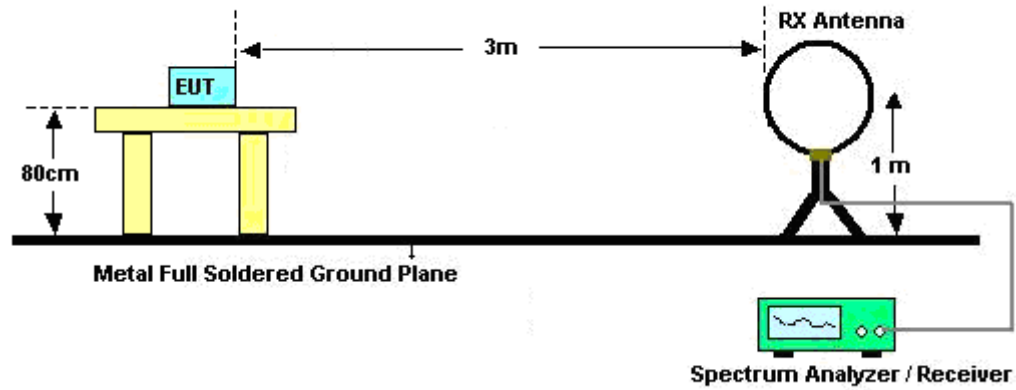

For radiated emissions from 30MHz to 1GHz

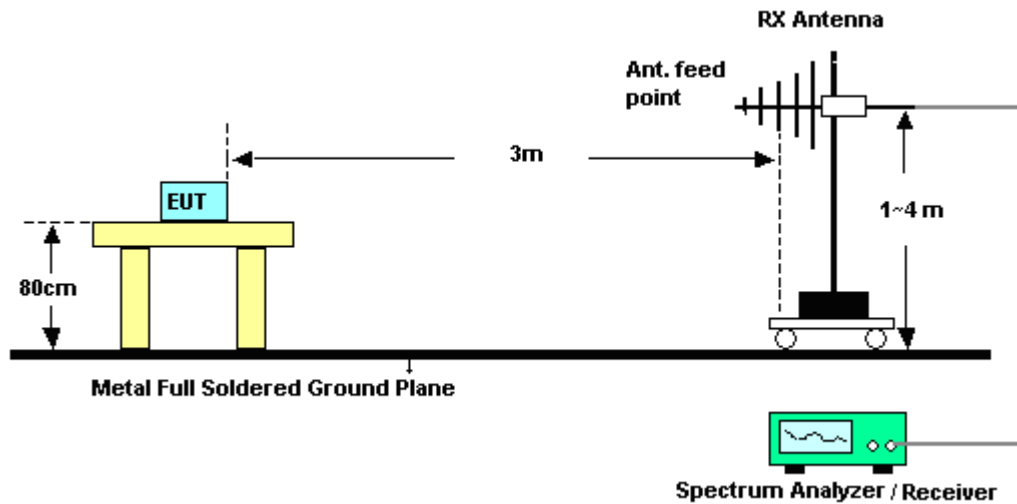

For radiated emissions above 1GHz

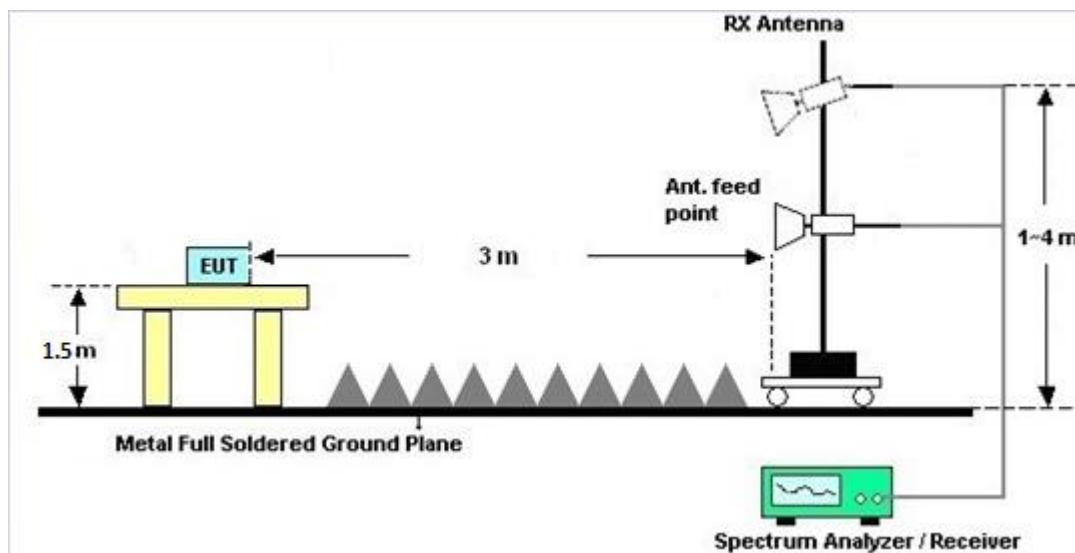

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

## 3.5 AC Conducted Emission Measurement

### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

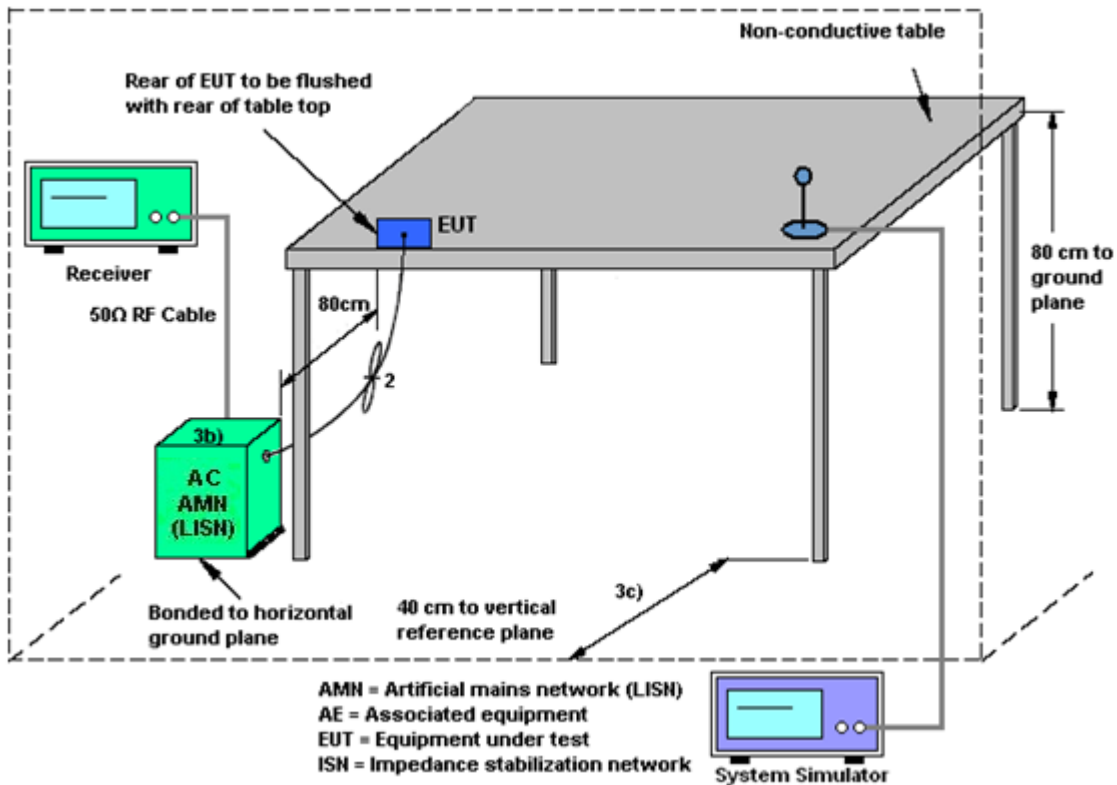

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Apr. 05, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Apr. 05, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Apr. 05, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 12, 2018	Mar. 21, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 17, 2018	Mar. 21, 2019	Apr. 16, 2019	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Mar. 21, 2019	Oct. 18, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 28, 2018	Mar. 21, 2019	Dec. 27, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2019	Mar. 21, 2019	Jan. 26, 2020	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Mar. 21, 2019	Jan. 04, 2020	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	Mar. 21, 2019	Nov. 18, 2019	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Mar. 21, 2019	Jan. 13, 2020	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Mar. 21, 2019	Apr. 16, 2019	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2018	Mar. 21, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 21, 2019	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 21, 2019	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 21, 2019	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Apr. 17, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Apr. 17, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Apr. 17, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Apr. 17, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required

## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------





## **Appendix A. Conducted Test Results**

Report Number : FR931204E

Test Engineer:	Weller Liu	Temperature:	21~25	°C
Test Date:	2018/4/5	Relative Humidity:	51~53	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.53	24.33	-	22.44		
11a	6Mbps	1	44	5220	17.48	24.33	-	22.43		
11a	6Mbps	1	48	5240	17.53	24.43	-	22.44		
VHT20	MCS0	1	36	5180	18.63	24.48	-	22.70		
VHT20	MCS0	1	44	5220	18.73	25.13	-	22.73		
VHT20	MCS0	1	48	5240	18.68	25.08	-	22.71		
VHT40	MCS0	1	38	5190	36.46	41.45	-	23.01		
VHT40	MCS0	1	46	5230	36.46	41.63	-	23.01		
VHT80	MCS0	1	42	5210	75.64	83.28	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.09	18.53	24.00	-2.30		Pass
11a	6Mbps	1	44	5220	0.09	18.75	24.00	-2.30		Pass
11a	6Mbps	1	48	5240	0.09	18.66	24.00	-2.30		Pass
HT20	MCS0	1	36	5180	0.06	17.65	24.00	-2.30		Pass
HT20	MCS0	1	44	5220	0.06	17.80	24.00	-2.30		Pass
HT20	MCS0	1	48	5240	0.06	17.92	24.00	-2.30		Pass
HT40	MCS0	1	38	5190	0.16	15.04	24.00	-2.30		Pass
HT40	MCS0	1	46	5230	0.16	17.73	24.00	-2.30		Pass
VHT20	MCS0	1	36	5180	0.08	17.67	24.00	-2.30		Pass
VHT20	MCS0	1	44	5220	0.08	17.84	24.00	-2.30		Pass
VHT20	MCS0	1	48	5240	0.08	17.95	24.00	-2.30		Pass
VHT40	MCS0	1	38	5190	0.16	14.89	24.00	-2.30		Pass
VHT40	MCS0	1	46	5230	0.16	17.74	24.00	-2.30		Pass
VHT80	MCS0	1	42	5210	0.31	14.06	24.00	-2.30		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.09	8.21	11.00	-2.30		Pass
11a	6Mbps	1	44	5220	0.09	8.43	11.00	-2.30		Pass
11a	6Mbps	1	48	5240	0.09	8.53	11.00	-2.30		Pass
VHT20	MCS0	1	36	5180	0.08	7.30	11.00	-2.30		Pass
VHT20	MCS0	1	44	5220	0.08	7.41	11.00	-2.30		Pass
VHT20	MCS0	1	48	5240	0.08	7.19	11.00	-2.30		Pass
VHT40	MCS0	1	38	5190	0.16	4.03	11.00	-2.30		Pass
VHT40	MCS0	1	46	5230	0.16	3.77	11.00	-2.30		Pass
VHT80	MCS0	1	42	5210	0.31	-2.41	11.00	-2.30		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	17.53	23.73	23.44	29.44	23.98	
11a	6M bps	1	60	5300	17.48	24.13	23.43	29.43	23.98	
11a	6M bps	1	64	5320	17.54	23.58	23.44	29.44	23.98	
VHT20	MCS 0	1	52	5260	18.73	25.03	23.73	29.73	23.98	
VHT20	MCS 0	1	60	5300	18.68	24.68	23.71	29.71	23.98	
VHT20	MCS 0	1	64	5320	18.68	24.58	23.71	29.71	23.98	
HT40	MCS 0	1	54	5270	36.56	44.60	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.46	41.72	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.64	83.28	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.09	18.66	23.98	-1.50	26.99	Pass
11a	6M bps	1	60	5300	0.09	18.71	23.98	-1.50	26.99	Pass
11a	6M bps	1	64	5320	0.09	17.25	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	52	5260	0.06	17.54	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	60	5300	0.06	17.57	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	64	5320	0.06	16.64	23.98	-1.50	26.99	Pass
HT40	MCS 0	1	54	5270	0.16	16.36	23.98	-1.50	26.99	Pass
HT40	MCS 0	1	62	5310	0.16	13.58	23.98	-1.50	26.99	Pass
VHT20	MCS 0	1	52	5260	0.08	17.55	23.98	-1.50	26.99	Pass
VHT20	MCS 0	1	60	5300	0.08	17.64	23.98	-1.50	26.99	Pass
VHT20	MCS 0	1	64	5320	0.08	17.66	23.98	-1.50	26.99	Pass
VHT40	MCS 0	1	54	5270	0.16	16.18	23.98	-1.50	26.99	Pass
VHT40	MCS 0	1	62	5310	0.16	13.36	23.98	-1.50	26.99	Pass
VHT80	MCS 0	1	58	5290	0.31	12.67	23.98	-1.50	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.09	8.46	11.00	-1.50		Pass
11a	6M bps	1	60	5300	0.09	8.51	11.00	-1.50		Pass
11a	6M bps	1	64	5320	0.09	8.51	11.00	-1.50		Pass
VHT20	MCS 0	1	52	5260	0.08	7.38	11.00	-1.50		Pass
VHT20	MCS 0	1	60	5300	0.08	7.08	11.00	-1.50		Pass
VHT20	MCS 0	1	64	5320	0.08	6.95	11.00	-1.50		Pass
HT40	MCS 0	1	54	5270	0.16	3.53	11.00	-1.50		Pass
HT40	MCS 0	1	62	5310	0.16	3.64	11.00	-1.50		Pass
VHT80	MCS 0	1	58	5290	0.31	-3.78	11.00	-1.50		Pass



**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.63	24.68	23.46	29.46	23.98	
11a	6M bps	1	116	5580	17.58	24.68	23.45	29.45	23.98	
11a	6M bps	1	140	5700	17.53	24.73	23.44	29.44	23.98	
VHT20	MCS 0	1	100	5500	18.68	24.98	23.71	29.71	23.98	
VHT20	MCS 0	1	116	5580	18.73	24.68	23.73	29.73	23.98	
VHT20	MCS 0	1	140	5700	18.73	24.98	23.73	29.73	23.98	
VHT40	MCS 0	1	102	5510	36.56	41.71	23.98	30.00	23.98	
VHT40	MCS 0	1	110	5550	36.56	41.90	23.98	30.00	23.98	
VHT40	MCS 0	1	134	5670	36.46	41.72	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.64	84.08	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.64	83.12	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**


FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.06	18.86	23.98	-0.50	26.99	Pass
11a	6M bps	1	116	5580	0.06	18.70	23.98	-0.50	26.99	Pass
11a	6M bps	1	140	5700	0.06	18.15	23.98	-0.50	26.99	Pass
HT20	MCS 0	1	100	5500	0.06	17.75	23.98	-0.50	26.99	Pass
HT20	MCS 0	1	116	5580	0.06	17.55	23.98	-0.50	26.99	Pass
HT20	MCS 0	1	140	5700	0.06	17.08	23.98	-0.50	26.99	Pass
HT40	MCS 0	1	102	5510	0.16	15.77	23.98	-0.50	26.99	Pass
HT40	MCS 0	1	110	5550	0.16	17.66	23.98	-0.50	26.99	Pass
HT40	MCS 0	1	134	5670	0.16	17.78	23.98	-0.50	26.99	Pass
VHT20	MCS 0	1	100	5500	0.08	17.76	23.98	-0.50	26.99	Pass
VHT20	MCS 0	1	116	5580	0.08	17.52	23.98	-0.50	26.99	Pass
VHT20	MCS 0	1	140	5700	0.08	17.31	23.98	-0.50	26.99	Pass
VHT40	MCS 0	1	102	5510	0.16	15.71	23.98	-0.50	26.99	Pass
VHT40	MCS 0	1	110	5550	0.16	17.71	23.98	-0.50	26.99	Pass
VHT40	MCS 0	1	134	5670	0.16	17.79	23.98	-0.50	26.99	Pass
VHT80	MCS 0	1	106	5530	0.31	11.75	23.98	-0.50	26.99	Pass
VHT80	MCS 0	1	122	5610	0.31	16.99	23.98	-0.50	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.09	8.65	11.00	-0.50		Pass
11a	6M bps	1	116	5580	0.09	8.39	11.00	-0.50		Pass
11a	6M bps	1	140	5700	0.09	7.82	11.00	-0.50		Pass
VHT20	MCS 0	1	100	5500	0.08	7.07	11.00	-0.50		Pass
VHT20	MCS 0	1	116	5580	0.08	7.06	11.00	-0.50		Pass
VHT20	MCS 0	1	140	5700	0.08	6.70	11.00	-0.50		Pass
VHT40	MCS 0	1	102	5510	0.16	4.17	11.00	-0.50		Pass
VHT40	MCS 0	1	110	5550	0.16	3.77	11.00	-0.50		Pass
VHT40	MCS 0	1	134	5670	0.16	3.81	11.00	-0.50		Pass
VHT80	MCS 0	1	106	5530	0.31	-4.72	11.00	-0.50		Pass
VHT80	MCS 0	1	122	5610	0.31	0.95	11.00	-0.50		Pass




## Appendix B. AC Conducted Emission Test Results

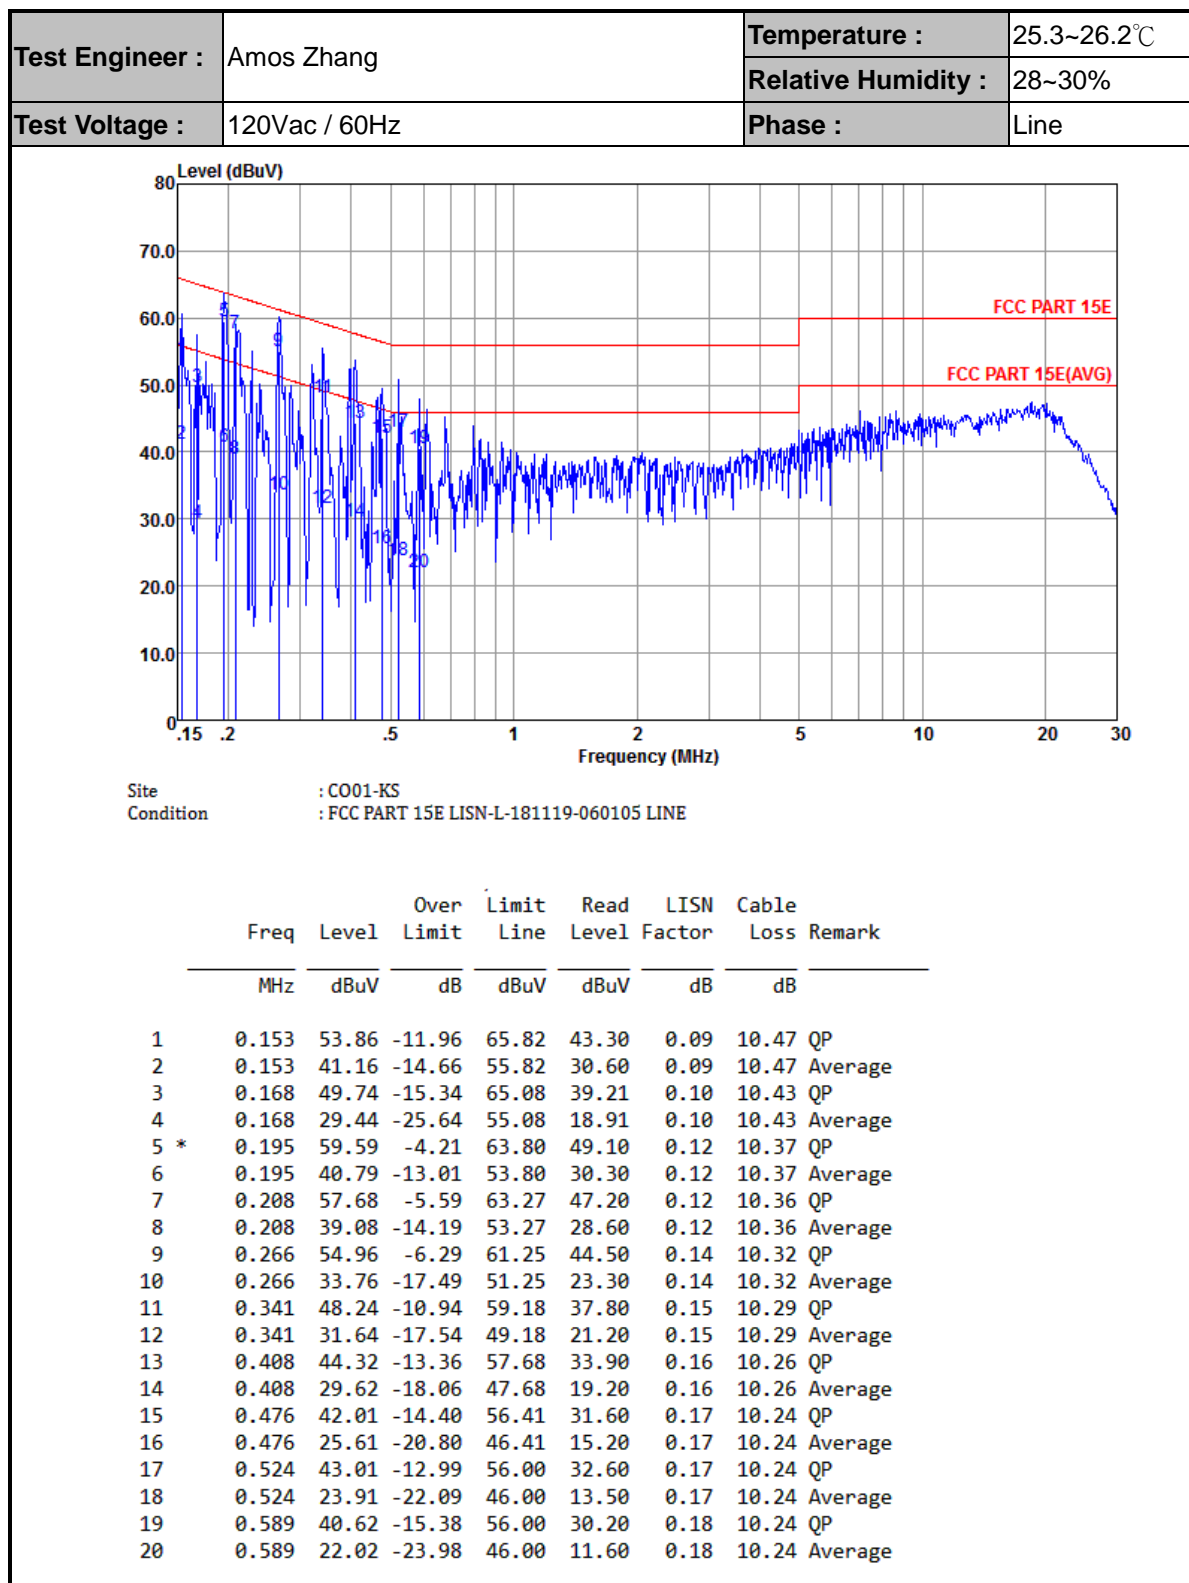



<b>Test Engineer :</b>	Amos Zhang	<b>Temperature :</b>	25.3~26.2℃
		<b>Relative Humidity :</b>	28~30%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral

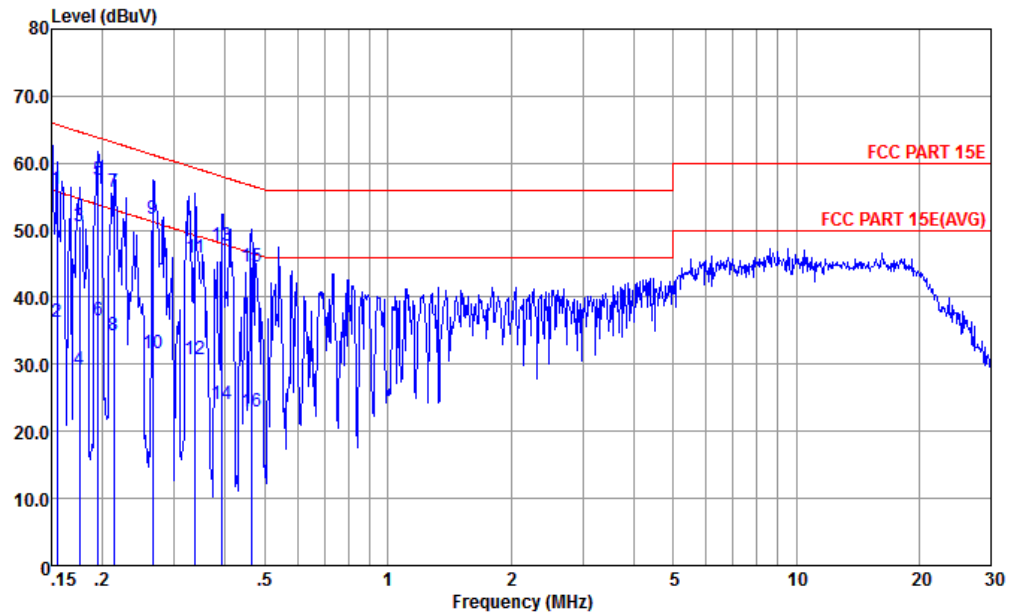

Site : CO01-KS  
Condition : FCC PART 15E LISN-N-181119-060105 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	56.15	-9.59	65.74	45.50	0.18	10.47	QP
2	0.155	36.25	-19.49	55.74	25.60	0.18	10.47	Average
3	0.176	50.49	-14.19	64.68	39.89	0.18	10.42	QP
4	0.176	29.19	-25.49	54.68	18.59	0.18	10.42	Average
5 *	0.195	57.45	-6.35	63.80	46.91	0.17	10.37	QP
6	0.195	36.45	-17.35	53.80	25.91	0.17	10.37	Average
7	0.213	55.63	-7.47	63.10	45.10	0.17	10.36	QP
8	0.213	34.43	-18.67	53.10	23.90	0.17	10.36	Average
9	0.266	51.69	-9.56	61.25	41.21	0.16	10.32	QP
10	0.266	31.69	-19.56	51.25	21.21	0.16	10.32	Average
11	0.337	45.95	-13.32	59.27	35.50	0.16	10.29	QP
12	0.337	30.65	-18.62	49.27	20.20	0.16	10.29	Average
13	0.393	47.62	-10.37	57.99	37.20	0.15	10.27	QP
14	0.393	24.02	-23.97	47.99	13.60	0.15	10.27	Average
15	0.464	44.60	-12.03	56.63	34.20	0.15	10.25	QP
16	0.464	23.00	-23.63	46.63	12.60	0.15	10.25	Average



## Appendix C. Radiated Spurious Emission

### Band 1 - 5150~5250MHz

#### WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.44	57.73	-16.27	74	49.77	31.16	8.47	31.67	160	187	P	H
		5149.96	48.07	-5.93	54	40.11	31.16	8.47	31.67	160	187	A	H
	*	5184	106.44	-	-	98.52	31.1	8.48	31.66	160	187	P	H
		5184	98.97	-	-	91.05	31.1	8.48	31.66	160	187	A	H
		5147.68	55.25	-18.75	74	47.29	31.16	8.47	31.67	131	261	P	V
		5150	44.49	-9.51	54	36.53	31.16	8.47	31.67	131	261	A	V
	*	5182	102.01	-	-	94.09	31.1	8.48	31.66	131	261	P	V
		5182	94.72	-	-	86.8	31.1	8.48	31.66	131	261	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 1 5150~5250MHz

## WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 36 5180MHz		10360	41.38	-26.92	68.3	56.12	38.04	12.29	65.07	150	360	P	H
		10360	40.84	-27.46	68.3	55.58	38.04	12.29	65.07	150	360	P	V
802.11a CH 44 5220MHz		10440	44.49	-23.81	68.3	59.09	38.14	12.35	65.09	150	360	P	H
		15660	45.84	-28.16	74	54.04	39.88	15.17	63.25	150	0	P	H
		10440	44.96	-23.34	68.3	59.56	38.14	12.35	65.09	150	360	P	V
		15660	46.7	-27.3	74	54.9	39.88	15.17	63.25	150	0	P	V
802.11a CH 48 5240MHz		10480	44.41	-23.89	68.3	58.9	38.22	12.4	65.11	150	360	P	H
		15720	46.27	-27.73	74	54.47	39.99	15.2	63.39	150	0	P	H
		10480	44.23	-24.07	68.3	58.72	38.22	12.4	65.11	150	360	P	V
		15720	45.94	-28.06	74	54.14	39.99	15.2	63.39	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 1 5150~5250MHz

## WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT40 CH 38 5190MHz		5149.76	58.65	-15.35	74	50.69	31.16	8.47	31.67	100	61	P	H
		5149.92	50.47	-3.53	54	42.51	31.16	8.47	31.67	100	61	A	H
	*	5192	101.31	-	-	93.42	31.07	8.48	31.66	100	61	P	H
		5192	93.43	-	-	85.54	31.07	8.48	31.66	100	61	A	H
		5376.96	48.37	-25.63	74	40.46	30.78	8.68	31.55	100	61	P	H
		5385.42	38.86	-15.14	54	30.96	30.75	8.7	31.55	100	61	A	H
		5149.76	55.9	-18.1	74	47.94	31.16	8.47	31.67	100	114	P	V
		5150	48.11	-5.89	54	40.15	31.16	8.47	31.67	100	114	A	V
	*	5194	97.17	-	-	89.28	31.07	8.48	31.66	100	114	P	V
		5194	89.76	-	-	81.87	31.07	8.48	31.66	100	114	A	V
		5381.46	47.71	-26.29	74	39.81	30.75	8.7	31.55	100	114	P	V
		5366.16	38.45	-15.55	54	30.56	30.78	8.68	31.57	100	114	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





## band 1 5150~5250MHz

## WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT40 CH 38 5190MHz		10380	41.01	-27.29	68.3	55.72	38.07	12.3	65.08	150	360	P	H
		10380	40.81	-27.49	68.3	55.52	38.07	12.3	65.08	150	360	P	V
802.11ac VHT40 CH 46 5230MHz		10460	41.56	-26.74	68.3	56.12	38.17	12.37	65.1	150	360	P	H
		10460	40.53	-27.77	68.3	55.09	38.17	12.37	65.1	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 1 5150~5250MHz

## WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		5145.92	55.71	-18.29	74	47.75	31.16	8.47	31.67	100	254	P	H
		5149.92	45.91	-8.09	54	37.95	31.16	8.47	31.67	100	254	A	H
	*	5182	104.54	-	-	96.62	31.1	8.48	31.66	100	254	P	H
		5182	97.47	-	-	89.55	31.1	8.48	31.66	100	254	A	H
		5149.92	51.33	-22.67	74	43.37	31.16	8.47	31.67	100	278	P	V
		5149.92	41.42	-12.58	54	33.46	31.16	8.47	31.67	100	278	A	V
	*	5178	98.68	-	-	90.76	31.1	8.48	31.66	100	278	P	V
		5178	91.47	-	-	83.55	31.1	8.48	31.66	100	278	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 1 5150~5250MHz

## WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		10360	40.69	-27.61	68.3	55.43	38.04	12.29	65.07	150	360	P	H
		10360	40.83	-27.47	68.3	55.57	38.04	12.29	65.07	150	360	P	V
802.11ac VHT20 CH 44 5220MHz		10440	41.02	-27.28	68.3	55.62	38.14	12.35	65.09	150	360	P	H
		10440	41.05	-27.25	68.3	55.65	38.14	12.35	65.09	150	360	P	V
802.11ac VHT20 CH 48 5240MHz		10480	41.45	-26.85	68.3	55.94	38.22	12.4	65.11	150	360	P	H
		10480	41.64	-26.66	68.3	56.13	38.22	12.4	65.11	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 1 5150~5250MHz

## WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5147.68	57.53	-16.47	74	49.57	31.16	8.47	31.67	100	65	P	H
		5149.76	49.86	-4.14	54	41.9	31.16	8.47	31.67	100	65	A	H
	*	5218	98.49	-	-	90.6	31.04	8.5	31.65	100	65	P	H
		5218	91.14	-	-	83.25	31.04	8.5	31.65	100	65	A	H
		5356.98	48.43	-25.57	74	40.53	30.81	8.66	31.57	100	65	P	H
		5352.12	40.38	-13.62	54	32.48	30.81	8.66	31.57	100	65	A	H
		5149.44	52.73	-21.27	74	44.77	31.16	8.47	31.67	100	116	P	V
		5149.92	44.29	-9.71	54	36.33	31.16	8.47	31.67	100	116	A	V
	*	5238	92.13	-	-	84.23	31.01	8.52	31.63	100	116	P	V
		5238	85.1	-	-	77.2	31.01	8.52	31.63	100	116	A	V
		5356.98	47.89	-26.11	74	39.99	30.81	8.66	31.57	100	116	P	V
		5351.04	39.48	-14.52	54	31.58	30.81	8.66	31.57	100	116	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**band 1 5150~5250MHz**

**WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80		10420	41	-27.3	68.3	55.63	38.12	12.34	65.09	150	360	P	H
CH 42 5210MHz		10420	40.28	-28.02	68.3	54.91	38.12	12.34	65.09	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Band 2 - 5250~5350MHz

## WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5316	107.68	-	-	99.79	30.86	8.62	31.59	100	62	P	H
		5316	100.59	-	-	92.7	30.86	8.62	31.59	100	62	A	H
		5352.7	61.67	-12.33	74	53.77	30.81	8.66	31.57	100	62	P	H
		5350	50.23	-3.77	54	42.33	30.81	8.66	31.57	100	62	A	H
	*	5318	104.98	-	-	97.09	30.86	8.62	31.59	121	338	P	V
		5318	98.3	-	-	90.41	30.86	8.62	31.59	121	338	A	V
		5352.4	58.75	-15.25	74	50.85	30.81	8.66	31.57	121	338	P	V
		5350	49.19	-4.81	54	41.29	30.81	8.66	31.57	121	338	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 52 5260MHz		10520	44.11	-24.19	68.3	58.53	38.27	12.43	65.12	150	360	P	H
		15780	45.19	-28.81	74	53.39	40.06	15.23	63.49	150	0	P	H
		10520	43.82	-24.48	68.3	58.24	38.27	12.43	65.12	150	360	P	V
		15780	45.3	-28.7	74	53.5	40.06	15.23	63.49	150	0	P	V
802.11a CH 60 5300MHz		10600	44.42	-23.88	68.3	58.66	38.39	12.52	65.15	150	360	P	H
		15900	45.36	-28.64	74	53.55	40.24	15.3	63.73	150	0	P	H
		10600	45.02	-23.28	68.3	59.26	38.39	12.52	65.15	150	360	P	V
		15900	45.79	-28.21	74	53.98	40.24	15.3	63.73	150	0	P	V
802.11a CH 64 5320MHz		10640	42.52	-31.48	74	56.69	38.44	12.55	65.16	150	360	P	H
		10640	42.25	-31.75	74	56.42	38.44	12.55	65.16	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT20 CH 64 5320MHz	*	5322	106.91	-	-	99.02	30.86	8.62	31.59	100	60	P	H
		5322	100.37	-	-	92.48	30.86	8.62	31.59	100	60	A	H
		5360.8	60.96	-13.04	74	53.07	30.78	8.68	31.57	100	60	P	H
		5350	50.32	-3.68	54	42.42	30.81	8.66	31.57	100	60	A	H
		5322	101.39	-	-	93.5	30.86	8.62	31.59	100	249	P	V
		5322	94.77	-	-	86.88	30.86	8.62	31.59	100	249	A	V
		5354.9	56.22	-17.78	74	48.32	30.81	8.66	31.57	100	249	P	V
		5350	44.81	-9.19	54	36.91	30.81	8.66	31.57	100	249	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





## band 2 5250~5350MHz

## WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT20		10520	40.67	-27.63	68.3	55.09	38.27	12.43	65.12	150	360	P	H
CH 52 5260MHz		10520	40.67	-27.63	68.3	55.09	38.27	12.43	65.12	150	360	P	V
802.11ac VHT20		10600	42.56	-25.74	68.3	56.8	38.39	12.52	65.15	150	360	P	H
CH 60 5300MHz		10600	41.38	-26.92	68.3	55.62	38.39	12.52	65.15	150	360	P	V
802.11ac VHT20		10640	41.92	-32.08	74	56.09	38.44	12.55	65.16	150	360	P	H
CH 64 5320MHz		10640	43.25	-30.75	74	57.42	38.44	12.55	65.16	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT40 CH 62 5310MHz		5118.4	49.16	-24.84	74	41.17	31.22	8.46	31.69	100	61	P	H
		5103.04	39.99	-14.01	54	31.98	31.25	8.46	31.7	100	61	A	H
	*	5312	101.48	-	-	93.59	30.86	8.62	31.59	100	61	P	H
		5312	94.14	-	-	86.25	30.86	8.62	31.59	100	61	A	H
		5351.3	59.54	-14.46	74	51.64	30.81	8.66	31.57	100	61	P	H
		5350	50.46	-3.54	54	42.56	30.81	8.66	31.57	100	61	A	H
		5145.12	48.95	-25.05	74	40.99	31.16	8.47	31.67	100	193	P	V
		5104.64	40.15	-13.85	54	32.14	31.25	8.46	31.7	100	193	A	V
	*	5316	96.28	-	-	88.39	30.86	8.62	31.59	100	193	P	V
		5316	89.02	-	-	81.13	30.86	8.62	31.59	100	193	A	V
		5355.6	53.74	-20.26	74	45.84	30.81	8.66	31.57	100	193	P	V
		5350.2	44.91	-9.09	54	37.01	30.81	8.66	31.57	100	193	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT40 CH 54 5270MHz		10540	40.23	-28.07	68.3	54.62	38.29	12.45	65.13	150	360	P	H
		10540	40.97	-27.33	68.3	55.36	38.29	12.45	65.13	150	360	P	V
802.11n HT40 CH 62 5310MHz		10620	42.15	-31.85	74	56.36	38.41	12.53	65.15	150	360	P	H
		10620	41.59	-32.41	74	55.8	38.41	12.53	65.15	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT80 CH 58 5290MHz		5132.96	49.85	-24.15	74	41.88	31.19	8.47	31.69	113	67	P	H
		5134.88	40.4	-13.6	54	32.43	31.19	8.47	31.69	113	67	A	H
	*	5298	97.51	-	-	89.61	30.89	8.6	31.59	113	67	P	H
		5298	90.19	-	-	82.29	30.89	8.6	31.59	113	67	A	H
		5359.5	58.38	-15.62	74	50.48	30.81	8.66	31.57	113	67	P	H
		5350	50.81	-3.19	54	42.91	30.81	8.66	31.57	113	67	A	H
		5103.52	49.74	-24.26	74	41.73	31.25	8.46	31.7	100	167	P	V
		5106.24	40.35	-13.65	54	32.37	31.22	8.46	31.7	100	167	A	V
	*	5272	91.58	-	-	83.68	30.95	8.56	31.61	100	167	P	V
		5272	84.32	-	-	76.42	30.95	8.56	31.61	100	167	A	V
		5360.7	52.42	-21.58	74	44.53	30.78	8.68	31.57	100	167	P	V
		5350.1	44.81	-9.19	54	36.91	30.81	8.66	31.57	100	167	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 2 5250~5350MHz

## WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80		10580	41.99	-26.31	68.3	56.26	38.37	12.5	65.14	150	360	P	H
CH 58 5290MHz		10580	41.09	-27.21	68.3	55.36	38.37	12.5	65.14	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Band 3 - 5470~5725MHz

## WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 100 5500MHz		5459.44	58.52	-15.48	74	50.63	30.63	8.77	31.51	211	110	P	H
		5468.72	62.76	-5.54	68.3	54.89	30.6	8.78	31.51	211	110	P	H
		5459.96	48.54	-5.46	54	40.65	30.63	8.77	31.51	211	110	A	H
	*	5506	108.68	-	-	100.82	30.54	8.81	31.49	211	110	P	H
		5506	102.35	-	-	94.49	30.54	8.81	31.49	211	110	A	H
		5459.28	53.83	-20.17	74	45.94	30.63	8.77	31.51	284	63	P	V
		5467.44	57	-11.3	68.3	49.13	30.6	8.78	31.51	284	63	P	V
		5459.92	43.31	-10.69	54	35.42	30.63	8.77	31.51	284	63	A	V
	*	5498	104.08	-	-	96.23	30.54	8.81	31.5	284	63	P	V
		5498	96.82	-	-	88.97	30.54	8.81	31.5	284	63	A	V
802.11a CH 140 5700MHz	*	5700	109.48	-	-	101.27	30.72	8.98	31.49	214	115	P	H
		5700	102.26	-	-	94.05	30.72	8.98	31.49	214	115	A	H
		5727.16	64.56	-3.74	68.3	56.08	30.99	9.01	31.52	214	115	P	H
	*	5698	105.74	-	-	97.53	30.72	8.98	31.49	230	79	P	V
		5698	98.18	-	-	89.97	30.72	8.98	31.49	230	79	A	V
		5727.64	59.91	-8.39	68.3	51.43	30.99	9.01	31.52	230	79	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**band 3 - 5470~5725MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 100 5500MHz		11000	42.43	-31.57	74	55.84	38.96	12.89	65.26	150	360	P	H
		11000	42	-32	74	55.41	38.96	12.89	65.26	150	360	P	V
802.11a CH 116 5580MHz		11160	44.72	-29.28	74	57.78	39.21	13.05	65.32	150	360	P	H
		16740	47.49	-20.81	68.3	53.45	41.15	15.75	62.86	150	0	P	H
		11160	45.28	-28.72	74	58.34	39.21	13.05	65.32	150	360	P	V
		16740	48.35	-19.95	68.3	54.31	41.15	15.75	62.86	150	0	P	V
802.11a CH 140 5700MHz		11440	42.38	-31.62	74	54.87	39.6	13.31	65.4	150	360	P	H
		11440	43.03	-30.97	74	55.52	39.6	13.31	65.4	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**band 3 - 5470~5725MHz**  
**WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT20 CH 100 5500MHz		5456.4	58.92	-15.08	74	51.03	30.63	8.77	31.51	100	65	P	H
		5465.84	63.87	-4.43	68.3	56	30.6	8.78	31.51	100	65	P	H
		5459.92	49.28	-4.72	54	41.39	30.63	8.77	31.51	100	65	A	H
	*	5498	108.94	-	-	101.09	30.54	8.81	31.5	100	65	P	H
		5498	101.72	-	-	93.87	30.54	8.81	31.5	100	65	A	H
		5458.48	51.16	-22.84	74	43.27	30.63	8.77	31.51	100	100	P	V
		5468.88	57.35	-10.95	68.3	49.48	30.6	8.78	31.51	100	100	P	V
		5459.92	43.36	-10.64	54	35.47	30.63	8.77	31.51	100	100	A	V
	*	5498	102.47	-	-	94.62	30.54	8.81	31.5	100	100	P	V
802.11ac VHT20 CH 140 5700MHz		5498	95.54	-	-	87.69	30.54	8.81	31.5	100	100	A	V
	*	5698	108.79	-	-	100.58	30.72	8.98	31.49	117	66	P	H
		5698	101.43	-	-	93.22	30.72	8.98	31.49	117	66	A	H
		5731.4	62.36	-5.94	68.3	53.91	30.99	9.01	31.55	117	66	P	H
	*	5698	104.3	-	-	96.09	30.72	8.98	31.49	100	101	P	V
		5698	96.31	-	-	88.1	30.72	8.98	31.49	100	101	A	V
Remark		5725.32	57.34	-10.96	68.3	48.86	30.99	9.01	31.52	100	101	P	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





## band 3 - 5470~5725MHz

## WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT20		11000	42.99	-31.01	74	56.4	38.96	12.89	65.26	150	360	P	H
CH 100 5500MHz		11000	43.1	-30.9	74	56.51	38.96	12.89	65.26	150	360	P	V
802.11ac VHT20		11160	42.45	-31.55	74	55.51	39.21	13.05	65.32	150	360	P	H
CH 116 5580MHz		11160	41	-33	74	54.06	39.21	13.05	65.32	150	360	P	V
802.11ac VHT20		11400	42.26	-31.74	74	54.82	39.55	13.28	65.39	150	360	P	H
CH 140 5700MHz		11400	43.47	-30.53	74	56.03	39.55	13.28	65.39	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**band 3 - 5470~5725MHz**  
**WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT40 CH 102 5510MHz		5459.44	58.73	-15.27	74	50.84	30.63	8.77	31.51	100	57	P	H
		5468.72	61.78	-6.52	68.3	53.91	30.6	8.78	31.51	100	57	P	H
		5460	50.42	-3.58	54	42.53	30.63	8.77	31.51	100	57	A	H
	*	5516	104.17	-	-	96.33	30.51	8.82	31.49	100	57	P	H
		5516	96.95	-	-	89.11	30.51	8.82	31.49	100	57	A	H
		5760.68	49.44	-18.86	68.3	40.7	31.27	9.05	31.58	100	57	P	H
		5456.56	53.95	-20.05	74	46.06	30.63	8.77	31.51	100	108	P	V
		5469.52	57.53	-10.77	68.3	49.66	30.6	8.78	31.51	100	108	P	V
		5460	46.16	-7.84	54	38.27	30.63	8.77	31.51	100	108	A	V
	*	5508	99.55	-	-	91.69	30.54	8.81	31.49	100	108	P	V
		5508	92.24	-	-	84.38	30.54	8.81	31.49	100	108	A	V
802.11ac VHT40 CH 134 5670MHz		5728.92	48.74	-19.56	68.3	40.26	30.99	9.01	31.52	100	108	P	V
		5427.76	47.29	-26.71	74	39.39	30.69	8.74	31.53	100	56	P	H
		5460.4	48.23	-20.07	68.3	40.34	30.63	8.77	31.51	100	56	P	H
		5454.8	38.98	-15.02	54	31.09	30.63	8.77	31.51	100	56	A	H
	*	5674	107.85	-	-	99.75	30.58	8.97	31.45	100	56	P	H
		5674	99.7	-	-	91.6	30.58	8.97	31.45	100	56	A	H
		5727.72	62.48	-5.82	68.3	54	30.99	9.01	31.52	100	56	P	H
		5447.44	47.55	-26.45	74	39.68	30.63	8.77	31.53	100	102	P	V
		5468.56	48.05	-20.25	68.3	40.18	30.6	8.78	31.51	100	102	P	V
		5453.2	38.62	-15.38	54	30.73	30.63	8.77	31.51	100	102	A	V
	*	5672	102.78	-	-	94.68	30.58	8.97	31.45	100	102	P	V
Remark		5672	94.85	-	-	86.75	30.58	8.97	31.45	100	102	A	V
		5726.76	60.2	-8.1	68.3	51.72	30.99	9.01	31.52	100	102	P	V
1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



## band 3 - 5470~5725MHz

## WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT40		11020	42.72	-31.28	74	56.1	38.98	12.91	65.27	150	360	P	H
CH 102 5510MHz		11020	42.44	-31.56	74	55.82	38.98	12.91	65.27	150	360	P	V
802.11ac VHT40		11100	41.56	-32.44	74	54.76	39.11	12.99	65.3	150	360	P	H
CH 110 5550MHz		11100	41.62	-32.38	74	54.82	39.11	12.99	65.3	150	360	P	V
802.11ac VHT40		11340	42.54	-31.46	74	55.25	39.45	13.21	65.37	150	360	P	H
CH 134 5670MHz		11340	43.25	-30.75	74	55.96	39.45	13.21	65.37	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 3 5470~5725MHz

## WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80 CH 106 5530MHz		5451.12	58.13	-15.87	74	50.24	30.63	8.77	31.51	218	117	P	H
		5465.68	59.51	-8.79	68.3	51.64	30.6	8.78	31.51	218	117	P	H
		5458.96	50.08	-3.92	54	42.19	30.63	8.77	31.51	218	117	A	H
	*	5528	97.1	-	-	89.24	30.51	8.82	31.47	218	117	P	H
		5528	89.46	-	-	81.6	30.51	8.82	31.47	218	117	A	H
		5763.48	50.21	-18.09	68.3	41.47	31.27	9.05	31.58	218	117	P	H
		5451.28	51.52	-22.48	74	43.63	30.63	8.77	31.51	100	103	P	V
		5467.6	52.42	-15.88	68.3	44.55	30.6	8.78	31.51	100	103	P	V
		5459.6	43.47	-10.53	54	35.58	30.63	8.77	31.51	100	103	A	V
	*	5536	89.99	-	-	82.14	30.48	8.84	31.47	100	103	P	V
		5536	82.63	-	-	74.78	30.48	8.84	31.47	100	103	A	V
		5728.76	49.61	-18.69	68.3	41.13	30.99	9.01	31.52	100	103	P	V
802.11ac VHT80 CH 122 5610MHz		5447.44	48.87	-25.13	74	41	30.63	8.77	31.53	220	115	P	H
		5465.36	48.51	-19.79	68.3	40.64	30.6	8.78	31.51	220	115	P	H
		5453.2	40.39	-13.61	54	32.5	30.63	8.77	31.51	220	115	A	H
	*	5600	100.75	-	-	92.94	30.36	8.9	31.45	220	115	P	H
		5600	93.91	-	-	86.1	30.36	8.9	31.45	220	115	A	H
		5735.88	52.29	-16.01	68.3	43.68	31.13	9.03	31.55	220	115	P	H
		5444.08	48.39	-25.61	74	40.51	30.66	8.75	31.53	308	91	P	V
		5464.72	48.77	-19.53	68.3	40.9	30.6	8.78	31.51	308	91	P	V
		5447.44	39.29	-14.71	54	31.42	30.63	8.77	31.53	308	91	A	V
	*	5594	98.86	-	-	91.04	30.39	8.88	31.45	308	91	P	V
		5594	91.21	-	-	83.39	30.39	8.88	31.45	308	91	A	V
		5730.76	51.42	-16.88	68.3	42.97	30.99	9.01	31.55	308	91	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## band 3 5470~5725MHz

## WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80		11060	42.66	-31.34	74	55.94	39.06	12.95	65.29	150	360	P	H
CH 106 5530MHz		11060	43.97	-30.03	74	57.25	39.06	12.95	65.29	150	360	P	V
802.11ac VHT80		11220	44.49	-29.51	74	57.44	39.28	13.1	65.33	300	0	P	H
CH 122 5610MHz		11220	44.52	-29.48	74	57.47	39.28	13.1	65.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11ac VHT80 LF		98.87	24.02	-19.48	43.5	39.47	16.5	0.97	32.92	-	-	P	H
		146.4	28.94	-14.56	43.5	43.84	16.83	1.23	32.96	-	-	P	H
		170.65	30	-13.5	43.5	46.08	15.53	1.33	32.94	-	-	P	H
		182.29	32.76	-10.74	43.5	49.07	15.24	1.38	32.93	100	0	P	H
		216.24	30.42	-15.58	46	46.57	15.28	1.51	32.94	-	-	P	H
		298.69	29.22	-16.78	46	41.24	19.19	1.81	33.02	-	-	P	H
		34.85	24.57	-15.43	40	35.62	21.4	0.5	32.95	-	-	P	V
		96.93	30.8	-12.7	43.5	46.67	16.1	0.96	32.93	100	0	P	V
		146.4	27.5	-16	43.5	42.4	16.83	1.23	32.96	-	-	P	V
		186.17	25.88	-17.62	43.5	42.08	15.32	1.4	32.92	-	-	P	V
		304.51	28.72	-17.28	46	40.6	19.32	1.83	33.03	-	-	P	V
		823.46	26.02	-19.98	46	29.43	26.19	3.21	32.81	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


**Both peak and average measured complies with the limit line, so test result is “PASS”.**




## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.95	2.073	0.483	0.51kHz
802.11an HT40	96.32	0.949	1.053	1.1kHz
802.11ac VHT20	98.16	-	-	10Hz
802.11ac VHT40	96.32	0.949	1.053	1.1kHz
802.11ac VHT80	93.06	0.467	2.143	2.2kHz


### 802.11a

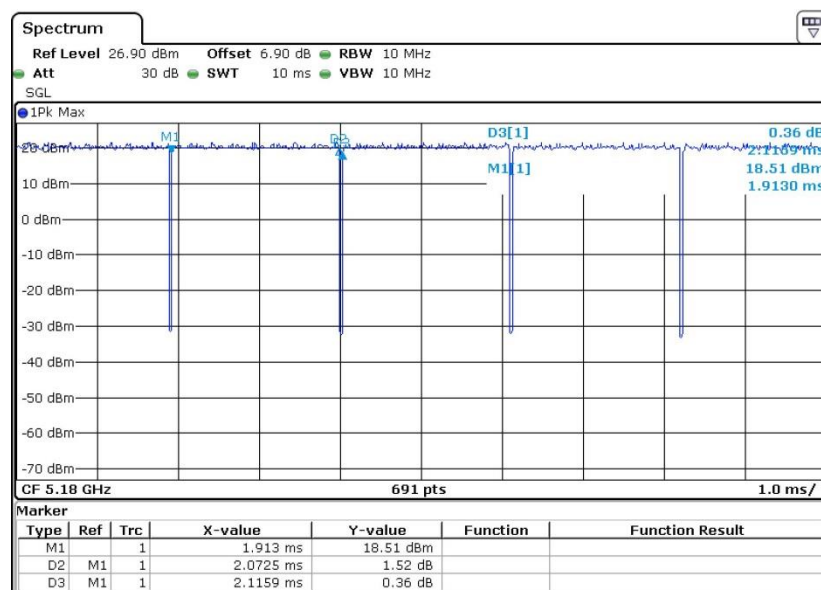


802.11an HT40

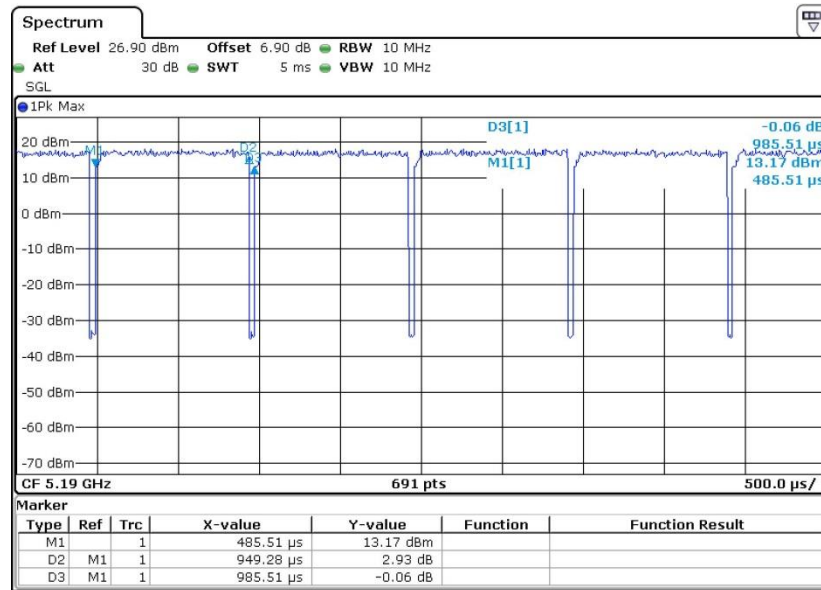

### 802.11ac VHT20

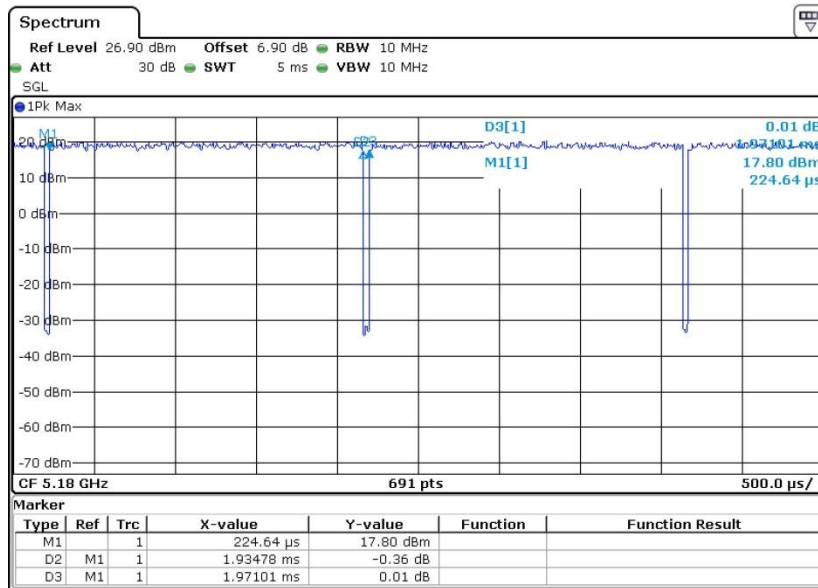

### 802.11ac VHT40

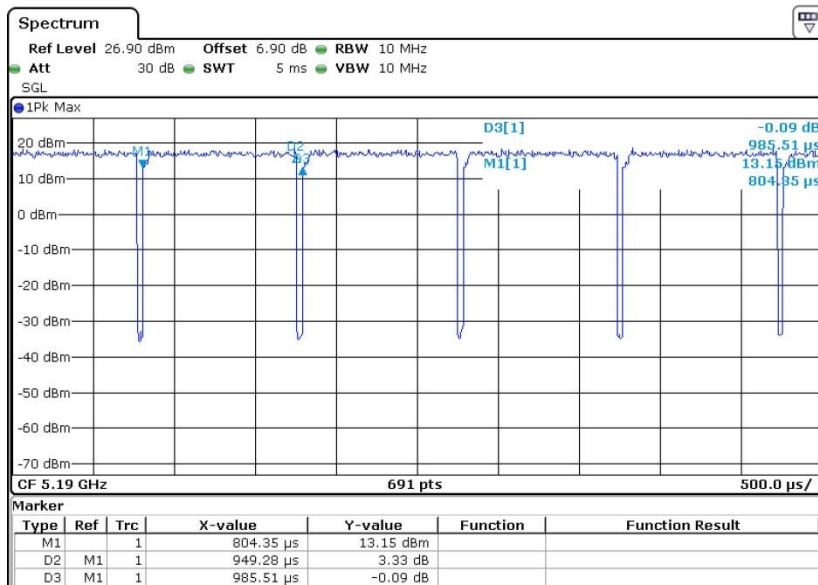



802.11ac VHT80

