Reference No.: WTS18S05113665-1W V1 Page 47 of 84

### 11 Out of band emission at antenna terminals

Test Requirement: FCC part90.1323
Test Method: FCC part2.1051

ANSI/TIA-603-E-2016

Test Mode: Data communicating mode

Limit: -13dBm

## 11.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
Humidity: 52.1 % RH
Atmospheric Pressure: 101.3kPa

#### 11.2 Test Procedure

- 1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
- 2. The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
- 3. For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic.
- 4. Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

#### 11.3 Test Result

Remark: During the test, pre-scan the QPSK, 64QAM modulation, and found the QPSK modulation(10MHz/20MHz middle channel) is the worst case.

The permit frequency range of Part 90Z is from 3650-3700MHz. according the frequency table of the device on page 7. Notes as below:

1. The frequency star and stop for band edge test instruction as below:

bandwid	Left th >1MHz	Left 1MHz	Low channel	Middle Channel	High channel	Right 1MHz	Right > 1MHz
5MHz	3646,5-3649	3649-3650	3652.5	3675	3697.5	3700-3701	3701-3703.5
OWITZ	0040.0 0040	0040 0000	0002.0	0070	0.007.0	0700 0701	0701 0700.0
10MHz	3644-3649	3649-3650	3655	3675	3695	3700-3701	3701-3706
15MHz	3641.5-3649	3649-3650	3657.5	3675	3692.5	3700-3701	3701-3708.5
					****		
20MHz	3639-3649	3649-3650	3660	3675	3690	3700-3701	3701-3711

Reference No.: WTS18S05113665-1W V1 Page 48 of 84

#### Note 1:

For **low** channel, we test left 1 MHz immediately and more than 1MHz away (5 MHz for 10 MHz bandwidth & 10MHz for 20MHz bandwidth) from the permit left band 3650 MHz; the emission above right of 3700MHz has no intentional.


For **high** channel, we test right 1 MHz immediately and more than 1MHz away (5 MHz for 10 MHz bandwidth & 10MHz for 20MHz bandwidth) from the permit right band 3700 MHz; the emission below left of 3650MHz has no intentional.


For **middle** channel, we both test left and right 1 MHz immediately and more than 1MHz away (5 MHz for 10 MHz bandwidth & 10MHz for 20MHz bandwidth) from the permit band 3650 MHz to 3700 MHz; see above table.


- 2. The RBW and the limit instruction as below: (The general limit = -13dBm)
  - 1. For 2x4 MIMO, the limit=-13dBm -10 log 2=-16dBm.
  - 2. For RBW=100kHz, the limit = -16dBm 10log(1MHz/100kHz) = -26dBm
  - 3. For RBW=50kHz, the limit= -16dBm 10log(1MHz/50kHz)= -29dBm (The spectrum of N9020A only display the RBW=51kHz, and RBW=50kHz limit is lower than RBW=51kHz.)
  - 4. For RBW=200kHz, the limit= -16dBm 10log(1MHz/200kHz)= -23dBm


#### **Test Plots**


# Spurious emission

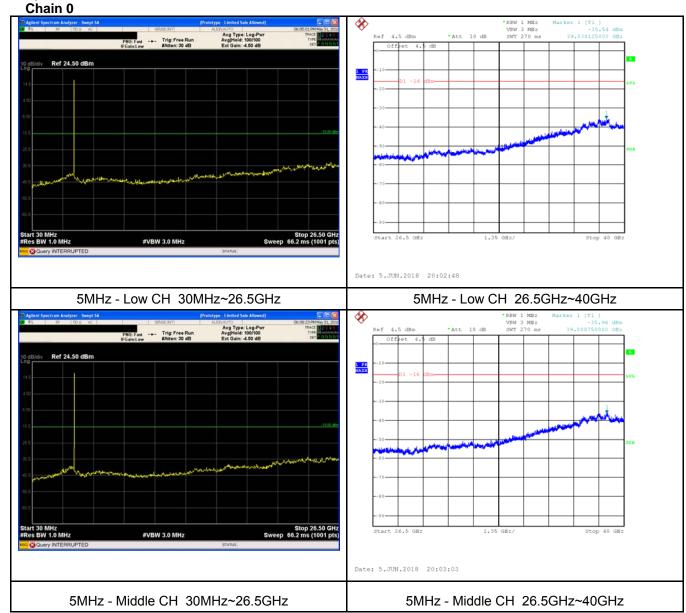

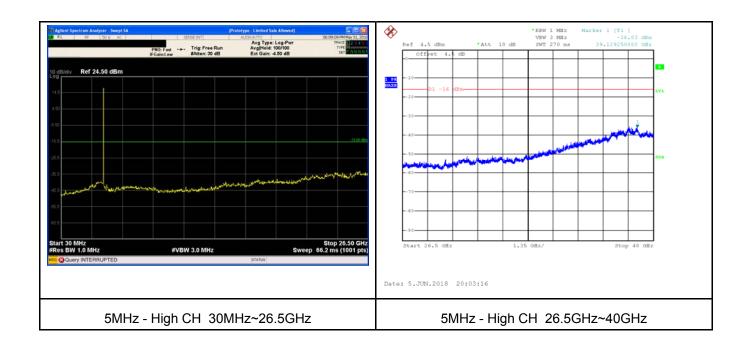


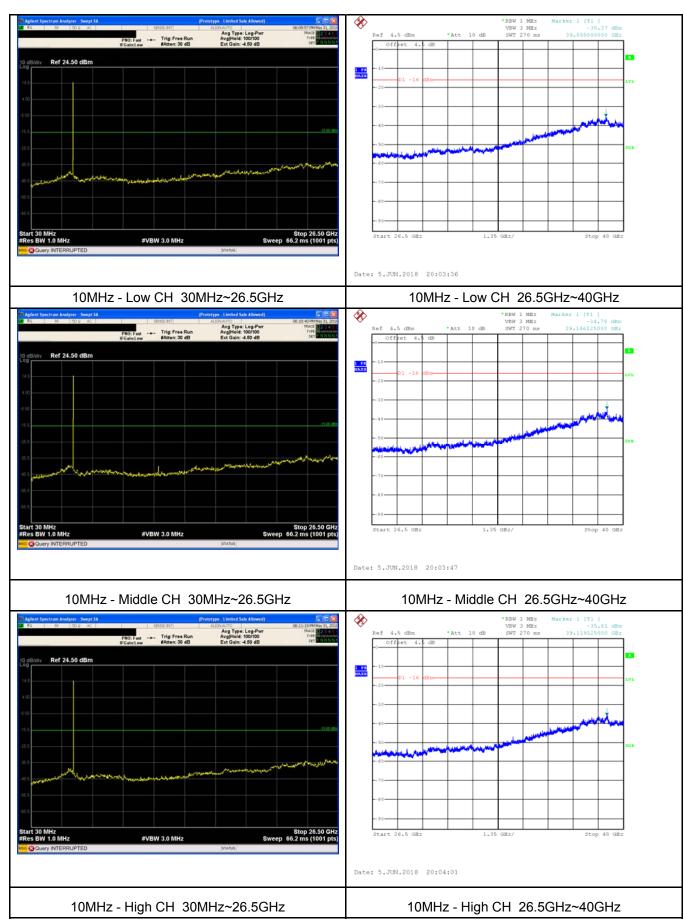


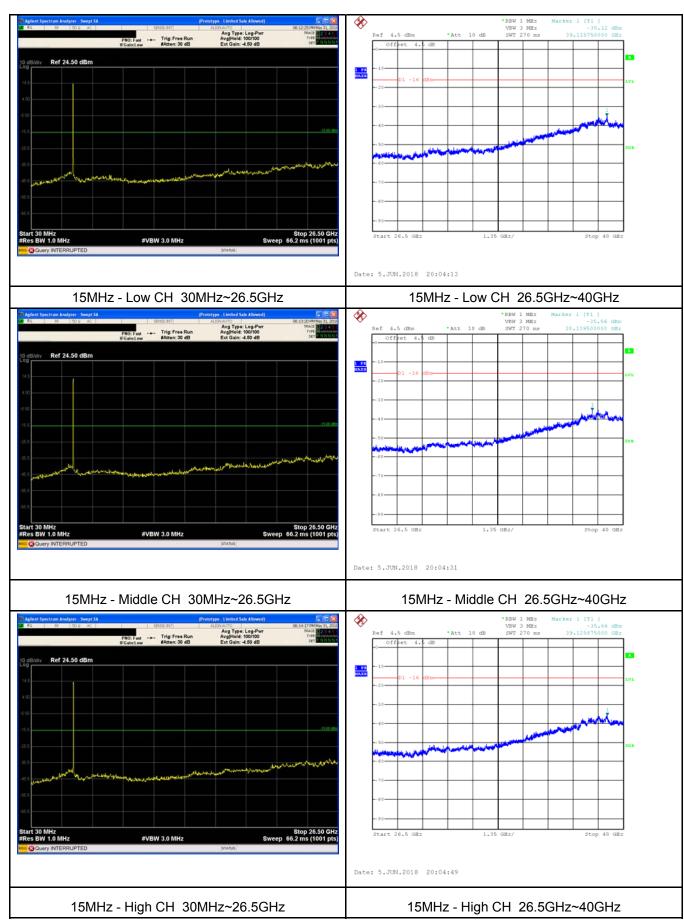


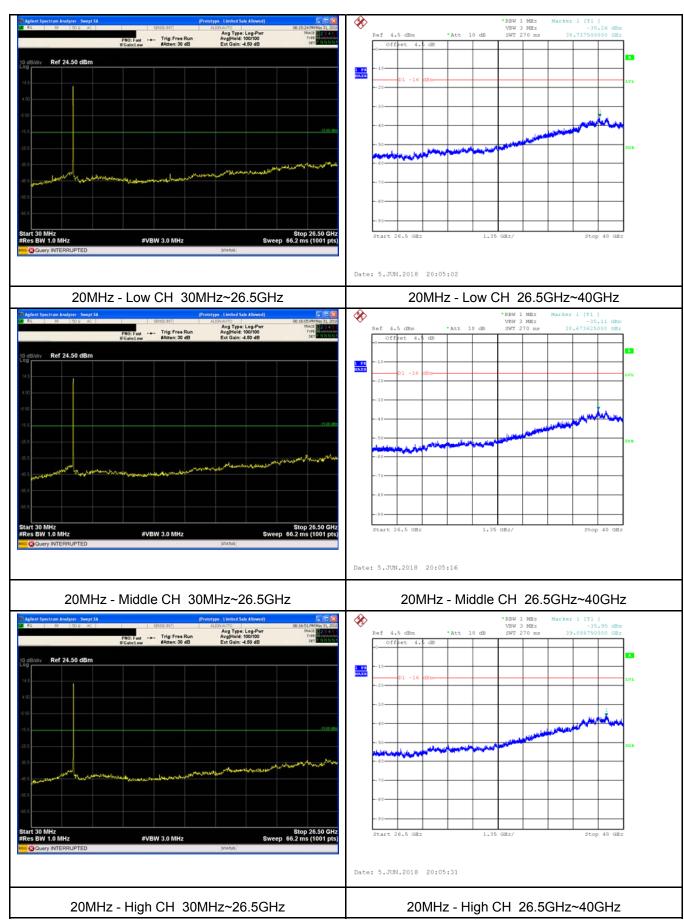




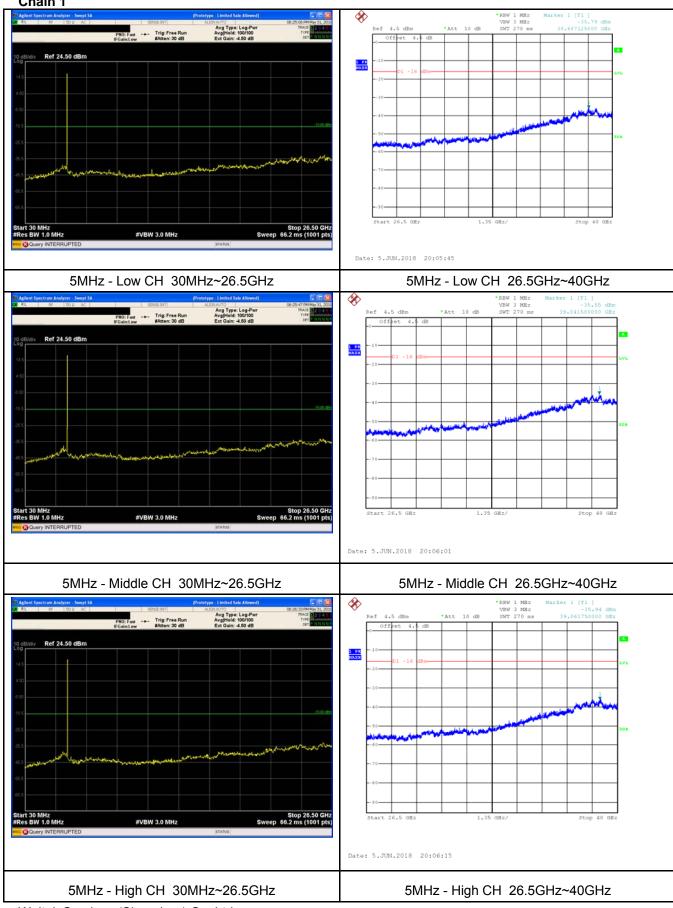


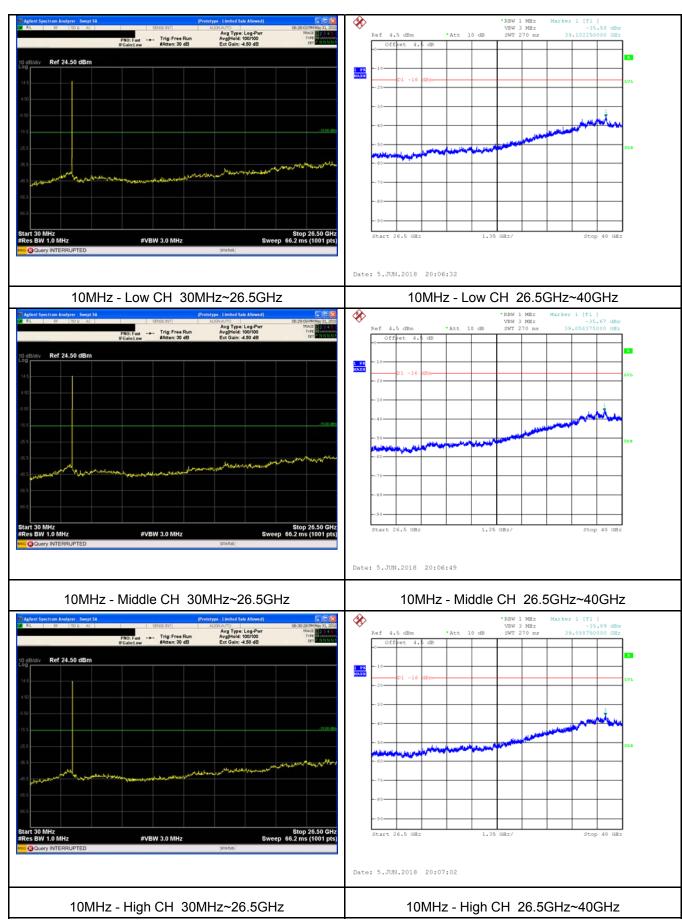


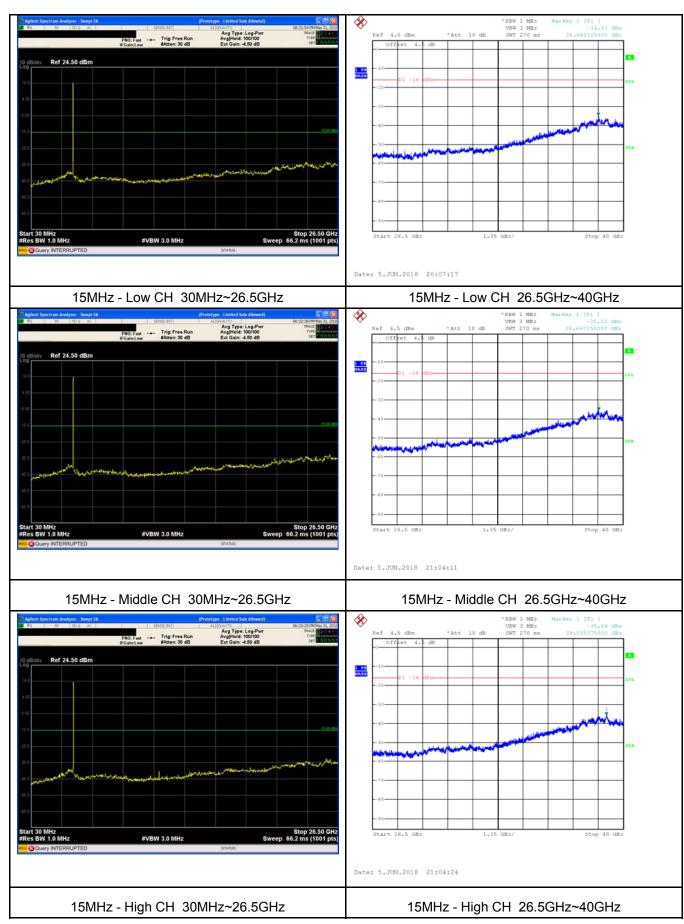


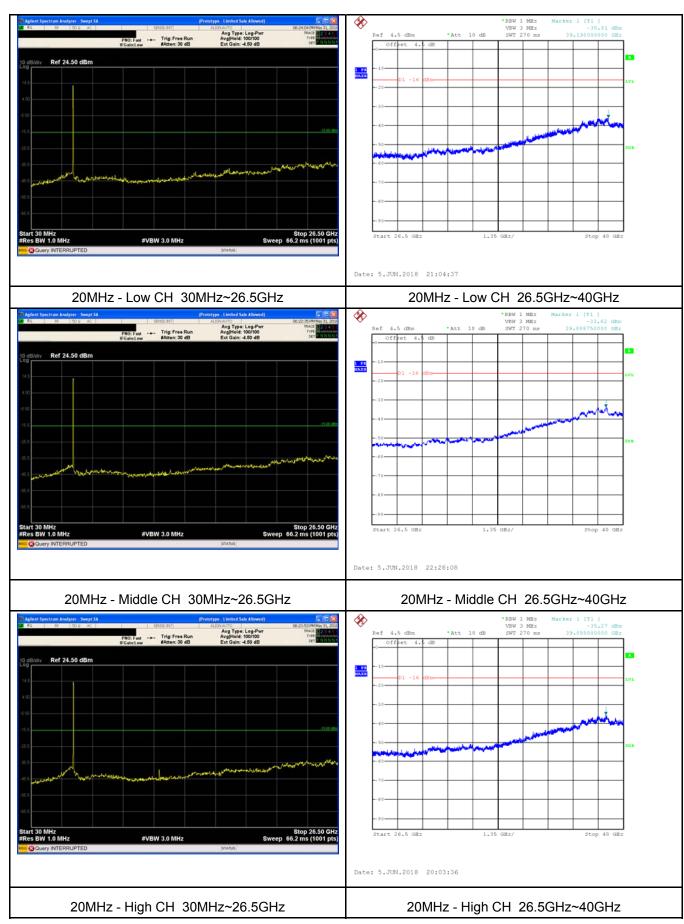





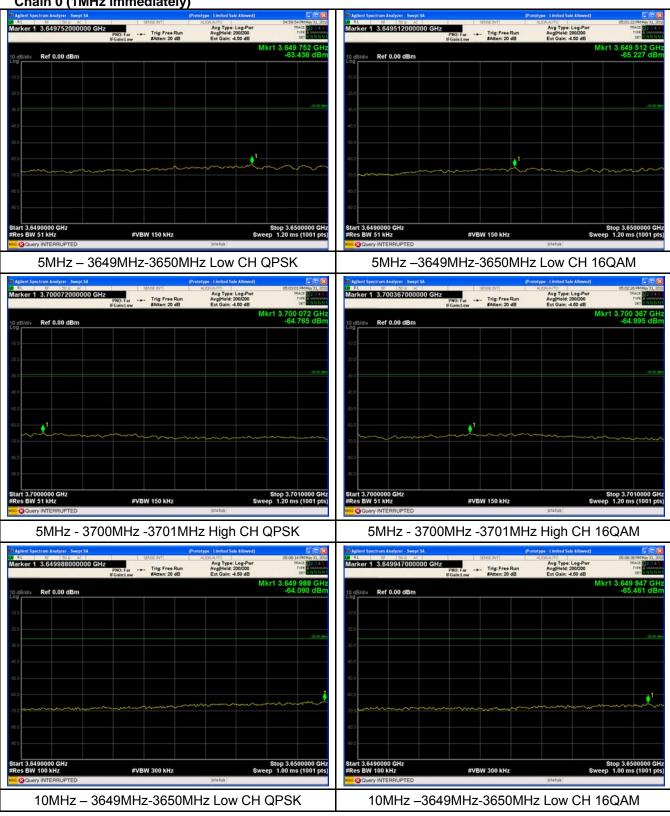


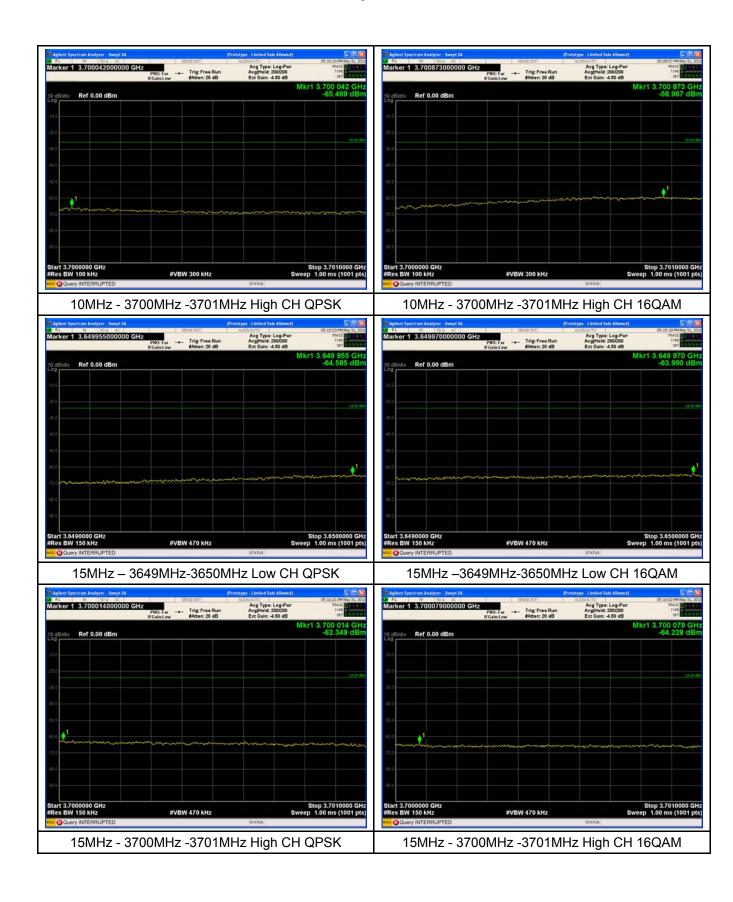

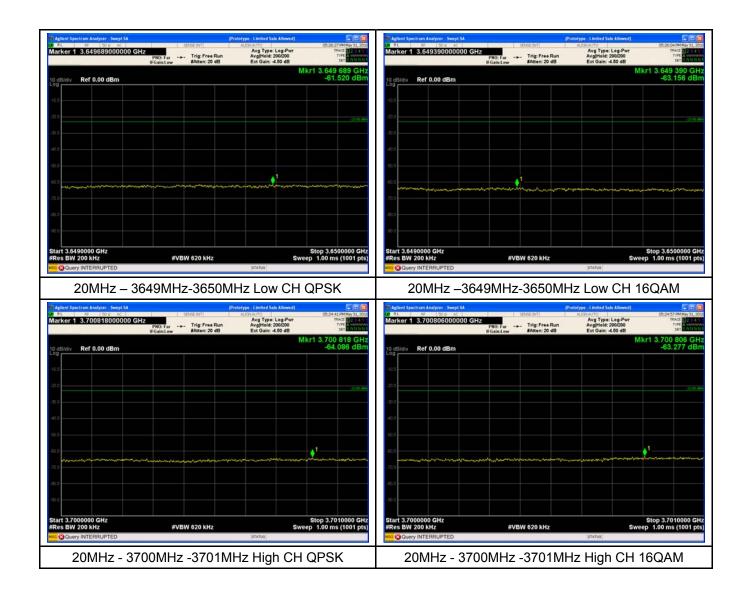


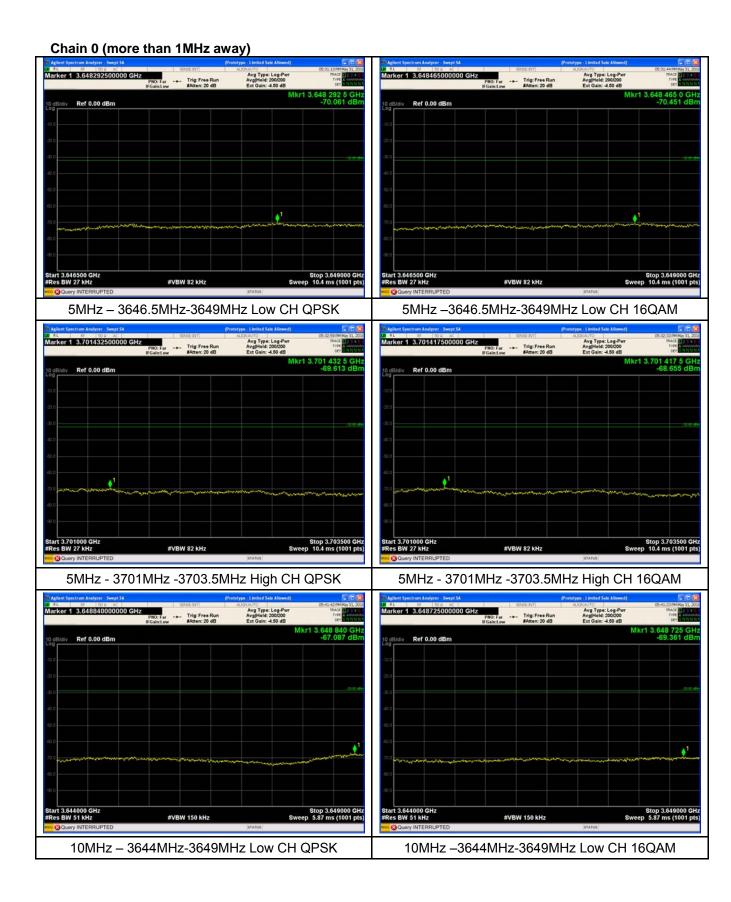

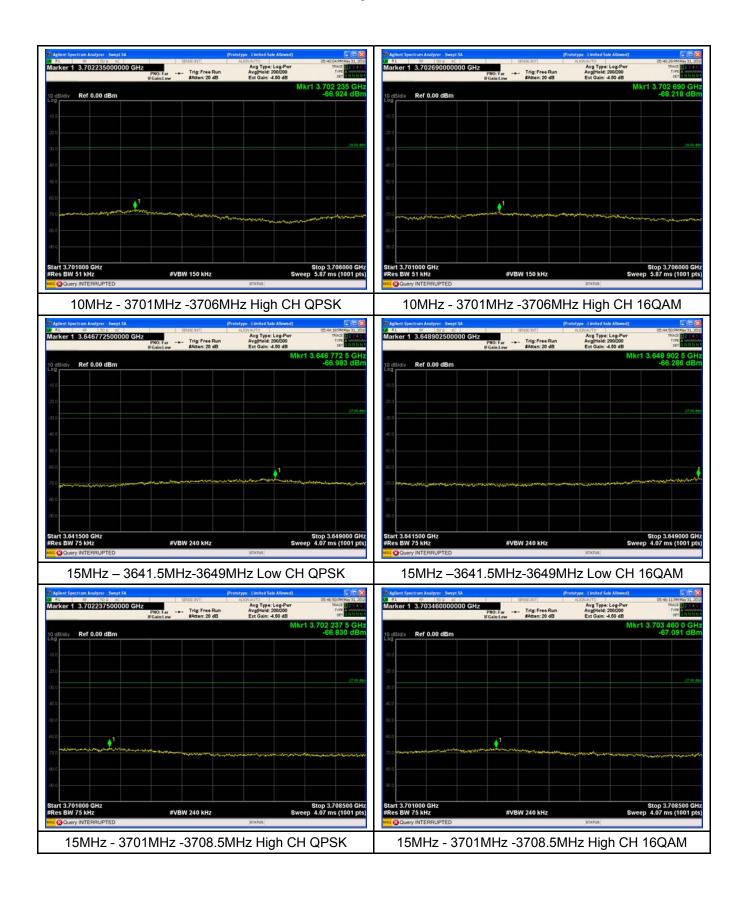


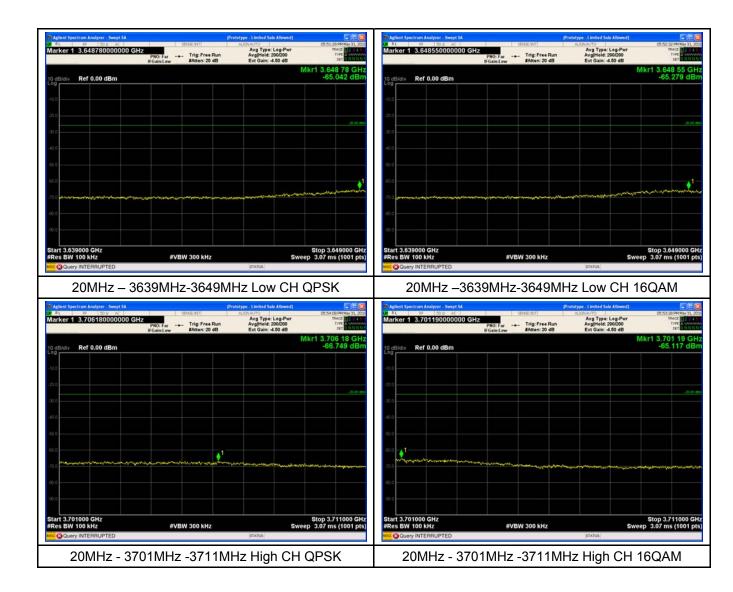





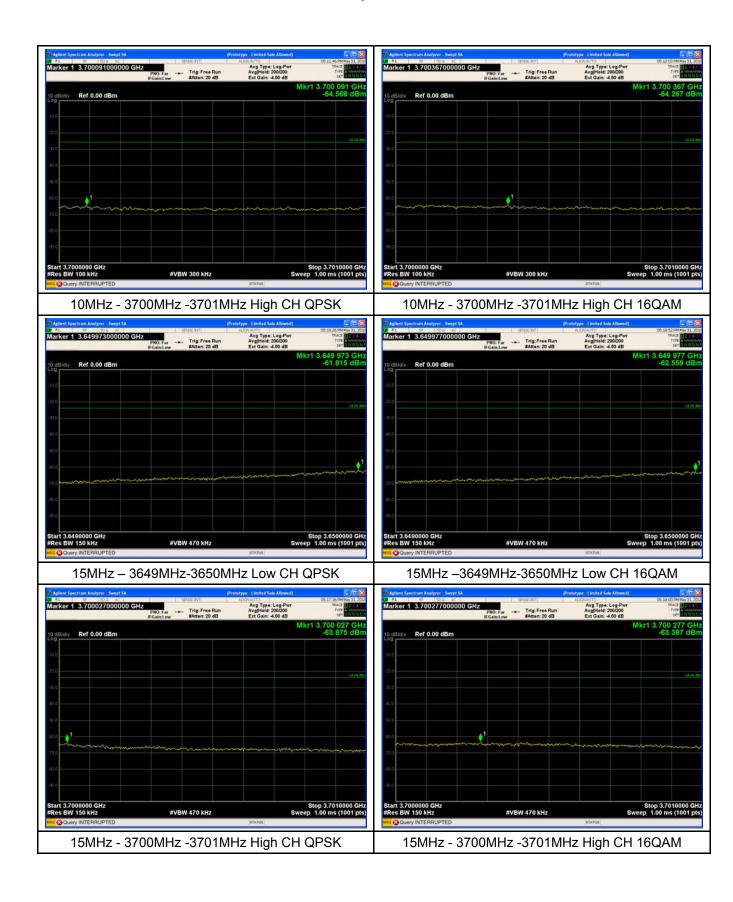



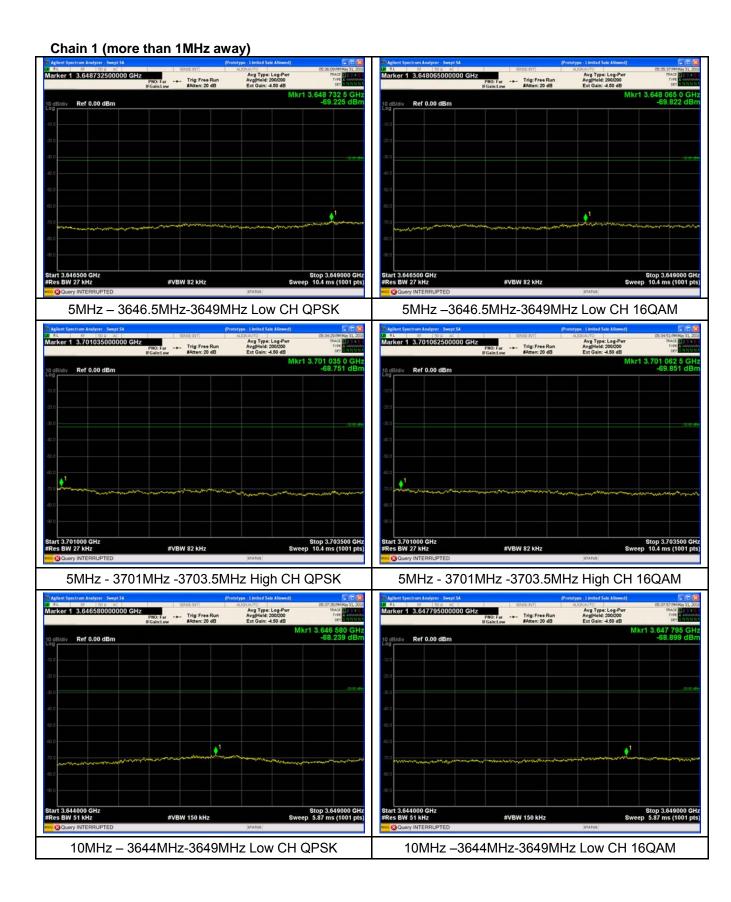

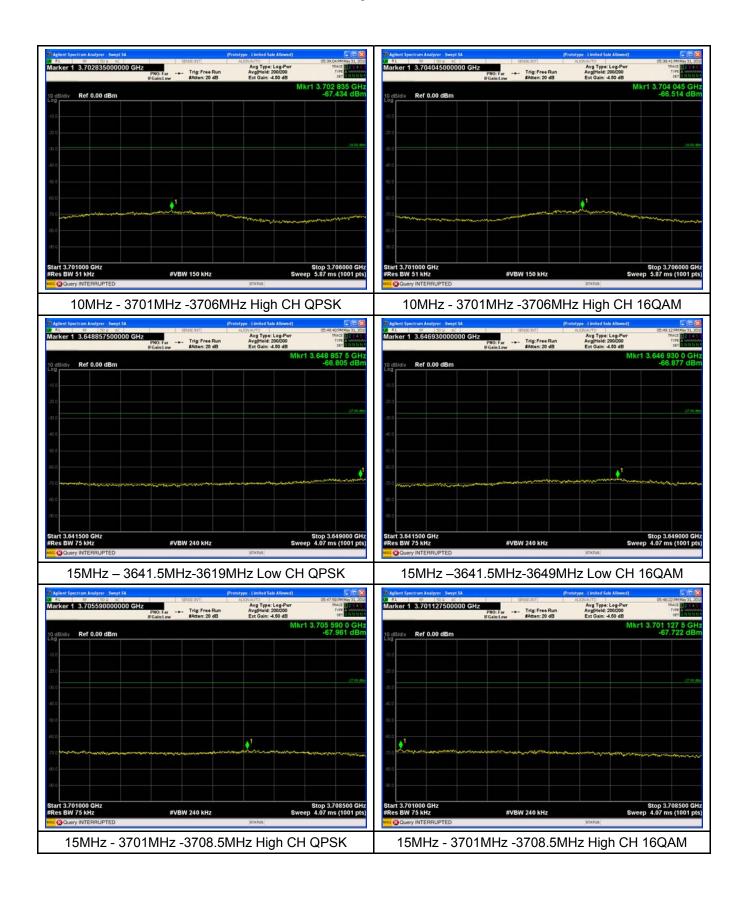

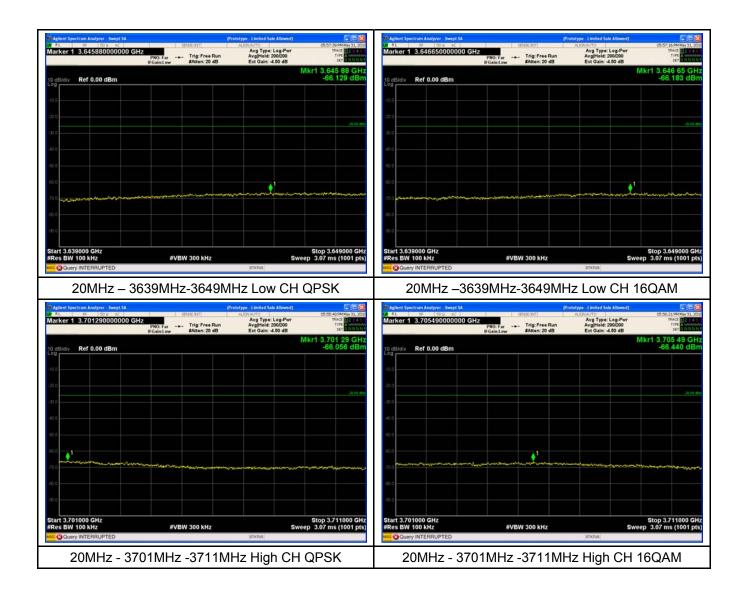

Reference No.: WTS18S05113665-1W V1 Page 70 of 84

# 12 Field strength of spurious radiation measurement

Test Requirement: FCC part90.1323
Test Method: FCC part2.1051

ANSI C63.26-2015

Test Mode: Data communicating mode

Limit: -13dBm


# 12.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
Humidity: 52.1 % RH
Atmospheric Pressure: 101.2kPa

# 12.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The test setup for emission measurement from 30 MHz to 1 GHz.

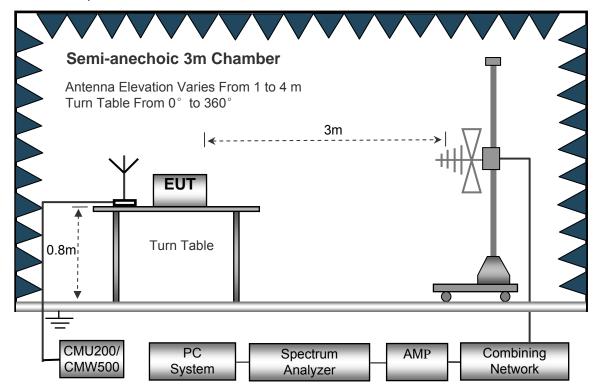

Semi-anechoic 3m Chamber

Antenna Elevation Varies From 1 to 4 m
Turn Table From 0° to 360°

3m

Turn Table

CMU200/ PC Spectrum AMP Combining

Analyzer

Network

The test setup for emission measurement above 1 GHz.

# 12.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

CMW500

System

Above 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth	1MHz
Video Bandwidth	3MHz
Detector	Ave.
Resolution Bandwidth	1MHz
Video Bandwidth	10Hz

Reference No.: WTS18S05113665-1W V1 Page 72 of 84

#### 12.4 Test Procedure

1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

- 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.
- 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.
- 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB)

## 12.5 Test Result

30MHz-18GHz

Remark: During the test, pre-scan the QPSK, 64QAM modulation, and found the QPSK modulation and 10MHz bandwitch is the worst case.

		Turn	RX An	tenna	Su	bstituted			Re	sult
Frequency	Receiver Reading	table Angle	Height	Polar	SG Level	Cable	Antenna Gain	Absolute Level	Limit	Margin
(MHz)	(dBµV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
			T		Low channel					
199.52	38.02	252	1.6	Н	-72.49	0.15	0.00	-72.64	-13.00	-59.64
199.52	31.21	14	2.1	V	-76.38	0.15	0.00	-76.53	-13.00	-63.53
7310.00	64.99	305	2.0	Н	-48.98	2.79	12.70	-39.07	-13.00	-26.07
7310.00	58.89	321	2.0	V	-54.64	2.79	12.70	-44.73	-13.00	-31.73
10965.00	53.55	129	1.3	Н	-60.45	3.12	11.50	-52.07	-13.00	-39.07
10965.00	44.67	151	1.7	V	-65.61	3.12	11.50	-57.23	-13.00	-44.23
	Middle channel									
199.52	48.09	43	1.8	Н	-62.42	0.15	0.00	-62.57	-13.00	-49.57
199.52	29.24	307	1.2	V	-78.35	0.15	0.00	-78.50	-13.00	-65.50
7350.00	26.97	159	2.1	Н	-87.00	2.37	12.50	-76.87	-13.00	-63.87
7350.00	53.25	292	1.9	V	-60.28	2.37	12.50	-50.15	-13.00	-37.15
11025.00	45.86	247	1.7	Н	-68.14	3.12	11.50	-59.76	-13.00	-46.76
11025.00	37.88	295	1.8	V	-72.40	3.12	11.50	-64.02	-13.00	-51.02
			T		High channel			1		
199.52	38.11	88	2.1	Н	-72.40	0.15	0.00	-72.55	-13.00	-59.55
199.52	30.02	256	1.0	V	-77.57	0.15	0.00	-77.72	-13.00	-64.72
7390.00	52.14	9	2.1	Н	-61.83	2.37	12.50	-51.70	-13.00	-38.70
7390.00	47.63	267	1.3	V	-65.90	2.37	12.50	-55.77	-13.00	-42.77
11085.00	41.33	352	1.4	Н	-72.67	3.12	11.50	-64.29	-13.00	-51.29
11085.00	29.31	294	1.3	V	-80.97	3.12	11.50	-72.59	-13.00	-59.59

Remark:

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not recorded.

Reference No.: WTS18S05113665-1W V1 Page 74 of 84

# 13 Frequency stability V.S. Temperature measurement

Test Requirement: FCC Part90.213(a)

Test Method: FCC Part2.1055(a)(1)(b)

ANSI/TIA-603-E-2016

Test Mode: Data communicating mode

Limit: FCC:

Francisco conce (BANA)	Fixed and base stations (±ppm)	Mobile stations (±ppm)	
Frequency range (MHz)	Fixed and base stations (±ppm)	Over 2 watts output power	2 watts or less output power
Below 25	100	100	200
25-50	20	20	50
72-76	5		50
150-174	5	5	50
216-220	1.0		1.0
220-222	0.1	1.5	1.5
421-512	2.5	5	5
806-809	1.0	1.5	1.5
809-824	1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	300	300	300
Above 2450			

# 13.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C


Humidity: 52.3 % RH

Atmospheric Pressure: 101.3kPa

### 13.2 Test Procedure

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to  $-30\,^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10℃ increased per stage until the highest temperature of +50℃ reached.

# Temperature Chamber

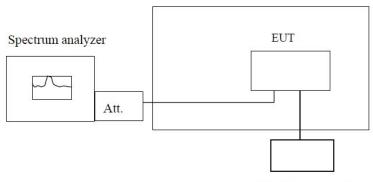

Variable Power Supply

Note: Measurement setup for testing on Antenna connector

# 13.3 Test Result

Remark: All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

Chain 0

	Test Frequency: 3652.5MHz QPSK 5MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		94	0.0257			
-25		98	0.0268			
-10		101	0.0277			
0		102	0.0279			
10	120	109	0.0298			
20		98	0.0268			
30		102	0.0279			
40		103	0.0282			
55		94	0.0257			

	Test Frequency: 3655MHz QPSK 10MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		100	0.0274			
-25		99	0.0271			
-10		108	0.0295			
0		104	0.0285			
10	120	99	0.0271			
20		98	0.0268			
30		98	0.0268			
40		108	0.0295			
55		109	0.0298			

Reference No.: WTS18S05113665-1W V1 Page 77 of 84

Test Frequency: 3657.5MHz QPSK 15MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)		
-40		110	0.0301		
-25		101	0.0276		
-10		107	0.0293		
0		105	0.0287		
10	120	108	0.0295		
20		104	0.0284		
30		106	0.0290		
40		111	0.0303		
55		112	0.0306		

	Test Frequency: 3660MHz QPSK 20MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		112	0.0306			
-25		103	0.0281			
-10		114	0.0311			
0		111	0.0303			
10	120	102	0.0279			
20		110	0.0301			
30		110	0.0301			
40		114	0.0311			
55		110	0.0301			

Reference No.: WTS18S05113665-1W V1 Page 78 of 84

## Chain 1

	Test Frequency: 3652.5MHz QPSK 5MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		104	0.0285			
-25		103	0.0282			
-10		103	0.0282			
0		108	0.0296			
10	120	106	0.0290			
20		101	0.0277			
30		102	0.0279			
40		99	0.0271			
55		116	0.0318			

	Test Frequency: 3655MHz QPSK 10MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		105	0.0287			
-25		105	0.0287			
-10		94	0.0257			
0		101	0.0276			
10	120	106	0.0290			
20		106	0.0290			
30		94	0.0257			
40		109	0.0298			
55		101	0.0276			

Reference No.: WTS18S05113665-1W V1 Page 79 of 84

	Test Frequency: 3657.5MHz QPSK 15MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		109	0.0298			
-25		115	0.0314			
-10		110	0.0301			
0		109	0.0298			
10	120	113	0.0309			
20		117	0.0320			
30		113	0.0309			
40		105	0.0287			
55		109	0.0298			

	Test Frequency: 3660MHz QPSK 20MHz					
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)			
-40		113	0.0309			
-25		110	0.0301			
-10		112	0.0306			
0		105	0.0287			
10	120	102	0.0279			
20		104	0.0284			
30		103	0.0281			
40		96	0.0262			
55		108	0.0295			

Reference No.: WTS18S05113665-1W V1 Page 80 of 84

# 14 Frequency stability V.S. Voltage measurement

Test Requirement: FCC Part90.213(a)

Test Method: FCC Part2.1055(a)(1)(b)

ANSI/TIA-603-E-2016

Test Mode: Data communicating mode

Limit: FCC:

Frequency range (MHz)	Fixed and base stations (±ppm)	Mobile stations (±ppm)		
Frequency range (IVIEZ)	Fixed and base stations (appin)	Over 2 watts output power	2 watts or less output powe	
Below 25	100	100	200	
25-50	20	20	50	
72-76	5		50	
150-174	5	5	50	
216-220	1.0		1.0	
220-222	0.1	1.5	1.5	
421-512	2.5	5	5	
806-809	1.0	1.5	1.5	
809-824	1.5	2.5	2.5	
851-854	1.0	1.5	1.5	
854-869	1.5	2.5	2.5	
896-901	0.1	1.5	1.5	
902-928	2.5	2.5	2.5	
902-928	2.5	2.5	2.5	
929-930	1.5			
935-940	0.1	1.5	1.5	
1427-1435	300	300	300	
Above 2450				

# 14.1 EUT Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 52.0 % RH

Atmospheric Pressure: 101.3kPa

### 14.2 Test Procedure

- 1. Set chamber temperature to 25℃. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

## Temperature Chamber

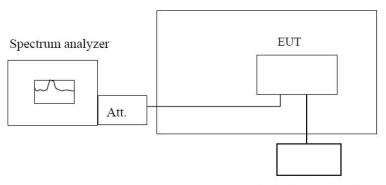

Variable Power Supply

Note: Measurement setup for testing on Antenna connector

## 14.3 Test Result

Remark: All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

## Chain 0

Test Frequency: 3652.5MHz QPSK 5MHz				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
	105	101	0.0277	
25	120	103	0.0282	
	144	105	0.0287	

Test Frequency: 3655MHz QPSK 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	
	105	114	0.0312	
25	120	112	0.0306	
	144	103	0.0282	

Test Frequency: 3657.5MHz QPSK 15MHz				
Temperature (°C)	pperature Power Supply Frequency Error Frequency Error (C) (VDC) (Hz) (ppm)			
	105	110	0.0301	
25	120	108	0.0295	
	144	112	0.0306	

Test Frequency: 3660MHz QPSK 20MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	
	105	96	0.0262	
25	120	102	0.0279	
	144	103	0.0281	

Reference No.: WTS18S05113665-1W V1 Page 83 of 84

# Chain 1

Test Frequency: 3652.5MHz QPSK 5MHz				
Temperature       Power Supply (℃)       Frequency Error (Hz)       Frequency Error (ppm)				
	105	107	0.0293	
25	120	107	0.0293	
	144	113	0.0309	

Test Frequency: 3655MHz QPSK 10MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	
	105	110	0.0301	
25	120	110	0.0301	
	144	109	0.0298	

Test Frequency: 3657.5MHz QPSK 15MHz				
Temperature       Power Supply       Frequency Error       Frequency Error         (℃)       (VDC)       (Hz)       (ppm)				
	105	107	0.0293	
25	120	102	0.0279	
	144	103	0.0282	

Test Frequency: 3660MHz QPSK 20MHz				
Temperature (℃)Power Supply (VDC)Frequency Error (Hz)Frequency Error (ppm)				
	105	104	0.0284	
25	120	103	0.0281	
	144	105	0.0287	

Reference No.: WTS18S05113665-1W V1 Page 84 of 84

# 15 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS18S05113665W \_Photo.

===== End of Report =====